




October 7, 2008

U.S. Army Corps of Engineers
Mr. Hector Santiago
1616 Capitol Avenue
Omaha, Nebraska 68102

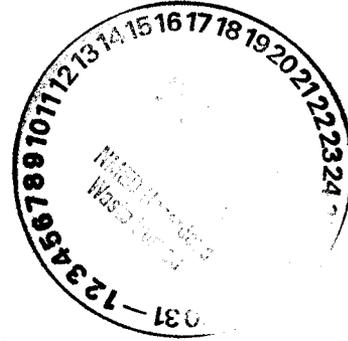

**Subject: Corrective Action Complete Proposals, 2nd Set (Revised)
Cannon Air Force Base, New Mexico
W9128F-04-D-0001, Delivery Order 0042**

Dear Hector:

Enclosed are three electronic copies on CD-ROM of the revised, second set of Corrective Action Complete Proposals for 14 Solid Waste Management Units (SWMUs) at Cannon Air Force Base (AFB), New Mexico.

The proposed modifications to Cannon AFB's Resource Conservation and Recovery Act (RCRA) permit would grant Corrective Action Complete (CAC) Without Controls status for the following eight SWMUs:

- SWMU 10 – Petroleum, Oil, and Lubricants (POL) Tank Number (No.) 170
- SWMU 50 – Inactive POL Storage Tank No. 4028A
- SWMU 72 – Oil/Water Separator (OWS) No. 390
- SWMU 75 – Sanitary Sewer Lift Station Overflow Pit
- SWMU 81 – Solvent Disposal Site
- SWMU 98 – Sanitary Sewer Line
- SWMU 106 – Fire Department Training Area No. 2
- SWMU 125 – Inactive Underground Storage Tank No. 2

In addition, the proposed modifications to Cannon AFB's RCRA permit would grant CAC With Controls status for the following six SWMUs:

- SWMU 2 – Recovered Diesel Tank No. 108
- SWMU 4 – Recovered Diesel Tank No. 121
- SWMU 6 – POL Tank No. 129
- SWMU 82 – Landfill No. 2

URS Group, Inc.
12120 Shamrock Plaza, Suite 300
Omaha, NE 68154
Tel: 402.334.8181
Fax: 402.334.1984



Omaha District, Corps of Engineers
CENWO-PM-HA (Mr. Hector Santiago)
October 7, 2008
Page 2

- SWMU 96 – Old Entomology Rinse Area
- SWMU 102 – Wastewater Treatment Effluent Discharge

The document has been revised to incorporate changes based on Cannon AFB's review. Mr. Pelfrey will be sending the revised document to the New Mexico Environment Department (NMED) under Cannon AFB letterhead.

Please call me at 952-2558 if you have any questions.

Sincerely,

A handwritten signature in black ink, appearing to read 'Jeffrey L. Voelker', with a long horizontal line extending to the right.

Jeffrey L. Voelker, CHMM
Project Manager
(402) 952-2558

Enclosure

cc: Jerry Pelfrey, Cannon AFB (three hardcopies and three CDs, including copies for distribution to NMED)

Corrective Action Complete Proposals

CANNON AIR FORCE BASE CLOVIS, NEW MEXICO

October 2008



Air Force Special
Operations Command



27th Special
Operations Wing

TABLE OF CONTENTS

Introduction.....	1
A. Facility Description	2
B. History of Investigation	3
C. Administrative Record.....	3
D. Corrective Action Complete Criterion	4
E. Public Participation.....	4
F. Next Steps.....	5
G. Contact Person for Additional Information.....	5
H. SWMU Descriptions	5
1. SWMU 2, Recovered Diesel Tank No. 108 (ST-28).....	6
Location – SWMU 2.....	6
History / Current and Anticipated Future Land Use – SWMU 2	6
Evaluation of Relevant Information – SWMU 2	6
Basis of Determination – SWMU 2	7
2. SWMU 4, Recovered Diesel Tank No. 121 (ST-29).....	7
Location – SWMU 4.....	7
History / Current and Anticipated Future Land Use – SWMU 4	7
Evaluation of Relevant Information – SWMU 4	8
Basis of Determination – SWMU 4	8
3. SWMU 6, POL Tank No. 129	8
Location – SWMU 6.....	8
History / Current and Anticipated Future Land Use – SWMU 6	8
Evaluation of Relevant Information – SWMU 6	9
Basis of Determination – SWMU 6	10
4. SWMU 10, POL Tank No. 170	10
Location – SWMU 10.....	10
History / Current and Anticipated Land Use – SWMU 10.....	10
Evaluation of Relevant Information – SWMU 10	10
Basis of Determination – SWMU 10	11
5. SWMU 50, Inactive POL Storage Tank No. 4028A (ST-26).....	11
Location – SWMU 50.....	11
History / Current and Anticipated Land Use – SWMU 50.....	11
Evaluation of Relevant Information – SWMU 50	11
Basis of Determination- SWMU 50.....	12
6. SWMU 72, OWS No. 390	12
Location – SWMU 72.....	12
History / Current and Anticipated Land Use – SWMU 72.....	12
Evaluation of Relevant Information – SWMU 72	12

TABLE OF CONTENTS

	Basis of Determination – SWMU 72	12
7.	SWMU 75, Sanitary Sewer Lift Station Overflow Pit (SD-13).....	12
	Location – SWMU 75	12
	History / Current and Anticipated Land Use – SWMU 75	13
	Evaluation of Relevant Information – SWMU 75	13
	Basis of Determination – SWMU 75	14
8.	SWMU 81, Solvent Disposal Site (DP-16).....	14
	Location – SWMU 81	14
	History / Current and Anticipated Land Use – SWMU 81	14
	Evaluation of Relevant Information – SWMU 81	14
	Basis of Determination – SWMU 81	15
9.	SWMU 82, Landfill No. 2 (LF-02).....	15
	Location – SWMU 82	15
	History / Current and Anticipated Land Use – SWMU 82.....	15
	Evaluation of Relevant Information – SWMU 82	16
	Basis of Determination – SWMU 82	17
10.	SWMU 96, Old Entomology Rinse Area (SD-17)	17
	Location – SWMU 96.....	17
	History / Current and Anticipated Future Land Use – SWMU 96	17
	Evaluation of Relevant Information – SWMU 96	17
	Basis of Determination – SWMU 96	19
11.	SWMU 98, Sanitary Sewer Line	19
	Location – SWMU 98.....	19
	History / Current and Anticipated Future Land Use – SWMU 98	19
	Evaluation of Relevant Information – SWMU 98	20
	Basis of Determination – SWMU 98	20
12.	SWMU 102, Wastewater Treatment Effluent Discharge (WP-21).....	21
	Location – SWMU 102.....	21
	History / Current and Anticipated Future Land Use – SWMU 102	21
	Evaluation of Relevant Information – SWMU 102	21
	Basis of Determination – SWMU 102	22
13.	SWMU 106, Fire Department Training Area No. 2 (FT-07).....	22
	Location – SWMU 106.....	22
	History / Current and Anticipated Future Land Use – SWMU 106	22
	Evaluation of Relevant Information – SWMU 106	22
	Basis of Determination – SWMU 106	24
14.	SWMU 125, Inactive Underground Storage Tank No. 2 (ST-31).....	24
	Location – SWMU 125	24
	History / Current and Anticipated Future Land Use – SWMU 125	24
	Evaluation of Relevant Information – SWMU 125	24
	Basis of Determination – SWMU 125	25
	I. Maps and Figures	26
	J. References	27
	Attachments.....	29

TABLE OF CONTENTS

µg/kg	micrograms per kilogram
AFB	Air Force Base
AST	aboveground storage tank
bgs	below ground surface
BRA	Baseline Risk Assessment
BTEX	benzene, toluene, ethylbenzene, and total xylenes
CAC	Corrective Action Complete
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
COPC(s)	Chemical of Potential Concern
HSWA	Hazardous and Solid Waste Amendments
IEUBK	Integrated, Exposure, Uptake and Biokinetic
IRP	Installation Restoration Program
Lee Wan	Lee Wan Associates, Inc.
MCL	maximum contaminant level
mg/kg	milligrams per kilogram
msl	mean sea level
MTBE	methyl tert-butyl ether
NMAC	New Mexico Administrative Code
NMED	New Mexico Environment Department
No(s).	number(s)
OVA	organic vapor analyzer
OVS	oil/water separator
PCB(s)	polychlorinated biphenyl(s)
POL	petroleum, oil, and lubricants
PVC	polyvinyl chloride
Radian	Radian Corporation
RCRA	Resource Conservation and Recovery Act
RFA	RCRA Facility Assessment
RFI	RCRA Facility Investigation
RI	Remedial Investigation
SSL(s)	soil screening level(s)

TABLE OF CONTENTS

SVOC(s)	semivolatile organic compound(s)
SWMU(s)	Solid Waste Management Unit(s)
TAL	Target Analyte List
TCE	trichloroethelyne
TPH	total petroleum hydrocarbons
URS	URS Group, Inc.
USACE	United States Army Corp of Engineers
USAF	Unites States Department of the Air Force
USEPA	United States Environmental Protection Agency
UST	underground storage tank
VOC(s)	volatile organic compound(s)
Walk Haydel	Walk Haydel & Associates, Inc.
W-C	Woodward-Clyde Consultants, Inc.

CORRECTIVE ACTION COMPLETE PROPOSALS

Introduction

Under authority of the New Mexico Hazardous Waste Act (Section 74-4-1 et seq., New Mexico Statutes Annotated 1978, as amended, 1992) and the New Mexico Hazardous Waste Management Regulations 20.4.1 New Mexico Administrative Code (NMAC), the New Mexico Environment Department (NMED) intends, pending public input, to approve a permit modification for the United States Department of the Air Force (USAF), Cannon Air Force Base (AFB) for Corrective Action Complete (CAC) Without Controls status for eight Solid Waste Management Units (SWMUs) and CAC With Controls status for six SWMUs. These sites are listed on the Resource Conservation and Recovery Act (RCRA) Part B Permit pursuant to 40 Code of Federal Regulations 270.42(c) of the Hazardous and Solid Waste Amendments of 1984.

If approved, NMED will initiate a modification of Cannon AFB's RCRA permit to adjust the content of the three corrective action tables (Attachment 1 of Cannon AFB's RCRA Permit). The tables list the status of SWMUs at the Base, and their content is as follows:

- Table 1 – List of SWMUs Requiring Corrective Action (corrective action may be necessary to characterize and/or remediate past releases of hazardous wastes or hazardous constituents)
- Table 2 – List of SWMUs Not Currently Requiring Corrective Action, Without Controls (corrective action has been completed, and further corrective action is not currently required, no controls are required)
- Table 3 – List of SWMUs and Not Currently Requiring Corrective Action, With Controls (corrective action has been completed, and further corrective action is not currently required, controls are required)

The proposed modification would grant CAC Without Controls status for eight SWMUs. The following SWMUs would move from Table 1 to Table 2:

- SWMU 10 – Petroleum, Oil, and Lubricants (POL) Tank Number (No.) 170
- SMWU 50 – Inactive POL Storage Tank No. 4028A
- SWMU 72 – Oil/Water Separator (OWS) No. 390
- SWMU 75 – Sanitary Sewer Lift Station Overflow Pit
- SWMU 81 – Solvent Disposal Site
- SWMU 98 – Sanitary Sewer Line
- SWMU 106 – Fire Department Training Area No. 2
- SWMU 125 – Inactive Underground Storage Tank No. 2

The proposed modification would also grant CAC With Controls for six SWMUs. The following SWMUs would move from Table 1 to Table 3:

- SWMU 2 – Recovered Diesel Tank No. 108
- SWMU 4 – Recovered Diesel Tank No. 121

CORRECTIVE ACTION COMPLETE PROPOSALS

- SWMU 6 – POL Tank No. 129
- SWMU 82 – Landfill No. 2
- SWMU 96 – Old Entomology Rinse Area
- SWMU 102 – Wastewater Treatment Effluent Discharge

All of the SWMUs addressed by this document, and the applicable NMED CAC Criteria (see **Section D**, below) for their closure, are listed in the following table:

Section H Sub-section	SWMU / AOC	Description	NMED Criterion
1	SWMU 2	Recovered Diesel Tank No. 108	5
2	SWMU 4	Recovered Diesel Tank No. 121	5
3	SWMU 6	POL Tank No. 129	5
4	SWMU 10	POL Tank No. 170	5
5	SWMU 50	Inactive POL Storage Tank No. 4028A	1
6	SWMU 72	OWS No. 390	1
7	SWMU 75	Sanitary Sewer Lift Station Overflow Pit	5
8	SWMU 81	Solvent Disposal Site	5
9	SWMU 82	Landfill No. 2	5
10	SWMU 96	Old Entomology Rinse Area	5
11	SWMU 98	Sanitary Sewer Line	5
12	SWMU 102	Wastewater Treatment Effluent Discharge	5
13	SWMU 106	Fire Department Training Area No. 2	5
14	SWMU 125	Inactive Underground Storage Tank No. 2	5

A. Facility Description

Cannon AFB is located in Curry County, New Mexico, approximately 7 miles west of the City of Clovis. The Base is situated on approximately 4,320 acres of land. Cannon AFB is situated in a nearly flat plain sloping gently (10 to 15 feet per mile) to the east and southeast. Elevations in the vicinity of Cannon AFB range from 4,250 feet to 4,350 feet above mean sea level (msl).

CORRECTIVE ACTION COMPLETE PROPOSALS

Cannon AFB dates to 1929, when Portair Field was established on the site as a civilian passenger terminal for early commercial transcontinental flights. In 1942 the Army Air Corps took control of the civilian airfield and it became known as the Clovis Army Air Base. In early 1945, the Base was renamed Clovis Army Air Field, where flying, bombing, and gunnery classes continued until the Base was de-activated in May 1947.

The Base was reassigned to the Tactical Air Command and formally reactivated as Clovis AFB in 1951. The Base was renamed Cannon AFB in 1957. Several Fighter-Bomber Groups and Tactical Fighter Wings have occupied the Base since 1951. In June 2006, it was announced that Cannon AFB would transfer from the Air Combat Command and become an Air Force Special Operations Command installation.

B. History of Investigation

The United States Environmental Protection Agency (USEPA) issued the Hazardous and Solid Waste Amendments (HSWA) Module IV to Cannon AFB's RCRA Operating Permit effective December 17, 1989. The HSWA module required investigation of approximately 130 environmental restoration sites, referred to as SWMUs in the permit. In January 1996, NMED received authorization for corrective action under the HSWA and became the administrative authority for this action.

Section H of this document briefly describes the location and history of each SWMU, a summary of relevant information from previous site investigations, and the basis for determination for each of SWMU proposed for CAC With Controls or CAC Without Controls. Detailed descriptions of the investigative results for each SWMU appear in the original investigative reports and/or administrative records. References for these sources are provided in **Section J**.

C. Administrative Record

This document, Corrective Action Complete Proposals, describes 14 SWMUs that were identified as appropriate for either a CAC With Controls or a CAC Without Controls determination. All 14 sites will be removed from Table 1 of Cannon AFB's Permit. Eight sites will be listed on Table 2 of Cannon AFB's RCRA Permit, and six sites will be listed on Table 3 of Cannon AFB's RCRA permit.

The Administrative Record for this proposed action consists of Cannon AFB's Permit Modification Request, the draft Permit consisting of Tables 1, 2, and 3, the Corrective Action Complete Proposals, the Public Notice, and the referenced supporting documentation for each site. References are listed in **Section J**. The complete Administrative Record may be reviewed at the following location during the public comment period:

CORRECTIVE ACTION COMPLETE PROPOSALS

NMED – Hazardous Waste Bureau
2905 Rodeo Park Drive East, Building 1
Santa Fe, New Mexico 87505-6303
(505) 428-2500
Monday through Friday from 8:00 a.m. to 5:00 p.m.

The Corrective Action Complete Proposals, Cannon AFB's Permit Modification Request, the Public Notice, and the draft Permit consisting of Tables 1, 2, and 3 may be reviewed at the following locations during the public comment period:

NMED – Hazardous Waste Bureau
2905 Rodeo Park Drive East, Building 1
Santa Fe, New Mexico 87505-6303
(505) 428-2500
Monday through Friday from 8:00 a.m. to 5:00 p.m.

Carver Public Library
701 North Main Street
Clovis, New Mexico 88101
(505) 769-7840
library@cityofclovis.org

D. Corrective Action Complete Criterion

NMED's determination that corrective action is complete at these sites is based on reports submitted by Cannon AFB that demonstrate that no additional corrective action is required to protect human health and the environment. General criteria that NMED considers include the following:

1. The SWMU cannot be located, does not exist, or is a duplicate SWMU.
2. The SWMU has never been used for the management (that is, generation, treatment, storage, or disposal) of RCRA solid or hazardous wastes and/or constituents or other Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) hazardous substances.
3. No release to the environment has occurred or is likely to occur in the future from the SWMU.
4. There was a release from the SWMU to the environment but the site was characterized and/or remediated under another authority that adequately addressed corrective action, and documentation such as a closure letter is available.
5. The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

E. Public Participation

A public meeting arranged by Cannon AFB was held on _____ in accordance with 20.4.1.901 NMAC. Subsequent to the meeting, no written comments were submitted to the NMED. NMED issued a public notice on _____, to announce the beginning of a 45-day comment period that will end at 5:00 p.m., on _____. Any person who wishes to comment on this action or request a public hearing should submit written or electronic mail (e-mail) comment(s) with the commenter's name and address to the respective address below.

CORRECTIVE ACTION COMPLETE PROPOSALS

Only comments and/or requests received on or before 5:00 p.m., _____ will be considered.

Mr. John E. Kieling, Program Manager
NMED, Hazardous Waste Bureau
2905 Rodeo Park Drive East, Building 1
Santa Fe, New Mexico 87505-6303
E-mail: john.kieling@state.nm.us
RE: CAFB – Corrective Action Complete (_____)

Written comments must be based on the administrative record. Documents in the administrative record need not be re-submitted if expressly referenced by the commenter. Requests for a public hearing shall provide: (1) a clear and concise factual statement of the nature and scope of the interest of the person requesting the hearing; (2) the name and address of all persons whom the requestor represents; (3) a statement of any objections to the proposed action, including specific references; and (4) a statement of the issues which such persons propose to raise for consideration at the hearing. Written comments and requests for a Public Hearing must be filed with Mr. John Kieling on or before 5:00 p.m., _____ at NMED Hazardous Waste Bureau, 2905 Rodeo Park Drive East, Building 1, Santa Fe, New Mexico, 87505-6303. NMED will provide a thirty (30) day notice of a public hearing, if schedule.

F. Next Steps

NMED will notify Cannon AFB and each person on the public comment mailing list of the final decision. The final decision will become effective 30 days after service of the decision unless a later date is specified or unless review is required under New Mexico Hazardous Waste Regulations, 20.4.1.900 New Mexico Administrative Code.

G. Contact Person for Additional Information

For additional information, contact the following individual:

Mr. John E. Kieling, Program Manager
NMED, Hazardous Waste Bureau
2905 Rodeo Park Drive East, Building 1
Santa Fe, New Mexico 87505-6303
Telephone: (505) 428-2500 Fax: (505) 428-2567
E-mail: john.kieling@state.nm.us

H. SWMU Descriptions

The following sections describe the location, history, and land use conditions for each SWMU. A summary of relevant information from previous investigations and a basis for CAC determination for the fourteen sites are also presented in this section. All data tables are presented in the RFI (URS 2007). Screening criteria were obtained from two NMED documents: Technical Background Document for Development of Soil Screening Levels (NMED 2006a) and

CORRECTIVE ACTION COMPLETE PROPOSALS

TPH Screening Guidelines (NMED 2006b). A site map showing all 14 SWMUs is presented as **Figure I-1** in **Section I**.

1. SWMU 2, RECOVERED DIESEL TANK NO. 108 (ST-28)

Location – SWMU 2

SWMU 2, Recovered Diesel Tank No. 108 (Installation Restoration Program [IRP] Site No. ST-28) was located near Hangar 108, approximately 100 feet east of an OWS (SWMU 3). Hangar 108 was located in the west central portion of Cannon AFB (**Figure I-1**). Hangar 108 was demolished and replaced by Building 125. A site map is presented as **Figure I-2** in **Section-I**.

History / Current and Anticipated Future Land Use – SWMU 2

A RCRA Facility Assessment (RFA) (A.T. Kearney 1987) described the suspected SWMU 2 location as a recovered diesel fuel tank connected to an OWS (SWMU 3). This led to the underground storage tank (UST) being listed as an Appendix II site. However, the only storage tank ever associated with Hangar 108 was a 2,000-gallon UST located approximately 100 feet east of the OWS (SWMU 3), which stored new diesel fuel used as heating oil for the building.

In 1989, Hangar 108 was demolished and replaced with Hangar 125. During demolition, a 2,000-gallon heating oil tank was removed from the suspected location of SWMU 2, and the former UST location was covered with the concrete floor of the new hangar.

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land use classification will continue to remain industrial.

Evaluation of Relevant Information – SWMU 2

2007 RFI

A RCRA Facility Investigation (RFI) (URS Group, Inc. [URS] 2007) was completed for this site. Sample locations were based on institutional knowledge and available demolition drawings. Four soil borings were advanced to depths of 15 to 16 feet below ground surface (bgs). Nine soil samples were collected from the borings at depths of 8 to 10 feet bgs and 13 to 15 feet bgs. The soil samples were submitted and analyzed for volatile organic compounds (VOCs), semi-volatile organic compounds (SVOCs), and Target Analyte List (TAL) metals.

VOCs, SVOCs, and selenium were not detected above the reporting limits in any of the samples. The detected analytes were compared to current NMED soil screening levels (SSLs). TAL metals did not exceed construction worker SSLs. Arsenic in subsurface soil (9.9 milligrams per kilogram [mg/kg]) exceeded the soil-to-groundwater SSL (0.292 mg/kg) and the residential SSL (3.9 mg/kg), but was within the range of background values at Cannon AFB. Maximum iron (6,610 mg/kg), mercury (0.0021 mg/kg), and thallium (4.3 mg/kg) concentrations exceeded soil-to-groundwater SSLs. The remaining TAL metals did not exceed any SSLs. Impacts to

CORRECTIVE ACTION COMPLETE PROPOSALS

groundwater were considered minimal because the depth to groundwater is greater than 250 feet. **Table 1** in the **Attachments** presents the comparison of maximum soil concentrations to NMED SSLs.

Ecological screening was not completed because the site is located in an industrial area near the flight line. The SWMU was characterized in accordance with current applicable state and federal regulations, and the available data indicate the chemicals present do not pose an unacceptable level of risk under current and projected land uses.

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC With Controls status for SWMU 2.

Basis of Determination – SWMU 2

SWMU 2 is proposed for CAC With Controls based on NMED CAC Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

2. SWMU 4, RECOVERED DIESEL TANK NO. 121 (ST-29)

Location – SMWU 4

SWMU 4, Recovered Diesel Tank No. 121 (IRP Site No. ST-29) was located near Hangar 121, in the west central portion of Cannon AFB (**Figure I-1**). Hangar 121 was demolished and replaced by Hangar 126. A site map is presented as **Figure I-3** in **Section I**.

History / Current and Anticipated Future Land Use – SWMU 4

An RFA (A.T. Kearney 1987) described the suspected SWMU 4 location as having a recovered diesel fuel tank connected to an OWS. This led to the UST being listed as an Appendix II site. However, the only storage tank ever associated with Hangar 108 was a 2,000-gallon UST, which stored new diesel fuel used as heating oil for the building, located approximately 50 feet east of the OWS.

In 1989, Hangar 121 was demolished and replaced with Hangar 126. During demolition, a 2,000-gallon heating oil tank was removed from the suspected location of SWMU 4, and the former UST location was covered with the concrete floor of the new hangar.

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land use classification will continue to remain industrial.

CORRECTIVE ACTION COMPLETE PROPOSALS

Evaluation of Relevant Information – SWMU 4

2007 RFI

An RFI (URS 2007) was completed for this site. Sample locations were based on institutional knowledge and available demolition drawings. Four soil borings were advanced to depths of 16 feet bgs. Ten soil samples were collected from the borings at depths of 8 to 10 feet bgs and 13 to 15 feet bgs. The soil samples were submitted and analyzed for VOCs, SVOCs, and TAL metals.

No VOCs or SVOCs were detected above the reporting limits in any of the samples. The detected analytes were compared to current NMED screening levels. None of the TAL metals exceeded the construction worker SSLs. Iron (9,630 mg/kg), mercury (0.027 mg/kg), and thallium (4.3 mg/kg) exceeded the soil-to-groundwater SSLs. Arsenic (7.2 mg/kg) exceeded residential and soil-to-groundwater SSLs, but did not exceed background concentrations. The remaining TAL metals did not exceed any SSLs. Impacts to groundwater were considered minimal because the depth to groundwater is greater than 250 feet. **Table 2** in the **Attachments** presents the comparison of maximum soil concentrations to NMED SSLs.

Ecological screening was not completed because the site is located in an industrial area near the flight line. The SWMU was characterized in accordance with current applicable state and federal regulations, and the available data indicate the chemicals present do not pose an unacceptable level of risk under current and projected land uses.

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for CAC With Controls status for SWMU 4.

Basis of Determination – SWMU 4

SWMU 4 is proposed for CAC With Controls based on NMED CAC Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

3. SWMU 6, POL TANK NO. 129

Location – SWMU 6

SWMU 6, POL Tank No. 129 was located near Hangar 129, in the west central portion of Cannon AFB (**Figure I-1**). A site map is presented as **Figure I-4** in **Section I**.

History / Current and Anticipated Future Land Use – SWMU 6

An RFA (A.T. Kearney 1987) described the suspected SWMU 6 location as having a recovered diesel fuel tank connected to an OWS (SWMU 7). This led to the UST being listed as an Appendix II site. However, the only storage tank ever associated with Hangar 129 was a 2,000-gallon UST located approximately 60 feet east of the OWS (SWMU 7), which stored new diesel

CORRECTIVE ACTION COMPLETE PROPOSALS

fuel used as heating oil for the building. The tank was originally positioned 30 feet south of this location, but was moved when Cannon AFB buildings were converted to natural gas heat. The conditions of the tank and excavation soil were not documented.

In 1992, the 2,000-gallon UST was removed from the suspected location of SWMU 6 and confirmatory samples were collected following NMED UST regulations.

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land use classification will continue to remain industrial.

Evaluation of Relevant Information – SWMU 6

1992 UST Removal

Two samples were collected during the UST's removal in 1992 and were analyzed for total petroleum hydrocarbons (TPH) and individual fuel oil constituents including methyl tert-butyl ether (MTBE), and benzene, toluene, ethylbenzene, and xylenes (BTEX).

2007 RFI

An RFI (URS 2007) was completed for this site. It was determined that additional sampling in the vicinity of the UST's original location was needed. Sample locations were based on institutional knowledge and available demolition drawings. Four soil borings were advanced to depths of 16 feet bgs. Eight soil samples were collected from the borings at depths of 8 to 10 feet bgs and 13 to 15 feet bgs. The soil samples were submitted and analyzed for VOCs, SVOCs, and TAL metals. Additionally, historical data was screened against current NMED standards.

SVOCs were not detected above the reporting limit in any of the samples. The detected analytes were compared to current NMED SSLs. Maximum benzene (0.003 mg/kg) and TPH (6.438 mg/kg) concentrations did not exceed any SSLs. No other VOCs were detected.

Selenium was not detected in any of the samples. The remaining detected metals were compared to current NMED SSLs, and none exceeded construction worker SSLs. Arsenic (5.9 mg/kg), iron (9,430 mg/kg), mercury (0.017 mg/kg), and thallium (4.6 mg/kg) exceeded soil-to-groundwater SSLs. Arsenic exceeded the residential SSL (3.9 mg/kg), but was considered to be within the range of background values, and was not considered to be a COPC. Impacts to groundwater were considered minimal because the depth to groundwater is greater than 250 feet. **Table 3** in the **Attachments** presents the comparison of maximum soil concentrations to NMED SSLs.

Ecological screening was not completed because the site is located in an industrial area near the flight line. The SWMU was characterized in accordance with current applicable state and federal regulations, and the available data indicate the chemicals present do not pose an unacceptable level of risk under current and projected land uses.

CORRECTIVE ACTION COMPLETE PROPOSALS

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC With Controls for SWMU 6.

Basis of Determination – SWMU 6

SWMU 6 is proposed for CAC With Controls based on NMED CAC Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

4. SWMU 10, POL TANK NO. 170

Location – SWMU 10

SWMU 10, POL Tank No. 170 was located near Hangar 170, in the central portion of Cannon AFB (**Figure I-1**). A site map is presented as **Figure I-5** in **Section I**.

History / Current and Anticipated Land Use – SWMU 10

An RFA (A.T. Kearney 1987) described the suspected SWMU 10 location as having a recovered diesel fuel tank connected to an OWS (SWMU 11). This led to the UST being listed as an Appendix II site. However, the only storage tank ever associated with Hangar 170 was a 2,000-gallon UST located approximately 120 feet east of the OWS (SWMU 11), which stored new diesel fuel used as heating oil for the building. In 1992, the 2,000-gallon heating oil tank was removed from the suspected location of SWMU 10, and confirmatory samples were collected following NMED UST regulations.

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land use classification will continue to remain industrial.

Evaluation of Relevant Information – SWMU 10

1992 UST Removal

Two samples were collected during the UST removal in 1992 and analyzed for TPH and individual fuel oil constituents including MTBE and BTEX.

2007 RFI

The RFI (URS 2007) screened historical data against current NMED SSLs, and confirmed that no further sample collection was needed. Maximum subsurface soil concentrations for all detected chemicals were compared with NMED SSLs. None of the VOCs were detected above reporting limits. Low levels of TPH were detected at a concentration (3.14 mg/kg) well below the screening levels. Impacts to groundwater were considered minimal because the depth to

CORRECTIVE ACTION COMPLETE PROPOSALS

groundwater is greater than 250 feet. **Table 4** in the **Attachments** presents the comparison of maximum soil concentrations to NMED SSLs.

Ecological screening was not completed because the site is located in an industrial area. The SWMU was characterized in accordance with current applicable state and federal regulations, and the available data indicate the chemicals present do not pose an unacceptable level of risk under current and projected land uses.

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC Without Controls for SWMU 10.

Basis of Determination – SWMU 10

SWMU 10 is proposed for CAC Without Controls based on NMED CAC Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

5. SWMU 50, INACTIVE POL STORAGE TANK NO. 4028A (ST-26)

Location – SWMU 50

SWMU 50, Inactive POL Storage Tank (No. 4028A) (IRP Site No. ST-26), was reported as an inactive storage tank associated with Facility No. 4028, a World War II era gas station. SWMU 50 is located in the north-central portion of Cannon AFB (**Figure I-1**). A site map is presented as **Figure I-6** in **Section I**.

History / Current and Anticipated Land Use – SWMU 50

An RFA (A.T. Kearney 1987) described SWMU 50 as an inactive POL storage tank associated with Facility No. 4028, a historical gas station built during the World War II era. There are four SWMU sites associated with this historical gas station: 48A, 48B, 49, and 50. The description of SWMU 50 was very similar to the description of SWMU 48A. According to Cannon AFB records, it appears that SWMU 50 is a duplication of SWMU 48A.

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land use classification will continue to remain industrial in nature.

Evaluation of Relevant Information – SWMU 50

SWMU 50 is a duplicate of SWMU 48A, and therefore no investigation of SWMU 50 has taken place. Investigations have been conducted at SWMU 48A, and no further work is required for this SWMU. As a result of the work completed for the RFI (URS 2007), a letter from NMED to Cannon AFB (NMED 2008) stated SWMU 50 is eligible for CAC Without Controls status.

CORRECTIVE ACTION COMPLETE PROPOSALS

Basis of Determination- SWMU 50

SWMU 50 is proposed for CAC Without Controls based on NMED CAC Criterion 1: The SWMU cannot be located, does not exist, or is a duplicate SWMU.

6. SWMU 72, OWS NO. 390

Location – SWMU 72

The RFA (A.T. Kearney 1987) placed the reported SWMU 72, OWS No. 390, in the Bulk Storage Area of the Cantonment Area, Cluster H. The SWMU is located along the north-central boundary of Cannon AFB (**Figure I-1**). A site map is presented as **Figure I-7** in **Section I**.

History / Current and Anticipated Land Use – SWMU 72

The RFA described SWMU 72, OWS No. 390, as a 2,000-gallon UST located in the Bulk Storage Area of the Cantonment Area, Cluster H, which was nearly identical to the description of SWMU 71. SWMU 71 was removed in 1991 and no evidence of an OWS was found at that time. An OWS was installed after the removal of SWMU 71, but the unit is not considered to be SWMU 72. Other than its appearance in the RFA report, there is no institutional knowledge, or other existing evidence, that indicates that an OWS or any other UST was ever associated with Facility No. 390 prior to the installation of the new unit.

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land use classification will continue to remain industrial in nature.

Evaluation of Relevant Information – SWMU 72

SWMU 72 is a duplicate of SWMU 71, and therefore no investigation of SWMU 72 has taken place. In response to the work completed as part of the RFI (URS 2007), a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC Without Controls for SWMU 72.

Basis of Determination – SWMU 72

SWMU 72 is proposed for CAC Without Controls based on NMED CAC Criterion 1: The SWMU cannot be located, does not exist, or is a duplicate SWMU.

7. SWMU 75, SANITARY SEWER LIFT STATION OVERFLOW PIT (SD-13)

Location – SWMU 75

SWMU 75, Sanitary Sewer Lift Station Overflow Pit (IRP Site No. SD-13) was located in the northwest part of Cannon AFB (**Figure I-1**). It is now a water hazard at the golf course. A site map is presented as **Figure I-8** in **Section I**.

CORRECTIVE ACTION COMPLETE PROPOSALS

History / Current and Anticipated Land Use – SWMU 75

This SWMU served as an emergency overflow containment area for a lift station in the northwest part of Cannon AFB. The pit was reportedly 100 feet wide by 600 feet long by 3 feet deep. The exact location of the SWMU is unknown, and no drawings of the pit have been identified.

According to historical records, the pit was used once in February 1983 when 100,000 to 150,000 gallons of raw domestic sewage were bypassed to the pit when the lift station pumps failed. The area around the pit was rebuilt twice after that event to improve drainage around the golf course and to create water hazards for a new section of the golf course.

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land use classification will continue to remain recreational in nature.

Evaluation of Relevant Information – SWMU 75

1986 IRP Phase II

As part of the IRP Phase II Stage 1 investigation (Radian Corporation [Radian] 1986), four samples were collected from two shallow borings located within the overflow pit. These samples were analyzed for purgeable organic; oil, grease, and metals.

2007 RFI

The RFI (URS 2007) verified that samples collected in 1986 were likely obtained from the pit, and screened historical data to current NMED SSLs. Maximum concentrations of arsenic (2.6 mg/kg) and mercury (3.8 mg/kg) exceeded soil-to-groundwater SSL. Manganese (150 mg/kg) exceeded construction worker SSLs. No other metals exceeded NMED SSLs. Impacts to groundwater were considered minimal because the depth to groundwater is greater than 250 feet.

Purgeable organics were not detected in any samples. Oil and grease were detected at a maximum concentration of 24 mg/kg. **Table 5** in the **Attachments** presents the comparison of maximum soil concentrations to NMED SSLs.

Based on site conditions, no ecological screening was warranted. The SWMU was characterized in accordance with current applicable state and federal regulations, and the available data indicate the chemicals present do not pose an unacceptable level of risk under current and projected land uses.

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC Without Controls for SWMU 75.

CORRECTIVE ACTION COMPLETE PROPOSALS

Basis of Determination – SWMU 75

SWMU 75 is proposed for CAC Without Controls based on NMED CAC Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

8. SWMU 81, SOLVENT DISPOSAL SITE (DP-16)

Location – SWMU 81

SWMU 81, Solvent Disposal Site (IRP Site No. DP-16) was located approximately 300 feet east of Fire Training Area No. 1 (SWMU 78) and 100 feet south of the northern Base boundary fence (**Figure I-1**). A site map is presented as **Figure I-9** in **Section I**.

History / Current and Anticipated Land Use – SWMU 81

SWMU 81 was first identified in the 1983 IRP Phase I Records Search (CH2M Hill 1983) as two empty drums labeled “trichloroethylene” lying on the ground. The drums had been positioned in such a way that they would have drained into a shallow pit.

The site could not be located during preparation of the 1987 RFA (A.T. Kearney 1987) or during the site visit performed as part of the preparation of the Appendix I, Phase I RFI Work Plan (Lee Wan Associates Inc. [Lee Wan] 1990). Air Force personnel were able to identify the location of the site as part of the preparations for the Remedial Investigation (RI) completed in 1991 (Woodward-Clyde [W-C] 1992).

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land use classification will continue to remain industrial in nature.

Evaluation of Relevant Information – SWMU 81

1992 RI

The RI (W-C 1992) involved drilling and sampling ten soil borings in the area of the shallow pit. One surface soil sample (0.5 foot bgs) and one subsurface soil sample (4 feet bgs) were collected from each of the ten borings. Based on elevated organic vapor analyzer (OVA) readings in subsurface soil, two additional soil borings were drilled and sampled continuously. Four additional soil samples were collected from 5 to 9 feet bgs in the two borings to evaluate the vertical extent of potential contamination. Replacement samples were collected from this site due to missed holding times. All samples were analyzed for VOCs. Only acetone and toluene were detected at SWMU 81 above the reporting limits.

CORRECTIVE ACTION COMPLETE PROPOSALS

2007 RFI

The RFI (URS 2007) verified that samples collected during the RI were collected from the pit, and screened the historical analytical data against current NMED SSLs. Ten VOCs were detected above the method detection limits in surface and subsurface soil. Methylene chloride (0.11 mg/kg) exceeded the soil-to-groundwater SSL (0.0169 mg/kg), but was not considered a COPC. Impacts to groundwater were considered minimal because the depth to groundwater is greater than 250 feet. The historical data screening confirmed that no further sample collection was needed. **Tables 6 and 7** in the **Attachments** present the comparison of maximum soil concentrations to NMED SSLs.

Ecological risks were not identified during previous investigations or associated risk evaluations. The SWMU was characterized in accordance with current applicable state and federal regulations, and the available data indicate the chemicals present do not pose an unacceptable level of risk under current and projected land uses.

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC Without Controls for SWMU 81.

Basis of Determination – SWMU 81

SWMU 81 is proposed for CAC Without Controls based on NMED CAC Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

9. SWMU 82, LANDFILL NO. 2 (LF-02)

Location – SWMU 82

SWMU 82, Landfill No. 2 (IRP Site No. LF-02) occupies approximately 15 acres of vacant and grass-covered land in the northeast corner of Cannon AFB (**Figure I-1**). A site map is presented as **Figure I-10** in **Section I**.

History / Current and Anticipated Land Use – SWMU 82

SMWU 82 accepted wastes from 1946 to 1947 and again from 1952 to 1959. The 4-year period of inactivity occurred when Cannon AFB was in deactivated status. The landfill's operation reportedly consisted of placing waste in trenches and burning it before burying it. The landfill reportedly received domestic solid wastes and shop wastes, which included; waste oils, solvents, paint strippers and thinners, outdated paint, pesticide containers, and various empty cans and drums (Radian 1986).

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Use classification will continue to remain industrial in nature.

CORRECTIVE ACTION COMPLETE PROPOSALS

Evaluation of Relevant Information – SWMU 82

1993 RFI

A geophysical survey was conducted as part of the 1993 RFI (W-C 1993) to identify landfill cell locations. A subsurface soil investigation was then designed based on the locations of the interpreted cells. The subsurface soil investigation involved digging a 28-foot-long trench into one of the landfill cells. Landfill materials were excavated and field screened with an OVA. No readings were above background level. The landfill material and cap were replaced.

Twenty-seven soil borings were also drilled to depths of 76 feet bgs. A total of 120 samples from 15 borings were analyzed for VOCs, SVOCs, pesticides / polychlorinated biphenyls (PCBs), and TAL Metals. The samples were collected from depths ranging from 11 to 76 feet bgs. Five additional surface soil samples were also collected from depths between 0 and 0.5 foot bgs.

Low levels of two VOCs (toluene and xylene) were detected in surface soil and several VOCs (acetone, benzene, 2-butanone, chloromethane, ethylbenzene, methylene chloride, toluene, vinyl acetate, and xylene) were detected in subsurface soil. Many of these were eliminated as COPCs in the 1993 RFI due to their low frequency of detection, and the possibility of laboratory contamination.

Low levels of twenty-five SVOCs, 4,4-DDE, 4,4-DDT, and Aroclor 1254 were also detected in surface and subsurface soils. The pesticides 4,4-DDE and 4,4-DDT were only detected in surface soils and were probably not associated with landfill waste. TPH was detected in one boring at 18 feet bgs at a concentration of 97.2 mg/kg. Many of the metals detected were present at concentrations exceeding the background range; however this was attributed to the presence of caliche and calcium carbonate-cemented sands and metal fragments in the trash debris. Impacts to groundwater were considered minimal because the depth to groundwater is greater than 250 feet.

A risk assessment was completed for SWMU 82 based on the results of the 1993 RFI, which identified toluene, acenaphthene, anthracene, benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene, fluoranthene, fluorine, indeno(1,2,3-cd)pyrene, and naphthalene as COPCs. Ecological risk screening indicated that COPCs did not pose an unacceptable risk to the environment.

2007 RFI

As part of the 2007 RFI (URS 2007), historical data was compared to current NMED SSLs. TPH, VOCs, and pesticides/PCBs did not exceed SSLs. Maximum concentrations of the SVOCs naphthalene (0.395 mg/kg) and phenanthrene (464 mg/kg) exceeded soil-to-groundwater SSLs. Impacts to groundwater were considered minimal because the depth to groundwater is greater than 250 feet. Benzo(a)pyrene (0.621 mg/kg) exceeded the residential SSL, but was not considered a COPC because it was detected in subsurface soil (approximately 20 feet bgs) where residential exposure was unlikely. None of the SVOCs were considered to be COPCs for this site.

CORRECTIVE ACTION COMPLETE PROPOSALS

Maximum concentrations of antimony (16.1 mg/kg), arsenic (2.8 mg/kg), iron (11,400 mg/kg), and mercury (0.048 mg/kg) exceeded soil-to-groundwater SSLs. Impacts to groundwater were considered minimal because the depth to groundwater is greater than 250 feet. Manganese (174 mg/kg) exceeded the construction worker SSL. All concentrations were under or near Cannon AFB background levels. **Tables 8 and 9** in the **Attachments** present the comparison of maximum soil concentrations to NMED SSLs.

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC With Controls for SWMU 82.

Basis of Determination – SWMU 82

SWMU 82 is proposed for CAC With Controls based on NMED CAC Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

10. SWMU 96, OLD ENTOMOLOGY RINSE AREA (SD-17)

Location – SWMU 96

SWMU 96, Old Entomology Rinse Area (IRP Site No. SD-17) was located behind Building 2160, Pesticide Storage Building, which was abandoned in October 1983 and demolished in September 1984. The site is located at the eastern end of Cannon AFB (**Figure I-1**). A site map is presented as **Figure I-11** in **Section I**.

History / Current and Anticipated Future Land Use – SWMU 96

Pesticide and herbicide application equipment was cleaned in a sink located within Building 2160. The sink drained into a 3-foot-square and 2-foot-deep pit at the rear of the building. The bottom of the pit was reported to be unlined and open to the soil (W-C 1992).

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land use classification will continue to remain industrial in nature.

Evaluation of Relevant Information – SWMU 96

1986 IRP Phase II

An IRP Phase II investigation (Radian 1986) of SWMU 96 detected potentially significant concentrations of pesticides and herbicides in samples collected from two of three soil borings. The soil borings were drilled to depths of approximately 60 feet bgs and analyzed for arsenic, mercury, herbicides, pesticides, and VOCs. Low concentrations of 4,4-DDD, 4,4-DDE, 4,4-DDT, dieldrin, and toxaphene were detected between 2 to 4 feet bgs, and the herbicide 2,4-D was detected at 5 feet bgs.

CORRECTIVE ACTION COMPLETE PROPOSALS

1990 IRP Phase IV

An IRP Phase IV-A investigation (Walk Haydel 1990) was completed to confirm and delineate potential contamination detected during the IRP Phase II investigation. One surface soil sample collected near the foundation of Building 2160 was analyzed for PCBs and pesticides, and one monitoring well sample was collected and analyzed for PCBs, pesticides, and TAL metals. Low concentrations of the pesticides 4,4-DDE, 4,4-DDT, alpha- and gamma-chlordane, and heptachlor epoxide were detected in the soil sample. Seven metals were detected in the groundwater sample. Only lead slightly exceeded the maximum contaminant level (MCL). No pesticides or PCBs were detected in groundwater.

A baseline risk assessment (BRA) was developed for this site, and two additional SWMUs, as part of the IRP Phase IV-A investigation. Toluene, barium, cadmium, chromium, cobalt, lead, mercury, nickel, zinc, 4,4-DDE, 4,4-DDT, chlordane, and heptachlor epoxide were identified as COPCs. None of the compounds exceeded the historical RFI soil criteria / proposed RCRA levels. Cobalt and lead did not have published toxicity values for the development of RCRA action levels but were qualitatively evaluated. An ecological risk assessment also identified cadmium, chromium, cobalt, copper, lead, and zinc as metals of concern in soil. No organic chemicals of concern were identified in soil. No unacceptable human health or ecologic risks due to chemical releases were expected from this SWMU.

1994 RFI

A Supplemental RFI (W-C 1994) was conducted to define potential contamination of the deeper soil beneath the suspected rinse sink pit location. One soil boring was drilled to 102 feet bgs and samples were collected at 10-foot intervals starting at 10 feet bgs. The soil samples were analyzed for VOCs, SVOCs, PCBs, TAL metals, TPH, and pesticides. Two pesticides (4,4-DDE and 4,4-DDT) were detected at 10 feet bgs. The concentrations of pesticides were lower than concentrations detected at other non-pesticide-related SWMUs. Low concentrations of acetone, methylene chloride, toluene, and TPH were detected at multiple depths, in concentrations well below the historical corrective action levels and were attributed to laboratory contamination. Seventeen metals were detected within the range of naturally occurring background levels.

2007 RFI

The 2007 RFI (URS 2007) compared the historical data to NMED SSLs. None of the pesticides or metals detected above the reporting limits exceeded the industrial or construction worker SSLs. Arsenic (5.6 mg/kg) and mercury (0.24 mg/kg) exceeded soil-to-groundwater SSLs; however, impacts to groundwater are considered minimal because the depth to groundwater was greater than 250 feet. Although arsenic concentrations exceeded the residential SSL, arsenic was not considered a COPC. The slightly elevated arsenic concentrations were within the range of background levels, and were associated with a subsurface soil sample. Low concentrations of arsenic detected in groundwater samples was likely due to naturally occurring arsenic, and not activities associated with this site.

No unacceptable ecological risks were identified during previous investigations or associated risk evaluations. The SWMU was characterized in accordance with current applicable state and

CORRECTIVE ACTION COMPLETE PROPOSALS

federal regulations, and the available data indicate the chemicals present do not pose an unacceptable level of risk under current and projected land uses. **Tables 10 and 11** in the **Attachments** present the comparison of maximum soil concentrations to NMED SSLs. **Table 12** in the **Attachments** presents the comparison of maximum groundwater concentrations to water screening criteria.

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC With Controls for SWMU 96.

Basis of Determination – SWMU 96

SWMU 96 is proposed for CAC With Controls based on NMED CAC Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

11. SWMU 98, SANITARY SEWER LINE

Location – SWMU 98

SWMU 98, Sanitary Sewer Line, is present throughout Cannon AFB. The sanitary sewer system's main trunk line flows northeast along Torch Boulevard in the aircraft maintenance area. A smaller branch flows south along Torch Boulevard near the main entrance to Cannon AFB. A secondary line flows southeast and enters the main trunk at Argentia Avenue, and a transmission line flows east across the runways to the wastewater lagoon. Maps of the sanitary sewer system are presented as **Figure I-12a** through **I-12d** in **Section I**.

History / Current and Anticipated Future Land Use – SWMU 98

The sanitary sewer system at Cannon AFB was constructed in 1943, and has undergone expansion and upgrade in subsequent years. The sewer lines are located underground and are used to transport sanitary wastewater to the wastewater treatment plant. The sewer lines are constructed of 8-inch diameter polyvinyl chloride (PVC) in the housing area of the Base, and of 15-inch diameter clay tile in the main Base area. Typically, the lines are buried 5 to 17 feet bgs. The system has an approximate flow-rate of 0.4 million gallons per day. No indication of significant sewage loss from the sewer lines has been observed.

Only the main trunk, the south-flowing branch, and the east flowing transmission line potentially received hazardous waste. All other lines, including the secondary branch lines, receive only domestic sewage.

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land use classification will continue to remain industrial in nature.

CORRECTIVE ACTION COMPLETE PROPOSALS

Evaluation of Relevant Information – SWMU 98

1992 RI

The RI of this SWMU (W-C 1992) consisted of a video camera survey of over 8,900 feet of sanitary sewer line, drilling 42 soil borings, and collecting 44 subsurface soil samples to identify locations where the sewer line may have leaked. Soil samples were analyzed for TPH, VOCs, and metals. Low concentrations of TPH and VOCs (acetone, 2-butanone, methylene chloride, and toluene) were detected. Impacts to groundwater were considered minimal because the depth to groundwater is greater than 250 feet.

A BRA was also completed using the data collected during the RI and the cumulative hazard index was below 1.0 for the future maintenance worker. None of the COPCs were carcinogens. No unacceptable human health or ecological risks due to chemical releases are expected from this SWMU.

2007 RFI

Historical subsurface data was compared to current NMED SSLs (URS 2007). None of the detected organic or inorganic chemicals exceeded the industrial or construction worker SSLs. The maximum detected concentrations of arsenic (2.4 mg/kg) and iron (1,310 mg/kg) in subsurface soil exceeded soil-to-groundwater SSLs (0.29 mg/kg and 554 mg/kg, respectively), but were not considered to be COPCS. No other metals exceeded NMED SSLs. **Table 13** in the **Attachments** presents the comparison of maximum soil concentrations to NMED SSLs.

No unacceptable ecological risks were identified during previous investigations or associated risk evaluations. The SWMU was characterized in accordance with current applicable state and federal regulations, and the available data indicate the chemicals present do not pose an unacceptable level of risk under current and projected land uses.

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC Without Controls for SWMU 98.

Basis of Determination – SWMU 98

SWMU 98 is proposed for CAC Without Controls based on NMED CAC Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

CORRECTIVE ACTION COMPLETE PROPOSALS

12. SWMU 102, WASTEWATER TREATMENT EFFLUENT DISCHARGE (WP-21)

Location – SWMU 102

SWMU 102, Wastewater Treatment Effluent Discharge (IRP Site No. WP-21), was located along the eastern boundary of Cannon AFB (**Figure I-1**). A site map is presented as **Figure I-13** in **Section I**.

History / Current and Anticipated Future Land Use – SWMU 102

SWMU 102 was an effluent discharge that directed wastewater from the former sewage lagoons (SWMU 101) to the self-contained Playa Lake (SWMU 103) to the east. The site consisted of a discharge pipe and an inlet chamber equipped with two slide gates.

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land use classification will continue to remain industrial in nature. However, the area is currently vacant and unoccupied.

Evaluation of Relevant Information – SWMU 102

2007 RFI

An RFI (URS 2007) was conducted at this site because previous sampling results were not available. Institutional knowledge and Base drawings were used to locate the discharge area. Four soil borings were advanced to depths of 16 to 17 feet bgs. Soil samples were collected from the 5- to 7-foot interval, and, depending on the depth of the boring, from the 15- to 17-foot interval or the 14- to 16-foot interval. Nine soil samples were submitted for the laboratory analysis of VOCs, SVOCS, pesticides, and TAL metals.

Maximum subsurface soil concentrations for all detected chemicals were compared with NMED SSLs. Two VOCs (toluene and xylene) were detected in one sample at very low concentrations that did not exceed any NMED SSL. No SVOCs or PCBs were detected above reporting limits. Five pesticides were detected (4,4-DDE, 4,4-DDT, alpha- and gamma-chlordane, and gamma-BHC), but did not exceed any NMED SSLs.

Selenium was not detected above the reporting limit in any of the samples. None of the metals exceeded the construction worker SSLs. Arsenic (5.8 mg/kg), iron (7,460 mg/kg), mercury (0.03 mg/kg), and thallium (5.2 mg/kg) exceeded the soil-to-groundwater SSL. Arsenic and thallium also exceeded residential soil SSLs. Both arsenic and thallium concentrations were within the range of Cannon AFB background levels. None of the metals were considered COPCs. Impacts to groundwater were considered minimal because the depth to groundwater is greater than 250 feet. **Table 14** in the **Attachments** presents the comparison of maximum soil concentrations to NMED SSLs.

Ecological screening was not completed because the site is located in an industrial area. The SWMU was characterized in accordance with current applicable state and federal regulations,

CORRECTIVE ACTION COMPLETE PROPOSALS

and the available data indicate the chemicals present do not pose an unacceptable level of risk under current and projected land uses.

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC With Controls for SWMU 102.

Basis of Determination – SWMU 102

SWMU 102 is proposed for CAC With Controls based on NMED CAC Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

13. SWMU 106, FIRE DEPARTMENT TRAINING AREA NO. 2 (FT-07)

Location – SWMU 106

SWMU 106, Fire Department Training Area No. 2 (IRP Site No. FT-07) was located in the southeast corner of Cannon AFB near abandoned north-south taxiway T-5 (**Figure I-1**). A site map is presented as **Figure I-14** in **Section I**.

History / Current and Anticipated Future Land Use – SWMU 106

The site consisted of two small, round depressions in the land surface, each sparsely vegetated and measuring about 100 feet in diameter. From 1968 to 1974, SWMU 106 was used concurrently with SWMU 107, Fire Department Training Area No. 3. During training exercises, the ground was saturated with water, and JP-4 jet fuel was introduced and ignited. Approximately 300 gallons of fuel were burned during each training exercise. The exercises occurred approximately eight times per year.

Cannon AFB is an integral part of the defense system of the United States; therefore, the Base will remain active for the foreseeable future. Land classification will continue to remain industrial in nature.

Evaluation of Relevant Information – SWMU 106

1986 IRP Phase II

An IRP Phase II – Confirmation / Quantification Stage I (Radian 1986) investigation was completed for this site. One deep soil boring was drilled at the lowest point of the area to define subsurface conditions in samples collected at approximately 1, 5, and 57 feet bgs. Samples were analyzed for oil, grease, TPH, lead, and VOCs. Oil, grease, and lead were detected in all samples.

CORRECTIVE ACTION COMPLETE PROPOSALS

1992 RI

An RI / BRA was conducted in 1992 (W-C 1992) to further evaluate the SWMU. During the RI, four soil borings, two in each depression, were drilled to depths between 31 and 32 feet bgs. Four subsurface soil samples were collected and analyzed from each soil boring. Samples were analyzed for VOCs, TPH, lead, and chromium. In addition, four surface soil samples were collected, one from each boring location. The surface soil samples were analyzed for BTEX, TPH, lead, and chromium. Two soil borings were redrilled due to missed sample holding times.

BTEX analysis indicated the presence of toluene at 140 micrograms per kilogram ($\mu\text{g}/\text{kg}$) in one surface soil sample and benzene at 170 $\mu\text{g}/\text{kg}$ in another. TPH was detected in surface soil samples ranging from 49.6 to 232 mg/kg . No petroleum or BTEX compounds were present in subsurface soils. In summary, the extent of soil petroleum contamination is limited to the shallow soils at this site and probably does not extend beyond the boundary of the SWMU. Impacts to groundwater were considered minimal because the depth to groundwater is greater than 250 feet.

A combined BRA (also including SWMU Nos. 106, 107, 109, and 113) was developed. The BRA identified benzene, toluene, xylenes, trichloroethylene (TCE), ethylbenzene, chromium and lead as COPCs. It also indicated that there were no unacceptable adverse effects due to non-carcinogenic chemicals, and the risks due to carcinogenic chemicals were within the acceptable risk range with the exception of VOC inhalation by future child residents.

The inhalation risk was due to benzene at SWMU 106 where it was detected at a concentration of 0.17 mg/kg in one of 37 samples. Based on the low frequency of detection, the 95-percent UCL was primarily based on nondetect values, and did not account for the biodegradation of VOCs in the environment and more than likely overestimated the risk due to potential concentrations of VOCs in ambient air.

2007 RFI

The RFI (URS 2007) compared historical data to current NMED SSLs. Only benzene (0.17 mg/kg) exceeded the soil-to-groundwater SSL, however the pathway was not considered applicable due to the depth of groundwater (250 feet bgs) at this site. Maximum concentrations of chromium (19 mg/kg) and lead (41 mg/kg) exceeded background levels, but did not exceed SSLs.

Based on the comparison of current maximum site soil concentrations with current applicable human health-based SSLs, no COPCs were identified. No unacceptable ecological risks were identified during previous investigations or associated risk evaluations. The SWMU was characterized in accordance with current applicable state and federal regulations, and the available data indicate the chemicals present do not pose an unacceptable level of risk under current and projected land uses. **Tables 15 and 16** in the **Attachments** present the comparison of maximum soil concentrations to NMED SSLs.

CORRECTIVE ACTION COMPLETE PROPOSALS

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC Without Controls for SWMU 106.

Basis of Determination – SWMU 106

SWMU 106 is proposed for CAC Without Controls based on NMED CAC Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

14. SWMU 125, INACTIVE UNDERGROUND STORAGE TANK NO. 2 (ST-31)

Location – SWMU 125

SWMU 125, Inactive Underground Storage Tank No. 2 (IRP Site No. ST-31) was located adjacent to Building 357, in the north central part of Cannon AFB (**Figure I-1**). A site map is presented as **Figure I-15** in **Section I**.

History / Current and Anticipated Future Land Use – SWMU 125

An RFA (A.T. Kearney 1987) described the suspected SWMU as a UST of unknown dimensions, construction, and capacity. Visual inspections and record searches failed to reveal the existence of the unit. Interviews with Base personnel indicated that a UST had been removed prior to the implementation of NMED UST regulations, but real property records indicated that the tank had been abandoned in place.

In February 1996, during the demolition of the former Civil Engineering Compound (including Building 357 and the adjacent parking area), two 500-gallon USTs were discovered and removed. The tanks were reportedly empty with no signs of leakage and had no associated piping.

Cannon AFB is an integral part of the defense system of the United States therefore, the Base will remain active for the foreseeable future. Land classification will continue to remain industrial in nature.

Evaluation of Relevant Information – SWMU 125

After removal of the USTs in 1996, four soil samples were collected from the corners of each excavation (eight samples total) and analyzed for TPH. The analytical results of all eight samples were all nondetects. The data did not warrant a comparison to current NMED SSLs.

SWMU 125 has been characterized in accordance with current state and federal regulations, and the available data indicated that the site does not pose an unacceptable level of risk under current and projected land uses.

CORRECTIVE ACTION COMPLETE PROPOSALS

In response to the work completed as part of the RFI, a letter dated May 14, 2008 from NMED (NMED 2008) stated that the RFI report was accepted, and the permittee (Cannon AFB) may petition for a CAC Without Controls for SWMU 125.

Basis of Determination – SWMU 125

SWMU 125 has been determined to be appropriate for CAC Without Controls based on NMED Criterion 5: The SWMU has been characterized or remediated in accordance with current applicable state and/or federal regulations, and the available data indicated that contaminants pose an acceptable level of risk under current and projected land use.

CORRECTIVE ACTION COMPLETE PROPOSALS



I. Maps and Figures

- Figure I-1 Base Map and Location of SWMU Sites Proposed for Corrective Action Complete
- Figure I-2 Site Layout and Sampling Locations, SWMU 2 – Recovered Diesel Tank No. 108
- Figure I-3 Site Layout and Sampling Locations, SWMU 4 – Recovered Diesel Tank No. 121
- Figure I-4 Site Layout and Sampling Locations, SWMU 6 – POL Tank No. 129
- Figure I-5 Site Layout and Sampling Locations, SWMU 10 – POL Tank No. 170
- Figure I-6 Reported Location of SWMU 50, and Site Layout and Sampling Locations, SWMU 48A – Inactive POL Storage Tank No 4028A
- Figure I-7 Reported Location of SWMU 72, and Site Layout and Sampling Locations, SWMU 71 – OWS No. 390.
- Figure I-8 Site Layout and Sampling Locations, SWMU 75 – Sanitary Sewer Lift Station Overflow Pit
- Figure I-9 Site Layout and Sampling Locations, SWMU 81 – Solvent Disposal Site
- Figure I-10 Site Layout and Sampling Locations, SWMU 82 – Landfill No. 2
- Figure I-11 Site Layout and Sampling Locations, SWMU 96 – Old Entomology Rinse Area
- Figure I-12A Site Layout and Sampling Locations, SWMU 98 – Sanitary Sewer Line (N. Torch Blvd)
- Figure I-12B Site Layout and Sampling Locations, SWMU 98 – Sanitary Sewer Line (S. Torch Blvd)
- Figure I-12C Site Layout and Sampling Locations, SWMU 98 – Sanitary Sewer Line (Taxiway B)
- Figure I-12D Site Layout and Sampling Locations, SWMU 98 – Sanitary Sewer Line (E. of Main Runway)
- Figure I-13 Site Layout and Sampling Locations, SWMU 102 – Wastewater Treatment Effluent Discharge
- Figure I-14 Site Layout and Sampling Locations, SWMU 106 – Fire Training Area No. 2
- Figure I-15 Site Layout and Sampling Locations, SWMU 125 – Inactive Underground Storage Tank No. 2


LEGEND

2 ● SOILD WASTE MANAGEMENT UNIT (SWMU) LOCATION AND NUMBER


SWMU No.	DESIGNATED AREA
2	RECOVERED DIESEL TANK No. 108
4	RECOVERED DIESEL TANK No. 121
6	POL TANK No. 129
10	POL TANK NO. 170
50	INACTIVE POL STORAGE TANK NO. 4028 A & B
72	OIL/WATER SEPARATOR No. 390
75	SANITARY SEWAGE LIFT STATION OVERFLOW PIT
81	SOLVENT DISPOSAL SITE
82	LANDFILL No. 2
96	OLD ENTOMOLOGY RINSE AREA
98	SANITARY SEWER LINE (NOT SHOWN)
102	WASTEWATER TREATMENT EFFLUENT DISCHARGE
106	FIRE DEPARTMENT TRAINING AREA No. 2
125	INACTIVE UNDERGROUND TANK No. 2

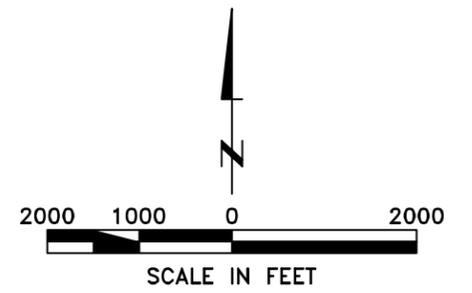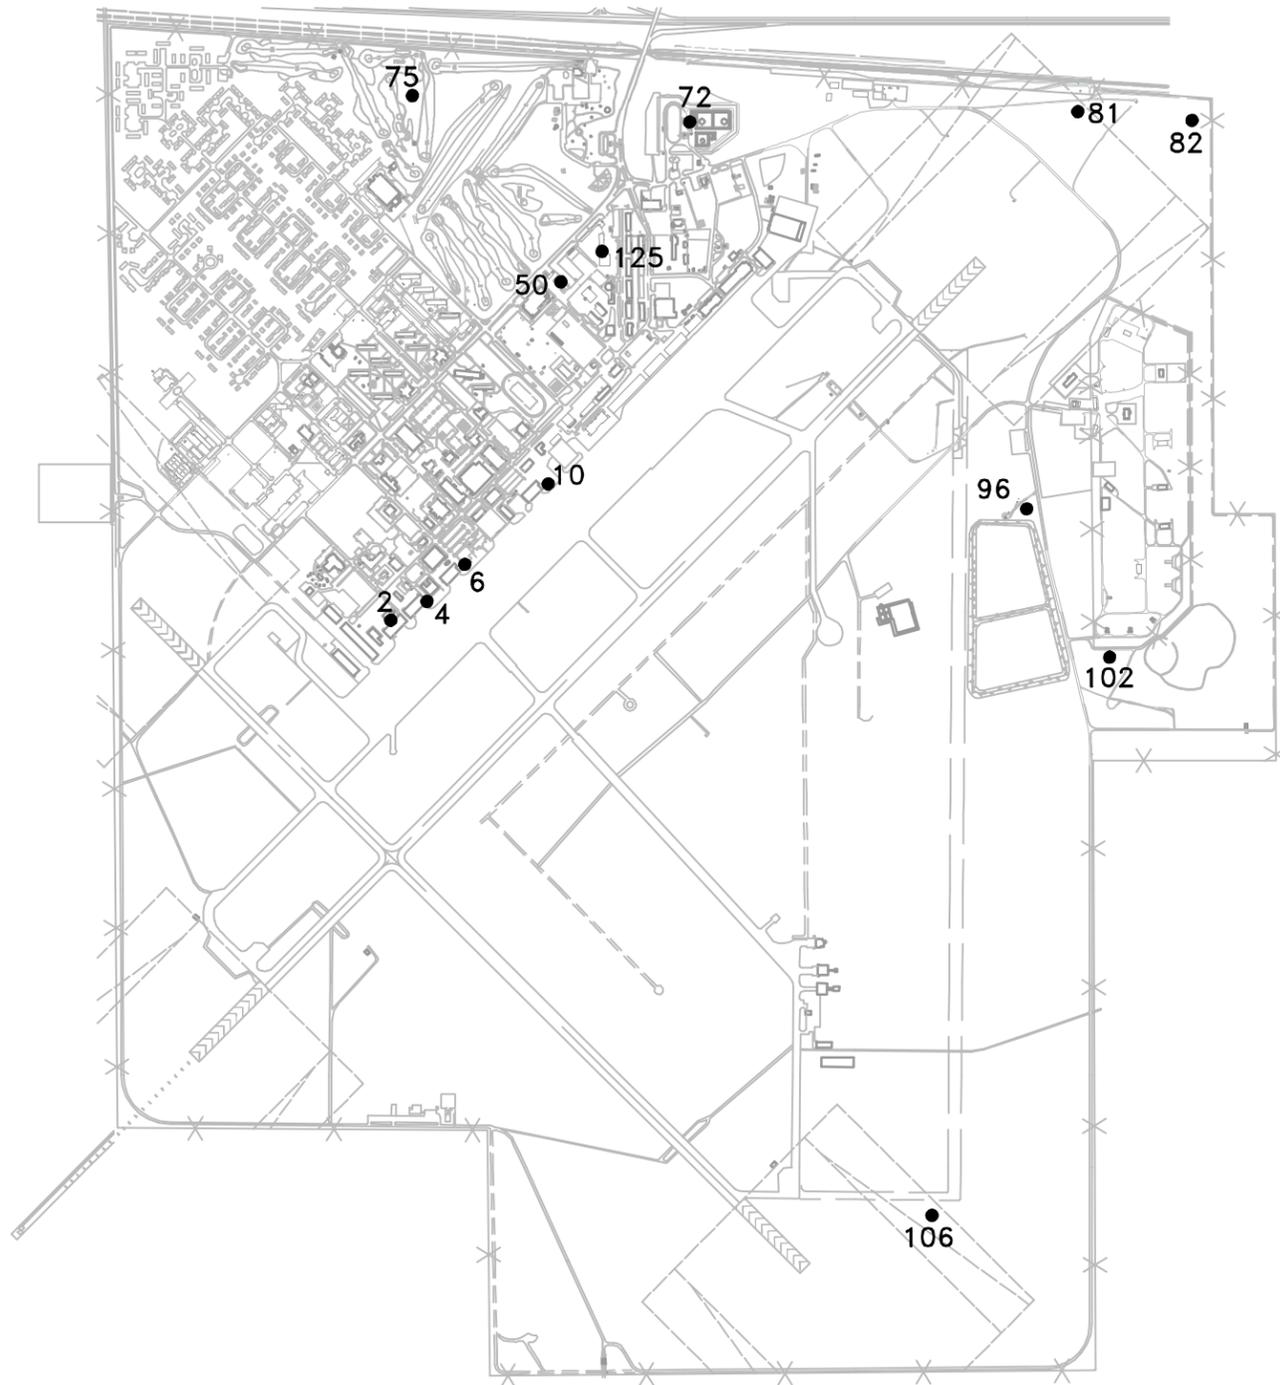


BASE MAP AND LOCATION OF SWMU SITES PROPOSED FOR CORRECTIVE ACTION COMPLETE CANNON AIR FORCE BASE CLOVES, NEW MEXICO			
DRN. BY: DPG	DATE: 06/30/08	PROJECT NO. 16170012	FIG. NO. 1-1
CHK'D. BY: .	REVISION: 0		

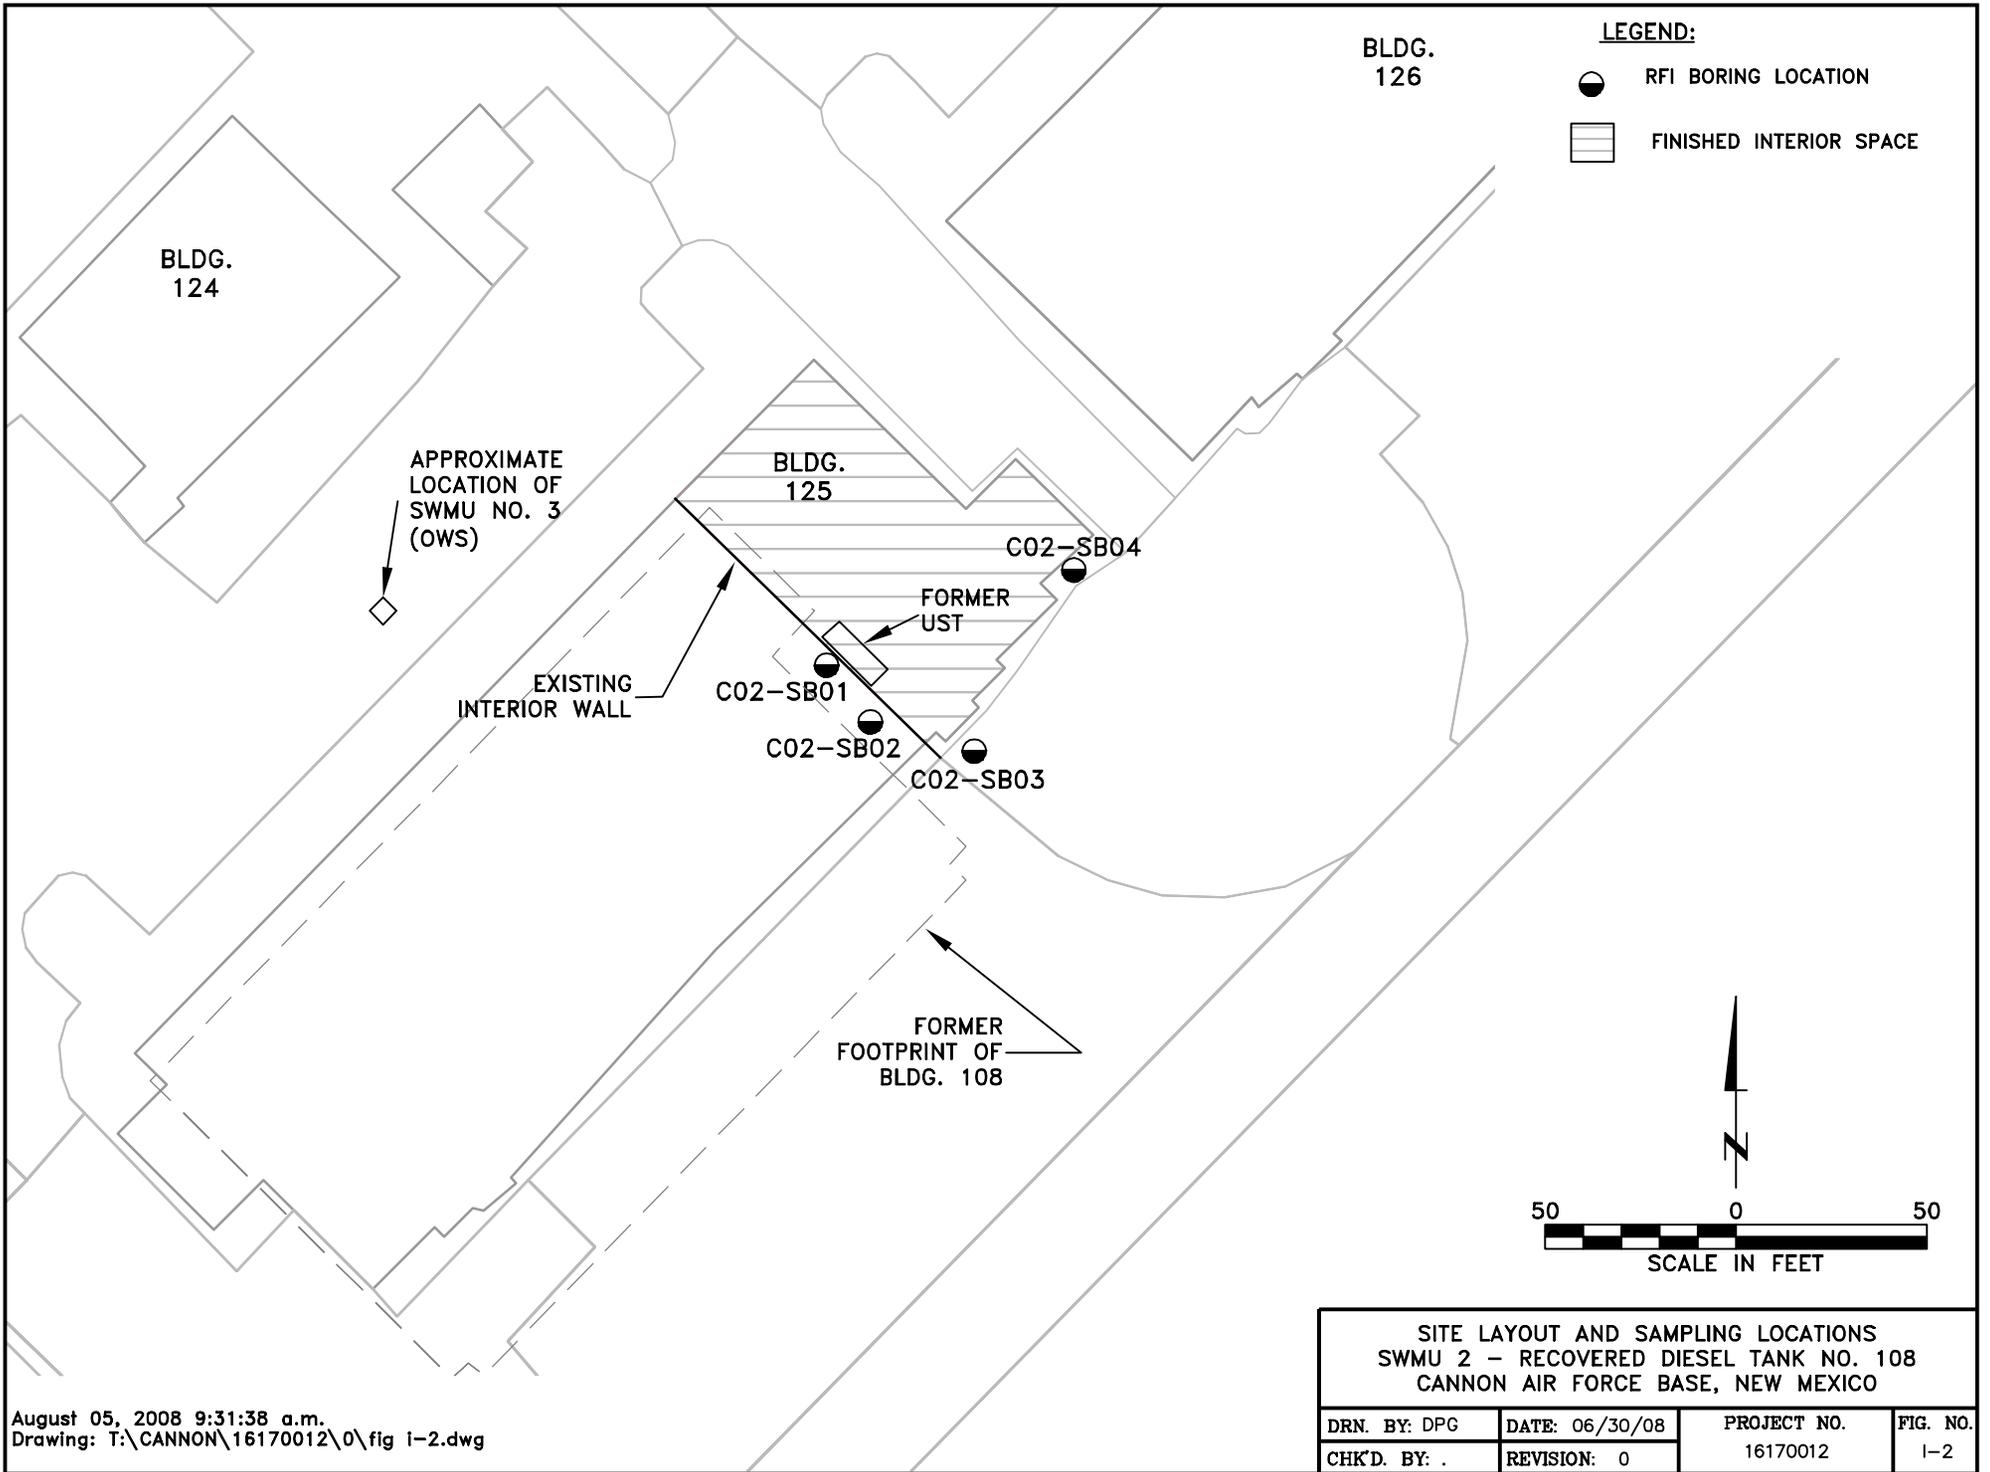

August 05, 2008 9:31:38 a.m.
 Drawing: T:\CANNON\16170012\0\fig 1-2.dwg

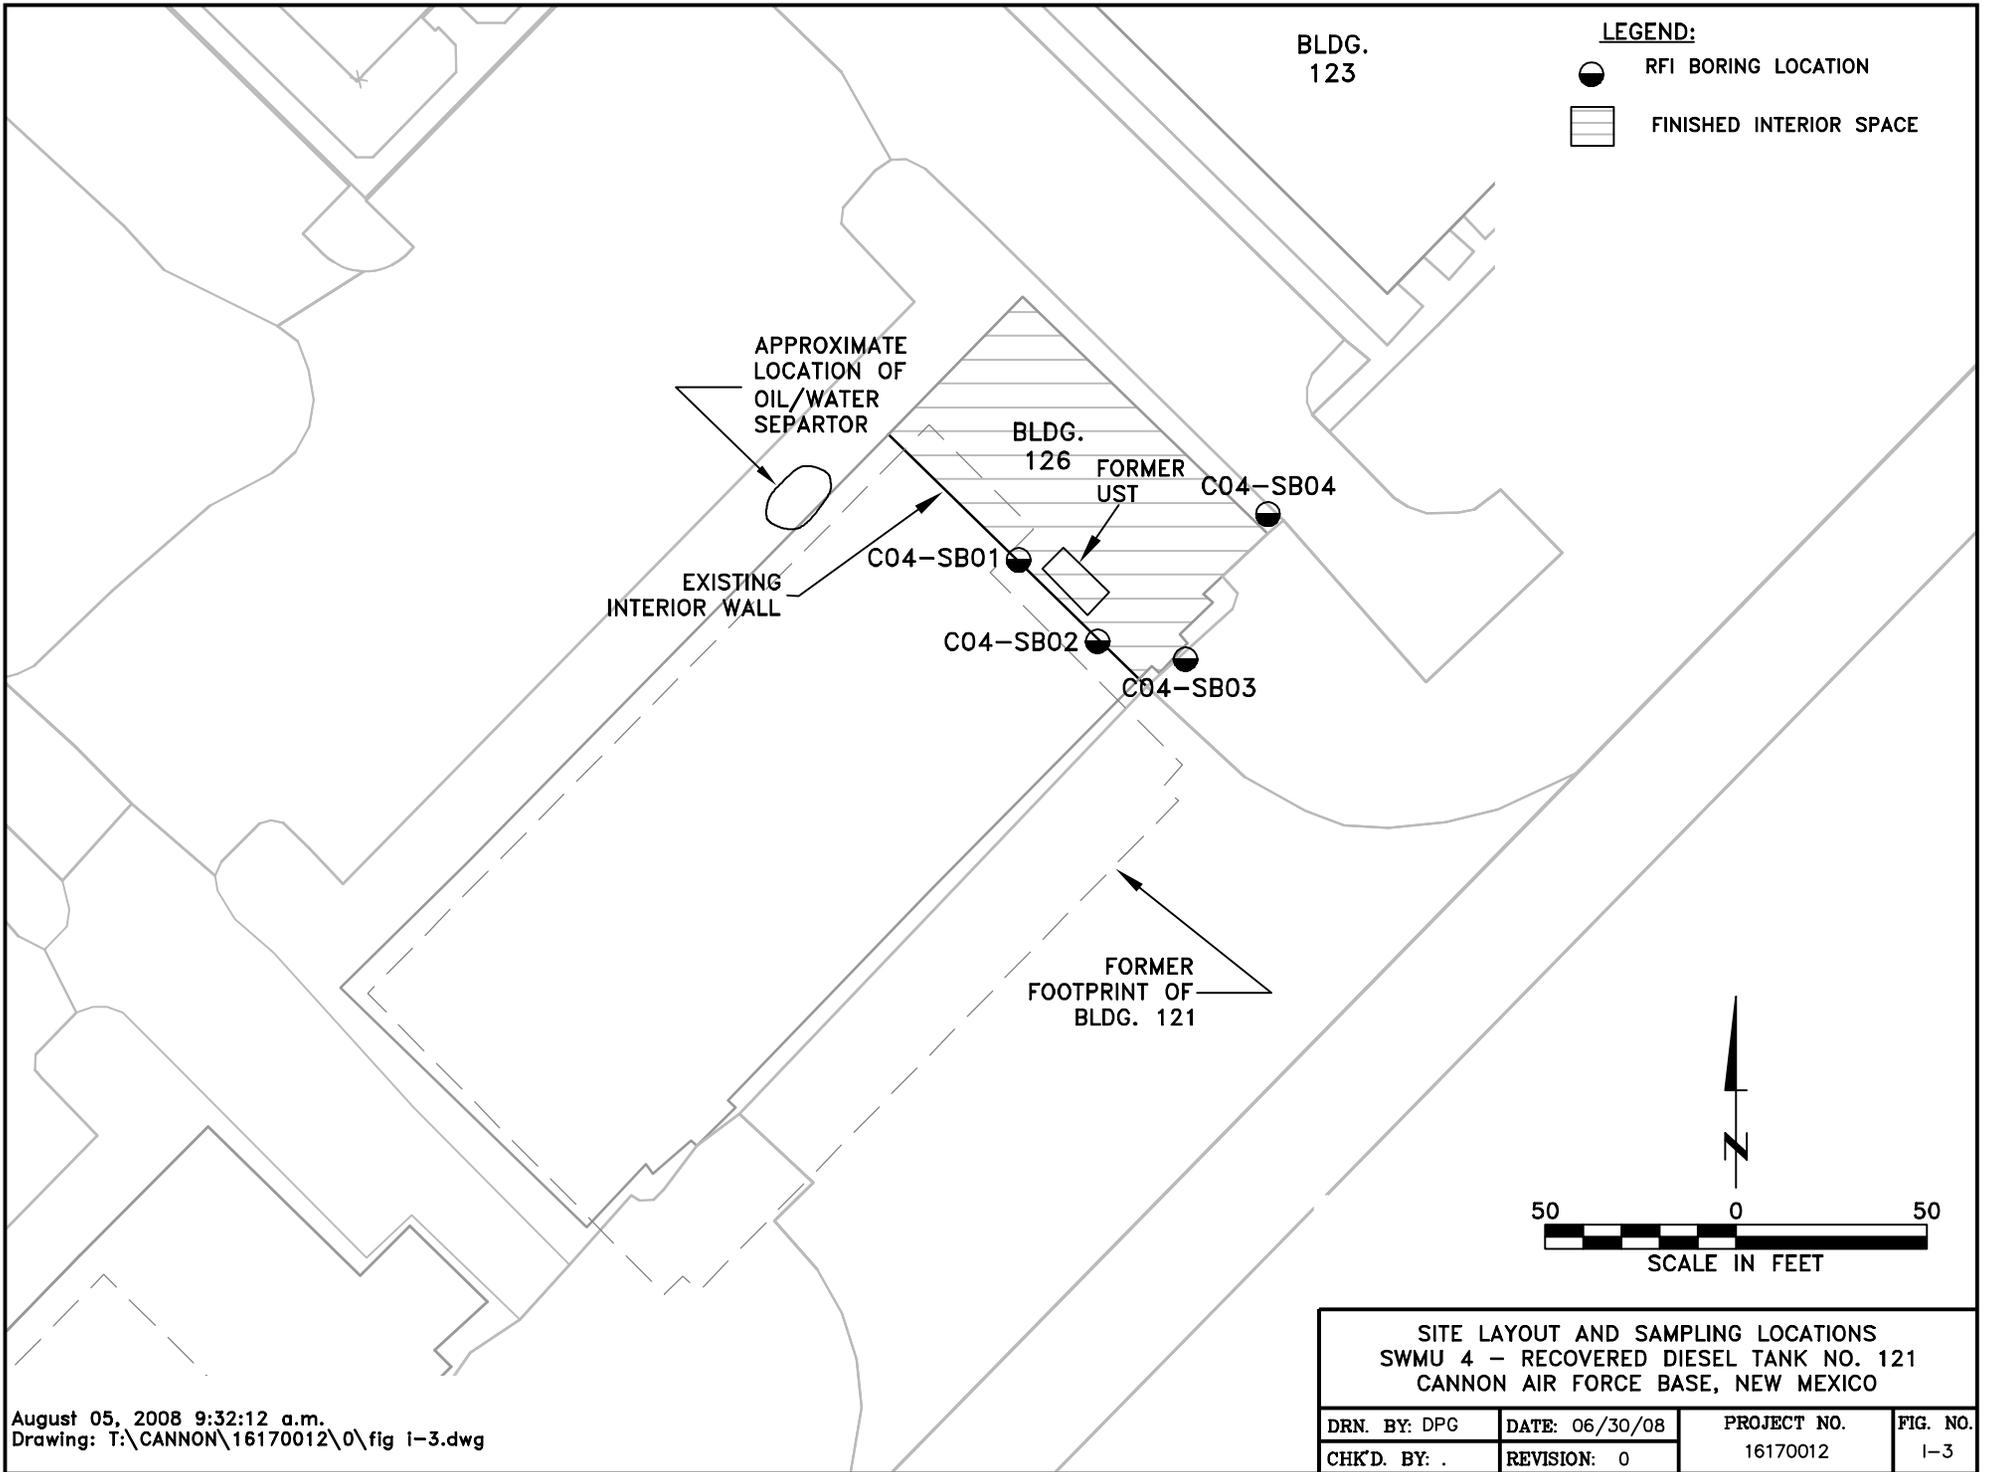


August 05, 2008 9:32:12 a.m.
 Drawing: T:\CANNON\16170012\0\fig 1-3.dwg

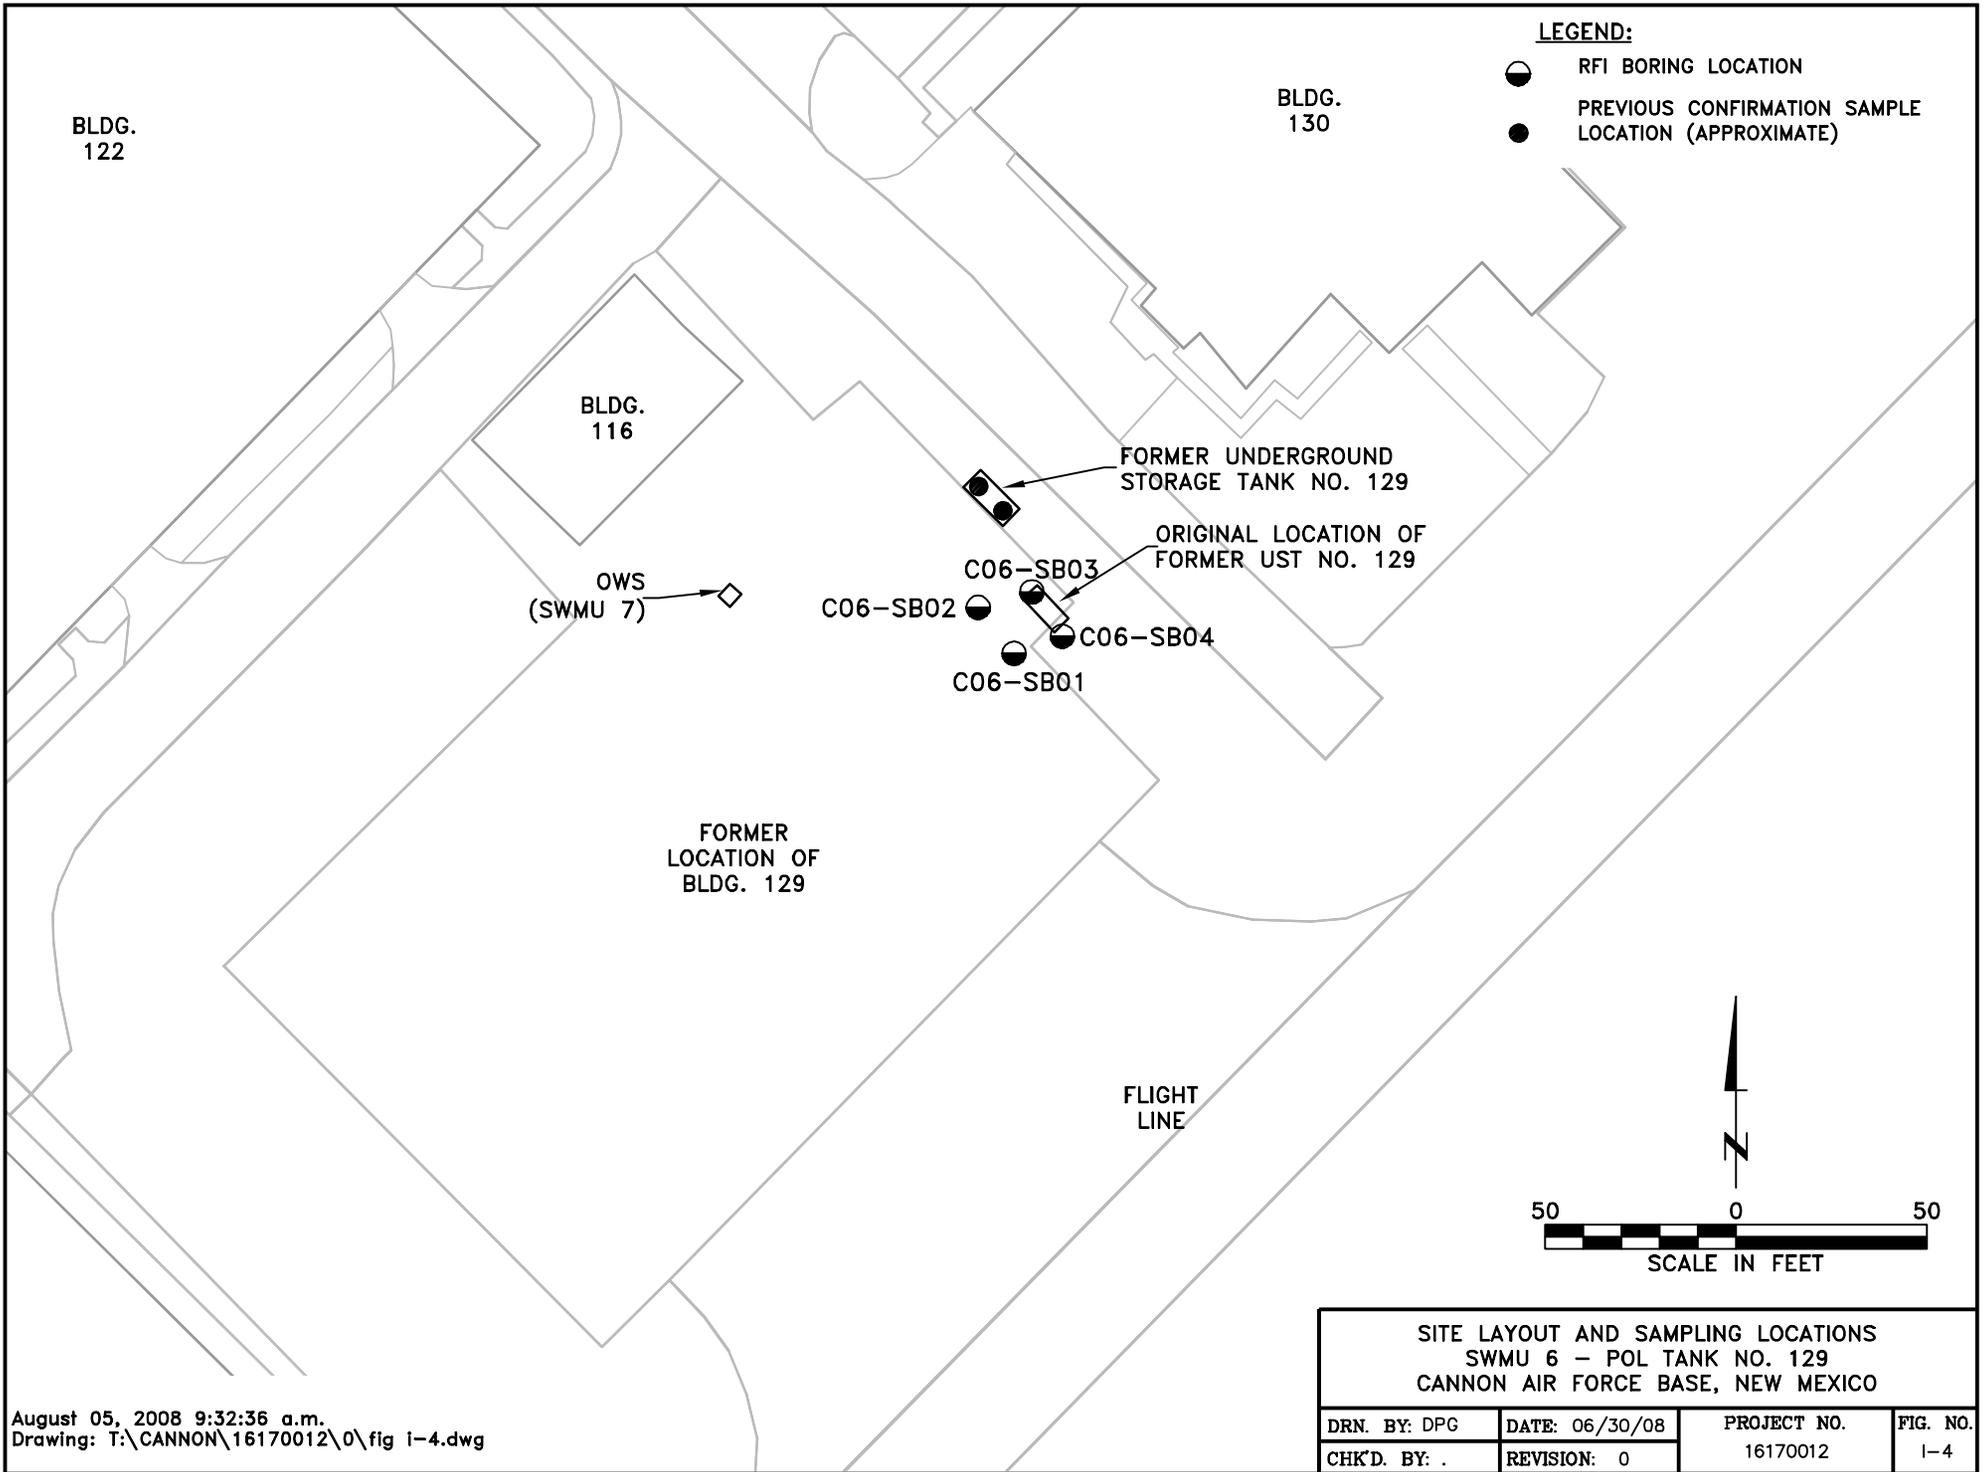

August 05, 2008 9:32:36 a.m.
 Drawing: T:\CANNON\16170012\0\fig 1-4.dwg

LEGEND:

● PREVIOUS CONFIRMATORY
SAMPLE LOCATION
(APPROXIMATE)

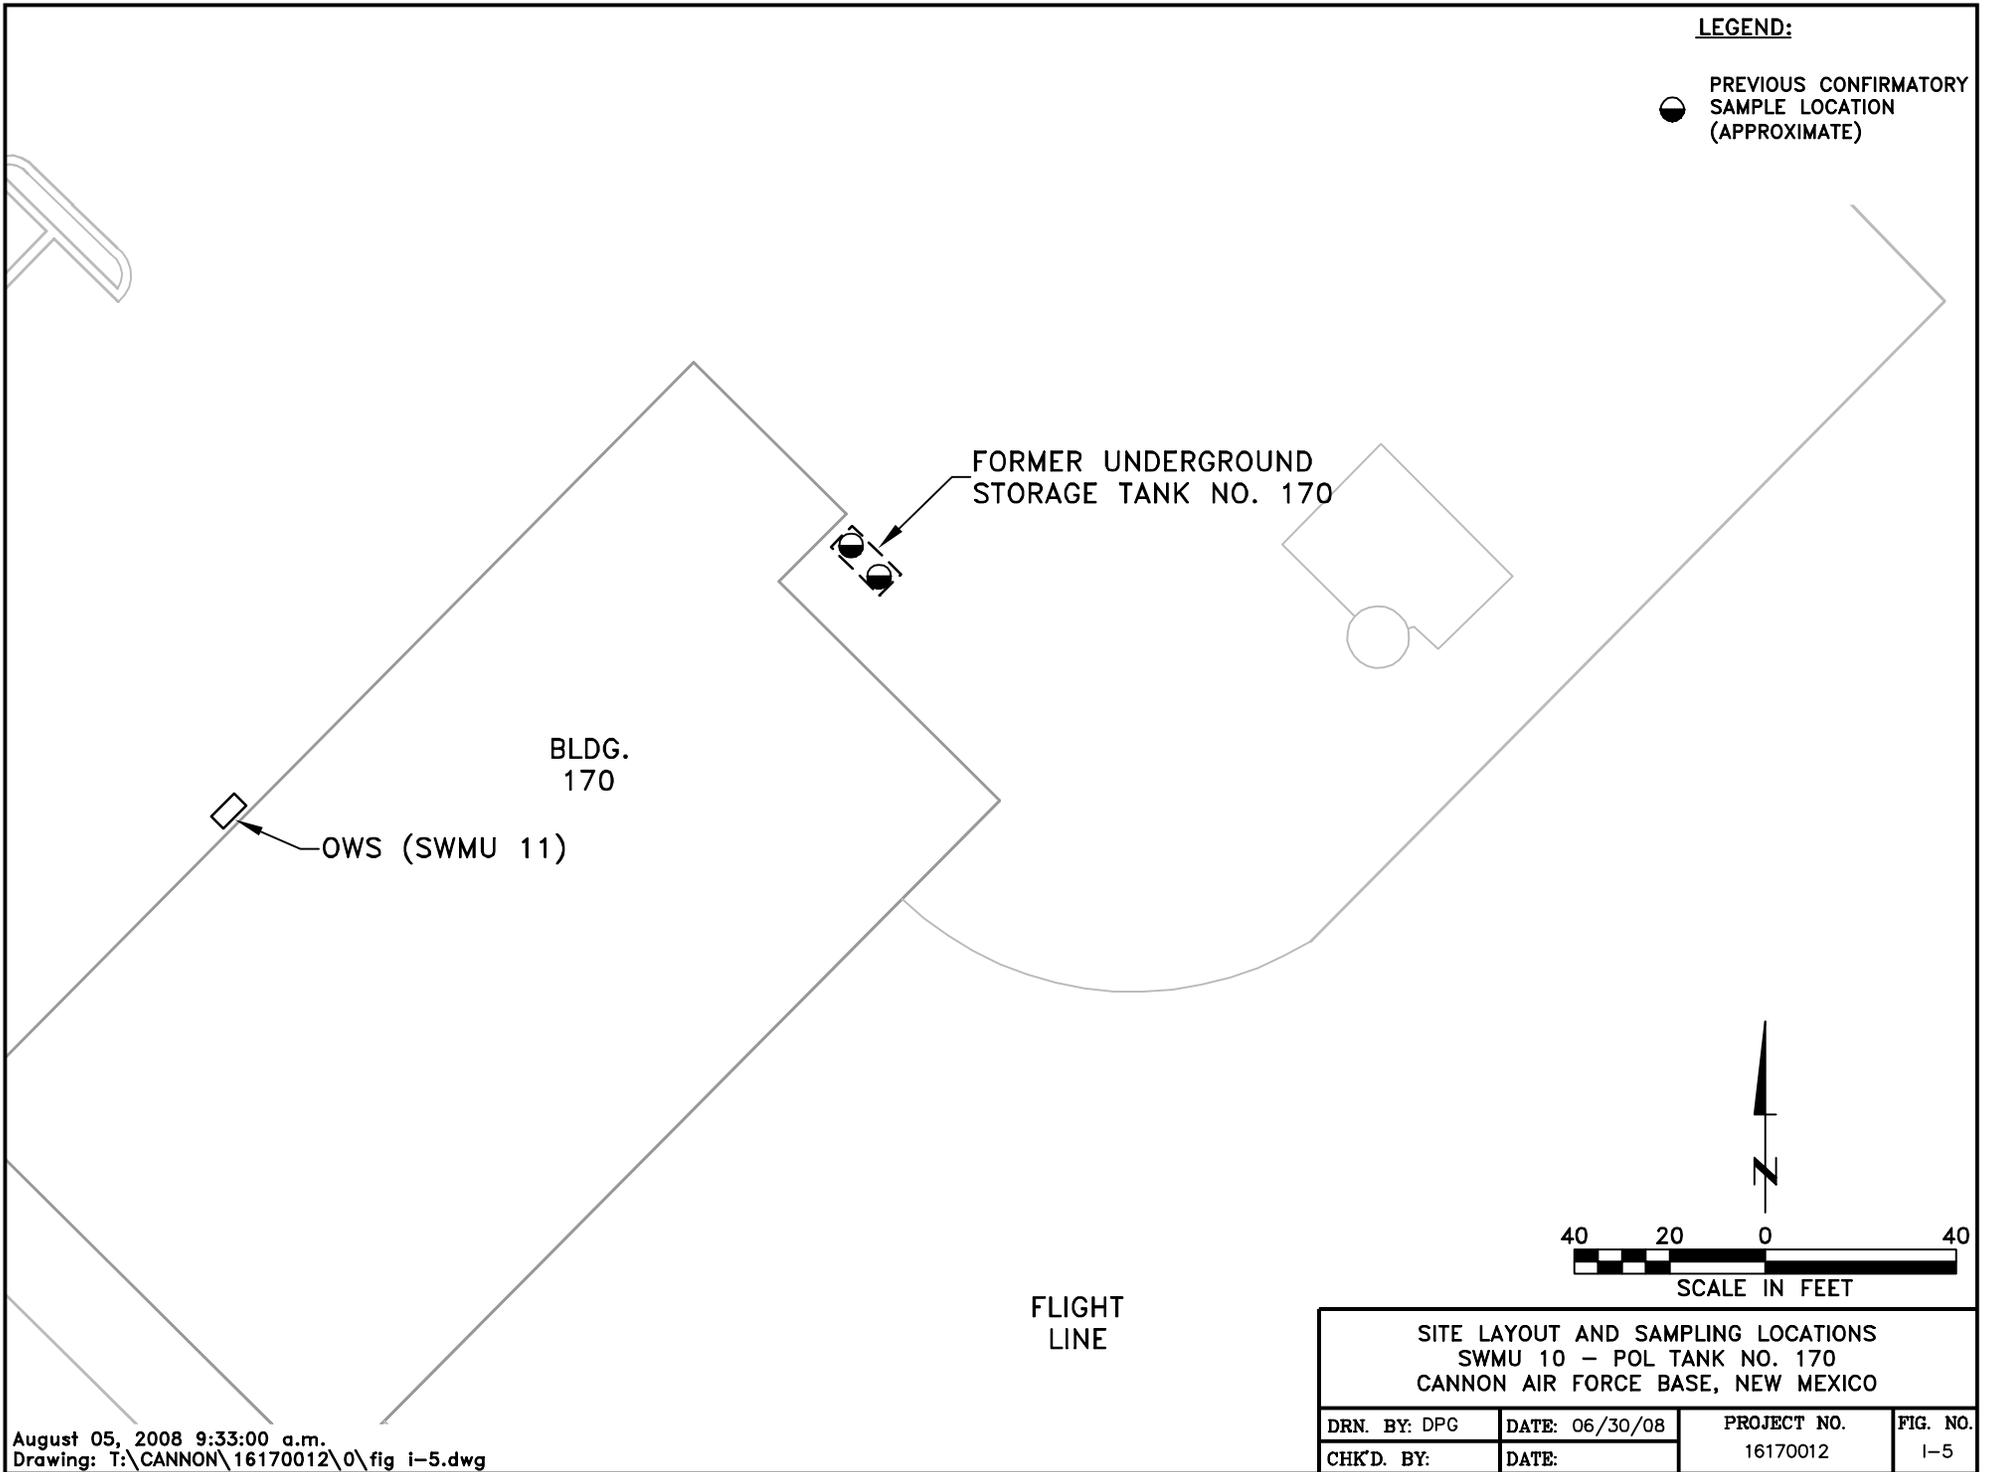


BLDG.
170


OWS (SWMU 11)

FORMER UNDERGROUND
STORAGE TANK NO. 170

FLIGHT
LINE

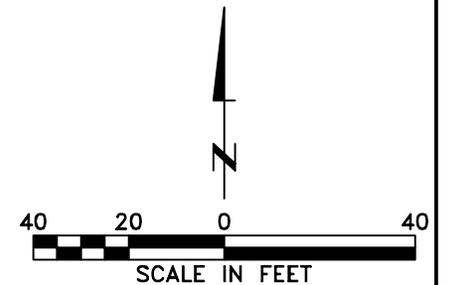


SITE LAYOUT AND SAMPLING LOCATIONS SWMU 10 - POL TANK NO. 170 CANNON AIR FORCE BASE, NEW MEXICO			
DRN. BY: DPG	DATE: 06/30/08	PROJECT NO. 16170012	FIG. NO. I-5
CHK'D. BY:	DATE:		

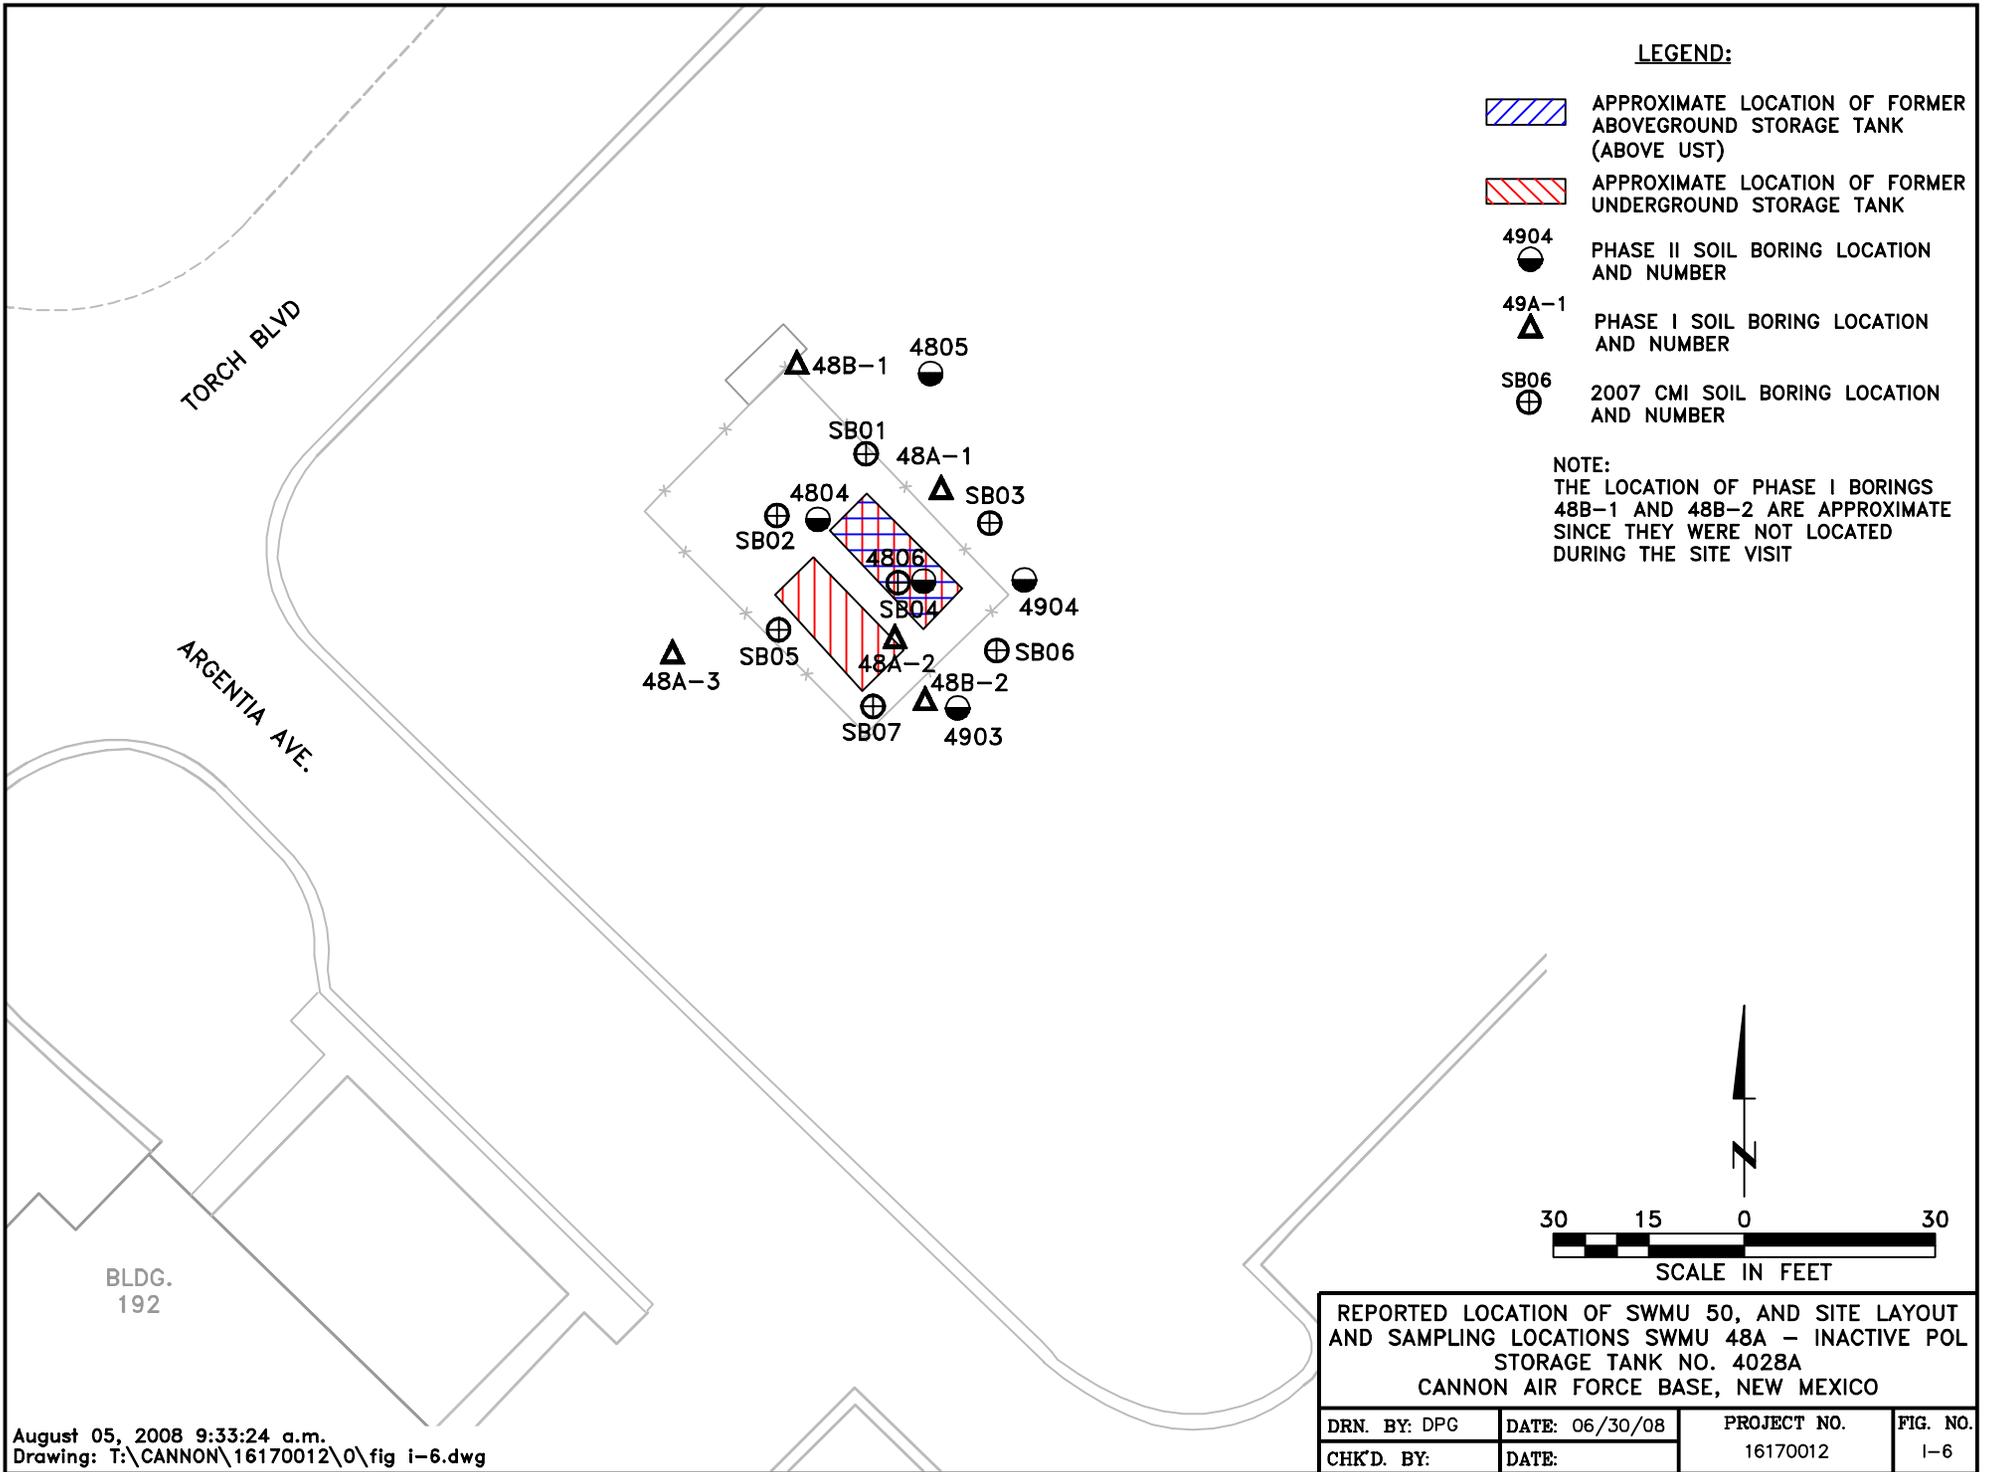

LEGEND:

-  APPROXIMATE LOCATION OF FORMER ABOVEGROUND STORAGE TANK (ABOVE UST)
-  APPROXIMATE LOCATION OF FORMER UNDERGROUND STORAGE TANK
-  4904 PHASE II SOIL BORING LOCATION AND NUMBER
-  49A-1 PHASE I SOIL BORING LOCATION AND NUMBER
-  SB06 2007 CMI SOIL BORING LOCATION AND NUMBER

NOTE:
 THE LOCATION OF PHASE I BORINGS 48B-1 AND 48B-2 ARE APPROXIMATE SINCE THEY WERE NOT LOCATED DURING THE SITE VISIT



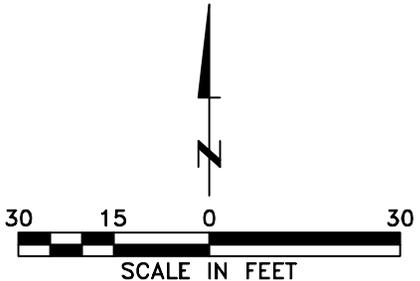


REPORTED LOCATION OF SWMU 50, AND SITE LAYOUT AND SAMPLING LOCATIONS SWMU 48A - INACTIVE POL STORAGE TANK NO. 4028A
 CANNON AIR FORCE BASE, NEW MEXICO

DRN. BY: DPG	DATE: 06/30/08	PROJECT NO.	FIG. NO.
CHK'D. BY:	DATE:	16170012	1-6

LEGEND:

-  FORMER UST
-  CONFIRMATION SAMPLE LOCATION (APPROXIMATE)

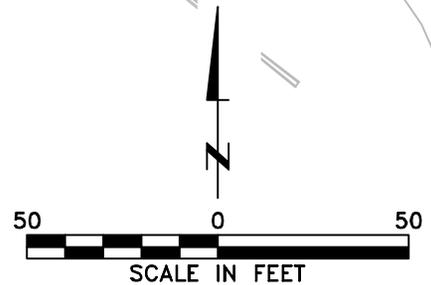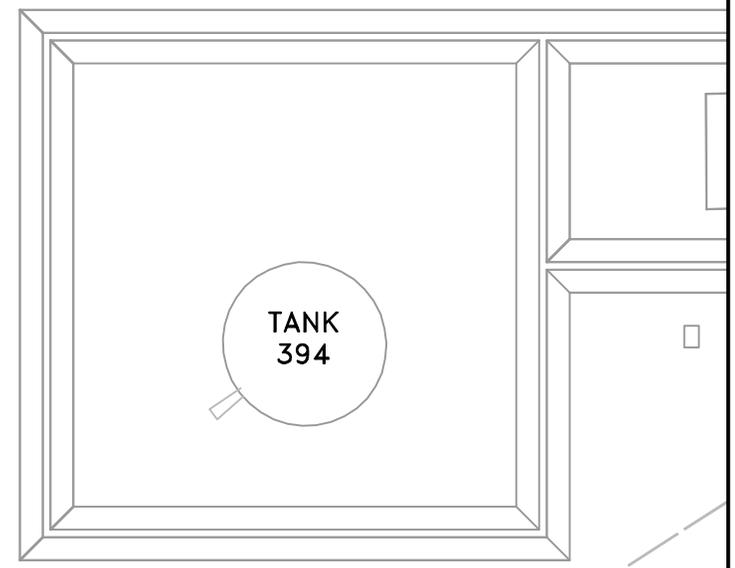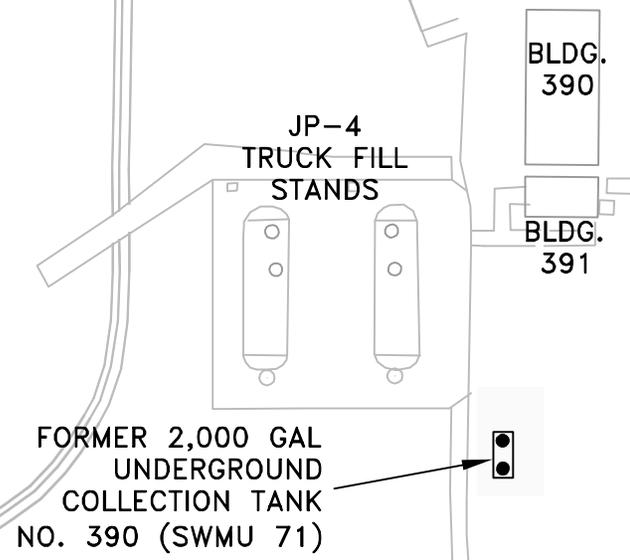


REPORTED LOCATION OF SWMU 72, SITE LAYOUT AND
SAMPLING LOCATIONS SWMU 71 - OWS NO. 390
CANNON AIR FORCE BASE, NEW MEXICO

DRN. BY: DPG	DATE: 06/30/08	PROJECT NO. 16170012	FIG. NO. 1-7
CHK'D. BY:	DATE:		

LEGEND:

● SOIL BORING LOCATION AND
13A NUMBER

— GPS SURVEY LINE

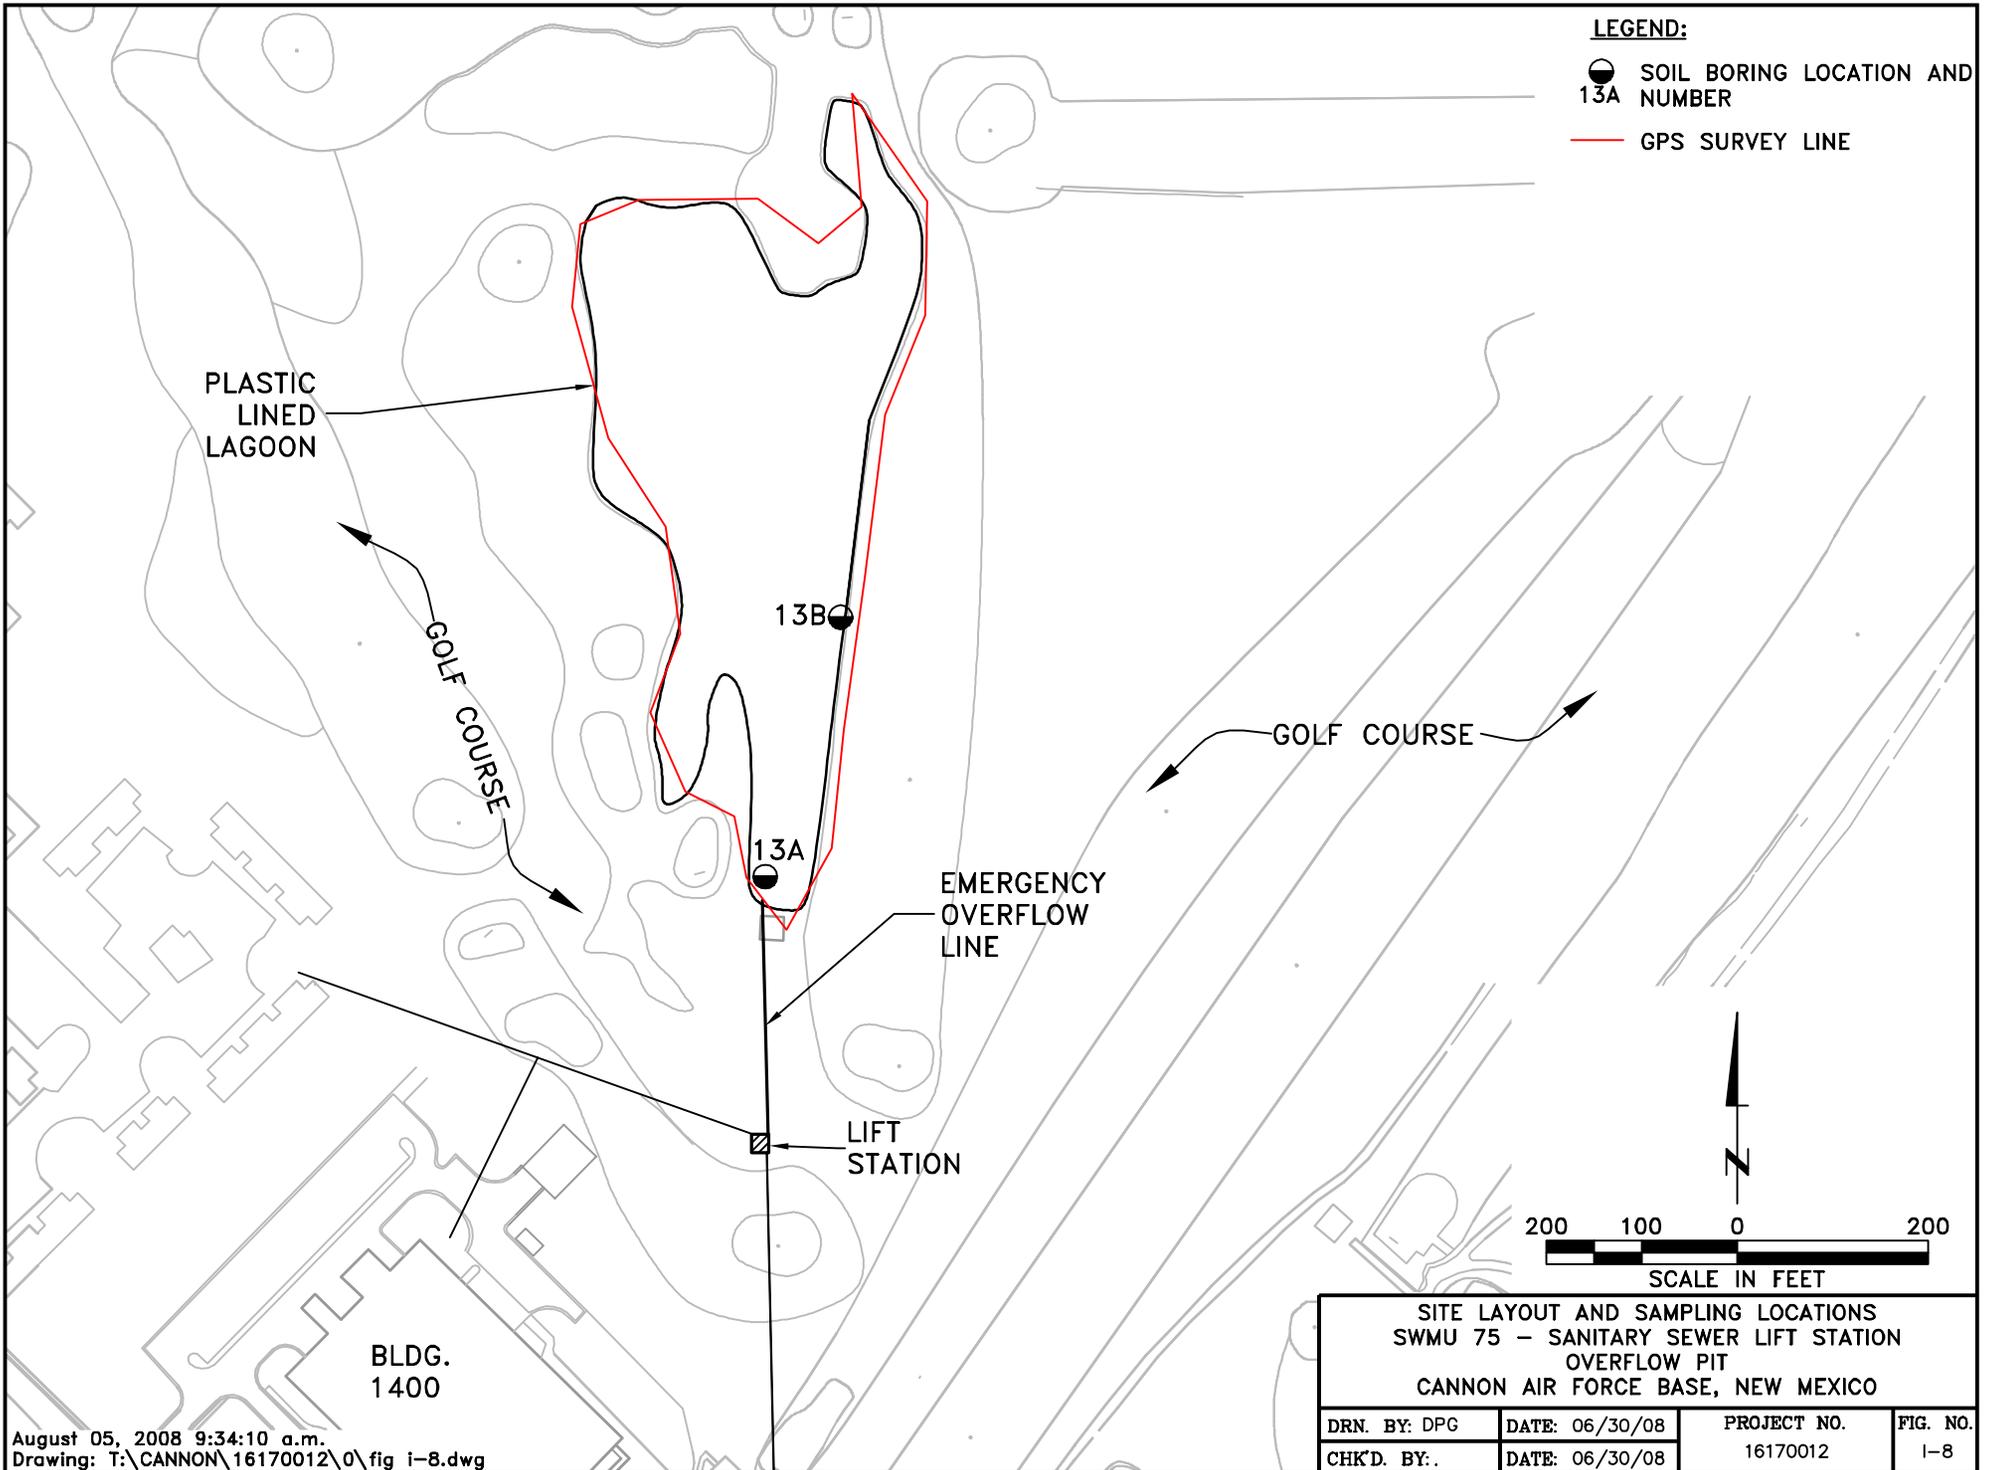


August 05, 2008 9:34:10 a.m.
Drawing: T:\CANNON\16170012\0\fig i-8.dwg

SITE LAYOUT AND SAMPLING LOCATIONS SWMU 75 - SANITARY SEWER LIFT STATION OVERFLOW PIT CANNON AIR FORCE BASE, NEW MEXICO			
DRN. BY: DPG	DATE: 06/30/08	PROJECT NO.	FIG. NO.
CHK'D. BY: .	DATE: 06/30/08	16170012	1-8

LEGEND:

- 8110
 1991 SOIL BORING LOCATION AND NUMBER
- (8111)
 1991 SURFACE SOIL SAMPLE LOCATION AND NUMBER
- — — — —
APPROXIMATE SWMU BOUNDARY


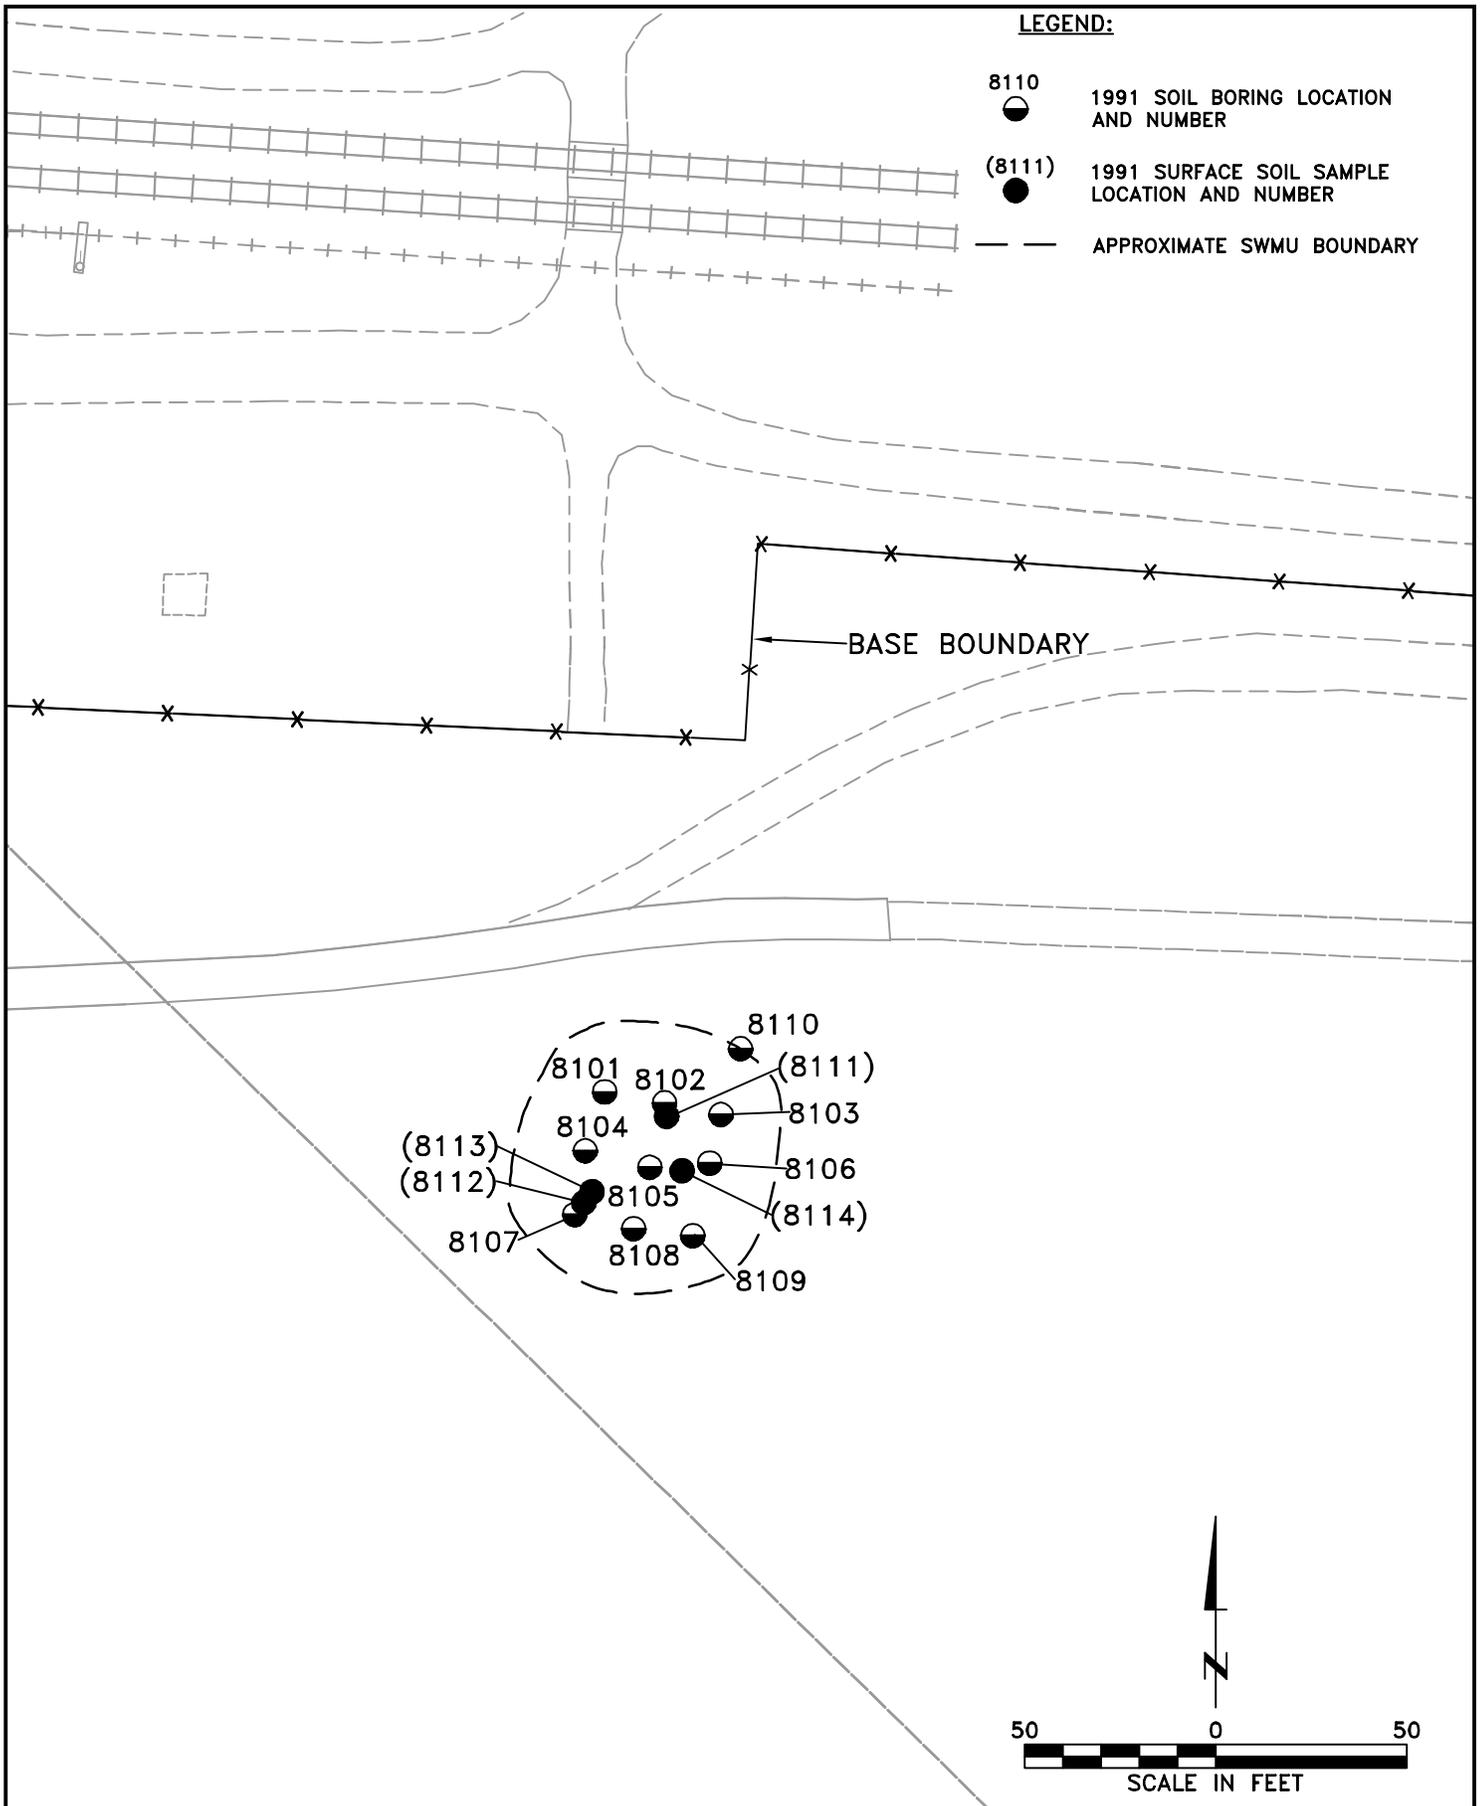


NOTE: SAMPLING LOCATIONS ARE APPROXIMATE

**SITE LAYOUT AND SAMPLING LOCATIONS
SWMU 81 – SOLVENT DISPOSAL SITE
CANNON AIR FORCE BASE, NEW MEXICO**

August 05, 2008 9:34:36 a.m.
Drawing: T:\CANNON\16170012\0\fig i-9.dwg


DRN. BY: DPG	DATE: 06/30/08	PROJECT NO. 16170012	FIG. NO. 1-9
CHK'D. BY:	REVISION:		

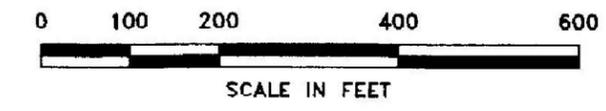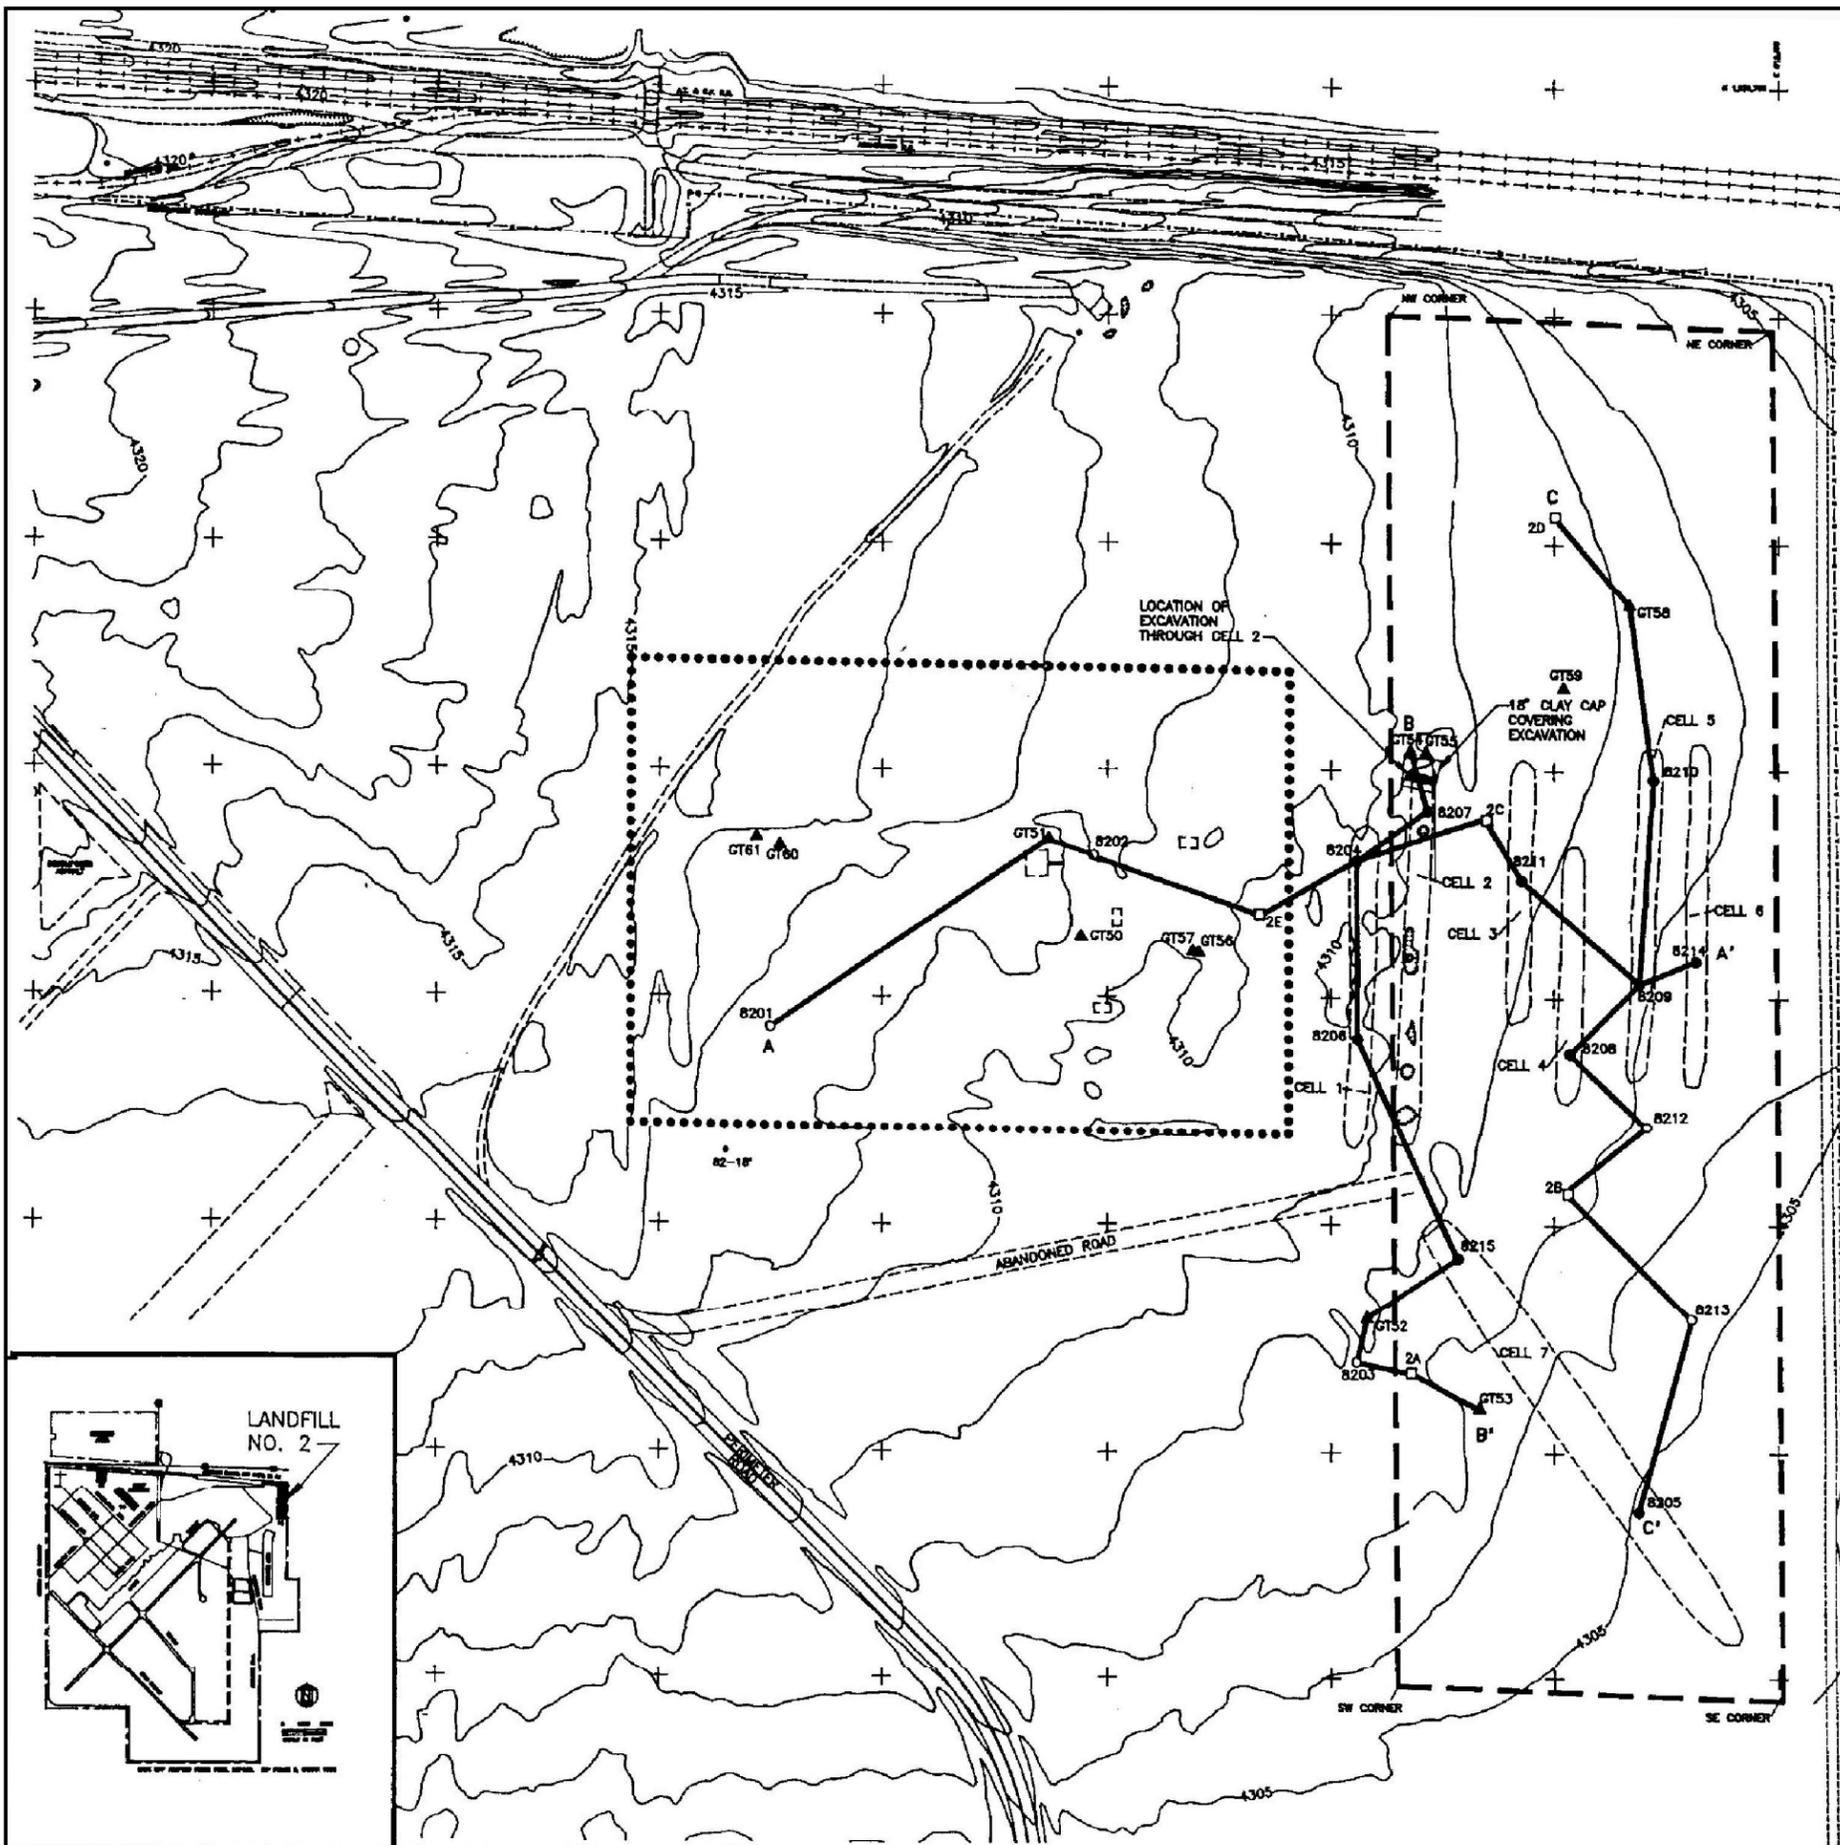

- LEGEND:**
- x - x - x - 4 WIRE B/W CANNON AFB BOUNDARY FENCE
 - ==== PAVED ROAD
 - UNPAVED ROAD
 - ++++ RAILROAD
 - BUILDING
 - CONCRETE FOUNDATIONS
 - TOPOGRAPHIC CONTOUR IN FEET MEAN SEA LEVEL
CONTOUR INTERVAL = 1 FOOT
 - DEPRESSION
 - RAISED
 - 8204 WCC 1992 ANALYTICAL SOIL BORING LOCATION WHICH ENCOUNTERED LANDFILL MATERIAL
 - 8201 WCC 1992 ANALYTICAL SOIL BORING LOCATION WHICH DID NOT ENCOUNTER LANDFILL MATERIAL
 - ▲ GT51 WCC 1992 GEOTECHNICAL SOIL BORING LOCATION WHICH DID NOT ENCOUNTER LANDFILL MATERIAL
 - 2A RADIAN CORP. 1985 SOIL BORING LOCATION
 - ESTIMATED EXTENT OF LANDFILL NO. 2 BASED ON WCC'S REVIEW OF AERIAL PHOTOGRAPHS
 - ESTIMATED EXTENT OF LANDFILL CELLS BASED ON AERIAL PHOTOGRAPHS, GEOPHYSICAL RESULTS, AND FIELD OBSERVATIONS
 - A --- A' GEOLOGICAL CROSS-SECTION LOCATION
 - AREA SHOWING EVIDENCE OF SURFACE DISTURBANCE FROM AERIAL PHOTOGRAPHS

NOTE:

1. THE LOCATIONS OF THE SOIL BORINGS DRILLED BY WCC IN MARCH AND APRIL 1992, ARE BASED ON SURVEY DATA COLLECTED ON APRIL 28 AND 30, 1992. THE LOCATIONS OF THE SOIL BORINGS DRILLED BY RADIAN IN JANUARY 1985 ARE APPROXIMATIONS BASED ON FIGURE 4-3 FROM RADIAN'S 1986 IRP PHASE II REPORT.



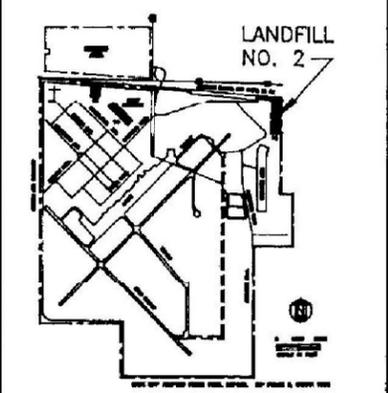


August 05, 2008 9:35:02 a.m.
Drawing: T:\CANNON\16170012\0\figs.dwg

SOURCE: WOODWARD-CLYDE, 1992

SITE LAYOUT AND SAMPLING LOCATIONS SWMU 82 - LANDFILL NO. 2 CANNON AIR FORCE BASE, NEW MEXICO			
DRN. BY: DPG	DATE: 06/30/08	PROJECT NO. 16170012	FIG. NO. I-10
CHK'D. BY: .	REVISION: 0		

OLD CONCRETE FOUNDATION FOR BUILDING 2160

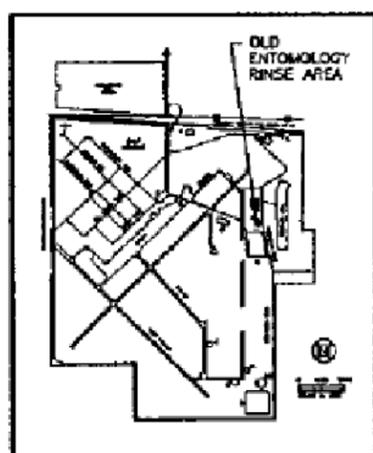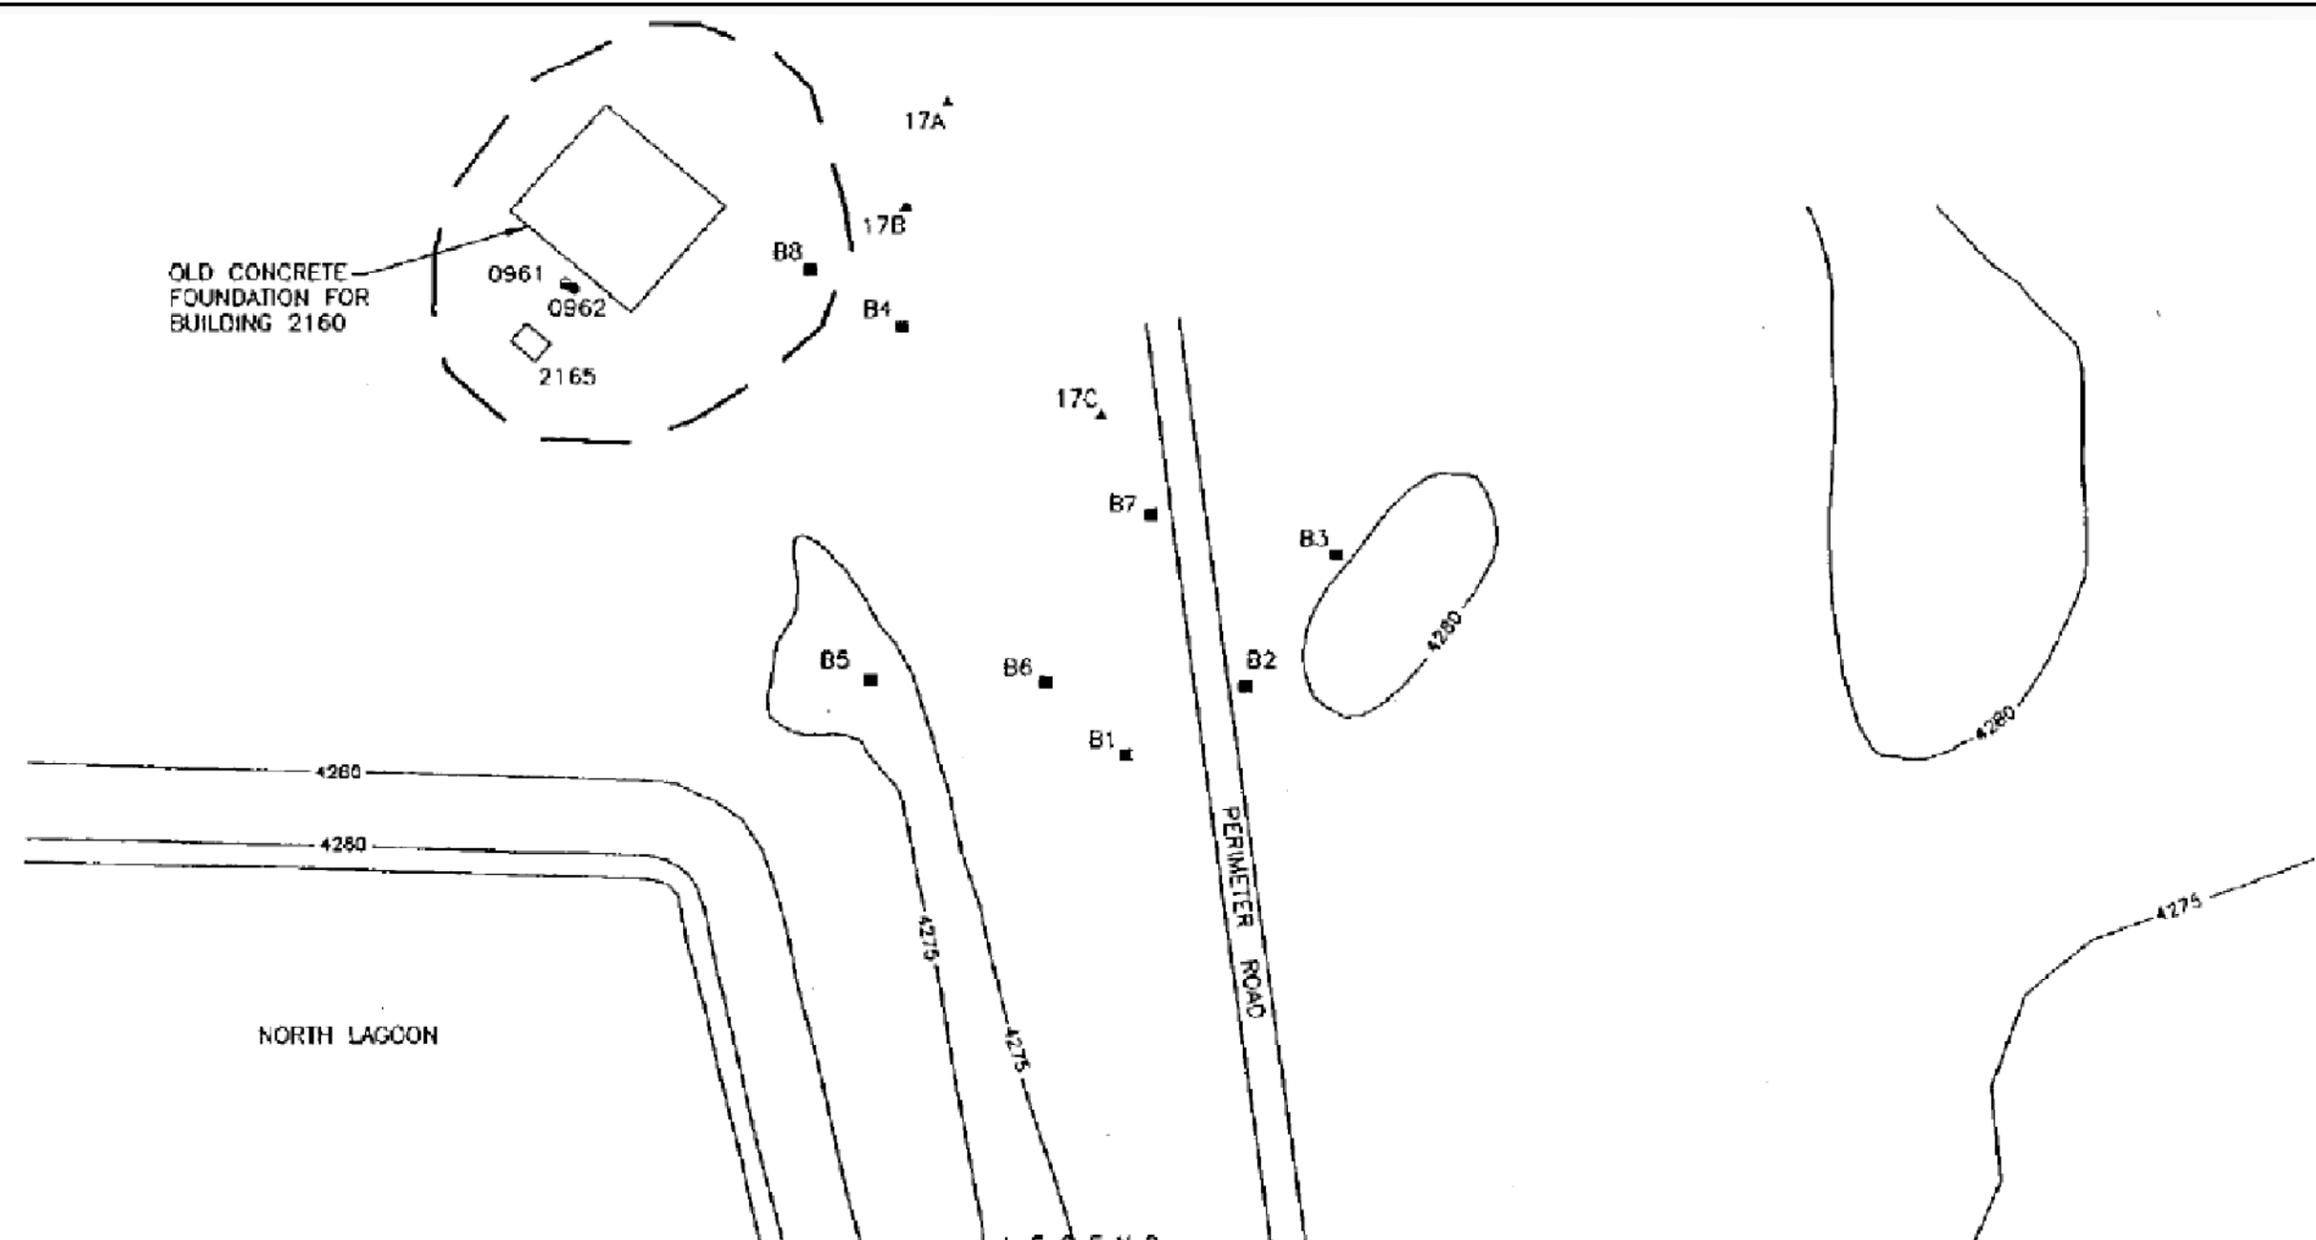


LEGEND

- ▲ 17C RADIAN 1985 FIELD INVESTIGATION SOIL BORING LOCATION
- B6 WALK, HAYDEL & ASSOCIATES 1986. FIELD INVESTIGATION SOIL BORING LOCATION
- 0961 W-C 1991 FIELD INVESTIGATION SURFACE SOIL SAMPLE LOCATION
- 0962 W-C 1993 FIELD INVESTIGATION SOIL BORING LOCATION
- ⊙ 096K MONITORING WELL LOCATION
- SWMU BOUNDARY
- ~4280~ GROUND SURFACE CONTOUR LINE IN FEET MSL
CONTOUR INTERVAL = 5 FEET
- 2165 BUILDING NUMBER

MONITORING WELL K
096K

SITE LAYOUT AND SAMPLING LOCATIONS
SWMU 96-OLD ENTOMOLOGY RINSE AREA
CANNON AIR FORCE BASE, NEW MEXICO

DRN. BY: DPG	DATE: 06/30/08	PROJECT NO. 16170012	FIG. NO. I-11
CHK'D. BY: .	REVISION: 0		

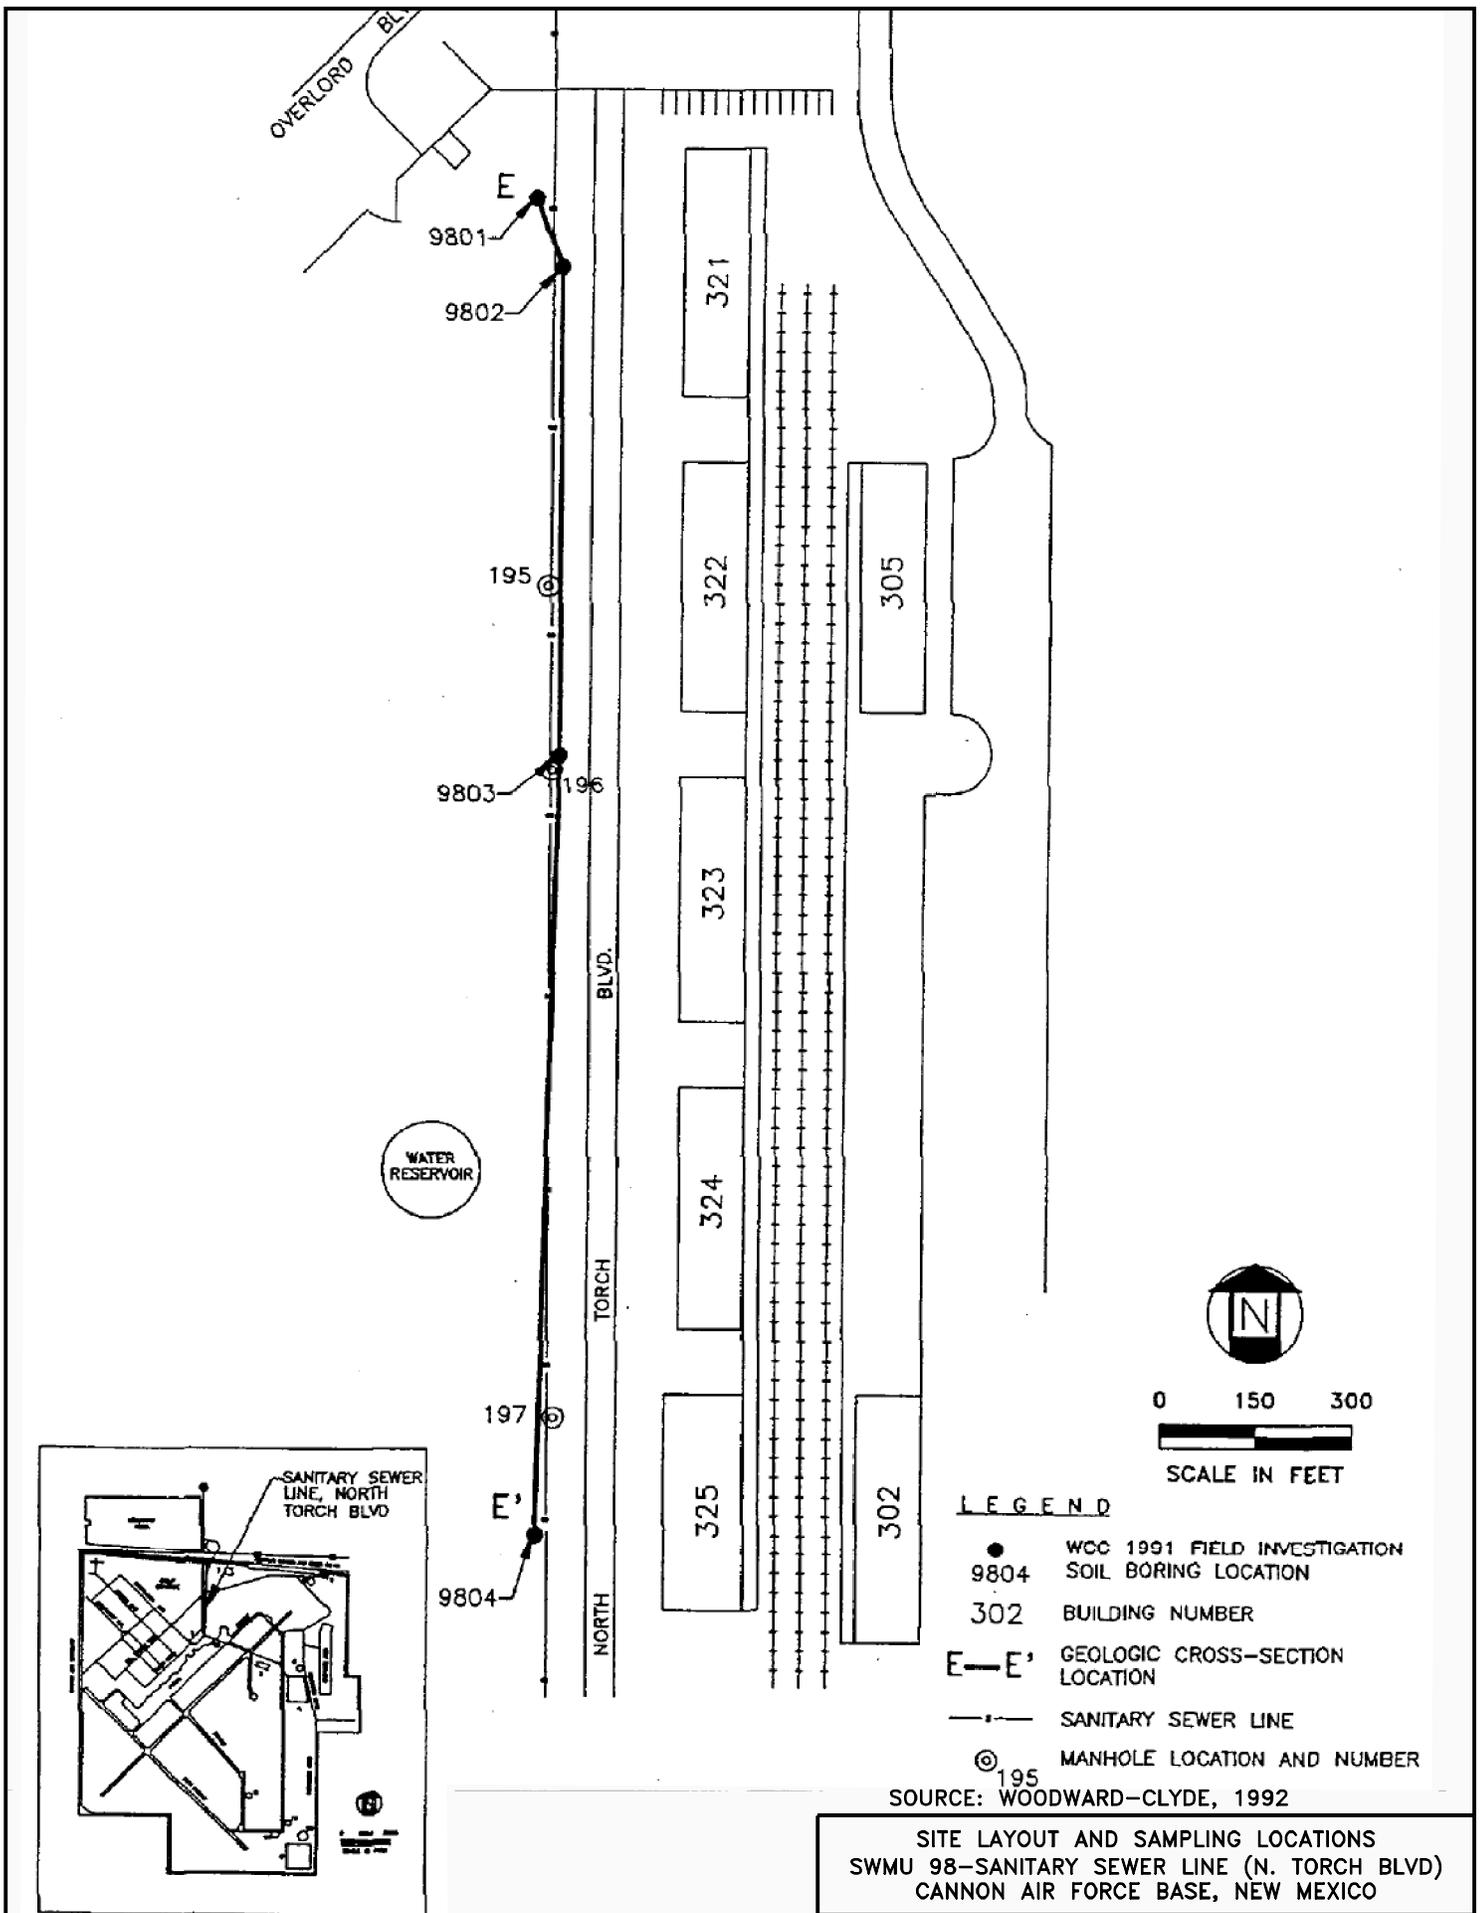




- LEGEND**
- WCC 1991 FIELD INVESTIGATION
 - 9804 SOIL BORING LOCATION
 - 302 BUILDING NUMBER
 - E—E' GEOLOGIC CROSS-SECTION LOCATION
 - SANITARY SEWER LINE
 - ⊙ MANHOLE LOCATION AND NUMBER

SOURCE: WOODWARD-CLYDE, 1992

**SITE LAYOUT AND SAMPLING LOCATIONS
SWMU 98—SANITARY SEWER LINE (N. TORCH BLVD)
CANNON AIR FORCE BASE, NEW MEXICO**

August 05, 2008 9:38:11 a.m.
Drawing: T:\CANNON\16170012\0\figs.dwg

DRN. BY: DPG	DATE: 06/30/08	PROJECT NO. 16170012	FIG. NO. I-12A
CHK'D. BY:	REVISION: 0		

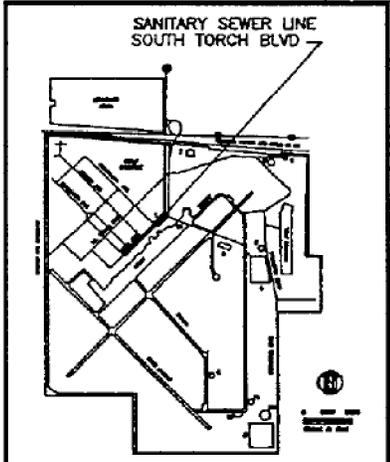
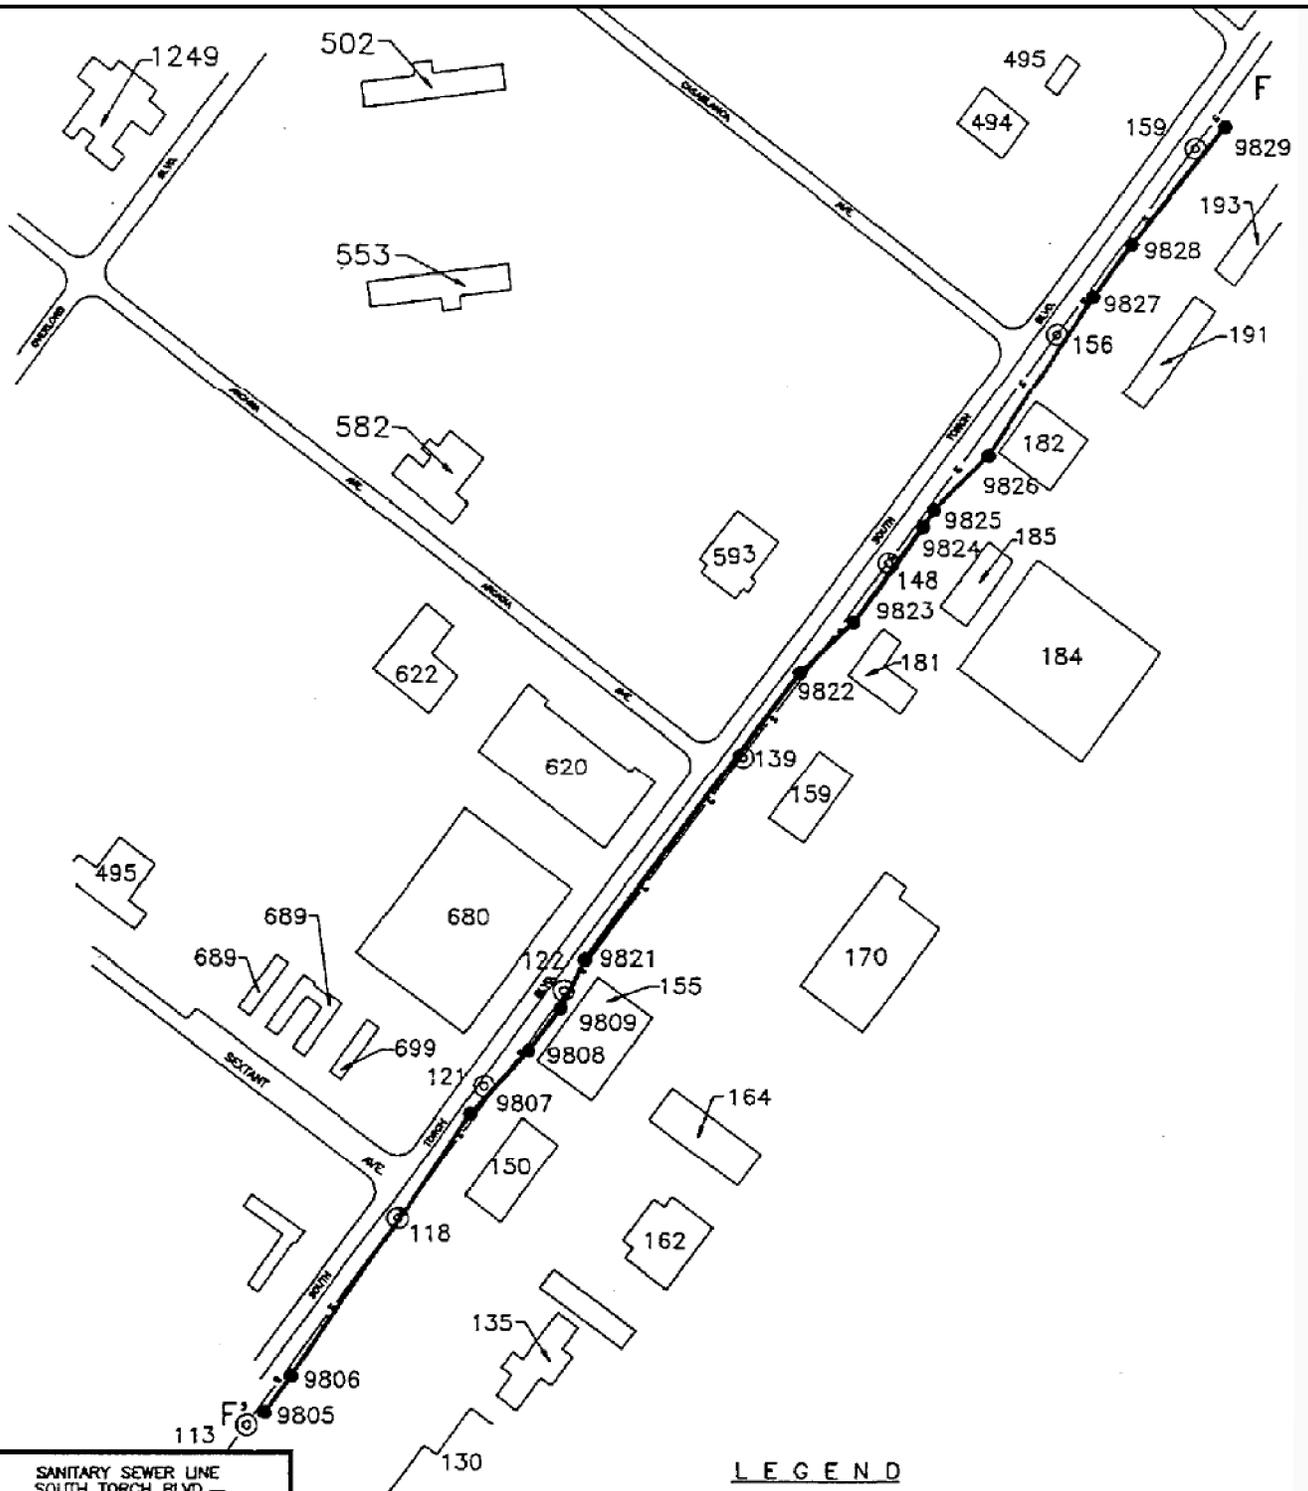


LEGEND

- 9807 WCC 1991 FIELD INVESTIGATION SOIL BORING LOCATION
 - 130 BUILDING NUMBER
 - F—F' GEOLOGIC CROSS-SECTION LOCATION
 - · — SANITARY SEWER LINE
 - ⊙113 MANHOLE LOCATION AND NUMBER
- SOURCE: WOODWARD-CLYDE, 1992

**SITE LAYOUT AND SAMPLING LOCATIONS
SWMU 98—SANITARY SEWER LINE (S. TORCH BLVD)
CANNON AIR FORCE BASE, NEW MEXICO**

DRN. BY: DPG	DATE: 06/30/08	PROJECT NO. 16170012	FIG. NO. I-12B
CHK'D. BY:	REVISION: 0		

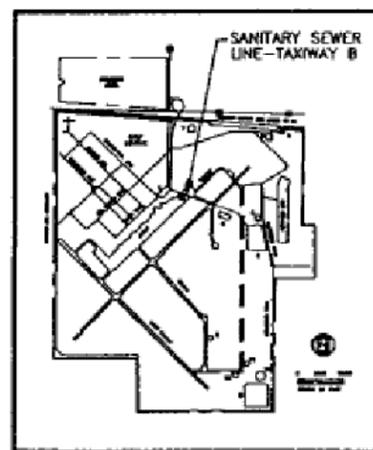
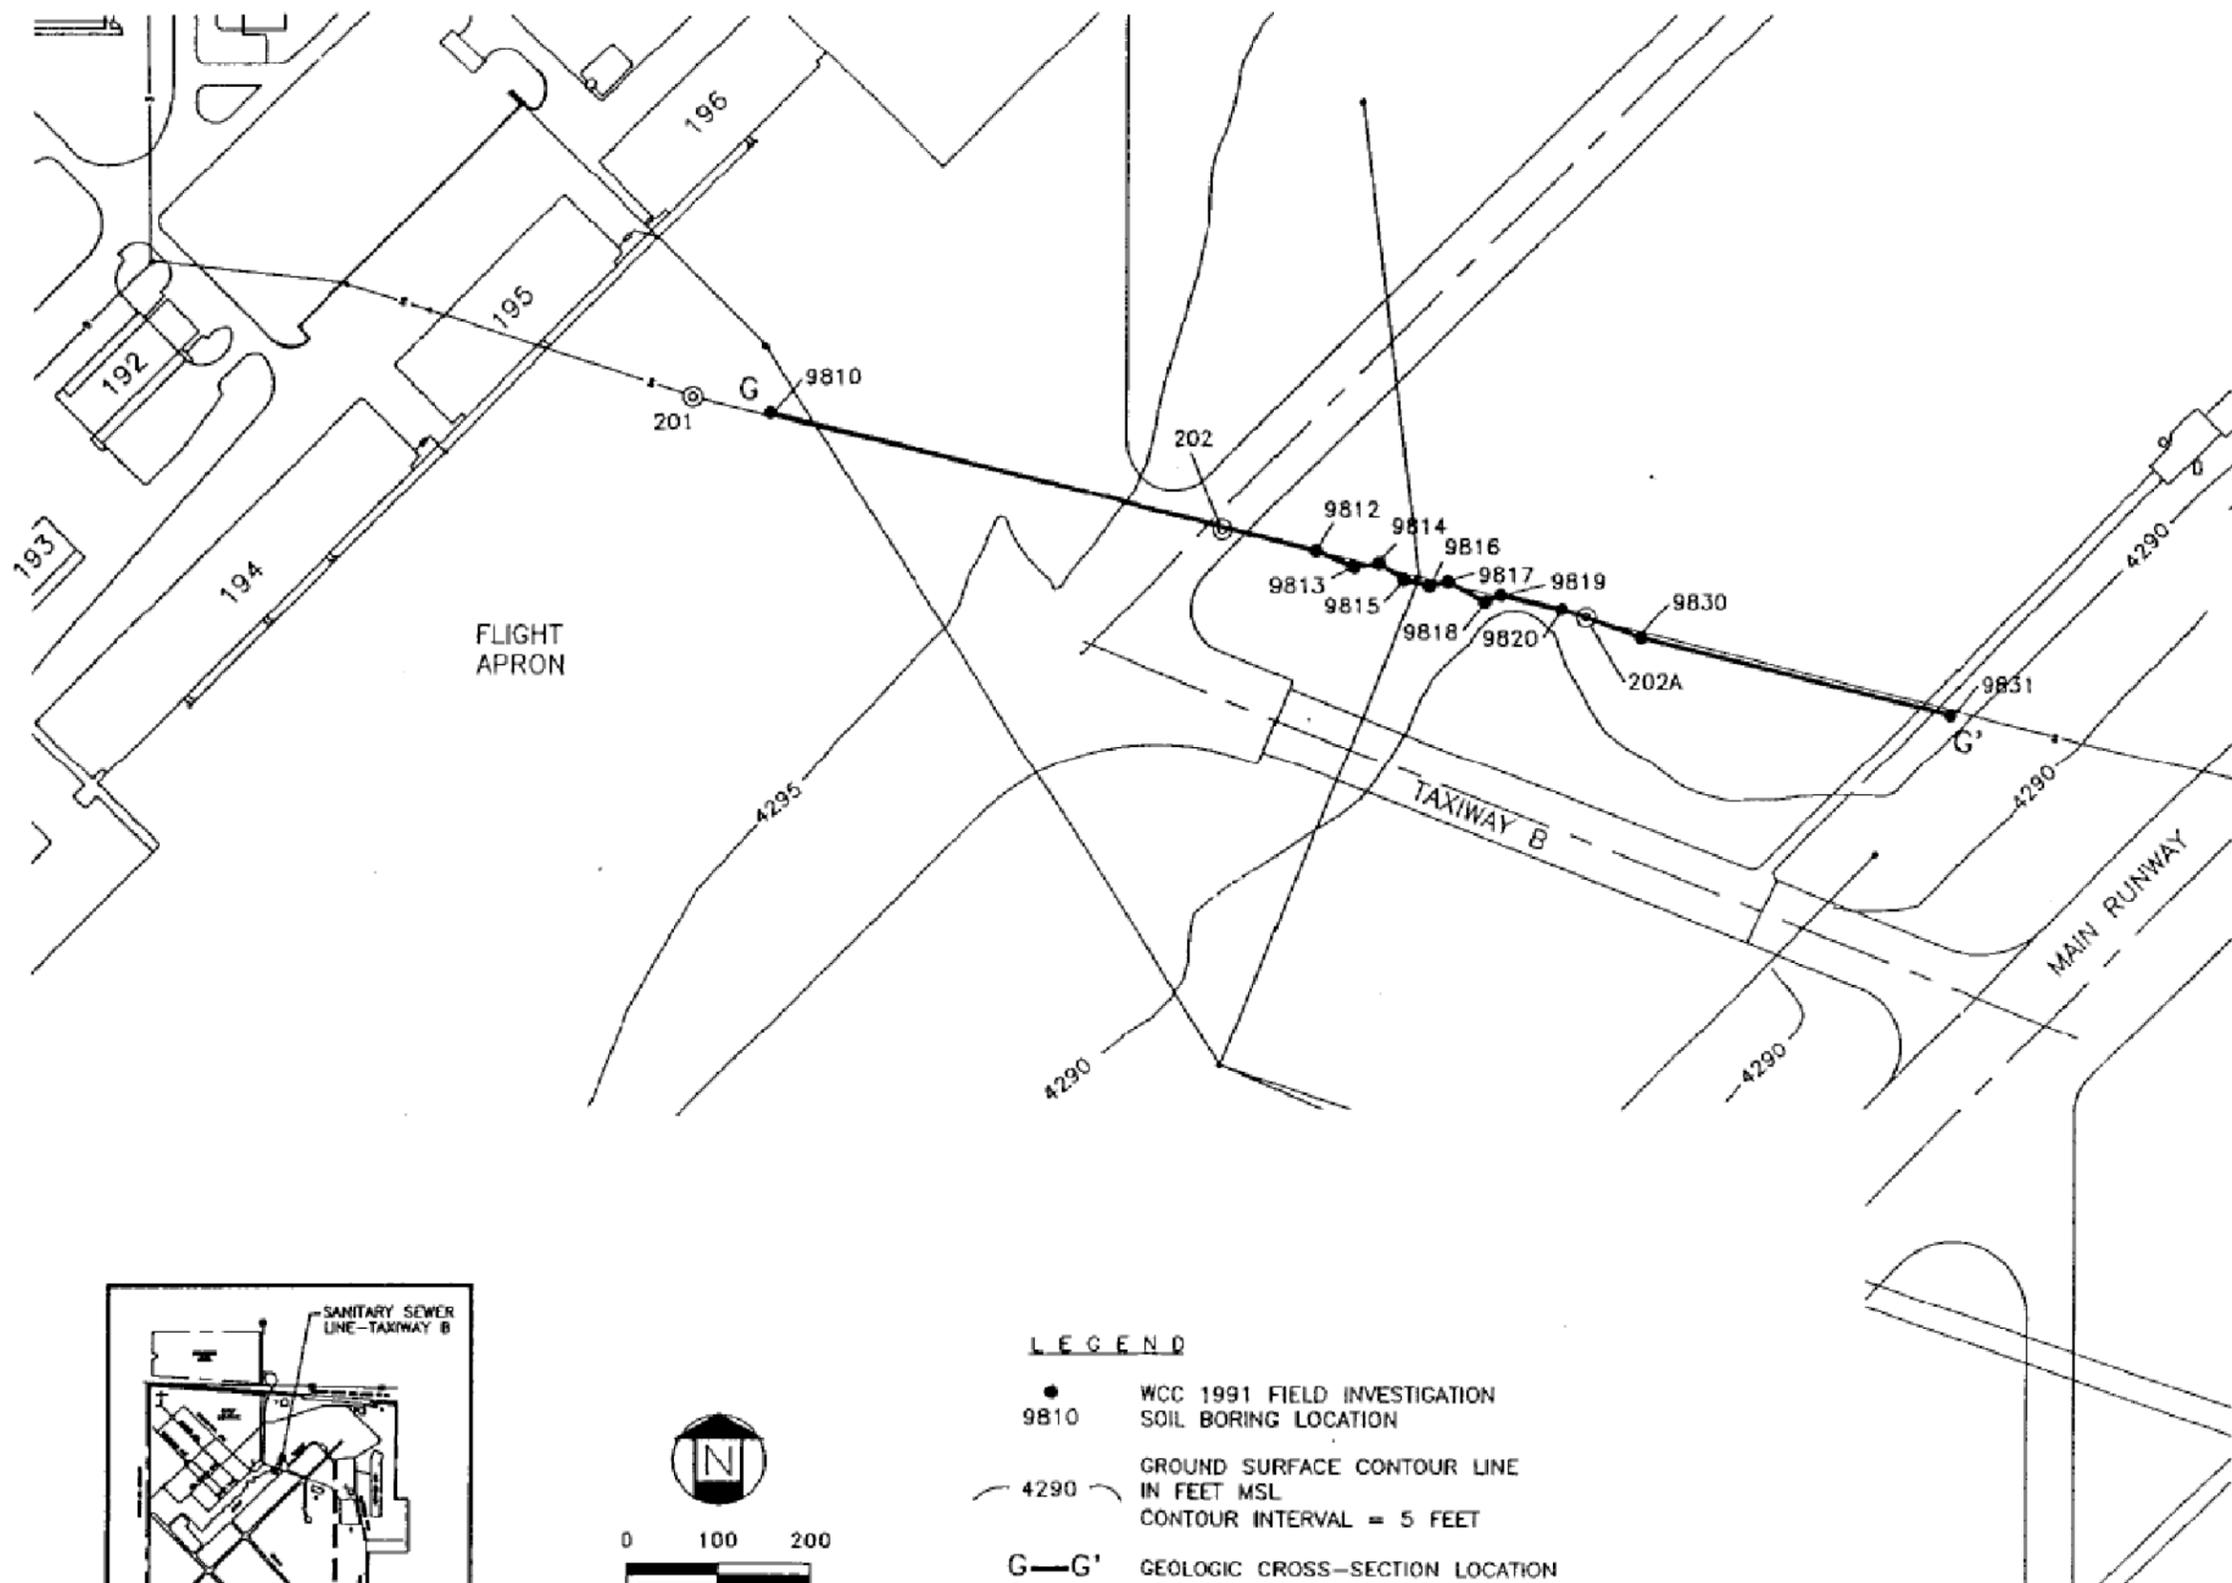


LEGEND

- WCC 1991 FIELD INVESTIGATION SOIL BORING LOCATION
- 9810
- 4290 — GROUND SURFACE CONTOUR LINE IN FEET MSL
CONTOUR INTERVAL = 5 FEET
- G—G' GEOLOGIC CROSS-SECTION LOCATION
- SANITARY SEWER LINE
- 193 BUILDING NUMBER
- ⊕ MANHOLE LOCATION AND NUMBER
- 202


SITE LAYOUT AND SAMPLING LOCATIONS
 SWMU 98-SANITARY SEWER LINE (TAXIWAY B)
 CANNON AIR FORCE BASE, NEW MEXICO

DRN. BY: DPG	DATE: 06/30/08	PROJECT NO. 16170012	FIG. NO. I-12C
CHK'D. BY:	REVISION: 0		

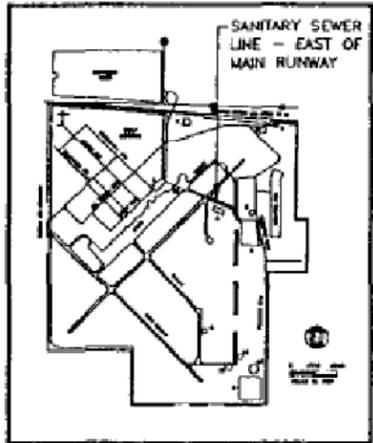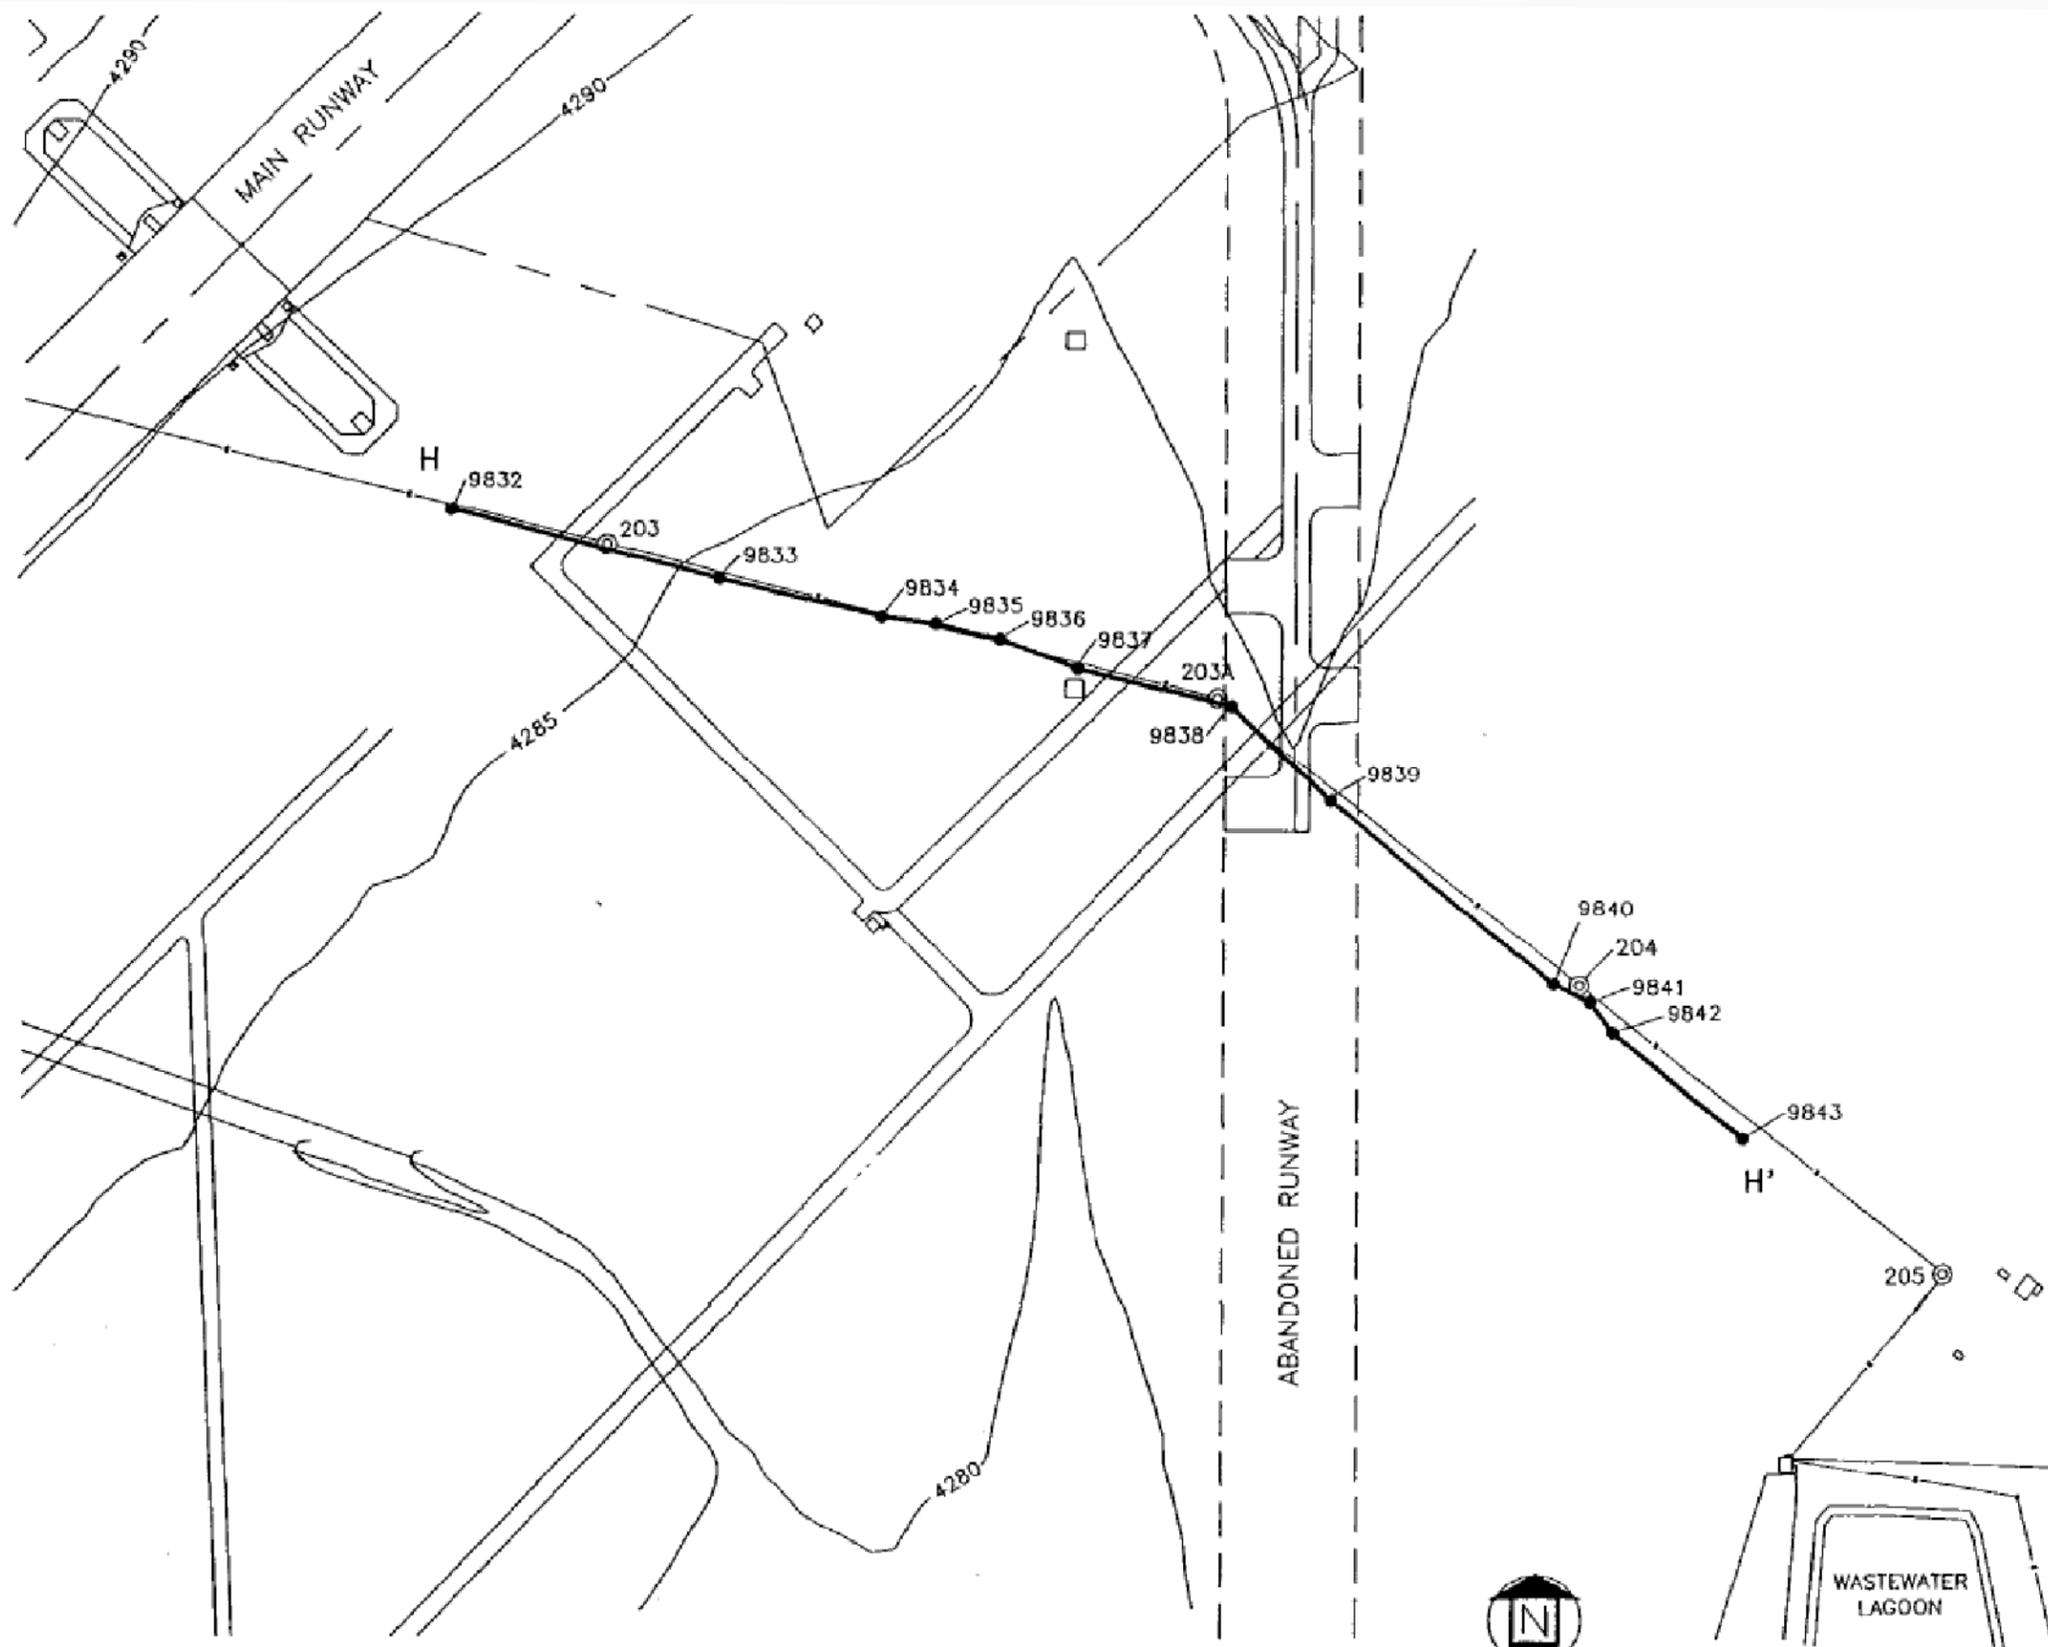

LEGEND


- WCC 1991 FIELD INVESTIGATION SOIL BORING LOCATION
- 4290 — GROUND SURFACE CONTOUR LINE IN FEET MSL. CONTOUR INTERVAL = 5 FEET
- H—H' GEOLOGIC CROSS-SECTION LOCATION
- SANITARY SEWER LINE
- ⊙ 205 MANHOLE LOCATION AND NUMBER




SITE LAYOUT AND SAMPLING LOCATIONS SWMU 98—SANITARY SEWER LINE (E. OF MAIN RUNWAY) CANNON AIR FORCE BASE, NEW MEXICO			
DRN. BY: DPG	DATE: 06/30/08	PROJECT NO. 16170012	FIG. NO. I-12D
CHK'D. BY: .	REVISION: 0		

August 05, 2008 9:39:12 a.m.
Drawing: T:\CANNON\16170012\0\figs.dwg

SOURCE: WOODWARD-CLYDE, 1992

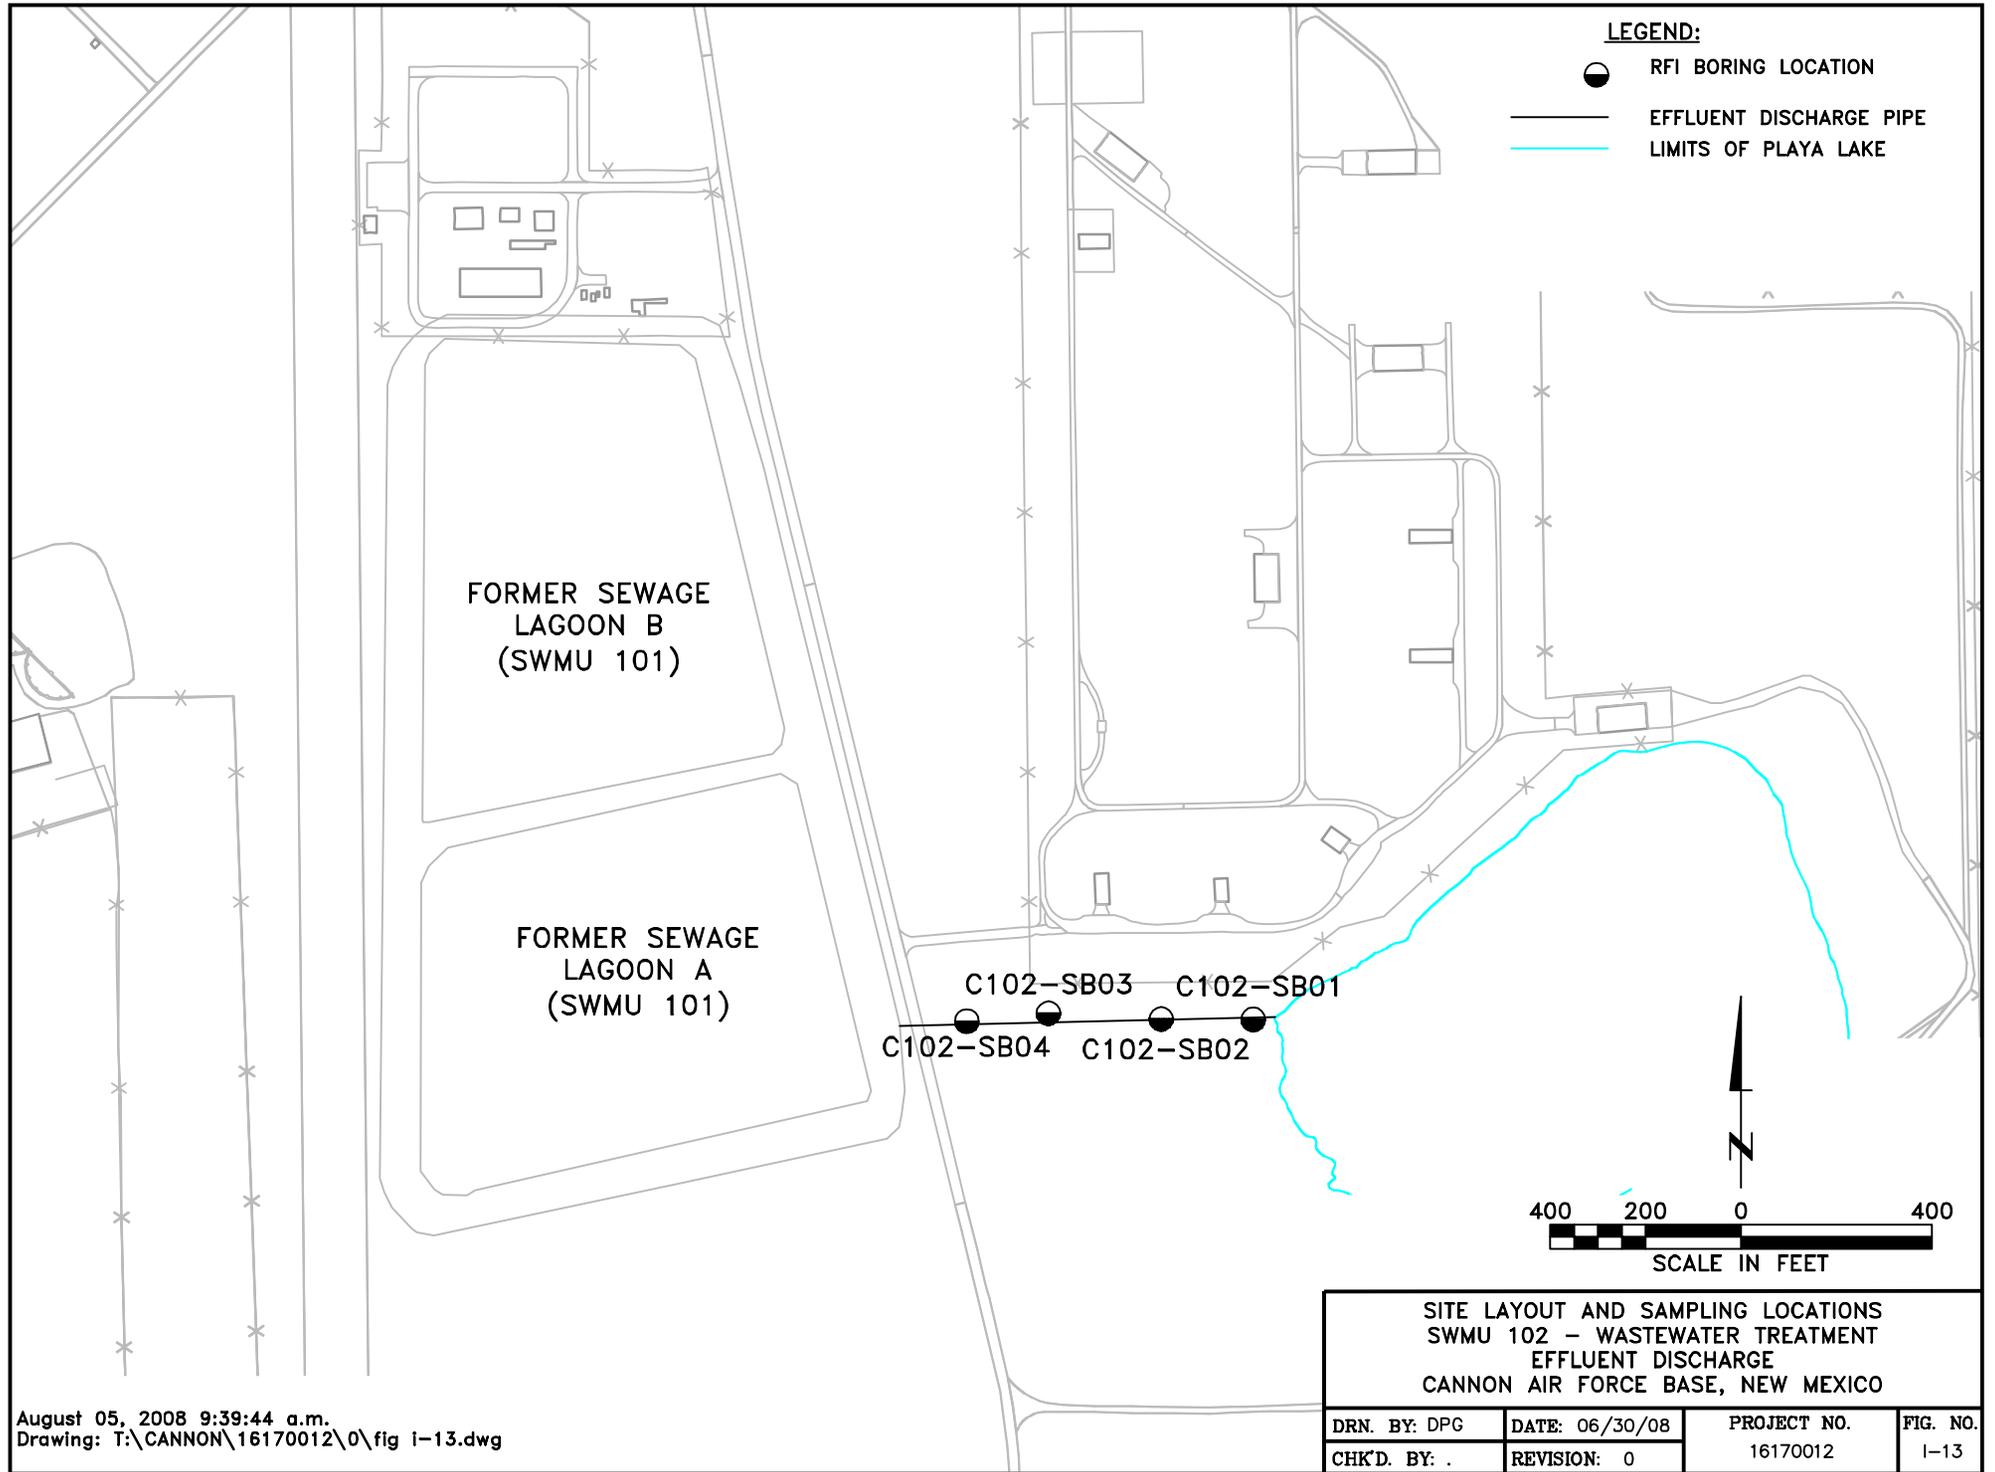

August 05, 2008 9:39:44 a.m.
Drawing: T:\CANNON\16170012\0\fig i-13.dwg

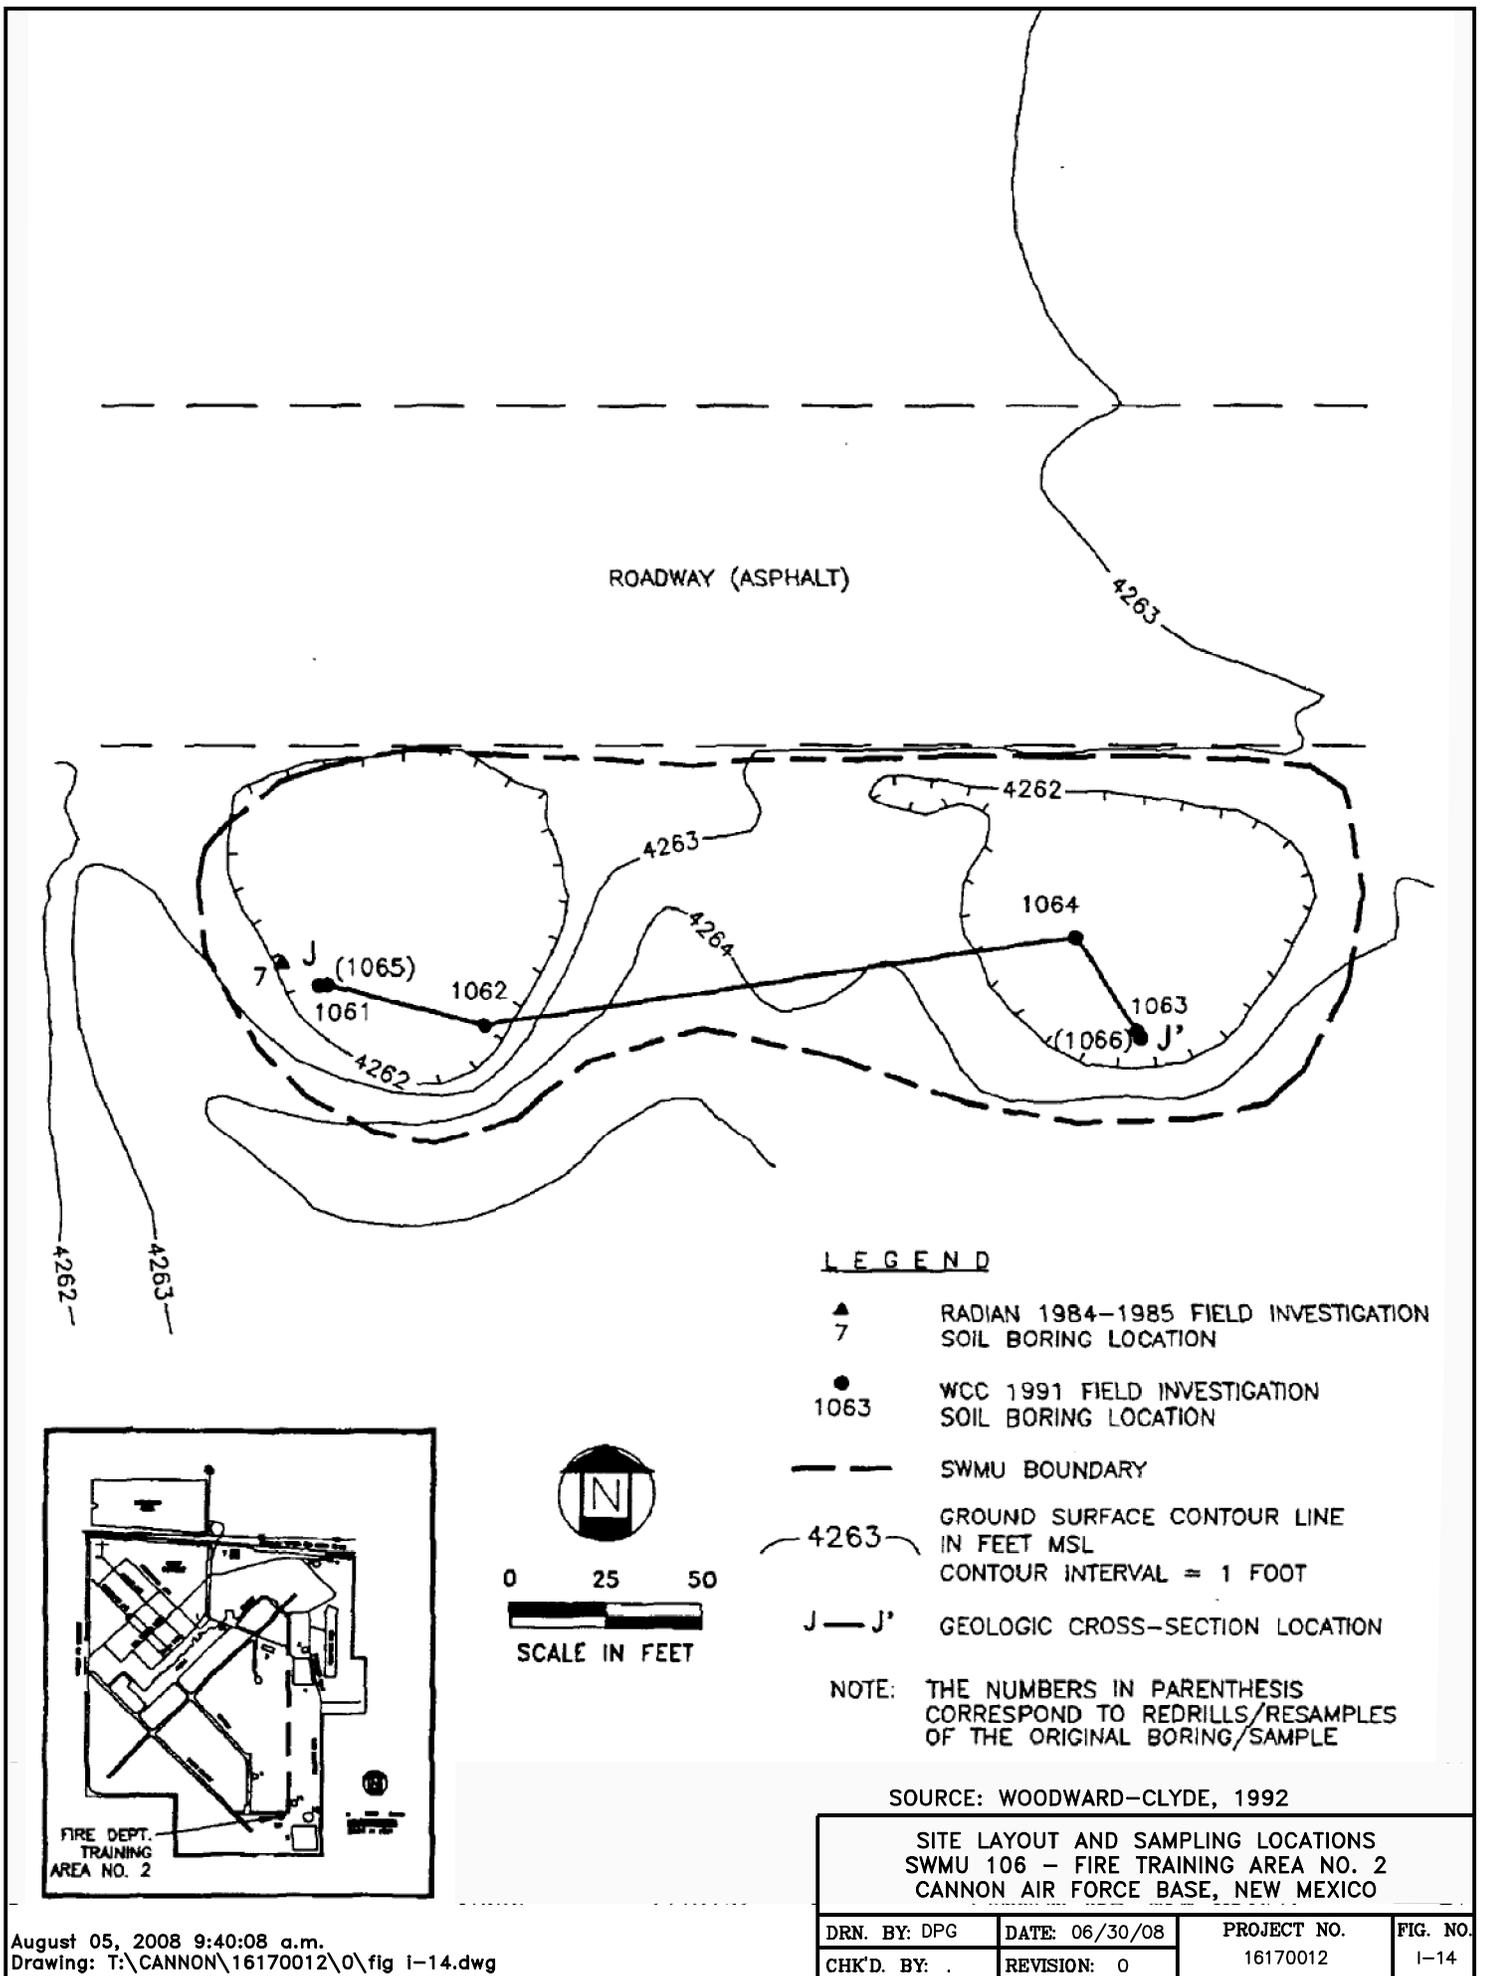

ROADWAY (ASPHALT)

LEGEND


- ▲ 7 RADIAN 1984-1985 FIELD INVESTIGATION SOIL BORING LOCATION
- 1063 WCC 1991 FIELD INVESTIGATION SOIL BORING LOCATION
- SWMU BOUNDARY
- 4263 — GROUND SURFACE CONTOUR LINE IN FEET MSL
CONTOUR INTERVAL = 1 FOOT
- J—J' GEOLOGIC CROSS-SECTION LOCATION

NOTE: THE NUMBERS IN PARENTHESIS CORRESPOND TO REDRILLS/RESAMPLES OF THE ORIGINAL BORING/SAMPLE

SOURCE: WOODWARD-CLYDE, 1992

SITE LAYOUT AND SAMPLING LOCATIONS
SWMU 106 - FIRE TRAINING AREA NO. 2
CANNON AIR FORCE BASE, NEW MEXICO

DRN. BY: DPG	DATE: 06/30/08	PROJECT NO. 16170012	FIG. NO. 1-14
CHK'D. BY: .	REVISION: 0		

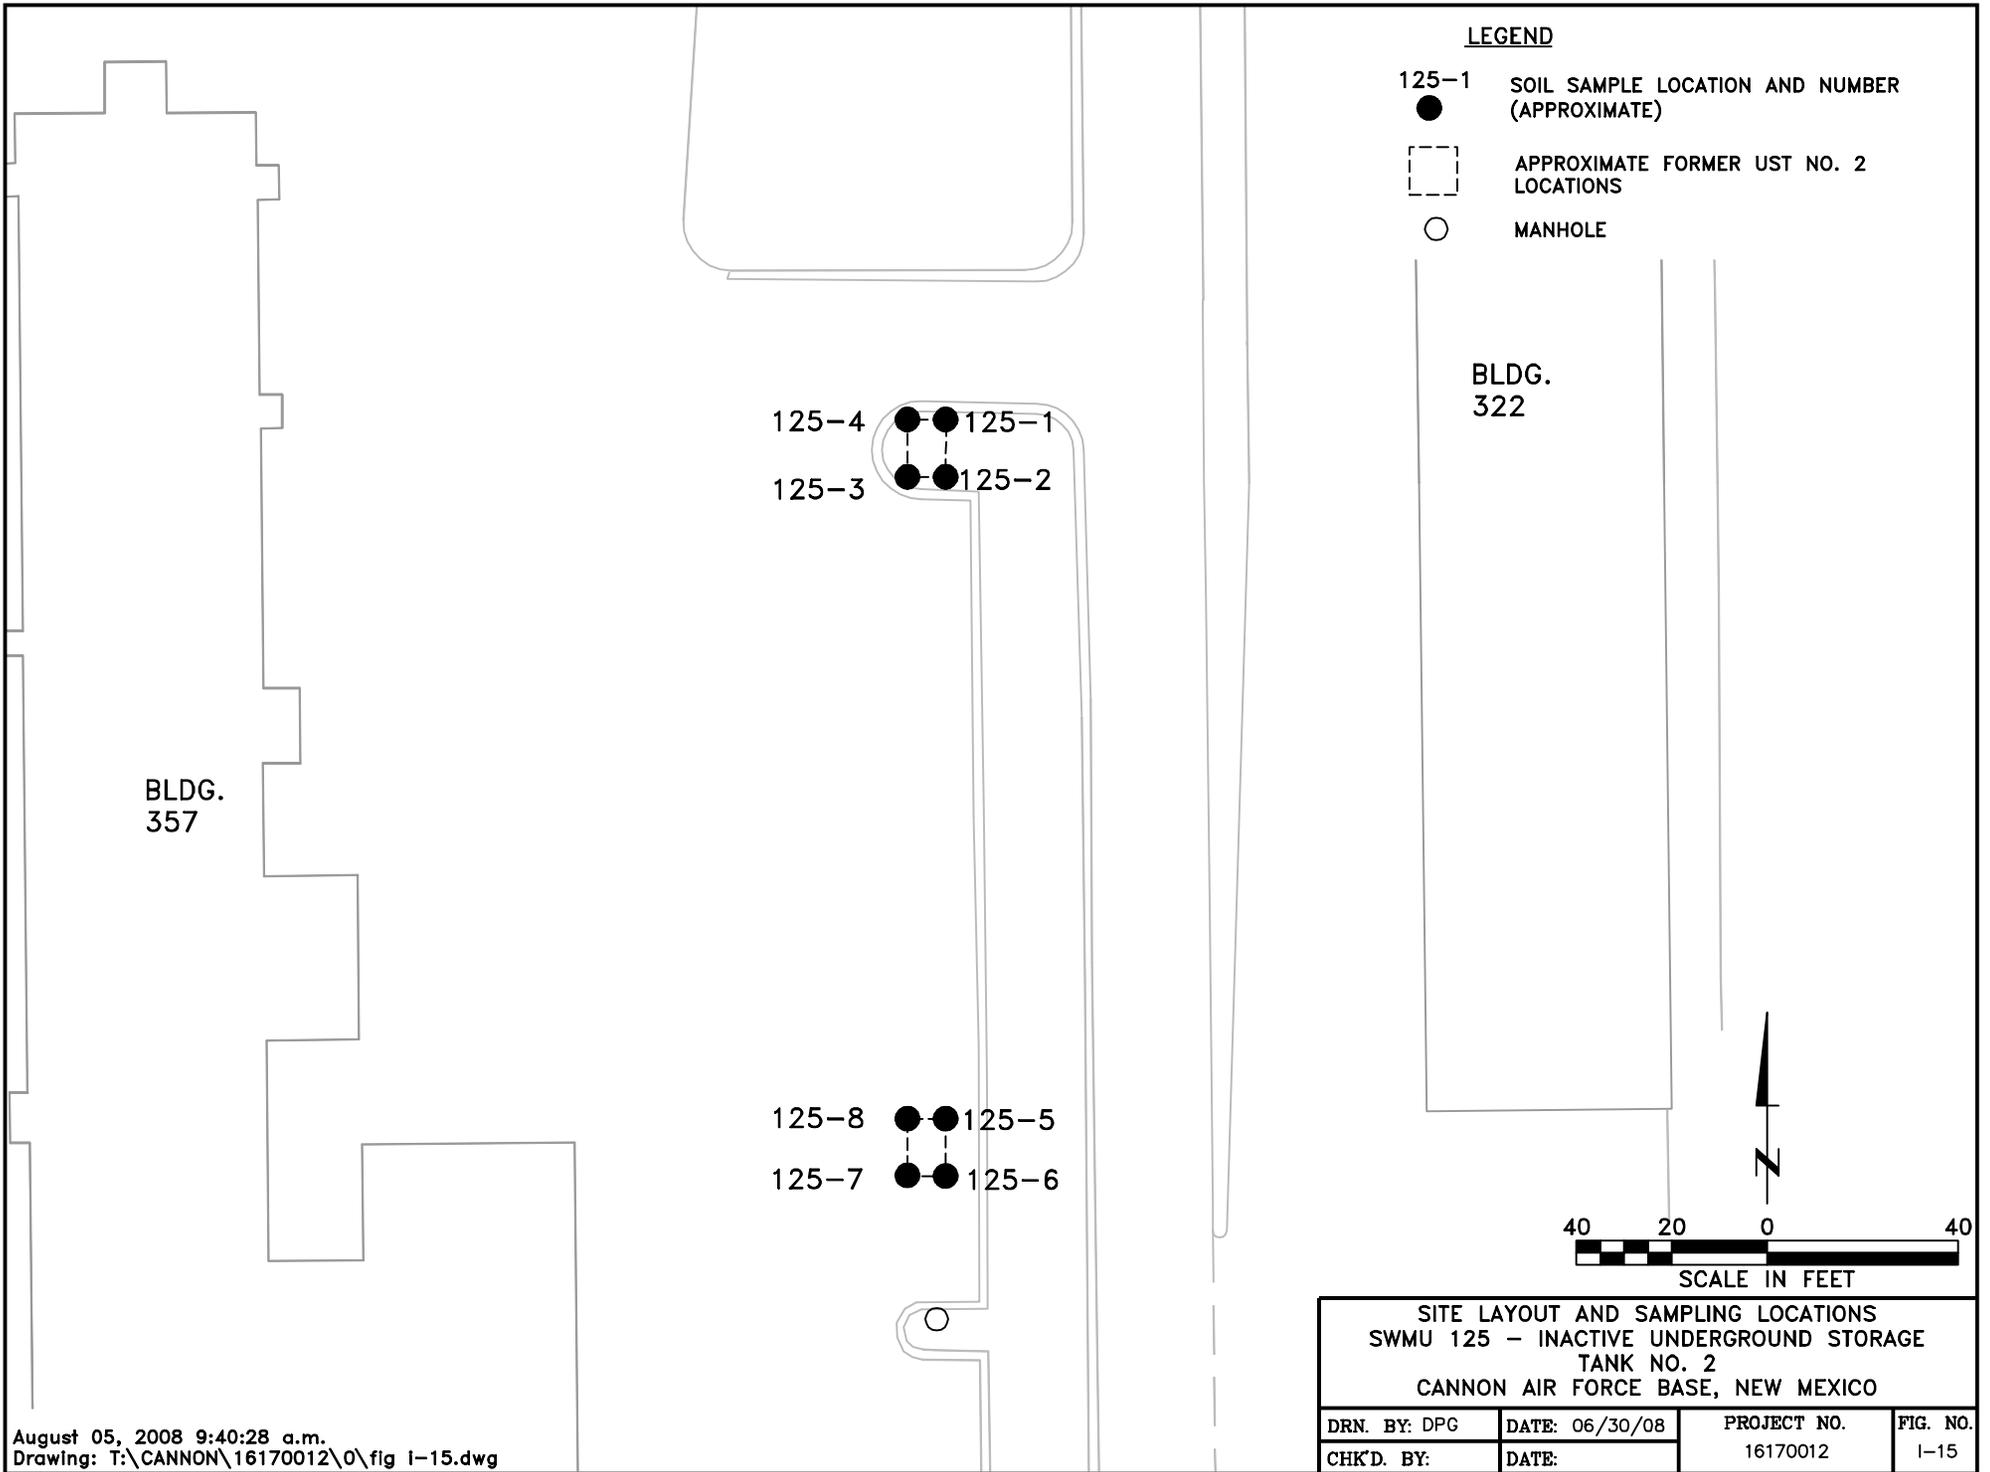

J. References

- A.T. Kearney. 1987. Preliminary Review/VSI Report RCRA Facility Assessment. Cannon AFB, Clovis, New Mexico. July.
- CH2M Hill. 1983. Installation Restoration Program Records Search for Cannon Air Force Base. August.
- Lee Wan Associates, Inc. (Lee Wan). 1990. RCRA Facility Investigation Work Plan, Field Sampling Plan, and Program Management Plan. Alexandria, Virginia. June.
- New Mexico Department of the Environment (NMED). 2004. Letter from Mr. Glen von Goetne, Cannon AFB Project Leader, MNED, to Colonel Yates, Commander, 27th Fighter Wing. 12 January
- NMED. 2006a. Technical Background Document for Development of Soil Screening Levels. Rev 4.0. June.
- NMED. 2006b. TPH Screening Guidelines. October.
- NMED. 2008. Approval with Direction, RCRA Facility Investigation for 21 SWMUs. Cannon Air Force Base, New Mexico. 14 May.
- Radian Corporation. (Radian). 1986. Installation Restoration Program, Phase II – Confirmation/Qualification, Stage I. Cannon AFB. September.
- URS Group, Inc. (URS). 2007. RCRA Facility Investigation for 21 SWMUs. Cannon Air Force Base, New Mexico. October.
- United States Environmental Protection Agency (USEPA). 1994. Integrated Exposure, Uptake, and Biokinetic Model. <http://www.epa.gov/superfund/lead/products.htm>. Accessed 8-July-2008.
- Walk Haydel & Associates (Walk Haydel). 1990. Installation Restoration Program, Final Remedial Investigation Report, Cannon Air Force Base, New Mexico. Prepared Under Contract with Omaha District, Corps of Engineers; Omaha, Nebraska, for Headquarters, Tactical Air Command, HQ, TAC/DEEV; Langley Air Force Base, Virginia.
- Woodward-Clyde (W-C). 1992. Remedial Investigation Report for 18 Solid Waste Management Units. Final Volumes Ia and Ib. Cannon Air Force Base, Clovis New Mexico. October.
- W-C. 1993. RCRA Facility Investigation Report for Landfill No. 1 (SWMU 74) and landfill No. 2 (SWMU 82). Final. Cannon AFB, New Mexico. February.

W-C. 1994. RCRA Facility Investigation Activities Phase II to Appendix I (Old Entomology Rinse Area Boring), Supplemental RFI Report (19 SWMU Boundary Survey). Final. Cannon Air Force Bas; Clovis, new Mexico. September.

Attachments

**TABLE 1
COMPARISON OF SWMU 2 MAXIMUM SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
VOLATILE ORGANICS	All ND											
SEMIVOLATILE ORGANICS	All ND											
METALS												
Aluminum	8/8	8.93E+03		1.22E+04			7.78E+04	1.00E+05	1.44E+04	1.10E+06	NO	NO / A,F
Antimony	8/8	5.90E+00	J	1.60E+01			3.13E+01	4.54E+02	1.24E+02	1.32E+01	NO	NO / A,F
Arsenic	8/8	9.90E+00		4.30E+00			3.90E+00	1.77E+01	8.52E+01	2.90E-01	YES	NO / A,F
Barium	8/8	7.42E+02		8.90E+02			1.56E+04	1.00E+05	6.02E+04	6.03E+03	NO	NO / A,F
Beryllium	8/8	5.70E-01	J	7.30E-01			1.56E+02	2.25E+03	5.62E+01	1.15E+03	NO	NO / A,F
Cadmium	8/8	2.30E+00		1.30E+00			3.90E+01	5.64E+02	1.54E+02	2.75E+01	YES	NO / A
Calcium	8/8	2.69E+05		2.37E+05	2.69E+01	1.20E+03	NA	NA	NA	NA	YES	NO / C
Chromium	8/8	7.20E+00		1.33E+01			1.00E+05	1.00E+05	1.00E+05	max 1.97E+09	NO	NO / A,F
Cobalt	8/8	4.40E+00		4.70E+00			1.52E+03	2.05E+04	6.10E+01	6.61E+02	NO	NO / A,F
Copper	8/8	4.70E+00		8.30E+00			3.13E+03	4.54E+04	1.24E+04	1.03E+03	NO	NO / A,F
Iron	8/8	8.61E+03		1.31E+04			2.35E+04	1.00E+05	9.29E+04	5.54E+03	NO	NO / A,F
Lead	8/8	5.70E+00		8.70E+00			4.00E+02	8.00E+02	8.00E+02	IEUBK	NO	NO / A,F
Magnesium	8/8	4.27E+03		1.93E+04	4.27E-01	4.00E+02	NA	NA	NA	NA	NO	NO / C,F
Manganese	8/8	1.51E+02		3.33E+02			3.59E+03	4.84E+04	1.50E+02	2.24E+03	NO	NO / A,F
Mercury	5/8	2.10E-02	J	1.90E-02			1.00E+05	1.00E+05	9.27E+02	2.09E-03	YES	NO / A,F
Nickel	8/8	7.60E+00		1.49E+01			1.56E+03	2.27E+04	6.19E+03	9.53E+02	NO	NO / A,F
Potassium	8/8	2.27E+03		2.51E+03	2.27E-01	3.90E+02 - 7.80E+02	NA	NA	NA	NA	NO	NO / C,F
Selenium	0/8	ND		2.60E-01			3.91E+02	5.68E+03	1.55E+03	1.90E+01	NO	NO/A
Silver	3/8	9.20E-01	J	2.65E+00			3.91E+02	5.68E+03	1.55E+03	3.13E+01	NO	NO / A,F
Thallium	4/8	4.30E+00	J	2.65E+00			5.16E+00	7.49E+01	2.04E+01	3.43E+00	YES	NO / A
Vanadium	8/8	1.82E+01		3.28E+01			7.82E+01	1.14E+03	3.10E+02	7.30E+02	NO	NO / A,F
Zinc	6/8	1.63E+01	J	3.06E+01			2.35E+04	1.00E+05	9.29E+04	1.36E+04	NO	NO / A,F

TABLE 1
COMPARISON OF SWMU 2 MAXIMUM SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO

Notes:

mg/kg = milligrams per kilogram

J = Estimated

NA = Not applicable

ND = Not detected

max = Indicates a chemical that exhibits relatively low toxicity, so a non-risk-based maximum concentration of 1.00E+05 mg/kg is used as the SSL.

IEUBK = Indicates that the SSL is derived using EPA's Integrated Exposure Uptake Biokinetic model

(1) Maximum detected concentration from current investigation at SWMU 2.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006) - NOT APPLICABLE TO SUBSURFACE SOILS AT THIS SITE.

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006).

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern(COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 2
COMPARISON OF SWMU 4 MAXIMUM SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLs
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
VOLATILE ORGANICS		All ND										
SEMIVOLATILE ORGANICS		All ND										
METALS												
Aluminum	8/8	1.10E+04		1.22E+04			7.78E+04	1.00E+05	1.44E+04	1.10E+06	NO	NO / A,F
Antimony	8/8	4.50E+00	J	1.60E+01			3.13E+01	4.54E+02	1.24E+02	1.32E+01	NO	NO / A,F
Arsenic	8/8	7.20E+00		4.30E+00			3.90E+00	1.77E+01	8.52E+01	2.90E-01	YES	NO / A,F
Barium	8/8	5.33E+02		8.90E+02			1.56E+04	1.00E+05	6.02E+04	6.03E+03	NO	NO / A,F
Beryllium	8/8	6.60E-01	J	7.30E-01			1.56E+02	2.25E+03	5.62E+01	1.15E+03	NO	NO / A,F
Cadmium	8/8	1.60E+00		1.30E+00			3.90E+01	5.64E+02	1.54E+02	2.75E+01	YES	NO / A
Calcium	8/8	2.00E+05		2.37E+05	2.00E+01	1.20E+03	NA	NA	NA	NA	NO	NO / C,F
Chromium	8/8	8.50E+00		1.33E+01			1.00E+05	1.00E+05	1.00E+05	max 1.97E+09	NO	NO / A,F
Cobalt	8/8	5.00E+00		4.70E+00			1.52E+03	2.05E+04	6.10E+01	6.61E+02	YES	NO / A
Copper	8/8	4.70E+00		8.30E+00			3.13E+03	4.54E+04	1.24E+04	1.03E+03	NO	NO / A,F
Iron	8/8	9.36E+03		1.31E+04			2.35E+04	1.00E+05	9.29E+04	5.54E+03	NO	NO / A,F
Lead	8/8	5.80E+00		8.70E+00			4.00E+02	8.00E+02	8.00E+02	IEUBK	NO	NO / A,F
Magnesium	8/8	4.61E+03		1.93E+04	4.61E-01	4.00E+02	NA	NA	NA	NA	NO	NO / C,F
Manganese	8/8	1.34E+02		3.33E+02			3.59E+03	4.84E+04	1.50E+02	2.24E+03	NO	NO / A,F
Mercury	3/8	2.70E-02	J	1.90E-02			1.00E+05	1.00E+05	9.27E+02	2.09E-03	YES	NO / A,F
Nickel	8/8	7.10E+00		1.49E+01			1.56E+03	2.27E+04	6.19E+03	9.53E+02	NO	NO / A,F
Potassium	8/8	2.20E+03		2.51E+03	2.20E-01	3.90E+02 - 7.80E+02	NA	NA	NA	NA	NO	NO / C,F
Silver	3/8	9.20E-01	J	2.65E+00			3.91E+02	5.68E+03	1.55E+03	3.13E+01	NO	NO / A,F
Sodium	1/8	2.38E+02		1.23E+03	2.38E-02	1.00E+03	NA	NA	NA	NA	NO	NO / C,F
Thallium	4/8	4.30E+00	J	2.65E+00			5.16E+00	7.49E+01	2.04E+01	3.43E+00	YES	NO / A
Vanadium	8/8	2.34E+01		3.28E+01			7.82E+01	1.14E+03	3.10E+02	7.30E+02	NO	NO / A,F
Zinc	8/8	1.73E+01		3.06E+01			2.35E+04	1.00E+05	9.29E+04	1.36E+04	NO	NO / A,F

TABLE 2
COMPARISON OF SWMU 4 MAXIMUM SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO

Notes:

mg/kg = milligrams per kilogram

J = Estimated

NA = Not applicable

ND = Not detected

max = Indicates a chemical that exhibits relatively low toxicity, so a non-risk-based maximum concentration of 1.00E+05 mg/kg is used as the SSL.

IEUBK = Indicates that the SSL is derived using EPA's Integrated Exposure Uptake Biokinetic model

(1) Maximum detected concentration from current investigation at SWMU 4.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006) - NOT APPLICABLE TO SUBSURFACE SOILS AT THIS SITE.

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006).

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern(COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 3
COMPARISON OF SWMU 6 MAXIMUM SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLs
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
TOTAL PETROLEUM HYDROCARBONS*	2/2	6.44E+00					5.20E+02	1.12E+03	NA	NA		NO / A
VOLATILE ORGANICS												
Benzene*	1/9	3.00E-03					1.03E+01	2.58E+01	1.74E+02	2.01E-02		NO / A
SEMIVOLATILE ORGANICS												
	0/8	All ND										
METALS												
Aluminum	8/8	9.94E+03		1.22E+04			7.78E+04	1.00E+05	1.44E+04	1.10E+06	NO	NO / A,F
Antimony	7/8	3.80E+00	J	1.60E+01			3.13E+01	4.54E+02	1.24E+02	1.32E+01	NO	NO / A,F
Arsenic	8/8	5.90E+00		4.30E+00			3.90E+00	1.77E+01	8.52E+01	2.90E-01	YES	NO / A,F
Barium	8/8	2.83E+02		8.90E+02			1.56E+04	1.00E+05	6.02E+04	6.03E+03	NO	NO / A,F
Beryllium	8/8	6.20E-01	J	7.30E-01			1.56E+02	2.25E+03	5.62E+01	1.15E+03	NO	NO / A,F
Cadmium	7/8	4.20E+00		1.30E+00			3.90E+01	5.64E+02	1.54E+02	2.75E+01	YES	NO / A
Calcium	8/8	2.51E+05		2.37E+05	2.51E+01	1.20E+03	NA	NA	NA	NA	YES	NO / F
Chromium	8/8	8.90E+00		1.33E+01			1.00E+05	1.00E+05	1.00E+05	max 1.97E+09	NO	NO / A,F
Cobalt	8/8	4.30E+00		4.70E+00			1.52E+03	2.05E+04	6.10E+01	6.61E+02	NO	NO / A,F
Copper	8/8	4.60E+00		8.30E+00			3.13E+03	4.54E+04	1.24E+04	1.03E+03	NO	NO / A,F
Iron	8/8	9.43E+03		1.31E+04			2.35E+04	1.00E+05	9.29E+04	5.54E+03	NO	NO / A,F
Lead	8/8	5.90E+00		8.70E+00			4.00E+02	8.00E+02	8.00E+02	IEUBK NA	NO	NO / A,F
Magnesium	8/8	5.47E+03		1.93E+04	5.47E-01	4.00E+02	NA	NA	NA	NA	NO	NO / C,F
Manganese	8/8	1.47E+02		3.33E+02			3.59E+03	4.84E+04	1.50E+02	2.24E+03	NO	NO / A,F
Mercury	7/8	1.70E-02	J	1.90E-02			1.00E+05	1.00E+05	9.27E+02	2.09E-03	NO	NO / A,F
Nickel	8/8	8.30E+00		1.49E+01			1.56E+03	2.27E+04	6.19E+03	9.53E+02	NO	NO / A,F
Potassium	8/8	2.30E+03		2.51E+03	2.30E-01	3.90E+02 - 7.80E+02	NA	NA	NA	NA	NO	NO / C,F
Silver	7/8	9.40E-01	J	2.65E+00			3.91E+02	5.68E+03	1.55E+03	3.13E+01	NO	NO / A,F
Sodium	8/8	1.17E+02		1.23E+03	1.17E-02	1.00E+03	NA	NA	NA	NA	NO	NO / C,F
Thallium	8/8	4.60E+00	J	2.65E+00			5.16E+00	7.49E+01	2.04E+01	3.43E+00	YES	NO / A
Vanadium	8/8	1.97E+01		3.28E+01			7.82E+01	1.14E+03	3.10E+02	7.30E+02	NO	NO / A,F
Zinc	8/8	1.94E+01		3.06E+01			2.35E+04	1.00E+05	9.29E+04	1.36E+04	NO	NO / A,F

TABLE 3
COMPARISON OF SWMU 6 MAXIMUM SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO

Notes:

mg/kg = milligrams per kilogram

* Sampling result from second (northern) tank location sampled during tank removal activities in 1992.

J = Estimated

NA = Not applicable

ND = Not detected

max = Indicates a chemical that exhibits relatively low toxicity, so a non-risk-based maximum concentration of 1.00E+05 mg/kg is used as the SSL.

IEUBK = Indicates that the SSL is derived using EPA's Integrated Exposure Uptake Biokinetic model

(1) Maximum detected concentration from current investigation at SWMU 6.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Residential Direct Exposure. - NOT APPLICABLE TO SUBSURFACE SOILS AT THIS SITE.

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Industrial Direct Exposure.

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern(COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 4
COMPARISON OF SWMU 10 MAXIMUM SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
TOTAL PETROLEUM HYDROCARBONS	2/2	3.136E+00					5.20E+02	1.12E+03	NA	NA		NO / A
VOLATILE ORGANICS	0/2	All ND										

Notes:

mg/kg = milligrams per kilogram

NA = Not applicable

ND = Not detected

sat = Detected concentrations above the "sat" value may indicate the presence of nonaqueous phase liquid (NAPL).

(1) Maximum detected concentration from current investigation at SWMU 10.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Residential Direct Exposure. - NOT APPLICABLE TO SUBSURFACE SOILS AT THIS SITE.

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Industrial Direct Exposure.

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern(COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 5
COMPARISON OF SWMU 75 MAXIMUM SURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration ¹ (mg/kg)	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
OIL AND GREASE	4/4	2.40E+01					NA	NA	NA	NA		NO / E
PURGEABLE ORGANICS	0/4	ND										
METALS												
Arsenic	4/4	2.60E+00		3.60E+00			3.90E+00	1.77E+01	8.52E+01	2.90E-01	NO	NO / A
Barium	4/4	1.30E+02		6.70E+02			1.56E+04	1.00E+05	6.02E+04	6.03E+03	NO	NO / A
Cadmium	3/4	3.40E-01		4.35E-01			3.90E+01	5.64E+02	1.54E+02	2.75E+01	NO	NO / A
Chromium	4/4	7.40E+00		1.05E+01			1.00E+05	1.00E+05	1.00E+05	max 1.97E+09	NO	NO / A
Copper	4/4	7.40E+00		1.83E+01			3.13E+03	4.54E+04	1.24E+04	1.03E+03	NO	NO / A
Lead	4/4	9.90E+00		1.20E+01			4.00E+02	8.00E+02	8.00E+02	IEUBK NA	NO	NO / A
Manganese	4/4	5.50E+02		3.07E+02			3.59E+03	4.84E+04	1.50E+02	2.24E+03	YES	YES / B
Mercury	4/4	3.80E-01		5.60E-02			1.00E+05	1.00E+05	9.27E+02	2.09E-03	YES	NO / A
Selenium	4/4	1.50E+00		2.60E-01			3.91E+02	5.68E+03	1.55E+03	1.90E+01	YES	NO / A
Silver	3/4	1.60E+00		4.00E-01			3.91E+02	5.68E+03	1.55E+03	3.13E+01	YES	NO / A
Zinc	4/4	2.40E+01	J	3.22E+01			2.35E+04	1.00E+05	9.29E+04	1.36E+04	NO	NO / A

Notes:

mg/kg = milligrams per kilogram

J = Estimated

NA = Not applicable

sat = Detected concentrations above the "sat" value may indicate the presence of nonaqueous phase liquid (NAPL).

max = Indicates a chemical that exhibits relatively low toxicity, so a non-risk-based maximum concentration of 1.00E+05 mg/kg is used as the SSL.

IEUBK = Indicates that the SSL is derived using EPA's Integrated Exposure Uptake Biokinetic model

(1) Maximum detected concentration from all investigations at SWMU 75.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006).

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006).

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006) - NOT APPLICABLE TO THIS SITE.

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern(COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 6
COMPARISON OF SWMU 81 MAXIMUM SURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
VOLATILE ORGANICS												
1,1,1-Trichloroethane	5/10	2.00E-03	J				5.63E+02	5.63E+02	5.63E+02	sat	2.65E+01	NO / A
Methylene Chloride	4/20	1.10E-01					1.65E+02	4.40E+02	2.55E+03		1.69E-02	NO / A
Methyl Ethyl Ketone (2-Butanone)	1/10	1.00E-03	J				3.18E+04	4.87E+04	4.87E+04	sat	2.55E+01	NO / A
Acetone	5/10	1.30E+00	J				2.81E+04	1.00E+05	9.85E+04		1.91E+01	NO / A
Ethylbenzene	5/10	2.00E-03	J				1.28E+02	1.28E+02	1.28E+02	sat	2.02E+01	NO / A
Tetrachloroethene	4/10	2.00E-03	J				1.25E+01	3.16E+01	1.34E+02	sat	5.74E-02	NO / A
Toluene	9/10	1.70E-02					2.52E+02	2.52E+02	2.52E+02	sat	2.17E+01	NO / A
Trichloroethane	6/10	2.00E-03	J				9.83E+00	2.46E+01	9.76E+01		6.44E-03	NO / A
Trichloroethene	6/10	2.00E-03	J				6.38E-01	1.56E+00	3.36E+01		2.00E-03	NO / A
Xylene (total)	7/10	6.00E-03	J				8.20E+01	8.20E+01	8.20E+01	sat	2.06E+00	NO / A

Notes:

mg/kg = milligrams per kilogram

J = Estimated

sat = Detected concentrations above the "sat" value may indicate the presence of nonaqueous phase liquid (NAPL).

(1) Maximum detected concentration from all investigations at SWMU 81.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006).

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006).

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006) - NOT APPLICABLE TO THIS SITE.

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern(COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 7
COMPARISON OF SWMU 81 MAXIMUM COMBINED SURFACE AND SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
VOLATILE ORGANICS												
1,1,1-Trichloroethane	6/25	2.00E-03	J				5.63E+02	5.63E+02	5.63E+02	sat	2.65E+01	NO / A
Methyl Ethyl Ketone (2-Butanone)	3/25	3.00E-03	J				3.18E+04	4.87E+04	4.87E+04	sat	2.55E+01	NO / A
Acetone	16/25	9.10E-01	J				2.81E+04	1.00E+05	9.85E+04		1.91E+01	NO / A
Ethylbenzene	6/25	2.00E-03	J				1.28E+02	1.28E+02	1.28E+02	sat	2.02E+01	NO / A
Tetrachloroethene	4/25	2.00E-03	J				1.25E+01	3.16E+01	1.34E+02	sat	5.74E-02	NO / A
Toluene	10/25	1.70E-02					2.52E+02	2.52E+02	2.52E+02	sat	2.17E+01	NO / A
Trichloroethane	6/25	2.00E-03	J				9.83E+00	2.46E+01	9.76E+01		6.44E-03	NO / A
Trichloroethene	7/25	3.00E-03	J				6.38E-01	1.56E+00	3.36E+01		2.00E-03	NO / A
Vinyl Chloride	0/25	ND	J				4.37E+00	1.40E+01	1.82E+02		5.45E-03	NO / A
Xylene (total)	8/25	6.00E-03	J				8.20E+01	8.20E+01	8.20E+01	sat	2.06E+00	NO / A

Notes:

mg/kg = milligrams per kilogram

J = Estimated

ND = Not detected

sat = Detected concentrations above the "sat" value may indicate the presence of nonaqueous phase liquid (NAPL).

(1) Maximum detected concentration from all investigations at SWMU 81.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006) - NOT APPLICABLE TO SUBSURFACE SOILS AT THIS SITE.

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006).

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006) - NOT APPLICABLE TO THIS SITE.

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern(COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 8
COMPARISON OF SWMU 82 MAXIMUM SURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
VOLATILE ORGANICS												
Toluene	4/5	1.40E-02					2.52E+02	2.52E+02	2.52E+02	sat	2.17E+01	NO / A
Xylene (total)	2/5	1.10E-03	J				8.20E+01	8.20E+01	8.20E+01	sat	2.06E+00	NO / A
SEMIVOLATILE ORGANICS												
Bis(2-Ethylhexyl)phthalate	2/5	1.60E-01	J				3.47E+02	1.37E+03	4.66E+03		2.15E+04	NO / A
Benzo(a)anthracene	1/5	5.50E-02	J				6.21E+00	2.34E+01	2.12E+02		1.09E+01	NO / A
Chrysene	1/5	4.90E-02	J				6.15E+02	2.31E+03	2.12E+04		3.48E+02	NO / A
Di-n-butylphthalate	1/5	4.80E-02	J				6.11E+03	6.84E+04	2.33E+04		3.72E+03	NO / A
Pyrene	1/5	5.60E-02	J				2.29E+03	3.09E+04	9.01E+03		3.73E+02	NO / A
PESTICIDES/PCBs												
4,4-DDE	4/5	2.90E-02					1.72E+01	7.81E+01	5.70E+02		2.62E+02	NO / A
4,4-DDT	2/5	1.70E-02					1.72E+01	7.81E+01	1.38E+02		1.54E+02	NO / A
METALS												
Aluminum	5/5	1.05E+04		8.95E+03			7.78E+04	1.00E+05	1.44E+04		1.10E+06	YES NO / A
Antimony	1/5	4.20E+00	J	3.15E+00			3.13E+01	4.54E+02	1.24E+02		1.32E+01	YES NO / A
Arsenic	5/5	2.80E+00		3.60E+00			3.90E+00	1.77E+01	8.52E+01		2.90E-01	NO NO / A
Barium	5/5	2.48E+02		6.70E+02			1.56E+04	1.00E+05	6.02E+04		6.03E+03	NO NO / A,F
Beryllium	5/5	8.20E-01		7.80E-01			1.56E+02	2.25E+03	5.62E+01		1.15E+03	YES NO / A
Cadmium	3/5	1.40E+00		4.35E-01			3.90E+01	5.64E+02	1.54E+02		2.75E+01	YES NO / A
Calcium	5/5	8.68E+04		4.48E+04	8.68E+00	1.20E+03	NA	NA	NA		NA	YES NO / C,F
Chromium	5/5	1.14E+01		1.05E+01			1.00E+05	1.00E+05	1.00E+05	max	1.97E+09	YES NO / A
Cobalt	5/5	5.30E+00		6.60E+00			1.52E+03	2.05E+04	6.10E+01		6.61E+02	NO NO / A,F
Copper	3/5	1.86E+01	J	1.83E+01			3.13E+03	4.54E+04	1.24E+04		1.03E+03	YES NO / A
Iron	5/5	1.14E+04		1.01E+04			2.35E+04	1.00E+05	9.29E+04		5.54E+03	YES NO / A
Lead	5/5	7.26E+01		1.20E+01			4.00E+02	8.00E+02	8.00E+02	IEUBK	NA	YES NO / A
Magnesium	5/5	2.64E+03		1.93E+03	2.64E-01	4.00E+02	NA	NA	NA		NA	YES NO / C
Manganese	5/5	1.74E+02		3.07E+02			3.59E+03	4.84E+04	1.50E+02		2.24E+03	NO NO / F
Mercury	1/5	4.80E-02	J	5.60E-02			1.00E+05	1.00E+05	9.27E+02		2.09E-03	NO NO / A,F
Nickel	5/5	9.70E+00	J	1.10E+01			1.56E+03	2.27E+04	6.19E+03		9.53E+02	NO NO / A,F
Potassium	5/5	2.46E+03		2.69E+03	2.46E-01	3.90E+02 - 7.80E+02	NA	NA	NA		NA	NO NO / C,F
Silver	1/5	1.00E+00	J	4.00E-01			3.91E+02	5.68E+03	1.55E+03		3.13E+01	YES NO / A
Sodium	1/5	3.25E+02	J	1.02E+02	3.25E-02	1.00E+03	NA	NA	NA		NA	YES NO / C
Vanadium	5/5	2.02E+01		2.33E+01			7.82E+01	1.14E+03	3.10E+02		7.30E+02	NO NO / A,F
Zinc	5/5	8.73E+01	J	3.22E+01			2.35E+04	1.00E+05	9.29E+04		1.36E+04	YES NO / A

TABLE 8
COMPARISON OF SWMU 82 MAXIMUM SURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO

Notes:

mg/kg = milligrams per kilogram

J = Estimated

NA = Not applicable

sat = Detected concentrations above the "sat" value may indicate the presence of nonaqueous phase liquid (NAPL).

max = Indicates a chemical that exhibits relatively low toxicity, so a non-risk-based maximum concentration of 1.00E+05 mg/kg is used as the SSL.

IEUBK = Indicates that the SSL is derived using EPA's Integrated Exposure Uptake Biokinetic model

(1) Maximum detected concentration from all investigations at SWMU 82.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006).

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006).

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern (COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 9
COMPARISON OF SWMU 82 MAXIMUM COMBINED SURFACE AND SUBSURFACE SOIL CONCENTRATIONS (0-75 FEET) TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
TOTAL PETROLEUM HYDROCARBONS	1/1	9.72E+01					7.60E+02	1.81E+03	1.81E+03	NA		NO / A,G
VOLATILE ORGANICS												
2-Butanone (MEK)	4/108	5.40E-03	J				3.18E+04	4.87E+04	4.87E+04	sat	2.55E+01	NO / A,G
Acetone	33/104	2.50E+00	J				2.81E+04	1.00E+05	9.85E+04		1.91E+01	NO / A,G
Benzene	1/108	1.20E-03	J				1.03E+01	2.58E+01	1.74E+02		2.01E-02	NO / A,G
Ethylbenzene	1/108	3.80E-03	J				1.28E+02	1.28E+02	1.28E+02	sat	2.02E+01	NO / A,G
Chloromethane	1/108	1.20E-03	J				2.18E+01	5.34E+01	2.84E+02		1.00E-01	NO / A,G
Methylene Chloride	31/108	6.20E-03					1.82E+02	4.90E+02	2.63E+03	sat	1.70E-01	NO / A,G
Toluene	33/108	3.50E-02					2.52E+02	2.52E+02	2.52E+02	sat	2.17E+01	NO / A
Vinyl Acetate	1/108	1.50E-03	J				1.07E+03	3.68E+03	3.52E+03		1.51E+00	NO / A,G
Xylene (total)	1/108	1.10E-03	J				8.20E+01	8.20E+01	8.20E+01	sat	2.06E+00	NO / A
SEMIVOLATILE ORGANICS												
2-Methylnaphthalene*	2/108	2.30E-01	J				7.95E+01	9.25E+01	8.25E+01		3.94E-01	NO / A,G
4-Nitrophenol*	3/108	1.60E-01	J				1.83E+04	1.00E+05	6.90E+04		2.11E-02	NO / A,G
Acenaphthene	2/108	7.10E-01					3.73E+03	3.35E+04	1.41E+04		5.49E+01	NO / A,G
Anthracene	4/108	1.30E+00					2.20E+04	1.00E+05	8.60E+04		1.62E+03	NO / A,G
Benzo(a)anthracene	8/108	2.10E+00					6.21E+00	2.34E+01	2.12E+02		1.09E+01	NO / A
Benzo(a)pyrene	4/108	1.60E+00					6.21E-01	2.34E+00	2.12E+01		2.78E+00	NO / A,G
Benzo(b)fluoranthene	6/108	2.20E+00					6.21E+00	2.34E+01	2.12E+02		3.35E+01	NO / A,G
Benzo(g,h,i)perylene*	2/108	4.60E-01					7.95E+01	9.25E+01	8.25E+01		3.94E-01	NO / A,G
Benzo(k)fluoranthene	2/108	9.30E-01					6.21E+01	2.34E+02	2.12E+03		3.35E+02	NO / A,G
Benzoic Acid	1/108	3.90E-02	J				1.00E+05	1.00E+05	1.00E+05	max	4.00E+02	NO / A,G
Bis(2-Ethyl hexyl)phthalate	63/108	7.80E-01	J				3.47E+02	1.37E+03	4.66E+03		2.15E+04	NO / A
Butylbenzylphthalate	2/108	4.90E-02	J				2.40E+02	2.40E+02	2.40E+02	sat	8.10E+02	NO / A,G
Chrysene	7/108	1.90E+00					6.15E+02	2.31E+03	2.12E+04		3.48E+02	NO / A
Dibenzo(a,h)anthracene	2/108	9.10E-02	J				6.21E-01	2.34E+00	2.12E+01		1.04E+01	NO / A,G
Dibenzofuran	2/108	6.20E-01					1.42E+02	1.62E+03	5.52E+02		2.87E+00	NO / A,G
Diethylphthalate	1/108	4.60E-02	J				4.89E+04	1.00E+05	1.00E+05	max	3.54E+02	NO / A,G
Di-n-butylphthalate	11/108	6.10E-02	J				6.11E+03	6.84E+04	2.33E+04		3.72E+03	NO / A
Di-n-octylphthalate	1/108	6.00E-02	J				2.40E+03	8.20E+04	2.70E+04		2.00E+05	NO / A,G
Fluoranthene	6/108	5.10E+00					2.29E+03	2.44E+04	8.73E+03		4.69E+03	NO / A,G
Fluorene	2/108	8.90E-01					2.66E+03	2.65E+04	1.02E+04		5.85E+01	NO / A,G
Indeno(1,2,3)pyrene	2/108	8.50E-01					6.21E+00	2.34E+01	2.12E+02		9.46E+01	NO / A,G
Napthalene	2/108	5.30E-01					7.95E+01	3.00E+02	2.62E+02		3.94E-01	NO / A,G
Pentachlorophenol	1/108	8.80E-02	J				2.98E+01	1.00E+02	1.02E+03		1.17E-01	NO / A,G
Phenanthrene	6/108	4.70E+00					1.83E+03	2.05E+04	6.99E+03		4.64E+02	NO / A,G
Pyrene	8/108	4.10E+00					2.29E+03	3.09E+04	9.01E+03		3.73E+02	NO / A
PESTICIDES/PCBs												
4,4-DDE	3/108	2.90E-02					1.72E+01	7.81E+01	5.70E+02		2.62E+02	NO / A
4,4-DDT	2/108	1.70E-02					1.72E+01	7.81E+01	1.38E+02		1.54E+02	NO / A
Aroclor 1254	3/108	3.60E-01					1.12E+00	8.26E+00	4.28E+00		5.28E+00	NO / A,G

**TABLE 9
COMPARISON OF SWMU 82 MAXIMUM COMBINED SURFACE AND SUBSURFACE SOIL CONCENTRATIONS (0-75 FEET) TO NMED SSLS
CANNON AFB, NEW MEXICO**

METALS													
Aluminum	108/108	1.05E+04		1.22E+04			7.78E+04	1.00E+05	1.44E+04		1.10E+06	NO	NO / A
Antimony	18/99	1.61E+01	J	1.60E+01			3.13E+01	4.54E+02	1.24E+02		1.32E+01	YES	NO / A,G
Arsenic	107/108	2.80E+00		4.30E+00			3.90E+00	1.77E+01	8.52E+01		2.90E-01	NO	NO / A,F
Barium	108/108	5.60E+03	J	8.90E+02			1.56E+04	1.00E+05	6.02E+04		6.03E+03	YES	NO / G
Beryllium	87/108	8.20E-01	J	7.30E-01			1.56E+02	2.25E+03	5.62E+01		1.15E+03	YES	NO / A
Cadmium	2/108	1.40E+00		1.30E+00			3.90E+01	5.64E+02	1.54E+02		2.75E+01	YES	NO / A,G
Calcium	108/108	3.58E+05		2.37E+05	3.58E+01	1.20E+03	NA	NA	NA		NA	YES	NO / C,G
Chromium	105/108	1.17E+02		1.33E+01			1.00E+05	1.00E+05	1.00E+05	max	1.97E+09	YES	NO / A,G
Cobalt	85/108	1.02E+01	J	6.60E+00			1.52E+03	2.05E+04	6.10E+01		6.61E+02	YES	NO / A,G
Copper	3/108	6.17E+01		8.30E+00			3.13E+03	4.54E+04	1.24E+04		1.03E+03	YES	NO / A,G
Iron	108/108	1.14E+04		1.31E+04			2.35E+04	1.00E+05	9.29E+04		5.54E+03	NO	NO / A
Lead	102/108	7.26E+01		8.70E+00			4.00E+02	8.00E+02	8.00E+02	IEUBK	NA	YES	NO / A
Magnesium	108/108	2.32E+04		1.93E+04	2.32E+00	4.00E+02	NA	NA	NA		NA	YES	NO / C,G
Manganese	107/108	1.74E+02		3.33E+02			3.59E+03	4.84E+04	1.50E+02		2.24E+03	NO	NO / F
Mercury	2/108	4.80E-02	J	1.90E-02			1.00E+05	1.00E+05	9.27E+02		2.09E-03	YES	NO / A,G
Nickel	97/108	3.30E+02	J	1.49E+01			1.56E+03	2.27E+04	6.19E+03		9.53E+02	YES	NO / A,G
Potassium	108/108	2.46E+03		2.51E+03	2.46E-01	3.90E+02 - 7.80E+02	NA	NA	NA		NA	NO	NO / C
Silver	22/108	2.60E+00		2.65E+00			3.91E+02	5.68E+03	1.55E+03		3.13E+01	NO	NO / A,G
Sodium	28/108	9.01E+02	J	1.23E+03	9.01E-02	1.00E+03	NA	NA	NA		NA	NO	NO / C,F,G
Thallium	5/91	1.30E+00		2.65E+00			5.16E+00	7.49E+01	2.04E+01		3.43E+00	NO	NO / A,F
Vanadium	108/108	2.75E+01		3.28E+01			7.82E+01	1.14E+03	3.10E+02		7.30E+02	NO	NO / A,F
Zinc	9/108	8.73E+01	J	3.06E+01			2.35E+04	1.00E+05	9.29E+04		1.36E+04	YES	NO / A,G

Notes:

mg/kg = milligrams per kilogram

* = Naphthalene used as a surrogate for 2-methylnaphthalene and benzo(g,h,i)perylene; phenol used as a surrogate for 4-nitrophenol.

J = Estimated

NA = Not applicable

sat = Detected concentrations above the "sat" value may indicate the presence of nonaqueous phase liquid (NAPL).

max = Indicates a chemical that exhibits relatively low toxicity, so a non-risk-based maximum concentration of 1.00E+05 mg/kg is used as the SSL.

IEUBK = Indicates that the SSL is derived using EPA's Integrated Exposure Uptake Biokinetic model

(1) Maximum detected concentration from all investigations at SWMU 82.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Residential Direct Exposure - NOT APPLICABLE TO SUBSURFACE SOILS AT THIS SITE.

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Industrial Direct Exposure.

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern (COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

G = All subsurface samples were collected at depths below 10 feet where direct contact with soil is an incomplete exposure pathway.

H = SSL based on soil saturation limit rather than a risk-based value.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 10
COMPARISON OF SWMU 96 MAXIMUM SURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
PESTICIDES/HERBICIDES												
alpha Chlordane	8/8	1.60E-02	J				1.62E+01	7.19E+01	1.30E+02	6.83E+00		NO / A
gamma Chlordane	1/8	4.70E-02	J				1.62E+01	7.19E+01	1.30E+02	6.83E+00		NO / A
4,4-DDD	4/8	5.00E-01					2.44E+01	1.11E+02	8.07E+02	8.30E+01		NO / A
4,4-DDE	8/8	2.60E+00					1.72E+01	7.81E+01	5.70E+02	2.62E+02		NO / A
4,4-DDT	8/8	2.00E+00					1.72E+01	7.81E+01	1.38E+02	1.54E+02		NO / A
Heptachlor epoxide	8/8	1.90E-02	J				1.08E+00	4.26E+00	3.63E+01	6.24E+00		NO / A

Notes:

mg/kg = milligrams per kilogram

- (1) Maximum detected concentration from all investigations at SWMU 96.
- (2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].
- (3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg
- (4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.
- (5) NMED Soil Screening Levels for Residential Soil (NMED 2006).
- (6) NMED Soil Screening Levels for Industrial Soil (NMED 2006).
- (7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).
- (8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.
- (9) For this site, a chemical is only considered a contaminant of potential concern (COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.
- (10) See A-F footnotes below.

- A = Does not exceed the applicable screening level.
- B = Exceeds the applicable screening value.
- C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.
- D = Daily Intake exceeds the RDA.
- E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.
- F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 11
COMPARISON OF SWMU 96 MAXIMUM COMBINED SURFACE AND SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
PESTICIDES/HERBICIDES												
alpha Chlordane	1/43	2.00E-01	J				1.62E+01	7.19E+01	1.30E+02	6.83E+00		NO / A
gamma Chlordane	1/43	4.70E-02	J				1.62E+01	7.19E+01	1.30E+02	6.83E+00		NO / A
2,4-D	2/43	3.41E+00					1.22E+02	1.37E+03	4.66E+02	1.05E+00		NO / A
4,4-DDD	6/43	5.00E-01					2.44E+01	1.11E+02	8.07E+02	8.30E+01		NO / A
4,4-DDE	12/43	2.60E+00					1.72E+01	7.81E+01	5.70E+02	2.62E+02		NO / A
4,4-DDT	12/43	2.00E+00					1.72E+01	7.81E+01	1.38E+02	1.54E+02		NO / A
Dieldrin	1/43	2.00E-03					3.04E-01	1.20E+00	1.02E+01	2.68E-02		NO / A
Heptachlor epoxide	1/43	1.90E-02	J				1.08E+00	4.26E+00	3.63E+01	6.24E+00		NO / A
Toxaphene	1/43	2.21E-01					4.42E+00	1.74E+01	1.48E+02	4.65E+00		NO / A
METALS												
Arsenic	7/7	5.60E+00		4.30E+00			3.90E+00	1.77E+01	8.52E+01	2.90E-01	YES	NO / A
Mercury	7/7	2.40E-01		1.90E-02			1.00E+05	1.00E+05	9.27E+02	2.09E-03	YES	NO / A

Notes:

mg/kg = milligrams per kilogram

J = Estimated

(1) Maximum detected concentration from all investigations at SWMU 96.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006) - NOT APPLICABLE TO SUBSURFACE SOILS AT THIS SITE.

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006).

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern (COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

TABLE 12
COMPARISON OF SWMU 96 MAXIMUM GROUNDWATER CONCENTRATIONS TO MCLS
CANNON AFB, NEW MEXICO

Chemical	Frequency Detected	Maximum Detected Concentration (mg/L) ¹	Qual	Background Concentration ² (mg/L)	Primary Drinking Water Standard		Exceeds Background ?	COPC ⁵ (Yes or No)/ Basis ⁶
					MCL ³ (mg/L)	NMED Tap Water (mg/L) ⁴		
METALS								
Arsenic	1/1	4.70E-03	J		1.00E-02	4.42E-04		YES / B
Barium	1/1	6.60E-01			2.00E+00	7.30E+00		NO / A
Copper	1/1	1.50E-01			1.30E+00	1.46E+00		NO / A
Lead	1/1	3.40E-02	J		1.50E-02	NA		YES / B
Nickel	1/1	2.90E-02	J		NA	7.30E-01		NO / A
Vanadium	1/1	3.50E-02			NA	3.60E-02		NO / A
Zinc	1/1	4.90E-02			5.00E+00	1.10E+01		NO / A

Notes:

mg/L = milligrams per liter

J = Estimated

NA = Not applicable

(1) Detected concentration from Well 96K.

(2) Site-specific groundwater background is not available.

(3) Maximum Contaminant Level (MCL) (USEPA 2005)

(4) NMED tap water (NMED 2006).

(5) For this site, a chemical is only considered a contaminant of potential concern (COPC) if the maximum concentration exceeds the tap water screening level.

(6) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 13
COMPARISON OF SWMU 98 MAXIMUM SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰	
TOTAL PETROLEUM HYDROCARBONS	1/43	3.38E-01					7.60E+02	1.81E+03	1.81E+03	NA		NO / A	
VOLATILE ORGANICS													
Acetone	16/43	7.80E+00	J				2.81E+04	1.00E+05	9.85E+04	1.91E+01		NO / A	
2-Butanone (MEK)	3/43	4.00E-03	J				3.18E+04	4.87E+04	4.87E+04	sat		NO / A	
Methylene Chloride	8/43	2.00E-03	J				1.82E+02	4.90E+02	2.63E+03	sat		NO / A	
Toluene	11/43	2.00E-03	J				2.52E+02	2.52E+02	2.52E+02	sat		NO / A	
METALS													
Aluminum	29/29	1.15E+04		1.22E+04			7.78E+04	1.00E+05	1.44E+04	1.10E+06	NO	NO / A,F	
Antimony	3/29	5.30E+00	J	1.60E+01			3.13E+01	4.54E+02	1.24E+02	1.32E+01	NO	NO / A,F	
Arsenic	29/29	2.40E+00	J	4.30E+00			3.90E+00	1.77E+01	8.52E+01	2.90E-01	NO	NO / A,F	
Barium	29/29	3.48E+03		8.90E+02			1.56E+04	1.00E+05	6.02E+04	6.03E+03	YES	NO/A	
Beryllium	5/29	7.20E-01	J	7.30E-01			1.56E+02	2.25E+03	5.62E+01	1.15E+03	NO	NO / A	
Cadmium	2/29	1.30E+00		1.30E+00			3.90E+01	5.64E+02	1.54E+02	2.75E+01	NO	NO / A,F	
Calcium	29/29	2.46E+05		2.37E+05	2.46E+01	1.20E+03	NA	NA	NA	NA	YES	NO / C	
Chromium	29/29	8.40E+00		1.33E+01			1.00E+05	1.00E+05	1.00E+05	max	1.97E+09	NO	NO / A,F
Cobalt	29/29	4.20E+00	J	4.70E+00			1.52E+03	2.05E+04	6.10E+01	6.61E+02	NO	NO / A,F	
Copper	14/29	1.27E+01		8.30E+00			3.13E+03	4.54E+04	1.24E+04	1.03E+03	YES	NO / A	
Iron	29/29	7.56E+03		1.31E+04			2.35E+04	1.00E+05	9.29E+04	5.54E+03	NO	NO / A,F	
Lead	29/29	8.90E+00		8.70E+00			4.00E+02	8.00E+02	8.00E+02	IEUBK	NA	YES	NO / A
Magnesium	29/29	3.53E+04		1.93E+04	3.53E+00	4.00E+02	NA	NA	NA	NA	YES	NO / C	
Manganese	29/29	1.33E+02	J	3.33E+02			3.59E+03	4.84E+04	1.50E+02	2.24E+03	NO	NO / F	
Nickel	29/29	7.50E+00	J	1.49E+01			1.56E+03	2.27E+04	6.19E+03	9.53E+02	NO	NO / A,F	
Potassium	29/29	2.70E+03		2.51E+03	2.70E-01	3.90E+02 - 7.80E+02	NA	NA	NA	NA	YES	NO / C	
Silver	3/29	1.00E+00	J	2.65E+00			3.91E+02	5.68E+03	1.55E+03	3.13E+01	NO	NO / A,F	
Sodium	4/29	4.27E+02		1.23E+03	4.27E-02	1.00E+03	NA	NA	NA	NA	NO	NO / C,F	
Thallium	3/29	2.30E-01		2.65E+00			5.16E+00	7.49E+01	2.04E+01	3.43E+00	NO	NO / A,F	
Vanadium	29/29	2.33E+01		3.28E+01			7.82E+01	1.14E+03	3.10E+02	7.30E+02	NO	NO / A,F	
Zinc	23/29	1.95E+01	J	3.06E+01			2.35E+04	1.00E+05	9.29E+04	1.36E+04	NO	NO / A,F	

TABLE 13
COMPARISON OF SWMU 98 MAXIMUM SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO

Notes:

mg/kg = milligrams per kilogram

J = Estimated

NA = Not applicable

ND = Not detected

sat = Detected concentrations above the "sat" value may indicate the presence of nonaqueous phase liquid (NAPL).

max = Indicates a chemical that exhibits relatively low toxicity, so a non-risk-based maximum concentration of 1.00E+05 mg/kg is used as the SSL.

IEUBK = Indicates that the SSL is derived using EPA's Integrated Exposure Uptake Biokinetic model

(1) Maximum detected concentration from all investigations at SWMU 98.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Residential Direct Exposure - NOT APPLICABLE TO SUBSURFACE SOILS AT THIS SITE.

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Industrial Direct Exposure.

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern (COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 14
COMPARISON OF SWMU 102 MAXIMUM SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLs
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
VOLATILE ORGANICS												
Toluene	1/8	1.30E-03	J				2.52E+02	2.52E+02	2.52E+02	sat	2.17E+01	NO / A
Xylene (total)	1/8	2.10E-03	J				8.20E+01	8.20E+01	8.20E+01	sat	2.06E+00	NO / A
PESTICIDES												
4,4-DDE	1/8	5.00E-03					1.72E+01	7.81E+01	5.70E+02		2.62E+02	NO / A
4,4-DDT	1/8	1.00E-03	J				1.72E+01	7.81E+01	1.38E+02		1.54E+02	NO / A
alpha Chlordane	1/8	8.00E-03					1.62E+01	7.19E+01	1.30E+02		6.83E+00	NO / A
gamma Chlordane	1/8	7.00E-03					1.62E+01	7.19E+01	1.30E+02		6.83E+00	NO / A
gamma-BHC (Lindane)	2/8	4.00E-03	J				4.37E+00	1.93E+01	8.09E+01		1.82E-02	NO / A
METALS												
Aluminum	8/8	9.11E+03		1.22E+04			7.78E+04	1.00E+05	1.44E+04		1.10E+06	NO / A,F
Antimony	8/8	4.00E+00	J	1.60E+01			3.13E+01	4.54E+02	1.24E+02		1.32E+01	NO / A,F
Arsenic	8/8	5.80E+00		4.30E+00			3.90E+00	1.77E+01	8.52E+01		2.90E-01	YES NO / A
Barium	8/8	4.58E+02		8.90E+02			1.56E+04	1.00E+05	6.02E+04		6.03E+03	NO NO / A,F
Beryllium	8/8	6.00E-01	J	7.30E-01			1.56E+02	2.25E+03	5.62E+01		1.15E+03	NO NO / A,F
Cadmium	7/8	1.80E+00		1.30E+00			3.90E+01	5.64E+02	1.54E+02		2.75E+01	YES NO / A
Calcium	8/8	2.96E+05		2.37E+05	2.96E+01	1.20E+03	NA	NA	NA		NA	YES NO / F
Chromium	8/8	8.00E+00		1.33E+01			1.00E+05	1.00E+05	1.00E+05	max	1.97E+09	NO NO / A,F
Cobalt	8/8	4.20E+00		4.70E+00			1.52E+03	2.05E+04	6.10E+01		6.61E+02	NO NO / A,F
Copper	7/8	6.70E+00		8.30E+00			3.13E+03	4.54E+04	1.24E+04		1.03E+03	NO NO / A,F
Iron	8/8	7.46E+03		1.31E+04			2.35E+04	1.00E+05	9.29E+04		5.54E+03	NO NO / A,F
Lead	8/8	4.80E+00		8.70E+00			4.00E+02	8.00E+02	8.00E+02	IEUBK	NA	NO NO / A,F
Magnesium	8/8	8.51E+03		1.93E+04	8.51E-01	4.00E+02	NA	NA	NA		NA	NO NO / C,F
Manganese	8/8	9.39E+01		3.33E+02			3.59E+03	4.84E+04	1.50E+02		2.24E+03	NO NO / A,F
Mercury	6/8	3.00E-02	J	1.90E-02			1.00E+05	1.00E+05	9.27E+02		2.09E-03	YES NO / A,F
Nickel	8/8	6.80E+00		1.49E+01			1.56E+03	2.27E+04	6.19E+03		9.53E+02	NO NO / A,F
Potassium	8/8	2.23E+03		2.51E+03	2.23E-01	3.90E+02 - 7.80E+02	NA	NA	NA		NA	NO NO / C,F
Silver	8/8	1.30E+00	J	2.65E+00			3.91E+02	5.68E+03	1.55E+03		3.13E+01	NO NO / A,F
Sodium	8/8	3.53E+02		1.23E+03	3.53E-02	1.00E+03	NA	NA	NA		NA	NO NO / C,F
Thallium	8/8	5.20E+00	J	2.65E+00			5.16E+00	7.49E+01	2.04E+01		3.43E+00	YES NO / A
Vanadium	8/8	1.91E+01		3.28E+01			7.82E+01	1.14E+03	3.10E+02		7.30E+02	NO NO / A,F
Zinc	8/8	1.47E+01		3.06E+01			2.35E+04	1.00E+05	9.29E+04		1.36E+04	NO NO / A,F

TABLE 14
COMPARISON OF SWMU 102 MAXIMUM SUBSURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO

Notes:

mg/kg = milligrams per kilogram

J = Estimated

NA = Not applicable

sat = Detected concentrations above the "sat" value may indicate the presence of nonaqueous phase liquid (NAPL).

max = Indicates a chemical that exhibits relatively low toxicity, so a non-risk-based maximum concentration of 1.00E+05 mg/kg is used as the SSL.

IEUBK = Indicates that the SSL is derived using EPA's Integrated Exposure Uptake Biokinetic model

(1) Maximum detected concentration from current investigation at SWMU 102.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006) - NOT APPLICABLE TO SUBSURFACE SOILS AT THIS SITE.

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006).

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern (COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 15
COMPARISON OF SWMU 106 MAXIMUM SURFACE SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
PETROLEUM HYDROCARBONS												
Oil and Grease	1/1	1.00E+03					NA	NA	NA	NA		NO / E
TPH	4/4	2.32E+02					7.60E+02	1.81E+03	1.81E+03	NA		NO / A
Purgeable Organic Compounds	0/1	ND					NA	NA	NA	NA		NO / E
VOLATILE ORGANICS												
Benzene	1/4	1.70E-01					1.03E+01	2.58E+01	1.74E+02	2.01E-02		NO / A
Toluene	2/4	1.40E-01					2.52E+02	2.52E+02	2.52E+02	sat	2.17E+01	NO / A
METALS												
Chromium	3/4	1.90E+01		1.05E+01			1.00E+05	1.00E+05	1.00E+05	max	1.97E+09	YES NO / A
Lead	3/5	4.10E+01		1.20E+01			4.00E+02	8.00E+02	8.00E+02	IEUBK	NA	YES NO / A

Notes:

mg/kg = milligrams per kilogram

J = Estimated

NA = Not applicable

ND = Not detected

sat = Detected concentrations above the "sat" value may indicate the presence of nonaqueous phase liquid (NAPL).

max = Indicates a chemical that exhibits relatively low toxicity, so a non-risk-based maximum concentration of 1.00E+05 mg/kg is used as the SSL.

IEUBK = Indicates that the SSL is derived using EPA's Integrated Exposure Uptake Biokinetic model

(1) Maximum detected concentration from all investigations at SWMU 106.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Residential Direct Exposure.

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Industrial Direct Exposure.

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern (COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.

**TABLE 16
COMPARISON OF SWMU 106 MAXIMUM COMBINED SOIL CONCENTRATIONS TO NMED SSLS
CANNON AFB, NEW MEXICO**

Chemical	Frequency Detected	Maximum Detected Concentration (mg/kg) ¹	Qual	Background Concentration ² (mg/kg)	Daily Intake from the Site ³ (Essential Nutrients)	Recommended Daily Allowance ⁴ (Essential Nutrients)	Residential Soil SSL Concentration ⁵ (mg/kg)	Industrial Soil SSL Concentration ⁶ (mg/kg)	Construction Worker Soil SSL Concentration ⁷ (mg/kg)	Soil to Groundwater SSL Using DAF ⁸ = 20	Exceeds Background ?	COPC ⁹ (Yes or No)/ Basis ¹⁰
PETROLEUM HYDROCARBONS												
Oil and Grease	3/3	3.40E+03					NA	NA	NA	NA		NO / E
TPH	4/20	2.32E+02					7.60E+02	1.81E+03	1.81E+03	NA		NO / A
Purgeable Organic Compounds	0/3	ND					NA	NA	NA	NA		NO / E
VOLATILE ORGANICS												
Benzene	1/23	1.70E-01					1.03E+01	2.58E+01	1.74E+02	2.01E-02		NO / A
Toluene	2/23	1.40E-01					2.52E+02	2.52E+02	2.52E+02	sat	2.17E+01	NO / A
Ethylbenzene	1/23	2.70E-02										
Xylene	2/23	2.70E-02										
Trichloroethene	0/23	ND										
METALS												
Chromium	20/20	4.10E+02		1.33E+01			1.00E+05	1.00E+05	1.00E+05	max	1.97E+09	YES NO / A
Lead	23/23	4.10E+01		8.70E+00			4.00E+02	8.00E+02	8.00E+02	IEUBK	NA	YES NO / A

Notes:

mg/kg = milligrams per kilogram

J = Estimated

NA = Not applicable

ND = Not detected

sat = Detected concentrations above the "sat" value may indicate the presence of nonaqueous phase liquid (NAPL).

max = Indicates a chemical that exhibits relatively low toxicity, so a non-risk-based maximum concentration of 1.00E+05 mg/kg is used as the SSL.

IEUBK = Indicates that the SSL is derived using EPA's Integrated Exposure Uptake Biokinetic model

(1) Maximum detected concentration from all investigations at SWMU 106.

(2) Site-specific background is the 95% upper tolerance limit (UTL) [W-C 1997].

(3) Daily intake from site soil (mg/day) = maximum detected concentration (mg/kg) x ingestion rate of 100 mg/day for construction workers x conversion factor of 1.00E-06 kg/mg

(4) National Research Council 1989. RDAs have not been established for potassium and sodium. These numbers are based on recommendations for a 2,000 calorie diet.

(5) NMED Soil Screening Levels for Residential Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Residential Direct Exposure - NOT APPLICABLE TO SUBSURFACE SOILS AT THIS SITE.

(6) NMED Soil Screening Levels for Industrial Soil (NMED 2006) or NMED TPH Screening Guidelines (NMED 2006) for Industrial Direct Exposure.

(7) NMED Soil Screening Levels for the Construction Worker (NMED 2006).

(8) NMED Soil-to-Groundwater Screening Levels (NMED 2006) with a dilution attenuation factor (DAF) of 20 - NOT APPLICABLE TO THIS SITE.

(9) For this site, a chemical is only considered a contaminant of potential concern (COPC) if the maximum concentration exceeds background and the industrial or construction worker SSL.

(10) See A-F footnotes below.

A = Does not exceed the applicable screening level.

B = Exceeds the applicable screening value.

C = The chemical is an essential nutrient; the calculated daily intake did not exceed the recommended daily allowance.

D = Daily Intake exceeds the RDA.

E = No toxicity value available to quantify risk. Chemical will be evaluated qualitatively in the risk assessment.

F = Concentration is below background concentration.

Shading indicates the maximum concentration exceeds the designated SSL.