102753

GJO-2004-552-TAC
ESL-RPT-2004-01

Environmental Sciences Laboratory

Final Report
Phase II: Performance Evaluation of Permeable Reactive Barriers and Potential for Rejuvenation by Chemical Flushing

U.S. Environmental Protection Agency
Region 8 Support

January 2004

Prepared for
U.S. Department of Energy
Grand Junction Site
Grand Junction, Colorado

Work Performed Under DOE Contract No. DE-AC01-02GJ79491 for the U.S. Department of Energy
Approved for public release; distribution is unlimited.

31179

SCANNED

GJO–2004–552–TAC
ESL–RPT–2004–01

Environmental Sciences Laboratory

Final Report
Phase II: Performance Evaluation of Permeable Reactive Barriers and Potential for Rejuvenation by Chemical Flushing

U.S. Environmental Protection Agency
Region 8 Support

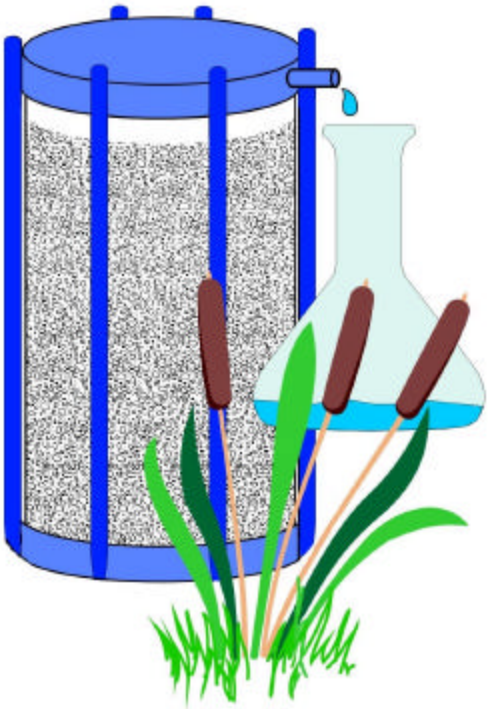

January 2004

Prepared for
U.S. Department of Energy
Grand Junction Site
Grand Junction, Colorado

Work Performed Under DOE Contract No. DE–AC01–02GJ79491 for the U.S. Department of Energy
Approved for public release; distribution is unlimited.

ESL–RPT–2004–01
OPG 3.2–2

Final Report

Phase II: Performance Evaluation of Permeable Reactive Barriers and Potential for Rejuvenation by Chemical Flushing

U.S. Environmental Protection Agency
Region 8 Support

January 2004

Work Performed by S.M. Stoller Corporation under DOE Contract No. DE-AC01-02GJ79491
for the U.S. Department of Energy, Grand Junction, Colorado

B0005600

Signature Page

Final Report

Phase II: Performance Evaluation of Permeable Reactive Barriers and Potential for Rejuvenation by Chemical Flushing

U.S. Environmental Protection Agency
Region 8 Support

January 2004

Prepared By: _____
Stan J. Morrison, Manager
Environmental Sciences Laboratory

Prepared By: _____
Tim Bartlett, Senior Hydrogeologist

Contents

Page

Acronyms ix
Executive Summary xi
1.0 Introduction 1
1.1 Background on Permeable Reactive Barriers Used to Treat Ground Water for Uranium 2
1.2 Background on the Monticello and Fry Canyon Permeable Reactive Barriers 3
1.3 Project Operations 4
2.0 Bulk Chemistry Analyses 5
2.1 Field Methods 5
2.2 Laboratory Methods 5
2.3 Results of Bulk Chemical Analyses 6
2.3.1 Monticello 6
2.3.2 Fry Canyon 7
3.0 Reactivity Tests 9
3.1 Analysis and Calculation Methods 9
3.2 Reactivity Tests on Standards 10
3.3 Reactivity Tests on PRB Samples 10
4.0 Fission Track Analysis 13
4.1 Methods 13
4.2 Results 13
5.0 Hydrology Tests at Monticello 15
5.1 Hydraulic Conductivity Determinations 15
5.2 Tracer Dilution Studies 16
5.2.1 Field Methods 16
5.2.2 Test Results 16
5.2.3 Data Analysis 17
5.2.4 Ground Water Flux Through PRB 18
5.2.5 Vertical Dilution Profiles 18
6.0 Rejuvenation Tests (Monticello) 19
6.1 Batch Tests 19
6.1.1 Rejuvenation Tests With Sodium Acetate Buffer 19
6.1.2 Rejuvenation Tests With EDTA 20
6.1.3 Rejuvenation Tests With Ammonium Oxalate 20
6.1.4 Rejuvenation Tests With Buffered Sodium Dithionite and Sodium Citrate 20
6.1.5 Rejuvenation Tests With Sodium Dithionite and EDTA 22
6.1.6 Rejuvenation Tests With Hydroxylamine Hydrochloride 22
6.1.7 Summary of Batch Rejuvenation Tests 23
6.2 Column Tests 23
6.2.1 Methods 23
6.2.2 Results 24
7.0 Summary and Conclusions 25
8.0 Recommendations 27
9.0 References 29

Tables

Page

Table 1. Comparison of February 2002 to August 2003 Uranium Data From Gravel/ZVI Zone 33
Table 2. Comparison of February 2002 to August 2003 Uranium Data From ZVI Zone 33
Table 3. Comparison of February 2002 to August 2003 Calcium Data From Gravel/ZVI Zone. 34
Table 4. Comparison of February-2002 to August-2003 Calcium Data From ZVI Zone 34
Table 5. Chemical Gradients in Ground Water Across the Monticello PRB 35
Table 6. Summary of Ground Water Flux Calculations. Flux is normalized to total length of PRB..... 35
Table 7. Results of Chemical Analysis of Fry Canyon Cores Collected September 1999..... 35
Table 8. Results of Chemical Analysis of Fry Canyon Cores Collected August 2003 36
Table 9. U to Fe Ratios for AFO PRB Samples 36
Table 10. Summary of Reactivity Values 37
Table 11. Summary of Fission-Tracked Samples 37
Table 12. August 2003 Slug Test Results 38
Table 13. Comparison of Hydraulic Conductivity: June 2000 and August 2003..... 39
Table 14. Ground Water Velocity in Well Screens 39
Table 15. Standard Materials used in Rejuvenation Batch Tests..... 40
Table 16. Rejuvenation Tests Using Sodium Acetate Buffer 40
Table 17. Rejuvenation Tests Using EDTA 40
Table 18. Rejuvenation Tests Using 0.2 M Ammonium Oxalate..... 41
Table 19. Rejuvenation Tests Using CBD Type Solutions..... 41
Table 20. Rejuvenation Tests Using Low Strength Sodium Dithionite and EDTA 42
Table 21. Rejuvenation Tests Using High Strength Sodium Dithionite and EDTA 42
Table 22. Rejuvenation Tests Using Hydroxylamine Hydrochloride..... 42
Table 23. Composition of Well R1-M3 and Synthesized Ground Water Used in Preliminary Column Test..... 43

Figures

Page

Figure 1.Core Locations: Monticello, Utah, PRB Site 45
Figure 2. Core Locations: Fry Canyon, Utah, PRB Site 46
Figure 3. Reproducibility of Reactivity Tests Using Standard ZVI Samples 47
Figure 4. Reactivity Curves for a Variety of ZVI Types 47
Figure 5. Reactivity Curves for Carbonate Minerals 48
Figure 6. Reactivity Curves for Iron Oxide Minerals 48
Figure 7. Model Fits to 3 Different Masses of Fisher 40 Mesh ZVI 49
Figure 8. Model Fits to 2 Different Crystallinities of Calcite 49
Figure 9. Typical Reactivity Test With Model Curve Fitted to Match Slope at 60 Minutes..... 50
Figure 10. Reactivity Curves for Bulk Sample PE-ZVI-3-4 and Various Size Fractions 50
Figure 11. Locations of August 2003 Slug Tests 51
Figure 12. Estimated Hydraulic Conductivity Calculated From August 2003 Slug Tests 52
Figure 13. Graphical Representation of Hydraulic Conductivities Determined From August 2003 Slug Tests 53
Figure 14. Location of Tracer Tests 54
Figure 15. Example Bromide Test Curves 55
Figure 16. Ground Water Velocity in Well Screen 56
Figure 17. Well Screen Velocity Verses Hydraulic Conductivity Relationship 57
Figure 18. Example Vertical Concentration Profiles 57
Figure 19. Results of Rejuvenation Batch Tests 58
Figure 20. Results of Rejuvenation Column Test Using EDTA 58
Figure 21. Chemical Inventory in Preliminary Column Test 59

Appendices

Appendix A Environmental Sciences Laboratory Notes
Appendix B Descriptions of Alluvium Samples from Monticello PRB
Appendix C Results of Chemical Analysis of Monticello Cores (see Figure 1 for locations)
Appendix D Reactivity Values for All Samples
Appendix E Bromide Concentration Vertical Profiles

End of current text

Acronyms

AFO	amorphous ferric oxyhydroxide
Ca	calcium
CBD	citrate bicarbonate dithionite
CCD	citrate carbonate dithionite
cm	centimeters
cm/s	centimeters per second
CO_2	carbon dioxide
DOE	U.S. Department of Energy
dpm	disintegrations per minute
EDTA	ethylenediaminetetraacetic
EPA	U.S. Environmental Protection Agency
ESL	Environmental Sciences Laboratory
Fe	iron
ft	feet (foot)
ft/day	feet per day
g	gram
gal/min	gallons per minute
HCl	hydrochloric acid
L/min	liters per minute
lb	pound
M	mol
mg/g	milligrams per gram
mg/kg	milligrams per kilogram
$mg \cdot kg^{-1} \cdot mo^{-1}$	milligrams per kilogram per month
mg/L	milligrams per liter
mL	milliliter
mL/min	milliliters per minute
mm	millimeter
mM	millimols
mV	millivolts
µg/L	micrograms per liter
NaOAc	sodium acetate
ORP	oxidation-reduction potential
pCi/L	picocuries per liter
PRB	permeable reactive barrier
psi	pounds per square inch
U	uranium
UMTRA	Uranium Mill Tailings Remedial Action
UO_2	uraninite
USGS	United States Geological Survey
XPS	x-ray photoelectron spectroscopy
ZVI	zero-valent iron

End of current text

Executive Summary

A permeable reactive barrier (PRB) is a zone of chemically reactive material placed in the flow path of contaminated ground water that can stabilize or degrade contaminants as ground water moves through the zone. The most common reactive material employed in PRBs is zero-valent iron (ZVI). PRBs are rapidly becoming a widely used means of remediating ground water.

Unfortunately, reactions of ZVI with contaminants, dissolved oxygen, and water molecules result in an increase in pH values. Carbonate minerals precipitate within the ZVI because of the increase in pH values. Alkalinity decreases of as many as several hundred milligrams per liter (as calcium carbonate) from influent to effluent indicate that large volumes of carbonate minerals have precipitated in the PRBs. In addition to carbonate precipitation, oxidation causes the precipitation of iron oxide minerals. The buildup of carbonate and oxide minerals within the reactive zone could disrupt the performance of the PRB by causing (1) preferential pathways within the reactive zone, (2) ground water mounding and bypassing the PRB, and (3) a reduction in the reactivity of the media because of mineral deposition on the surface of the ZVI.

The U.S. Environmental Protection Agency (EPA) is funding this project to evaluate performance of PRBs and to investigate chemical methods of rejuvenating ZVI-based PRBs. The work is being conducted by Environmental Sciences Laboratory (ESL) personnel at the U.S. Department of Energy (DOE) office in Grand Junction, Colorado, in two phases. The goal of Phase I was to characterize ZVI core samples collected in February 2002 from the Monticello, Utah, PRB site. The purpose of Phase II was to characterize the time-dependent chemical changes using core samples collected August 2003 and to conduct bench-scale research to develop means of rejuvenating ZVI. This report discusses the results of Phase II.

Fresh samples of the reactive media were collected in August 2003 from the Monticello and Fry Canyon, Utah, sites by coring with a Geoprobe. Three PRBs were installed at the Fry Canyon site in 1997 as a joint project with the U.S. Geological Survey, EPA, DOE, the State of Utah, and Bureau of Land Management. Ninety-one samples (about four from each core) from various depths were collected in approximately 6-inch increments. The distributions of calcium (Ca), iron (Fe), and uranium (U) in these samples were measured to help determine if significant changes have occurred in the Monticello samples for the study period of February 2002 through August 2003.

Twenty-two vertical cores and four angle cores were obtained at the Monticello site. Most of the cores were collected near the two well transects that are currently used to monitor ground water. Because of the limited access at Fry Canyon, only the following borings were possible: two vertical and two angle borings in the amorphous ferric oxyhydroxide (AFO) PRB, three vertical borings in the ZVI PRB, and two vertical borings in the bone charcoal PRB. The most favorable coring method was to push an open core barrel to bedrock and collect a continuous core. A plug of bedrock at the bottom prevented the core from falling out of the pipe when the pipe was withdrawn from the subsurface.

Calcium inventories in the gravel/ZVI zone at Monticello increased in 60 percent of the cores during the study period. At some locations, Ca was apparently removed from the gravel/ZVI during the study period. The mean Ca deposition rate (110.4 milligrams per kilogram per month [$mg \cdot kg^{-1} \cdot mo^{-1}$]) during the study period is lower than the mean rate (931.2) for the initial

period (June 1999 through February 2002), suggesting that the rate of calcium carbonate precipitation is decreasing in the gravel/ZVI zone. The Ca inventory increased in 73 percent of the cores collected from the ZVI zone with a mean increase of 8,400 milligrams per kilogram (mg/kg). The mean Ca deposition rates are similar for the initial and study periods (459 and 467 $mg \cdot kg^{-1} \cdot mo^{-1}$, respectively), suggesting that precipitation of calcium carbonate is relatively constant in the ZVI zone. Ground water flux, based on mass balance, ranges from 2.1 to 10.4 gallons per minute (gal/min) through the Monticello PRB for the study period, which is similar to the range (3.0 to 6.3 gal/min) calculated for the initial period in February 2002. The similarity suggests that ground water flow through the PRB has not been significantly impeded by ZVI corrosion products during the study period.

In all but one core from the gravel/ZVI zone at Monticello, the U inventory increased during the study period. The mean rate of U deposition in the gravel/ZVI zone increased by 18.2 $mg \cdot kg^{-1} \cdot mo^{-1}$ from the initial period to the study period. The mean U inventory in the ZVI zone increased by 8.63 mg/kg during the study period. The U deposition rate (0.48 $mg \cdot kg^{-1} \cdot mo^{-1}$) in the ZVI zone during the study period is higher than the rate (0.03 $mg \cdot kg^{-1} \cdot mo^{-1}$) for the initial period but is significantly less than the rate (25.9 $mg \cdot kg^{-1} \cdot mo^{-1}$) in the gravel/ZVI zone. Although U deposition rates appear to increase substantially for the study period, the means of the rates in both the gravel/ZVI and ZVI zones are biased by one high value.

The concentrations of U in the August 2003 ZVI PRB core samples from the Fry Canyon site are relatively low with a mean of 8 mg/kg. The U concentrations are similar to the concentration (9.8 mg/kg) measured in a single sample collected in September 1999. On the basis of the U gradient across the ZVI PRB and the ground water flow rates that were measured in tracer studies, much higher concentrations of U were expected. The low U concentrations may be a result of inadequate sampling of a highly concentrated U zone. Another possibility is that ground water flow through the PRB is less than indicated by the ground water monitoring program. The bone charcoal PRB had the highest U concentrations (mean 996 mg/kg) of the three Fry Canyon PRBs. One sample from the bone charcoal PRB had the highest U concentration (3,130 mg/kg) ever encountered in a PRB. The mean uranium concentration (197 mg/kg) in the AFO PRB is intermediate to the other two Fry Canyon PRBs. On the basis of Fe to U ratios, it appears that AFO has continued to sorb U since 1999, but the number of samples is too few to be conclusive.

The mean Ca concentration in the August 2003 Fry Canyon samples from the ZVI PRB is 35,046 mg/kg, and the Ca concentration in the September 1999 sample is 10,900 mg/kg. These values are much higher than the Ca concentration (1,710 mg/kg) in a fresh sample of Cercona ZVI pellets used in the PRB, indicating that Ca (probably as calcium carbonate) is accumulating in the ZVI PRB. No significant amount of Ca appears to be accumulating in the bone charcoal or AFO PRBs.

A simple method to determine the amount of reactive ZVI remaining in a sample from a PRB was developed during this project. The method is useful to determine reactivity loss of PRB material over time. The test is based on the principle that ZVI generates hydrogen gas (H_2) when in contact with a weak acid and is the only material in these samples to do so. The method uses an increase in gas pressure in a closed vessel to determine the relative reactivity of samples containing ZVI. Calcium carbonate also reacts with HCl to produce carbon dioxide (CO_2), which adds to the pressure, but CO_2 generation occurs much faster than H_2 generation from ZVI.

Mean reactivity values of samples collected from the Monticello gravel/ZVI zone appear to have declined during the study period. The relatively small difference in reactivities, however, could be statistically insignificant. ZVI in the gravel/ZVI zone is less reactive than that of the ZVI zone for both sampling periods. The lower reactivity of ZVI in the gravel/ZVI zone compared to the ZVI zone is consistent with other data, such as the predominance of U in the gravel/ZVI zone. Mean reactivity values of samples collected from the ZVI zone were slightly lower in February 2002 than in August 2003, but the differences may be statistically insignificant.

When bombarded with neutrons, U atoms fission and, when properly etched, the fission products produce visible tracks in a sheet of mica. This effect was used to map the U distributions in PRB samples to determine the association between U and mineral grains in the samples. Samples from the ZVI zones at Monticello and Fry Canyon have few fission tracks, consistent with their low U concentrations. Fission track densities were highest in the samples from the gravel/ZVI zone at Monticello, where U is associated with the rims of many of the ZVI grains. Fission-tracked rims do not occur on grains of any other minerals, indicating a close association between U and ZVI surfaces. It appears that much more U is directly associated with ZVI than with the fine-grained corrosion products in the matrix. The distribution of U suggests that U uptake by ZVI surface-mediated processes dominates over uptake by corrosion products dispersed in the matrix.

In contrast to the ZVI grains, fission tracks are distributed relatively evenly throughout bone charcoal grains in samples from Fry Canyon. This distribution suggests that U-bearing solutions are able to penetrate the Cercona bone charcoal pellets and contact the internal surfaces that are available for U uptake. Etched samples from the AFO PRB contain fission tracks throughout most of the AFO, but the tracks are often concentrated in small hot spots. The hot spots may result from grains or floccules of AFO or they may be crystallization centers. The U distribution suggests that most of the AFO surface adsorption sites were accessible to the ground water.

On the basis of August 2003 slug test results, geometric means of hydraulic conductivity for the alluvium, gravel/ZVI zone, and ZVI zone at the Monticello PRB are 0.011, 0.012, and 0.011 centimeter per second (cm/s), respectively. Slug test results for the three wells and data from two time periods suggest that hydraulic conductivity decreased by about 80 to 90 percent in the ZVI zone from June 2000 to August 2003. Tracer dilution data from August 2003 suggest a ground water flux through the Monticello PRB of between 1.0 and 1.6 gal/min, which is lower than previous estimates.

Bench-scale tests were conducted to evaluate the potential for rejuvenation of ZVI PRBs using chemical solvent flushing. We tested five solvents: tetrasodium ethylenediaminetetraacetic (EDTA), ammonium oxalate, sodium dithionite, sodium citrate, and hydroxlyamine hydrochloride. Some tests were conducted with combinations of these solvents and sometimes included bicarbonate or carbonate as a pH buffer. Suitable rejuvenation agents were defined by high dissolution of calcite (a ZVI corrosion product that occludes porosity), low dissolution of ZVI, and low toxicity. The ability to dissolve AFO, magnetite, and hematite was also considered favorable. Most of the solvents and combinations were able to dissolve some calcite, but most also dissolved some ZVI. Of the solvents tested in batch mode, EDTA was considered to be the most suitable and was selected for a preliminary column test. The column test results indicate that EDTA was able to remove all the calcite deposited during ZVI corrosion and some of the calcite initially present in the column fill material. While some Fe was also dissolved by EDTA, the change in the Fe inventory was insignificant.

End of current text

1.0 Introduction

A permeable reactive barrier (PRB) is a zone of chemically reactive material placed in the flow path of contaminated ground water to stabilize or degrade contaminants as ground water moves through the zone. The most common reactive material employed in PRBs is zero-valent iron (ZVI). PRBs are rapidly becoming a widely used means of remediating ground water.

Unfortunately, reactions of ZVI with contaminants, dissolved oxygen, and water molecules result in an increase in pH values. Carbonate minerals precipitate within the ZVI because of the increase in pH values. Alkalinity decreases of as many as several hundred milligrams per liter (as calcium carbonate) from influent to effluent indicate that large volumes of carbonate minerals have precipitated in the PRBs. In addition to carbonate precipitation, oxidation causes the precipitation of iron oxide minerals. The buildup of carbonate and oxide minerals within the reactive zone could disrupt the performance of the PRB by causing (1) preferential pathways within the reactive zone, (2) ground water mounding and bypassing the PRB, and (3) a reduction in the reactivity of the media because of mineral deposition on the surface of the ZVI.

The U.S. Environmental Protection Agency (EPA) is funding this project to evaluate performance of PRBs and to investigate chemical methods of rejuvenating ZVI-based PRBs. The work is being conducted by Environmental Sciences Laboratory (ESL) personnel at the U.S. Department of Energy's (DOE) office in Grand Junction, Colorado, in two phases. The goal of Phase I was to characterize ZVI core samples collected in February 2002 from the Monticello, Utah, PRB site. The purpose of Phase II was to characterize the time-dependent chemical changes using core samples collected August 2003 and to conduct research to develop means of rejuvenating ZVI.

Phase I of this project was completed in December 2002, and the results were presented in a report (DOE 2002b). Three tasks were completed in Phase I: (1) published literature was reviewed for information related to ZVI PRBs and in particular to rejuvenation; (2) an investigation was conducted to determine the nature of ZVI corrosion products, particularly carbonate minerals and iron oxides, from core samples collected from the Monticello PRB in February 2002; and (3) a determination was made of the amount of uncorroded ZVI remaining in the Monticello core samples. A test was developed that determines the reactivity of a ZVI sample by measuring pressure buildup, which is due to H_2 generated by reaction of ZVI with weak HCl, in a closed system.

Objectives of this Phase II study are

1. Determine how PRBs at Monticello and Fry Canyon, Utah, are changing over time.
2. Determine the hydraulic conductivity of the Monticello reactive media and if ground water continues to flow through it freely.
3. Determine the micro-scale distribution of uranium contained by the reactive media.
4. Bench test several chemical agents that might be capable of rejuvenating ZVI.

This report describes the results of the Phase II activities and the five different tasks that were conducted: (1) bulk chemical analysis of cores, (2) reactivity testing, (3) fission track analysis, (4) hydrologic testing, and (5) bench-scale rejuvenation testing.

1.1 Background on Permeable Reactive Barriers Used To Treat Ground Water for Uranium

More than 150 million tons of uranium mill tailings have been removed from 22 former uranium ore-processing sites in the United States. Remediation of ground water at these sites is mandated by Congress and was formerly conducted by the DOE Uranium Mill Tailings Remedial Action (UMTRA) Ground Water Project (NRC 1980) and now is being performed by the DOE Office of Legacy Management. EPA promulgated a ground water concentration limit of 30 picocuries per liter (pCi/L) (approximately 44 micrograms per liter [µg/L]) for U to ensure protection of human health and the environment near these sites (EPA 1995); this U concentration is also being used as a ground water cleanup goal at a former uranium-ore processing site near Monticello, Utah. At many of these former ore processing sites, U has entered the ground water system and has contaminated more than 10 billion gallons of ground water (DOE 1996). Uranium ore processing outside the United States, particularly in Australia, Canada, South Africa, and Europe, has also resulted in significant ground water with U contamination. In addition to tailings sites, U has been reported in ground water at 12 of 18 major DOE facilities because of contamination from the weapons production cycle (Riley et al. 1992).

Cost-effective means of cleaning up ground water contaminated by U are needed. Ground water at some of the tailings sites is being extracted and treated ex situ, but costs are high and no site has yet been remediated to EPA's prescribed standards. PRBs to treat ground water contaminated by U are currently being tested at four sites (Monticello, Utah; Fry Canyon, Utah; Durango, Colorado; and Oak Ridge National Laboratory Y-12 Plant, Tennessee) as a low-cost alternative to pumping and treating ground water.

ZVI, a scrap-metal product that is available from the automotive industry, is being used as a reactive material in the PRBs at these four sites. Contact with ZVI causes U concentrations in ground water to decrease to a few micrograms per liter. Results of numerous laboratory experiments have confirmed the ability of ZVI to remove U from ground water. Because of the promising results of laboratory and field studies, project managers are expressing increasing interest in using ZVI to treat U. Research is still needed, however, to understand the mechanisms of U uptake to support optimal designs for remediation systems and to make accurate predictions of the length of time that PRBs will remain effective. Research has also been conducted to evaluate the efficiency of using amorphous ferric oxyhydroxide (AFO) or phosphate minerals in PRBs (Morrison et al. 1996; Fuller et al. 2002).

Researchers have proposed two fundamentally different reaction mechanisms to explain the uptake of U by ZVI (Cantrell et al. 1995; Morrison et al. 2002b). In one mechanism, ZVI causes the oxidation state to decrease, resulting in reduction of solubilized U(VI) to immobile U(IV) via Reaction 1:

$$Fe(0)[solid] + UO_2(CO_3)_2^{2-} + 2H^+ = UO_2[solid] + 2HCO_3^- + Fe^{2+}. \quad \text{(Reaction 1)}$$

Uranium(IV) is transferred from the aqueous phase to low-solubility minerals, such as uraninite (UO_2). In the other mechanism, ferric oxyhydroxides are formed as ZVI is oxidized by ground water. The ferric oxyhydroxides subsequently adsorb the dissolved U(VI). Cantrell et al. (1995) suggested that reductive precipitation is more dominant than adsorption and demonstrated its feasibility with thermodynamic calculations.

Fiedor et al. (1998) conducted experiments with a small disk (1.4 centimeters [cm] in diameter by 1.6 millimeters [mm] thick) of mild steel immersed in 300 milliliters (mL) of aqueous solution and concluded that the dominant mechanism for U removal by ZVI is adsorption on ferric oxyhydroxide corrosion products. When their experiments were conducted under aerobic conditions, U sorbed rapidly to the ferric oxyhydroxides, but U was slowly and incompletely reduced under anaerobic conditions. The surfaces of the solid phases in the aerobic experiments contained only U(VI); whereas the surfaces of the solid phases under anaerobic conditions contained about 75 percent U(IV) as determined by x-ray photoelectron spectroscopy. Fiedor et al. (1998) deduced that some reductive precipitation occurred, but the reaction was too slow to account for the observed rate of U removal in the experiments. They also concluded that reductive precipitation would not contribute significantly to U uptake in a PRB containing ZVI.

In contrast, Gu et al. (1998) provided experimental data confirming that reductive precipitation caused by ZVI is the dominant U uptake mechanism. Their experiments consisted of agitating 2 grams (g) of granular ZVI with 10 mL of a solution containing 42 millimols (10,000 milligrams per liter [mg/L]) U for 3 weeks. The reaction products were separated from ZVI by decanting and filtering. Less than 4 percent of the U was associated with the suspended reaction products. A 0.1 mol (M) Na_2CO_3 solution readily removed U from suspended reaction products but not from ZVI, signifying that U was adsorbed to reaction products but not to ZVI. Fluorescence spectroscopy confirmed that the U on the surfaces of the ZVI was in the U(IV) oxidation state, whereas U associated with suspended corrosion products was in the U(VI) oxidation state. Gu et al. (1998) demonstrated that the rate of U uptake in the presence of ZVI was slower than adsorption rates and that the shape of sorption isotherms indicated precipitation rather than adsorption, further evidence supporting a mechanism of reductive precipitation.

1.2 Background on the Monticello and Fry Canyon Permeable Reactive Barriers

This project is directly applicable to the Monticello, Utah, Mill Tailings National Priorities List site and the Fry Canyon, Utah, site. An in situ PRB was installed downgradient of the Monticello site in 1999; it is a funnel-and-gate system with a three-zone PRB (Morrison et al. 2002a). The furthest upgradient zone (the pretreatment zone) has 13-percent ZVI by volume mixed with pea gravel. Downgradient from the pretreatment zone is a zone of 100-percent ZVI, followed by the third zone that contains 100-percent gravel and an air sparging unit. At Fry Canyon, three PRBs were emplaced (Naftz et al. 2002). Each Fry Canyon PRB has a different reactive media: (1) Cercona ZVI pellets, (2) Cercona bone charcoal (phosphate) pellets, and (3) AFO mixed with pea gravel.

1.3 Project Operations

Fieldwork at both PRB installation sites was conducted from August 17 through August 29, 2003. Participants in the fieldwork included personnel from S.M. Stoller Corporation (Stoller), Grand Junction, Colorado, Office (Joe Trevino, Stan Morrison, Sarah Morris, and Tim Bartlett); Monticello, Utah, Office (Joe Slade and Todd Moon); EPA, Region VIII (Paul Mushovic and Rich Musa); Utah Department of Environmental Quality (David Bird); Kayenta Consulting (Bob Schlosser); and the U.S. Geological Survey (USGS) (Dave Naftz).

DOE Task Order ST03-304 directs Stoller to conduct the Phase II work scope. The Task Order is based on a Statement of Work prepared by Stoller, DOE, and EPA (EPA IAG – DW-89-95376701-7). A fieldwork plan, based on the Statement of Work, was used to manage the fieldwork (DOE 2003a). A kick-off meeting was held on August 15 to discuss the fieldwork scope with the participants. The Stoller Health and Safety organization was responsible for radiological control and project health and safety. Because of possible radiological emission from the cores, radiological controls were implemented. Radiological controls were also used to conduct laboratory investigations of the core material. A permit for bromide injections was received from the Utah Department of Environmental Quality.

Bench-scale investigations were conducted in the ESL at Grand Junction. Copies of the ESL notes are provided as Appendix A.

2.0 Bulk Chemistry Analyses

To address Objective 1 and part of Objective 2 (Section 1.0), fresh samples of the reactive media were collected in August 2003 from the Monticello and Fry Canyon sites with a Geoprobe. The distributions of Ca, Fe, and U in these samples were measured to help determine if significant changes have occurred in the Monticello samples since the February 2002 coring of this PRB. Locations of cores are provided in Figures 1 and 2.

Twenty-two vertical cores and four angle cores were obtained at the Monticello PRB site. Most of the cores were collected near the two well transects that are currently used to monitor ground water. The upper 6 feet (ft) or so of each core, consisting mostly of fill, was discarded at the field site. Because of limited access at Fry Canyon, only the following borings were possible: two vertical and two angle borings in the AFO PRB, three vertical borings in the ZVI PRB, and two vertical borings in the bone charcoal PRB. Five samples were recovered from the AFO PRB, ten from the ZVI PRB, and two from the bone charcoal PRB. All cores are 1.75 inches in diameter and were collected in plastic sleeves (except in the case of problems discussed in the following section).

2.1 Field Methods

Some problems were encountered during the coring. Only the upper 3 ft or so (fill material) was rigid enough to remain open as the core barrel was withdrawn. To core below this depth, a closed barrel with a pointed tip was used to penetrate to the desired coring depth; the tip was then released by unthreading a holding pin to initiate the coring. In some borings, the closed core barrel could not penetrate the ZVI, probably because of increased compaction of the ZVI with depth. If penetration was not possible, the boring location was moved slightly and attempted again.

In some borings, the release pin came unthreaded as the pipe was vibrated into the subsurface; causing the core barrel to fill prior to the target depths. To overcome this problem, an open barrel was pushed to bedrock and a continuous core was collected. A plug of bedrock at the bottom prevented the core from falling out of the pipe as the pipe was withdrawn from the subsurface. Removing the core from the barrel required extensive pounding with a steel mallet.

Ninety-one samples (about 4 from each core) from various depths were collected in approximately 6-inch increments. Samples were placed in plastic zip-lock bags and were surveyed for radioactivity before being transported to the ESL. Samples with above-background radioactivity were appropriately labeled and manifested for transportation. Descriptions of alluvium samples from the Monticello site are provided in Appendix B. Some samples obtained near the front edge of the PRB had sticky clay. While not conclusive, the clay suggests a possible smear zone that may have formed while driving sheet piling.

2.2 Laboratory Methods

Samples were dried at 90 ºC, and were weighed before and after drying to calculate moisture content. Density was not calculated because the coring methods prevented an accurate volume determination. Radioactivity was measured before and after drying the samples; radiologic controls, including a limited access controlled area, were implemented in the ESL. One sample

split from each Monticello core was stored in acetone to help preserve the chemically reducing conditions in the PRB. Additional splits of these samples were archived in glass jars without drying. Oven-dried samples were submitted to the on-site Analytical Chemistry Laboratory where they were digested in nitric acid using microwave energy. The digestates were analyzed for Ca and Fe by inductively coupled plasma – emission and for U by inductively coupled plasma – mass spectrometry. The coring locations were determined by measuring from wells located within a few feet of the borings.

The same analysis methods for Ca, Fe, and U were used for the Fry Canyon samples. Fewer samples were available from each Fry Canyon core than at Monticello because of a thinner zone of reactive material and because the angle borings only penetrated a portion of the reactive zone. Each 6-inch core of reactive material was sampled, and all samples were processed for chemical analysis in the same manner as the samples from Monticello.

2.3 Results of Bulk Chemical Analyses

Results of bulk chemical analyses were used to estimate the change in chemical conditions in the PRBs over time as addressed in Objective 1 (Section 1.0).

2.3.1 Monticello

Raw data from the chemical analyses are provided in Appendix C; core locations are shown on Figure 1. Tables 1 through 4 present the solid-phase chemistry for cores collected August 2003 and for cores collected at the same locations in February 2002. Each value listed in the tables is the mean of the individual sample results (usually four) from that core. Values in columns 5 and 6 are the rates of constituent deposition based on an initial period of 32 months (June 1999 through February 2002) and a study period (February 2002 through August 2003) of 18 months, respectively.

The U inventory increased during the study period in all but one core (PE 10) from the gravel/ZVI zone (Table 1). The mean rate of U deposition in the gravel/ZVI zone increased by 18.2 $mg \cdot kg^{-1} \cdot mo^{-1}$ from the initial period to the study period. The mean U inventory in the ZVI zone increased by 8.63 mg/kg during the study period (Table 2). The U deposition rate (0.48 $mg \cdot kg^{-1} \cdot mo^{-1}$) in the ZVI zone during the study period is higher than the rate (0.03 $mg \cdot kg^{-1} \cdot mo^{-1}$) for the initial period but is significantly less than the rate (25.9 $mg \cdot kg^{-1} \cdot mo^{-1}$) in the gravel/ZVI zone. Although the U deposition rates appear to increase substantially for the study period, the means in both the gravel/ZVI and ZVI zones are biased by one high value (PE 9 and PE 3; Table 1 and Table 2).

Calcium inventories in the gravel/ZVI zone increased in 60 percent of the cores during the study period (Table 3). At some locations, Ca was apparently removed from the gravel/ZVI. The mean deposition rate (110.4 $mg \cdot kg^{-1} \cdot mo^{-1}$) during the study period is lower than the mean rate (931.2) for the initial period, suggesting that calcium carbonate precipitation is decreasing in the gravel/ZVI zone. The Ca inventory increased in 73 percent of the cores collected from the ZVI zone with a mean increase of 8,400 mg/kg (Table 4). The mean Ca deposition rates are similar for the initial and study periods (459 and 466.7 $mg \cdot kg^{-1} \cdot mo^{-1}$, respectively) suggesting that precipitation of calcium carbonate is relatively constant in the ZVI zone.

Dissolved-phase and solid-phase concentration data were obtained along two transects across the PRB (R1-M3 and R1-M4; see Figure 1 for locations). Table 5 presents dissolved-phase concentration gradients for the study period and for the initial period. The U gradient (368 micrograms per liter [µg/L]) across the gravel/ZVI zone in transect R1-M3 during the study period is similar to the mean U gradient (334 µg/L) during the initial period. The U concentration gradient at transect R1-M4 is only 163 µg/L, indicating variability in the reactivity along the length of the gravel/ZVI zone. The Ca concentration gradient in the gravel/ZVI zone has decreased from 47.0 mg/L during the initial period to values of 2.8 and 14 mg/L for the two study-period transects. The similar Ca concentration gradients across the ZVI zone during the study period (99 and 141 mg/L) and the concentration gradient (118.4 mg/L) during the initial period (Table 5), suggest that reaction removal rates have remained relatively constant across the zone.

Ground water flux for the study period was calculated along each transect using dissolved phase concentration gradients and the increases in solid-phase inventories. Details of the calculation method are available in Morrison (2003). Calculated ground water flux ranges from 2.1 to 10.4 gallons per minute (gal/min) for the study period, which is similar to the range (3.0 to 6.3 gal/min) calculated for the initial period (Table 6). The similarity in flux rates suggests that ground water flow through the PRB has not been significantly impeded by ZVI corrosion products.

2.3.2 Fry Canyon

Fry Canyon was not cored in February 2002. Table 7 presents analytical results for one core sample from the ZVI PRB, one from the bone charcoal PRB, and two from the AFO PRB that were collected and analyzed in September 1999 as part of a previous project. Bulk chemical concentrations were also determined for samples of the same material that had not been used in a PRB (“fresh” samples). The bulk chemical results for the current study are listed in Table 8, and core locations are shown on Figure 2.

The concentrations of U in the August 2003 ZVI PRB core samples are relatively low with a mean of 8 mg/kg (Table 8). The U concentrations are similar to the concentration (9.8 mg/kg) measured in a single sample collected in September 1999. On the basis of the U gradient in samples collected across the ZVI PRB and the ground water flow rates measured in tracer studies, much higher concentrations of U were expected (Naftz et al. 2002). The low U concentrations may be because a highly concentrated U zone was not adequately sampled. Another possibility is that ground water flow through the PRB is less than indicated by the monitoring program, but this scenario seems less likely because the ground water deposited a significant mass of U in the other two PRBs.

The bone charcoal PRB had the highest U concentrations (mean 996 mg/kg in the August 2003 samples) of the three PRBs (Table 8). The bone charcoal PRB also had the highest U value (216 mg/kg) among all samples collected in September 1999 (Table 7). One sample from August 2003 had the highest U concentration (3,130.0 mg/kg) ever encountered in core samples from a PRB. One explanation for the high concentrations is the ability of the bone charcoal to sorb U throughout the pellets, not just on the outside surface (Section 4.0). The mean U concentration in the August 2003 sample (996 mg/kg) is considerably higher than the

concentration of the single sample (216 mg/kg) collected in September 1999, but there are too few samples to accurately determine the rate of accumulation.

Uranium concentrations (mean 197 mg/kg) in the AFO PRB samples are intermediate to U concentrations in the other two PRBs (Table 8). One U value (19.0 mg/kg) is much lower than U concentrations in other samples, and this sample also has a much lower Fe concentration, reflective of less AFO. The samples have different proportions of AFO and gravel; ratios of U to Fe can be used to establish the amount of U uptake that is due solely to the AFO. Ratios of U to Fe in the samples collected August 2003 range from 1.51 to 2.30 milligrams per gram (mg/g); whereas the two samples collected September 1999 have U to Fe ratios of only 0.85 and 0.77 mg/g (Table 9). From these results, it appears that the AFO has continued to sorb U since 1999, but the number of samples is too few to be conclusive. The bulk U concentrations remain well below the concentration (19 mg U/g Fe) encountered in a laboratory test using Fry Canyon site ground water with a dissolved U concentration of 2 mg/L.

The mean Ca concentration in the August 2003 samples from the ZVI PRB is 35,046 mg/kg (Table 8), and the Ca concentration in the September 1999 sample is 10,900 mg/kg (Table 7). These values are much higher than the Ca concentration (1,710 mg/kg) in a fresh sample of Cercona ZVI pellets, indicating that Ca (probably as calcium carbonate) is accumulating in the ZVI PRB. Significant Ca does not appear to be accumulating in the bone charcoal or AFO PRBs.

3.0 Reactivity Tests

To further evaluate the changes taking place in the ZVI PRBs (Objective 1), an investigation was conducted to determine the reactivity of the ZVI at the two project sites. As ZVI reacts with ground water, some of the ZVI is lost by dissolution and formation of corrosion products. In addition, ZVI grains can lose reactivity as mineral precipitants coat their surfaces. In an effort to determine the proportion of ZVI remaining in the PRB, a hand magnet was used to separate ZVI in some samples. It was readily apparent, however, that magnetic separation was inadequate for determining ZVI composition because the magnetic separates contained a large proportion of corrosion products that could not be separated by physical means. Electron microprobe examination revealed relatively thick mineral coatings on many ZVI grains (DOE 2002b), confirming the strong association of corrosion products with the ZVI grains.

Because ZVI generates H_2 gas when in contact with a weak acid (HCl) and ZVI is the only material in these samples to do so, a test was devised that measures the ZVI concentration based on gas pressure (DOE 2003b). Gas pressure increase that was due to H_2 generation in a closed vessel was used to determine the relative reactivity of samples containing ZVI. Other components of the sample also react with HCl. For example, calcium carbonate reacts with HCl to produce CO_2, which adds to the pressure. CO_2 generation from calcium carbonate usually occurs much faster than H_2 generation from ZVI, and the two processes can be differentiated on time and pressure plots. The term “reactivity” as used in this report refers to 10,000 times the rate constant (min^{-1}) for generation of H_2 (Section.3.1).

The reactivity method was developed during this project and has not been used previously. The gas generation curves yield a great deal of information regarding the mineralogy of the samples and is simple to implement. The curves were useful in making a preliminary evaluation of the PRB reactivity. With additional method development, particularly in the evaluation of complex gas-generation curves, more detailed information about the reactivity and mineralogy of the PRB could be interpreted. Appendix D presents reactivity values for all samples.

3.1 Analysis and Calculation Methods

A glass OMNI glass chromatography column (Omnifit cat no. 006412) (15 mm diameter by 150 mm length) was used as the reaction vessel. A sample (0.2 g within 2 mg) was placed in the column. A 5-mL aliquot of 5 percent HCl was injected into the bottom of the column to make contact with the sample. A valve was used to close the column, and pressure data were collected every second for 1 hour.

An Excel spreadsheet model was used to evaluate the pressure curves. Several different approaches were tested to model the reactivity curves, including both first order (dependent on ZVI concentration only) and second order (dependent on ZVI and hydrogen ion [H^+] concentrations). Similarly, the carbonate dissolution was modeled with various rate laws. The modeling is still being refined; however, a model using first-order dissolution of both ZVI and carbonate fit the data reasonably well and was used to evaluate reactivities for this project. It was assumed that the gas pressure is due only to CO_2 from calcite dissolution and H_2 from ZVI corrosion. Factors considered in the model include (1) mol-for-mol dissolution of calcite and generation of CO_2; (2) calcite dissolution is first-order rate controlled; (3) 1 M of ZVI dissolution

generates 2 M of H_2, the reaction is first-order rate controlled; (4) ideal gases are assumed; and (5) gas solubilities are controlled by Henry's law.

3.2 Reactivity Tests on Standards

Reactivity tests were conducted on a number of ZVI standards and on standard specimens of potential corrosion products (aragonite, calcite, hematite, magnetite, and siderite). Duplicate tests on standards were conducted to determine the reproducibility of the reactivity tests. Figure 3 presents the results of duplicate runs on three different ZVI samples and one calcite sample; these results indicate that the pressure curves are reasonably reproducible. The small variations observed are probably due to sample heterogeneity or inconsistent pressure readings at pressures above about 25 pounds per square inch (psi) (the upper limit of the pressure gauge is about 35 psi).

Figure 4 shows examples of reactivities of a range of standard ZVI samples. Reactivity curves for magnetite powder (with virtually zero reactivity) and calcite powder (with rapid CO_2 evolution) are shown for comparison. Fisher –100 mesh ZVI has the highest rate of H_2 evolution, followed by Peerless –60 +100 mesh ZVI, then Fisher –40 mesh. Coarse-grained Peerless –4 +20 ZVI has the lowest reactivity.

Figure 5 presents reactivity curves for a variety of carbonate minerals. Calcite powder generates CO_2 at the highest rate; coarser crystalline sparry calcite and aragonite evolve CO_2 at slightly lower rates. Siderite generates little CO_2 gas in contact with the 5 percent HCl. Magnetite and hematite generate little or no gas (Figure 6).

Three reactivity curves using various masses (0.1, 0.2, and 0.3 g) of Fisher –40 mesh ZVI were used to test the model (Figure 7). As expected, the tests that used more ZVI generated pressure at a higher rate. The first-order rate model, although not perfect, is able to reproduce the results reasonably accurately. The rate constant for carbonate dissolution was fit so that the model curve was between the measured curves for sparry and powdered calcite (Figure 8).

3.3 Reactivity Tests on PRB Samples

The gas generation curves for many of the PRB ZVI samples did not fit the model-generated curves. In some cases, a poor fit appeared to result from generation of CO_2 gas for longer time periods than for standard samples. Anomalously long periods of CO_2 generation could result if carbonate minerals are intergrown with other corrosion products. For the purpose of assigning reactivities, it was assumed that the rate of H_2 generation was best quantified by the slope of the curve after most of the carbonate had dissolved and before pressure increased to near the limit of the gauge. Therefore, the fit of the first-order model at 60 minutes was used to determine reactivity values. With this method, the reactivity values are interpreted to be a function of the rate of H_2 generation that is directly related to ZVI corrosion rates. The amount of carbonate in the samples could be qualitatively assessed by observing the early pressure increase but the amount was not quantified (Figure 9).

The reactivity of a sample is affected by the size fraction. Therefore, the results could be biased by the sample splitting method used to yield the 0.2-g samples in the test. Figure 10 demonstrates the effects of sample grain-size fraction. It is clear that nearly all the carbonate in the sample is in

the –200 mesh fraction; the coarser fractions contain a higher proportion of ZVI. The slope at 60 minutes on the bulk sample is nearly the same as the slope on both coarse-grained fractions; thus, the reactivity determined from the bulk sample should reasonably approximate the ZVI content of the sample. A small laboratory spatula was used to collect a 0.2-g sample for analysis; efforts were made to collect the sample without grain size bias. In samples containing gravel (gravel/ZVI zone at Monticello and AFO from Fry Canyon), the sample consisted of matrix only, the gravel was purposely avoided.

Table 10 presents a summary of the reactivity values of the PRB samples. A fresh (unused in a PRB) sample of Peerless ZVI –8 +20 mesh (the ZVI used in the ZVI zone at Monticello) has a mean reactivity value of 4.4. The reactivity of ZVI-zone samples collected from above the water table should also represent original ZVI reactivity; the mean reactivity of ZVI zone samples collected from above the water table is 3.5 (Appendix D). The difference between the mean reactivities of fresh ZVI (4.4) and ZVI collected from the unsaturated zone (3.5) suggests a small amount of corrosion of the ZVI while residing in the unsaturated zone, but the difference could result from sample heterogeneity.

Mean reactivity values of samples collected from the gravel/ZVI zone appear to have declined from February 2002 to August 2003 (1.7 versus 1.3) (Table 10). Although reactivity likely reduces over time in the gravel/ZVI zone, the relatively small difference in reactivity values between February 2002 and August 2003 could be statistically insignificant, as suggested by the high standard deviations presented in Table 10. If we assume that the fine-grained matrix of the gravel/ZVI zone material is composed of only ZVI and its corrosion products, then the ZVI in the gravel/ZVI zone is less reactive than that of the ZVI zone for both sampling periods. This observation is also supported by the relatively high abundance (determined qualitatively from reactivity curves) of carbonate minerals in the gravel/ZVI samples. The lower reactivity of ZVI in the gravel/ZVI zone compared to the ZVI zone is consistent with other data, such as the predominance of U in the gravel/ZVI zone.

Mean reactivity values of samples collected from the ZVI zone were slightly lower in February 2002 than in August 2003 (3.0 versus 3.7) (Table 10). The difference between these mean reactivity values is likely due to the high variance of the populations as suggested by the relatively high standard deviations.

The reactivity value of a fresh sample of the Cercona ZVI pellets used at Fry Canyon was 2.9; whereas, the mean reactivity value of samples collected from the PRB was 1.3 (Table 10). These results suggest that the samples have lost some reactivity even though little U precipitated in the PRB samples (Section 2.3.2).

End of current text

4.0 Fission Track Analysis

Uranium atoms fission when bombarded with neutrons, and the fission products produce visible tracks in a sheet of mica when properly etched. This effect was used to map the U distributions in PRB samples to determine the association between U and mineral grains in the samples. This activity supports Objective 3 (Section 1.0)

4.1 Methods

PRB samples preserved in acetone were used for the fission track investigation. The samples were air dried and additional acetone was added during the drying process to displace any residual water. Uncovered polished thin sections were made of six samples from the Monticello PRB and six samples from the Fry Canyon PRB (Table 11). A thin sheet of muscovite mica was taped over each thin section directly in contact with the sample. A carbide stylus was used to make location marks through the mica and into the underlying slide. The thin sections, with the mica sheets, were irradiated for 1 hour in a reactor at the Denver Federal Center to achieve a neutron dose of about 0.8×10^{16} neutrons per square centimeter. The neutron bombardment causes U in the sample to fission, and the energized fission products produce atom dislocations in the mica sheet.

Some elements, such as sodium in the glass slide, become radioactive during irradiation. The samples were retained at the reactor site for about 2 weeks to allow some of the induced radiation to decay, then the samples were returned to the ESL. Because the samples were still radioactive, they were placed in a radioactive materials area; however, the samples were still radioactive after another 2 weeks, with counts up to 3 millirems per hour. A few flakes of mica were removable, so the analysis at the ESL was conducted under radiological controls.

The mica was etched for 1 minute in hydrofluoric acid. The etching causes the dislocations to become tracks that are visible at high magnification. Thus, the final product is a detailed map, on the mica sheet, of the U distribution in the sample. The samples were viewed with a petrographic microscope. Using the location marks, the fission-track maps (mica sheets) were oriented the same as the thin section so that the fission tracks could be associated with individual grains.

4.2 Results

Samples from the ZVI zones at Monticello and Fry Canyon have few fission tracks, consistent with their low U concentrations (Table 11). Fission track densities were highest in the samples from the gravel/ZVI zone at Monticello, where U is associated with the rims of many of the ZVI grains. Also in the gravel/ZVI zone, U is dispersed at low levels throughout some of the fine-grained matrix but is also concentrated into “hot spots” within the matrix. The hot spots may be remnant ZVI grains that are too small to be recognized petrographically or are due to larger grains mostly buried below the surface of the thin section. Fission-tracked rims do not occur on grains of any other minerals in the samples, indicating a close association between U and ZVI surfaces. It appears that much more U is directly associated with ZVI than with the fine-grained corrosion products in the matrix. The distribution of U suggests that U uptake by ZVI surface-mediated processes dominates over uptake by corrosion products.

In contrast to the ZVI grains, fission tracks are distributed relatively evenly throughout bone charcoal grains in samples from Fry Canyon. This distribution suggests that U-bearing solutions are able to penetrate the Cercona bone charcoal pellets so that internal surfaces are available for U uptake. Samples from the AFO PRB contain fission tracks throughout most of the AFO, but tracks are often concentrated in small hot spots. The hot spots may result from grains or floccules of AFO or may be crystallization centers. The U distribution suggests that most of the AFO surface adsorption sites were accessible to the ground water.

5.0 Hydrology Tests at Monticello

Hydrologic investigations at the Monticello site included hydraulic conductivity determinations at 42 locations and tracer dilution tests at 20 locations. These activities support Objective 2 (Section 1.0).

5.1 Hydraulic Conductivity Determinations

Forty-two rising-head slug tests were conducted August 26 to 28, 2003, to determine hydraulic conductivity of the gravel/ZVI and ZVI treatment zones of the PRB. Three wells completed in the alluvial channel were also tested. Slug test locations are shown on Figure 11. Field methodology consisted of using pressurized nitrogen gas to displace the water table within a test well. After the water level had stabilized, which typically occurred at the top of the well intake, the gas pressure was relieved and the ground water recovered to its static level. A pressure transducer coupled to a data logging system and a portable computer were used to measure and record the water level data. Real-time viewing of test progress was possible using hydrogeological software designed for aquifer test analysis (AquiferWin32 Version 3.5). Test conditions were similar for each well: in general, the depth to ground water was about 5 ft below ground surface and well intakes spanned the lower half of the aquifer, which is about 10 to 15 ft below ground surface. Four wells that were tested (T2-S, T3-S, T4-S, T5-S [Figure 11]) are completed about 5 ft higher than other wells.

Three tests were completed at each well. Slug test data were analyzed to estimate hydraulic conductivity using the solution of Bouwer and Rice (1976) embedded in AquiferWin32. Results showed a high level of reproducibility among the triplicate tests; Table 12 presents a summary of the results. Conductivity among all tests ranged from 1.4E–03 to 9.0E–02 cm/s, as determined from results of the three-test average per well. The corresponding arithmetic and geometric means are 1.8E–02 and 1.1E–02, respectively. Bulk conductivity of the gravel/ZVI zone is indicated to be equal to that of the ZVI zone, and the alluvium at the test locations is equally or slightly less conductive than the treatment zones (Table 12).

Spatial distribution of hydraulic conductivity as determined from the August 2003 slug tests is illustrated on Figure 12 and on Figure 13 with proportionally scaled symbols to indicate relative magnitude. Maximum conductivity values appear to correspond to the central region of the PRB (relative to its long axis), although some low values also resulted in that area. The distribution may indicate that flow rates within the central region are more variable than in either end of the PRB, particularly to the south. The limited data set for shallow wells completed in the upper half of the aquifer indicates that there is probably no difference in hydraulic conductivity between the northern and southern portions of the PRB.

Table 13 presents the results of slug tests conducted at five wells in June 2000 and August 2003. Conductivity estimates were similar for both test events at the alluvial wells (wells R1-M2 and R1-M3). However, the conductivity values estimated for the ZVI from the recent tests were almost an order of magnitude less than the June 2000 results, possibly because of precipitation in the ZVI.

5.2 Tracer Dilution Studies

5.2.1 Field Methods

Twenty-four single-well tracer dilution tests were conducted from August 18 to 29, 2003, to determine ground water flow rates within the Monticello PRB. Test locations consisted of 20 wells; 10 wells completed in the gravel/ZVI zone and 10 wells completed in the ZVI treatment zone (Figure 14). Four wells were tested in duplicate.

The tests used a 120-mL slug of 10,000 mg/L sodium bromide solution tagged with red food coloring as the tracer. A peristaltic pump was used to circulate ground water at approximately 250 mL/min from an inlet placed at the top of the well screen to a bromide sensor and then to the pump outlet placed at the bottom of the well screen (upward flow). Dilution data were collected for at least 3 hours per well (data were collected for about 8 hours in two of the tests) after injection of the bromide. Down-hole tubing used to circulate ground water and tracer solution was 0.25-inch (outside diameter) polyethylene. Each well screen measured 5-ft in length and extended upward from near the base of the reactive zones.

Bromide concentrations were measured with Cole-Palmer (Model A-27504-02) ion-selective electrodes, and data were recorded using a Vernier Logger Pro system connected to a laptop computer. The raw measurements are in millivolts (mV) of signal. Calibrations were performed at least daily on samples with 0, 1, 10, 100, 1,000, and 10,000 mg/L concentrations of bromide. A log-linear equation was fit to the calibrations. R-squared values for the curve fits exceeded 0.99 indicating an excellent fit of the calibration data to the calibration equation. The calibrations were conducted on ice-chilled standards made with de-ionized water. Because both temperature and solution matrix can slightly affect the reading, the measurements may have errors to about 10 percent. A 1,000-mg/L bromide standard made from site ground water had nearly the same reading as the standard made from de-ionized water, indicating reasonable accurate calibration using the de-ionized water standards.

In addition to the dilution tests, vertical bromide concentrations in the ground water were measured in 10 wells at various times following tracer injection by the same circulation method. These profiles were measured by lowering a bromide ion-selective electrode into a monitoring well and recording data at every foot of depth. Calibrations were conducted at least daily. Vertical profile tests were conducted from August 18 through August 27, 2003.

5.2.2 Test Results

Test results were developed as a plot of bromide concentration in relation to time for each well. Figure 15 presents example test plots. Under the test conditions, approximately 25 minutes of continuous circulation elapsed after bromide injection and prior to probe detection. Concentrations then peaked within the next several minutes, typically followed by a period of about 25 minutes during which the concentration oscillated significantly through one or more cycles during a net declining trend. A relatively stable tail of decreasing concentration typified the remainder of the test period. Peak concentrations for many of the tests approached the assumed initial value of about 1,100 mg/L for the test interval (tubing, tracer slug, and well screen volumes). Among the remaining tests, peak values generally ranged between about 500 and 2,000 mg/L. The oscillating behavior and the non-ideal peak concentrations may be the

result of preferential flow and incomplete mixing of the tracer solution in the well casing early in the tests.

5.2.3 Data Analysis

For the type of dilution test conducted within the PRB, the rate that the concentration of tracer C decreases in the test interval is

$$dC/dt = -Av_sC/W \qquad \text{(Freeze and Cherry 1979; eqn. 9.25),} \qquad \text{(Eq. 1)}$$

where A is the cross-sectional area through the center of the test interval normal to ground water flow, v_s is the ground water velocity across the well screen, t is elapsed time, and W is the volume of the test interval. Integration and rearrangement yields

$$v_s = -W/At \ln (C/C_0) \qquad \text{(Freeze and Cherry 1979; eqn. 9.27),} \qquad \text{(Eq. 2)}$$

where C and C_0 are the final and initial and concentrations, respectively, during the time interval t. Each dilution curve was analyzed using this second relationship to estimate the ground water velocity across the well screen. Effects of diffusion were excluded.

Two sets of velocity determinations are reported in Table 14. Curves were first analyzed to exclude data from the early period of oscillation. In the second analysis, the initial time was assumed to coincide with either a measured concentration approximating the theoretical initial value of 1,100 mg/L or the peak if the maximum concentration was significantly lower. Inclusion of the oscillation period in the analysis generally resulted in greater apparent velocity. Mean velocity for the two sets of analyses were 0.47 (oscillation period excluded) and 0.82 feet per day (ft/day) (oscillation period included). The overall range in velocity for both sets of analyses is about 0.1 to 1.5 ft/day.

Figure 16 presents the results in map view with proportionally scaled symbols to illustrate the relative magnitude of velocity. Spatial variation appears random and the computed values do not display a wide variation. Localized stagnation may be indicated among the lowest values. Figure 17 illustrates the relationship between hydraulic conductivity of the treatment zones, as determined by slug testing (Section 5.1), and estimated ground water velocity (post-oscillation data set). In general, the plot indicates that the measured tracer velocity is not a function of the measured hydraulic conductivity under the conditions of this study.

The preceding analysis estimated the ground water flow velocity in the well screens. Average linear velocity within the surrounding PRB media is calculated by dividing the well-screen velocity by the corresponding porosity, assuming the local flow field is not significantly distorted by the well completions. Installation of PRB wells used direct-push technology and no artificial filter pack, thus supporting this assumption. Therefore, an assumed PRB porosity of 50 percent results in average linear velocities that are twice the well-screen velocities reported in Table 14 and on Figure 16 and Figure 17.

5.2.4 Ground Water Flux Through PRB

The calculated rates of ground water flow through the PRB, using both average well screen velocities presented in Table 14, are 1.8 and 3.1 gal/min, respectively. This estimate assumes a cross-sectional area perpendicular to flow of 105 ft by 7 ft (approximate saturated thickness). Ground water flow through the PRB was previously estimated to be about 9 gal/min from results of a pumping test conducted in December 2001 (DOE 2002) and between about 3 and 6 gal/min averaged for the first 2.7 years of operation as determined from chemical mass balance analysis of PRB core samples obtained in February 2002 (DOE 2002a).

5.2.5 Vertical Dilution Profiles

Tracer injection for the eight dilution tests started on August 18 and 19, 2003, was by the method described in Section 5.2.1. However, circulation was typically maintained only until soon after the peak bromide concentration was attained. Injection at four wells per day was accomplished in relatively rapid succession. Following the concentration peak interval, automated data logging was replaced by manual measurement with a down-hole probe, at 1-ft depth intervals, beginning 3 to 30 hours after the injection and repeated every several hours or more (no overnight readings) through August 27, 2003. Example vertical profiles are shown on Figure 18 for well R5-M9 for times of 27 and 49 hours after bromide injection (Appendix E contains all the profiles). Red shading on Figure 18 from 9.5 to 14.5 ft below ground surface represents the screen interval of well R5-M9.

For this test, ground water and tracer solution were circulated via pump inlet and outlet tubing at about 9.5 and 14.5 ft, respectively (upward flow), for about 1 hour after injection. As in all tests measuring vertical concentration, bromide was detected above the circulation interval. Typical of these tests, relative stagnation above the screen is indicated over time while tracer solution in the screen section becomes diluted (Figure 18). Dilution within the test interval was essentially completed well within 24 hours in all tests, but significant concentrations of bromide commonly persisted in the stagnant zone for 48 hours or more after tracer injection.

Manual measurements were too infrequent or the test was too far advanced to allow calculation of apparent velocity, either by appending the data to the early time results obtained with the data logger or by analyzing only the late-time manually measured values. In general, these first eight tests provided a basis to measure gross test response and to refine the field method for the later tests.

6.0 Rejuvenation Tests (Monticello)

Ground water chemistry data for samples from the PRB at Monticello indicate that reactivity has decreased. Data in this study also indicate that carbonate minerals and iron oxide corrosion products have precipitated in the ZVI matrix. Other PRB sites have experienced similar decreases in reactivity and precipitation of corrosion products (e.g., Wilkin and Puls 2003). Also, data presented in this report indicate that ZVI is still present in zones that have lost reactivity. If the corrosion products could be removed while leaving ZVI intact, the reactivity of the PRB may be improved. This section reports on preliminary laboratory tests conducted to evaluate the efficiency of several solvents for rejuvenating ZVI-based PRBs. Batch tests using standard specimens of ZVI and corrosion products were performed to determine the amount of mineral dissolution after a specific time period. Subsequently, one solvent was used in a column test to determine rejuvenation efficiency under flow conditions. These activities support Objective 4 (Section 1.0).

6.1 Batch Tests

Batch tests were conducted by combining a solid material (Table 15) with a solvent, agitating for a period of time, filtering, and then analyzing the filtrate for Ca and Fe. The amount of Ca or Fe removed was used as an indication of the degree of solution of the solid material.

6.1.1 Rejuvenation Tests With Sodium Acetate Buffer

Sodium acetate (NaOAc) adjusted to a pH value of 5 using glacial acetic acid (NaOAc buffer) is often used to remove calcite from clay samples in preparation for hydrometer tests (Jackson 1979). The NaOAc buffer is used because it can remove calcite without affecting the clay mineral composition.

NaOAc buffer (50 mL) was combined with 50 mg of powdered calcite in a 50-mL plastic centrifuge tube. Three additional tubes contained 2 g of the fresh gravel/ZVI mixture used in the gravel/ZVI zone in the Monticello PRB and 50 mL of NaOAc buffer. The tubes were agitated end-over-end for various periods of time at room temperature. After agitation, they were centrifuged, decanted, and preserved with nitric acid. Calcium and Fe concentrations were determined by flame atomic absorption.

Gas was generated, and consequently, an increase in pressure occurred during agitation in the tests with gravel/ZVI, and a small amount of liquid was lost by leakage. The pressure was probably due to generation of H_2 gas from ZVI corrosion. About 88 percent of the calcite was dissolved, indicating that NaOAc was effective at dissolving calcite (Table 16). Calcium was also removed from the three gravel/ZVI samples in approximately equivalent amounts, suggesting that all the calcite in the samples was dissolved. Unfortunately, much of the ZVI also was dissolved. For the sample that agitated for 39 hours, about 86 percent of the ZVI was dissolved (based on 13 percent by volume ZVI in the gravel/ZVI; the density of the ZVI was 2.4 g/mL, and the density of the gravel was 1.7 g/mL). Because of the capacity to dissolve the ZVI, NaOAc is not suitable as a chemical rejuvenation agent.

6.1.2 Rejuvenation Tests With EDTA

Ethylenediaminetetraacetic acid (EDTA) is an industrial organic chelating agent used in cleansers, vegetable oils, and pharmaceuticals and to decontaminate radioactive surfaces and remove insoluble deposits of Ca. The tetrasodium salt of EDTA with a formula of $(NaOCOCH_2)_2NCH_2CH_2N(CH_2COONa)_2 \bullet H_2O$ (Baker I693-7) was tested in this study as a potential ZVI PRB rejuvenation agent. Its use in many consumable items indicates it is relatively nontoxic.

In one set of tests, 50 mL of 0.1 M EDTA was combined with 2 g of fresh gravel/ZVI samples and various amounts of concentrated HCl to adjust the pH value (Table 17; tests 1 through 3). The mixtures were agitated end-over-end for 9 hours, centrifuged, and decanted. Values of final pH ranged from 8.25 to 11.02. The amount of Ca removed from the sample was similar at all three pH values and was more than the amounts removed by NaOOAc (Table 16). The amount of Fe removed from the gravel/ZVI mixtures increased significantly as pH decreased (Table 17; test 1 through 3). Additional tests evaluated the ability of 0.1 M EDTA to dissolve powdered calcite, ZVI, hematite, and magnetite from standard specimens. The EDTA was moderately effective at dissolving calcite; it did not dissolve much of the Fe minerals (Table 17; tests 4 through 7). In another set of tests, the effect of the EDTA concentration on dissolution of a mixture of calcite and ZVI was examined. Lowering the EDTA concentration from 0.1 M to 0.025 M caused a decrease in the dissolution of both calcite and ZVI (Table 17; tests 7 through 10). The combined results indicate that EDTA in a solution with a high pH value may be beneficial for ZVI PRB rejuvenation because it can remove large amounts of calcite while leaving most of the ZVI intact.

6.1.3 Rejuvenation Tests With Ammonium Oxalate

Ammonium oxalate $[(NH_4)_2C_2O_4 \bullet H_2O]$ solution buffered with oxalic acid to a pH value of 3 is used to selectively remove amorphous, or poorly crystalline, ferric oxides from soil samples (Smith and Mitchell 1987). The extractant is prepared by mixing 0.2 M ammonium oxalate solution with 0.2 M oxalic acid in the proportion 4:3 by volume. The dissolution effects of this extractant were evaluated for calcite, ZVI, and a variety of ferric oxides. A 40-mL volume of extractant was agitated with 0.5 g samples of powdered calcite, ZVI, and a variety of iron oxide standard materials to determine the extent of dissolution. Agitation was conducted in 50-mL glass Erlenmeyer flasks using an orbital motion in a temperature-controlled bath (Precision Model 25) at 25 °C.

The buffered ammonium oxalate extractant was ineffective at removing calcite (Table 18). In the rejuvenation tests with iron-based materials, it was most effective in removing Fe from AFO and magnetite. In addition to its ineffectiveness at removing calcite, ammonium oxalate is one of the most toxic of the compounds tested. Ammonium oxalate is not suitable for ZVI PRB rejuvenation.

6.1.4 Rejuvenation Tests With Buffered Sodium Dithionite and Sodium Citrate

Sodium dithionite ($Na_2S_2O_4$, also called sodium hydrosulfite) is commonly used together with sodium citrate and sodium bicarbonate to selectively remove crystalline ferric iron from soil samples (Jackson 1979). This extractant is often referred to as citrate bicarbonate dithionite (CBD). Each constituent of the CBD extractant has a purpose in helping to dissolve ferric

minerals; the citrate chelates Fe, dithionite chemically reduces ferric to ferrous iron, and bicarbonate buffers the pH. Citrate, by itself, is often used to chelate metals and is also used in many consumable products. Citrate and bicarbonate are nontoxic.

Sodium dithionite, by itself, has also been used for remediating chromium contamination by injection of its dissolved form into ground water (Vermeul et al. 2002). As with CBD, dithionite causes reduction of ferric to ferrous iron. In the subsurface, dithionite decomposes rapidly to compounds with low toxicity.

Extraction of Fe and Ca was tested with mixtures containing sodium dithionite, sodium citrate, and/or sodium bicarbonate. A 40-mL volume of solution was agitated with 0.5-g samples of powdered calcite, ZVI, and a variety of iron oxide standard materials to determine the extent of dissolution. Agitation was conducted in 50-mL glass Erlenmeyer flasks using an orbital motion in a temperature controlled bath (Precision Model 25) at 25 °C.

Sodium dithionite, by itself, removed 6.8 mg Ca from the calcite sample (about 3 percent of the calcite) and 5.6 mg of Fe from the ZVI sample (Table 19; items 4 and 5). It removed up to 17.4 mg of Fe from AFO, 8.2 mg of Fe from magnetite, and 10.4 mg of Fe from hematite. Although the sodium dithionite was able to preserve the ZVI reasonably well, it was unable to dissolve a significant portion of calcite. Sodium dithionite may be useful in removing ferric oxides or reducing them to ferrous minerals. As with ZVI, ferrous minerals have the capacity to reduce some metals to an insoluble form.

Sodium citrate, combined with sodium bicarbonate, extracted 10.0 mg of Ca from the calcite sample (about 5 percent of the calcite) and little Fe (Table 19; items 6 through 10). However, the dissolution of iron-based materials was highest for ZVI. These results suggest that sodium citrate may be useful in removing calcite from a PRB but may dissolve some ZVI while leaving Fe corrosion products intact.

A solution of CBD (0.27 M sodium citrate, 0.11 M sodium bicarbonate, and 0.1 M sodium dithionite), mixed in the same proportions as in Jackson (1979), was tested for extraction of calcite, ZVI, and Fe oxides (Table 19, items 11 through 15). CBD removed 8.4 mg of Ca from the calcite sample (about 4 percent of the calcite). It also removed some of the ferric oxides, but the ZVI was least affected. The results with CBD are similar to those with dithionite alone, but more AFO was removed with CBD.

Results of some of the previous tests suggest that an increase in pH values in a CBD extractant may have a positive effect on calcite dissolution. Therefore, an extractant using citrate carbonate dithionite (CCD) was designed that used carbonate (as potassium carbonate [K_2CO_3]) instead of bicarbonate to buffer pH. The pH value of CCD is 9.70 compared to 6.98 for CBD. Tests were conducted in the same manner as previous tests, and the results are presented in Table 19 (items 16 through 20). Less calcite was dissolved using CCD than with CBD; no other significant changes were apparent.

6.1.5 Rejuvenation Tests With Sodium Dithionite and EDTA

The CBD extractant previously discussed combines a chelating agent (citrate) with a chemical reductant (dithionite). The effects of using EDTA instead of citrate as the chelating agent were investigated. A 40-mL volume of extractant solution was agitated with 0.5-g samples of powdered calcite, ZVI, and a variety of iron oxide standard materials to determine the extent of dissolution. Agitation was conducted in 50-mL glass Erlenmeyer flasks using an orbital motion in a temperature-controlled bath (Precision Model 25) at 25 °C.

Extraction of Fe and Ca was tested with a mixture of EDTA and sodium dithionite; for control, the same tests were conducted with only EDTA (Table 20). By comparing the Ca and Fe removal with EDTA alone (Table 20, items 1 through 5) to tests with EDTA and dithionite (Table 20, items 6 through 10), it was determined that the presence of dithionite had little effect on mineral dissolution.

Some of the previous results suggested that the pH values of extractants using EDTA and dithionite may have an effect on the mineral dissolution capability. A titration of EDTA with sodium dithionite solution was conducted to determine a solution composition that has a pH value greater than 9.17 used in the previous tests. The selected solution contains 0.16 M EDTA and 0.057 M sodium dithionite and has a pH value of 9.69 (Table 21; items 6 through 10). Tests were conducted with this high-strength mixture in the same manner as described for the low-strength EDTA/dithionite solution.

Table 21 presents the results of the high-strength EDTA/dithionite solution tests and the tests with 0.1 M EDTA. The tests containing dithionite (Table 21; items 6 through 10) dissolved essentially the same amounts of calcite as 0.1 M EDTA alone (Table 21; items 1 through 5). Slightly more iron oxide minerals were dissolved by the higher strength solution than by the lower strength solution (compare data in Table 20 to data in Table 21). However, the results of the higher strength mixture do not represent a significant improvement over the lower strength mixture.

6.1.6 Rejuvenation Tests With Hydroxylamine Hydrochloride

Hydroxylamine hydrochloride ($NH_2OH \bullet HCl$) mixed with acetic acid (CH_3COOH) has been used as an extractant to selectively remove iron and manganese oxides from soil samples (Landa 1982). The solution used for the tests was made by combining 1 M hydroxylamine hydrochloride solution with 25 percent (by volume) concentrated glacial acetic acid, the same as used by Landa (1982). Agitation was conducted in 50-mL glass Erlenmeyer flasks using an orbital motion in a temperature-controlled bath (Precision Model 25) at 25 °C.

The pH value of the hydroxylamine hydrochloride solution is 1.48. The solution removed 224.8 mg of Ca from the calcite sample, which is essentially total dissolution (Table 22). Unfortunately, this extractant also dissolved 86.4 mg of Fe from the ZVI sample (about 17 percent of the sample). The ferric oxides were relatively unaffected, bringing into question the use of this extractant to selectively remove ferric oxides. Hydroxylamine hydrochloride is more toxic than most of the other extractants tested.

6.1.7 Summary of Batch Rejuvenation Tests

Batch tests described in Sections 6.1.3 through 6.1.6 were conducted with the same methods; orbital agitation of a 40-mL sample in a 50-mL glass volumetric Erlenmeyer flask in temperature controlled bath at 25 °C for 2 hours. Figure 19 presents a summary of the results of these tests. Extractants that remove large amounts of calcite with small amounts of ZVI are considered most favorable for use in rejuvenating a ZVI PRB. Removal of large amounts of AFO, hematite, and magnetite is also considered beneficial.

Sodium citrate/potassium carbonate/sodium dithionite and ammonium oxalate/oxalic acid removed the least calcite. Hydroxylamine hydrochloride removed the most calcite, but also removed the most ZVI. All other extractants were nearly equally effective in removing calcite and ZVI. Of these, 0.05 and 0.1 M EDTA were the most effective. Therefore, EDTA was selected for preliminary column testing. Unfortunately, EDTA was relatively ineffective in removing ferric oxides.

6.2 Column Tests

A preliminary column test was conducted to better evaluate the effectiveness of EDTA as an extractant to rejuvenate ZVI PRBs. EDTA was selected for its ability to remove calcite while leaving most of the ZVI intact.

6.2.1 Methods

The test was conducted in a 2-inch-diameter clear acrylic column packed with a fresh gravel/ZVI mixture (the same material that was used in the gravel/ZVI zone of the Monticello PRB). The gravel/ZVI is a mixture of 2,500 lb of –4 +20 Peerless ZVI to 9 cubic yards of 3/8-inch pea gravel. Dry weight of the gravel/ZVI in the column was 1602.5 g. Influent solution flowed from the bottom to the top of the column using a peristaltic pump.

Influent to the column was synthesized to be similar in major ion composition to ground water from well R1-M3, located immediately hydraulically upgradient of the Monticello PRB. Table 23 presents the compositions of the R1-M3 ground water and the synthesized column influent water. Influent solution was stored in a 20-L plastic carboy feed tank that was constantly stirred with a magnetic stir bar. Gaseous CO_2 flowing into the feed tank through a gas diffuser stone was used to control influent pH and alkalinity values. Flow rates for CO_2 ranged from 0 to 20 milliliters per minute (mL/min).

A programmable fraction collector was used to collect samples for analysis. Calcium and Fe concentrations were determined by atomic absorption on samples preserved with nitric acid. Alkalinity was measured by titration with sulfuric acid. Values of pH and oxidation-reduction potential (ORP) were made with inline probes with data fed to an automated data collection system.

6.2.2 Results

Synthetic ground water flowed through the column at 0.7 mL/min for about 12 days. During that time, the mean influent and effluent pH values were about 6.8 and 7.5, respectively (Figure 20). The mean ORP values were about +180 and less than –400 mV, respectively. The Ca inventory in the column solids increased by about 1 g because of Ca-mineral precipitation as determined from the difference in Ca concentrations between influent and effluent (Figure 21). There was no significant change in the Fe inventory (Figure 21).

After about 12 days (25.8 pore volumes), the influent was changed to 0.1 M EDTA (as the tetrasodium salt; Baker I693-7) and the flow rate increased to 10 mL/min for about 5 pore volumes before switching back to synthetic ground water. The pH value in the column effluent increased to about 11.5, similar to the EDTA influent value of about 11 (Figure 20). Calcium and Fe in the effluent EDTA solution increased to maximum concentrations of 2,520 and 2,000 mg/L, respectively (Figure 20).

Although the concentration of Fe in the effluent increased substantially during EDTA injection, the inventory of Fe decreased only slightly (Figure 21). In contrast, all the Ca precipitated from the influent water and an additional 755 mg was removed by the EDTA solution (Figure 21). The additional Ca was probably present in calcium carbonate minerals in the gravel. These positive results may encourage additional investigations with EDTA as a rejuvenation agent.

7.0 Summary and Conclusions

This report presents data from detailed investigations of the Monticello and Fry Canyon PRBs. Samples for the investigation were collected in August 2003 and represent conditions approximately 4 years after installation of the Monticello PRB and 6 years after installation of Fry Canyon PRB. The investigations included (1) bulk chemical analysis, (2) determination of relative reactivity in ZVI samples, (3) determination of uranium distributions in small samples of reactive material using fission track analysis, (4) hydraulic conductivity measurements by gas slug injection, (5) ground water velocity analysis by tracer dilution analysis, and (6) evaluation of ZVI rejuvenation using various chemicals.

Bulk chemical analysis indicated that the Monticello PRB treated ground water at about the same flux rate (approximately 5 gal/min) from February 2002 through August 2003 as it did from installation (June 1999) through February 2002. Calcium and U continue to be deposited in the PRB. Of the three PRBs at Fry Canyon, U is most concentrated in the bone charcoal PRB and moderately concentrated in the AFO PRB. Samples from the Fry Canyon ZVI PRB have low U concentrations. The unexpectedly low concentrations in the ZVI PRB may be due to sampling bias or may result from low ground water flow through that PRB.

Reactivity of ZVI samples can be easily evaluated by the addition of dilute HCl to the sample in a closed vessel and measuring the pressure increase (because of formation of H_2). Calcium carbonate also causes pressure to increase because of evolution of gaseous CO_2. The rate of gas evolution can be used to differentiate ZVI from carbonate minerals. A simple model was developed during this study to analyze the pressure curves. While this model is insufficient to quantify the amounts of ZVI and calcium carbonate, it was useful in defining relative reactivities (i.e., amounts of ZVI) of the samples. Mean reactivity of samples from the Monticello PRB suggests that ZVI in the gravel/ZVI zone is less reactive than in the ZVI zone. The mean reactivity values in the Monticello gravel/ZVI zone decrease over time, consistent with a gradual decrease in reactivity noted in ground water chemistry data. Mean reactivity values of samples collected from the ZVI zone at Fry Canyon PRB is less than fresh samples, suggesting some loss of reactivity over time.

Fission track maps indicate that U is concentrated on the rims of ZVI grains. In contrast, U is disseminated throughout bone charcoal and AFO grains. This distribution suggests that more surface area is available for U uptake in bone charcoal and AFO PRBs than in ZVI PRBs.

On the basis of the August 2003 slug test results, geometric means of hydraulic conductivity for the alluvium, gravel/ZVI zone, and ZVI zone at the Monticello PRB are 0.011, 0.012, and 0.011 cm/s, respectively. Slug test results for the three wells with data from two time periods show that hydraulic conductivity decreased by about 80 to 90 percent in the ZVI zone from June 2000 to August 2003. Tracer dilution data from August 2003 report a ground water flux through the Monticello PRB of between 1.8 and 3.1 gal/min, which is lower than previous estimates.

Bench-scale tests were conducted to evaluate the potential for rejuvenation of ZVI PRBs using chemical solvent flushing. Solvents tested include (1) tetrasodium EDTA, (2) ammonium oxalate, (3) sodium dithionite, (4) sodium citrate, and (5) hydroxlyamine hydrochloride. Some tests were conducted with combinations of these solvents, sometimes with bicarbonate or carbonate as a pH buffer. Suitable rejuvenation agents were defined by the high ability to dissolve calcite (a ZVI corrosion product that occludes porosity), low dissolution of ZVI, and low toxicity; the ability to dissolve AFO, magnetite, and hematite was also considered favorable. Most of the solvents and combinations were able to dissolve some calcite; however, most also dissolved some ZVI. Of the solvents tested in batch mode, EDTA was considered to be the most suitable and was selected for a preliminary column test. The column test indicated that EDTA was able to remove all the calcite deposited during ZVI corrosion and some of the calcite initially present in the column fill material. While some ZVI was also dissolved by the EDTA, the change in the Fe inventory was insignificant.

8.0 Recommendations

Some recommendations for additional work are

- Mass balance of bulk chemical analysis of reactive material is perhaps the most reliable means to determine the amount of ground water being treated by a PRB. It would be useful to apply this method to other PRBs.
- Better methods for sampling solids in PRBs are needed.
- Additional samples of Fry Canyon reactive media are needed to calculate a reliable mass balance. Because of current access restrictions at the site, these samples will need to be collected during PRB decommissioning.
- On the basis of these high concentrations of U in the Fry Canyon bone charcoal and AFO PRBs, these materials should be reconsidered for use in future PRBs.
- Additional calibration and modeling efforts are needed to perfect the reactivity test. This test is a simple means of evaluating reactive media and could be developed as a field test.
- Slug tests using gas injection are a rapid means of evaluating hydraulic conductivity of PRBs and could be applied at other sites. It would be worthwhile to conduct these tests again at Monticello after another 1 to 5 years of operation.
- Additional laboratory tests of chemical flushing agents are needed prior to implementation in a field test.

End of current text

9.0 References

Bouwer H. and Rice, R.C., 1976. "A Slug Test for Determining Hydraulic Conductivity of Unconfired Aquifers With Complety or Partially Penetrating Wells," *Water Resources Research*, v. 12, pp. 423–428.

Cantrell, K. J., Kaplan, D. I., and Wietsma, T. W., 1995. "Zero-Valent Iron for the In Situ Remediation of Selected Metals in Ground Water," *J. Hazard. Mater*., v. 42, pp. 201–212.

DOE (U.S. Department of Energy), 1996. *Final Programmatic Environmental Impact Statement for the Uranium Mill Tailings Remedial Action Project*, DOE/EIS-0198 (available from National Technical Information Service, Springfield, Virginia, as NTIS Reports DE96013507INZ [Vol. 1] and DE9601358INZ [Vol. 2]).

———, 2002a. *Evaluation of the Permeable Reactive Treatment Wall Treatability Study, Draft Final*, GJO-2002-346-TAC, U. S. Department of Energy Grand Junction Office, Grand Junction, Colorado.

———, 2002b. *Interim Report: Performance Evaluation of Zero-Valent Iron-Based Permeable Reactive Barriers and Potential for Rejuvenation by Chemical Flushing*, U.S. Department of Energy Grand Junction Office, Grand Junction, Colorado, ESL-RPT-2003-02, December.

———, 2003a. *Field Work Plan, Phase II: Performance Evaluation of Permeable Reactive Barriers and Potential for Rejuvenation by Chemical Flushing for U.S. Environmental Protection Agency Region 8 Support*, U.S. Department of Energy Grand Junction Office, Grand Junction, Colorado, GJO-2003-472-TAC, August.

———, 2003b. *Environmental Sciences Laboratory Procedures Manual*, U.S. Department of Energy Grand Junction Office, Grand Junction, Colorado, GJO-210, continually updated.

EPA (U.S. Environmental Protection Agency), 1995. "Health and Environmental Protection Standards for Uranium and Thorium Mill Tailings," *Code of Federal Regulations*, Part 192, Title 40; *Federal Register*, v. 53, pp. 2854-2871.

Fiedor, J. N., Bostick, W. D., Jarabek, R. J., and Farrell, J., 1998. "Understanding the Mechanism of Uranium Removal from Ground water by Fe0 using X-ray Photoelectron Spectroscopy (XPS)," *Environ. Sci. Technol*., v. 32, pp. 1466–1473.

Freeze, R.A., and Cherry, J.A., 1979. *Groundwater*, Prentice-Hall, Inc., Englewood Cliffs, New Jersey.

Fuller, C. C., Piana, M. J., Bargar, J. R., Davis, J. A., and Kohler, M., 2002. "Evaluation of Apatite Materials for Use in Permeable Reactive Barriers for the Remediation of Uranium-Contaminated Ground Water," in Naftz, D. L., Morrison, S. J., Fuller, C. C., and Davis, J. A. (eds.), *Handbook of Groundwater Remediation Using Permeable Reactive Barriers, Applications to Radionuclides, Trace Metals, and Nutrients*, Academic Press, Amsterdam, pp. 255-280.

Gu, B., Liang, L., Dickey, M. J., Yin, X., and Dai, S., 1998. "Reduction Precipitation of Uranium (VI) by Zero-Valent Iron," *Environ. Sci. Technol*., v. 32, pp. 3366–3373.

Jackson, M. L., 1979. *Soil Chemical Analysis – Advanced Course, Second Edition*, published by the author, Madison, Wisconsin.

Landa, E. R., 1982. "Leaching of Radionuclides from Uranium Ore and Mill Tailings," *Uranium*, v. 1, pp. 53-64.

Morrison, S.J., Carpenter, C.E., Metzler, D.R., Bartlett, T.R., and Morris, S.A., 2002a. "Design and Performance of a Permeable Reactive Barrier for Containment of Uranium Arsenic, Selenium, Vanadium, Molybdenum, and Nitrate at Monticello, Utah," in Naftz, D. L., Morrison, S. J., Fuller, C. C., and Davis, J. A. (eds.), *Handbook of Groundwater Remediation Using Permeable Reactive Barriers, Applications to Radionuclides, Trace Metals, and Nutrients*, Academic Press, Amsterdam, pp. 371–399.

Morrison, S.J., Naftz, D.L., Davis, J.A., and Fuller C.C., 2002b. "Introduction to Groundwater Remdiation of Metals, Radionuclides, and Nutrients with Permeable Reactive Barriers," in Naftz, D. L., Morrison, S. J., Fuller, C. C., and Davis, J. A. (eds.), *Handbook of Groundwater Remediation Using Permeable Reactive Barriers, Applications to Radionuclides, Trace Metals, and Nutrients*, Academic Press, Amsterdam, pp. 1–15.

Morrison, S. J., 2003. "Performance Evaluation of a Permeable Reactive Barrier Using Reaction Products as Tracers," *Environ. Sci. Technol*., v. 37, pp. 2302-2309.

Morrison, S. J., Spangler, R. R., and Morris, S. A., 1996. "Subsurface Injection of Dissolved Ferric Chloride to Form a Chemical Barrier: Laboratory Investigations," *Ground Water*, v. 34, pp. 75-83.

Naftz, D. L., Fuller, C. C., Davis, J. A.; Morrison, S. J., Feltcorn, E. M., Rowland, R. C., Freethey, G. W., Wilkowske, C., and Piana, M., 2002. "Field Demonstration of Three Permeable Reactive Barriers to Control Uranium Contamination in Ground water, Fry Canyon," Utah, Naftz, D. L., Morrison, S. J., Fuller, C. C., and Davis, J. A. (eds.), *Handbook of Groundwater Remediation Using Permeable Reactive Barriers, Applications to Radionuclides, Trace Metals, and Nutrients*, Academic Press, Amsterdam, pp. 401–434.

NRC (U.S. Nuclear Regulatory Commission), 1980. *Final Generic Environmental Impact Statement on Uranium Milling*, U.S. Nuclear Regulatory Commission, Washington DC, NUREG-0706.

Riley, R.G., Zachara, J.M., and Wobber, F.J., 1992. *Chemical Contaminants on DOE Lands and Selection of Contaminant Mixtures for Subsurface Science Research*, U.S. Department of Energy Office of Energy Research, Washington, DC, 1992, Report DOE/ER–0547 (available from National Technical Information Service Springfield, Virginia, as NTIS Report DE92014826INZ).

Smith, B. F. L., and Mitchell, B. D., 1987. "Characterization of Poorly Ordered Minerals by Selective Chemical Methods," in Wilson, M. J. (ed.), *A Handbook of Determinative Methods in Clay Mineralogy*, Blackie, Glasgow, pp. 275-293.

Vermeul, V. R., Williams, M. D., Szecsody, J. E., Fruchter, J. S., Cole, C. R., and Amonette, J. E., 2002. "Creation of a Subsurface Permeable Reactive Barrier Using in Situ Redox Manipulation," in Naftz, D. L., Morrison, S. J., Fuller, C. C., and Davis, J. A. (eds.), *Handbook of Groundwater Remediation Using Permeable Reactive Barriers, Applications to Radionuclides, Trace Metals, and Nutrients,* Academic Press, Amsterdam, pp. 163-192.

Wilkin, R. T., and Puls, R. W., 2003. *Capstone Report on the Application, Monitoring, and Performance of Permeable Reactive Barriers for Ground-Water Remediation: Volume 1 – Performance Evaluations at Two Sites,* EPA/600/R-03/045a, National Risk Management Research Laboratory, U.S. Environmental Protection Agency, Cincinnati, Ohio.

End of current text

Table 1. Comparison of February 2002 to August 2003 Uranium Data for Monticello Gravel/ZVI Zone

Core 2003	Feb 02 Raw Data U (mg/kg)	Aug 03 Raw Data U (mg/kg)	Feb 02 to Aug 03 Delta U (mg/kg)	Jun 99 to Feb 02 Deposition Rate ($mg \cdot kg^{-1} \cdot mo^{-1}$)	Feb 02 to Aug 03 Deposition Rate ($mg \cdot kg^{-1} \cdot mo^{-1}$)
PE 2	157	274	117	4.9	6.5
PE 7	92.65	804	711.35	2.9	39.5
PE 8	156.65	821.93	665.28	4.9	37.0
PE 9	156.65	2,741.33	2,584.68	4.9	143.6
PE 10	437	405	-32	13.7	-1.8
PE 14	371	533.75	162.75	11.6	9.0
PE 15	269	362.75	93.75	8.4	5.2
PE 16	251.75	290.75	39	7.9	2.2
PE 17	190.28	444.48	254.2	5.9	14.1
PE 19	384.43	448.13	63.7	12.0	3.5
Mean	**246.6**	**712.6**	**466.0**	**7.7**	**25.9**

Table 2. Comparison of February 2002 to August 2003 Uranium Data for Monticello ZVI Zone

Core 2003	Feb 02 Raw Data U (mg/kg)	Aug 03 Raw Data U (mg/kg)	Feb 02 to Aug 03 Delta U (mg/kg)	Jun 99 to Feb 02 Deposition Rate ($mg \cdot kg^{-1} \cdot mo^{-1}$)	Feb 02 to Aug 03 Deposition Rate ($mg \cdot kg^{-1} \cdot mo^{-1}$)
PE 3	0.04	86.84	86.8	0.001	4.822
PE 4	0.02	0.61	0.59	0.001	0.033
PE 5	0.01	1.45	1.44	0.000	0.080
PE 6	0.01	0.02	0.01	0.000	0.001
PE 11	0.98	6.08	5.1	0.031	0.283
PE 12	0.09	0.05	-0.04	0.003	-0.002
PE 13	0.16	0.07	-0.09	0.005	-0.005
PE 18	1.75	4.83	3.08	0.055	0.171
PE 21	1.01	0.47	-0.54	0.032	-0.030
PE 23	0.98	3.22	2.24	0.031	0.124
PE 24	6.29	2.61	-3.68	0.197	-0.204
Mean	**1.03**	**9.66**	**8.63**	**0.03**	**0.48**

Table 3. Comparison of February 2002 to August 2003 Calcium Data for Monticello Gravel/ZVI Zone

Core 2003	Feb 02 Raw Data Ca (mg/kg)	Aug 03 Raw Data Ca (mg/kg)	Feb 02 to Aug 03 Delta Ca (mg/kg)	Jun 99 to Feb 02 Deposition Rate ($mg \cdot kg^{-1} \cdot mo^{-1}$)	Feb 02 to Aug 03 Deposition Rate ($mg \cdot kg^{-1} \cdot mo^{-1}$)
PE 2	35,600	18,963	-16,637	1,112.5	-924.3
PE 7	37,575	25,650	-11,925	1,174.2	-662.5
PE 8	35,600	25,550	-10,050	1,112.5	-558.3
PE 9	35,600	40,467	4,867	1,112.5	270.4
PE 10	23,150	42,400	19,250	723.4	1,069.4
PE 14	26,900	40,800	13,900	840.6	772.2
PE 15	27,125	32,848	5,723	847.7	317.9
PE 16	32,300	39,875	7,575	1,009.4	420.8
PE 17	29,050	23,350	-5,700	907.8	-316.7
PE 19	15,075	27,950	12,875	471.1	715.3
Mean	**29,797.5**	**31,785.3**	**1,987.8**	**931.2**	**110.4**

Table 4. Comparison of February-2002 to August-2003 Calcium Data for Monticello ZVI Zone

Core 2003	Feb 02 Raw Data Ca (mg/kg)	Aug 03 Raw Data Ca (mg/kg)	Feb 02 to Aug 03 Delta Ca (mg/kg)	Jun 99 to Feb 02 Deposition Rate ($mg \cdot kg^{-1} \cdot mo^{-1}$)	Feb 02 to Aug 03 Deposition Rate ($mg \cdot kg^{-1} \cdot mo^{-1}$)
PE 3	8,680	25,380	16,700	271.3	927.778
PE 4	28,283	27,600	-683	883.8	-37.944
PE 5	11,465	25,750	14,285	358.3	793.611
PE 6	11,465	23,100	11,635	358.3	646.389
PE 11	11,510	41,200	29,690	359.7	1,649.444
PE 12	5,295	13,905	8,610	165.5	478.333
PE 13	11,485	9,778	-1,707	358.9	-94.833
PE 18	15,185	19,488	4,303	474.5	239.056
PE 21	24,785	14,678	-10,107	774.5	-561.500
PE 23	11,510	22,125	10,615	359.7	589.722
PE 24	21,850	30,910	9,060	682.8	503.333
Mean	**14,683**	**23,083**	**8,400**	**459**	**466.7**

Table 5. Chemical Gradients in Ground Water Samples Collected Across the Monticello PRB

Period	Zone	Transect	Constituent	Gradient
Feb 02 – Aug 03	gravel/ZVI	N/A[a]	Calcium	47.0 mg/L
Feb 02 – Aug 03	gravel/ZVI	N/A[a]	Uranium	334 µg/L
Feb 02 – Aug 03	ZVI	N/A	Calcium	118.4 mg/L
June 02 – Feb 02	gravel/ZVI	R1-M3	Calcium	2.8 mg/L
June 02 – Feb 02	ZVI	R1-M3	Calcium	99 mg/L
June 02 – Feb 02	gravel/ZVI	R1-M3	Uranium	368 µg/L
June 02 – Feb 02	gravel/ZVI	R1-M4	Calcium	14 mg/L
June 02 – Feb 02	ZVI	R1-M4	Calcium	141 mg/L
June 02 – Feb 02	gravel/ZVI	R1-M4	Uranium	163 µg/L

[a] N/A = not applicable; the values presented are means for the entire length of the PRB as provided in Morrison 2003. Data from See_Pro database.

Table 6. Summary of Monticello Ground Water Flux Calculations; Flux Is Normalized to Total Length of PRB (see text)

Period	Transect	Parameter	Zone	Calculated Flux (gal/min)
June 02 – Feb 02	N/A[a]	Calcium	gravel/ZVI	6.3
June 02 – Feb 02	N/A[a]	Calcium	ZVI	3.0
June 02 – Feb 02	N/A[a]	Uranium	gravel/ZVI	6.3
June 02 – Feb 02	N/A[a]	Vanadium	gravel/ZVI	4.2
Feb 02 – Aug 03	R1-M3	Calcium	gravel/ZVI	Not Possible[b]
Feb 02 – Aug 03	R1-M3	Calcium	ZVI	3.7
Feb 02 – Aug 03	R1-M3	Uranium	gravel/ZVI	10.4
Feb 02 – Aug 03	R1-M4	Calcium	gravel/ZVI	2.4
Feb 02 – Aug 03	R1-M4	Calcium	ZVI	4.1
Feb 02 – Aug 03	R1-M4	Uranium	gravel/ZVI	2.1

[a] N/A = not applicable; the values presented are means for the entire length of the PRB as provided in Morrison 2003.
[b] Calcium was lost from along this transect.

Table 7. Results of Chemical Analysis of Fry Canyon Cores Collected September 1999 and Fresh Material

PRB, depth (ft)	Aluminum (mg/kg)	Calcium (mg/kg)	Iron (mg/kg)	Manganese (mg/kg)	Sodium (mg/kg)
BC[a], 15-15.2	17,500	286,000	1,620	1331	5,270
BC, fresh	17,400	267,000	854	12.4	5,600
ZVI, 12-13	157	10,900	704,000	6,180	6,690
ZVI, fresh	130	1,710	824,000	6,930	6,420
AFO, 13	2,600	30,000	157,000	884	4,020
AFO, 14-14.2	25,600	21,300	22,100	461	6,580
AFO, fresh	40,900	14,900	33,800	494	14,000
PRB, depth (ft)	**Total Inorganic Compounds (mg/kg)**	**Total Organic Compounds (mg/kg)**	**Uranium (mg/kg)**	**Vanadium (mg/kg)**	
BC, 15-15.2	897	3,660	216	<0.68	
BC, fresh	617	19,600	1.9	<0.68	
ZVI, 12-13	7,780	1,180	9.8	79.6	
ZVI, fresh	718	<30	2.3	98.4	
AFO, 13	11,700	1,890	134	31	
AFO, 14-14.2	8,030	3,550	17.1	25.6	
AFO, fresh	1,760	38	2.9	41.9	

[a] BC = bone charcoal.

Table 8. Results of Chemical Analysis of Fry Canyon Cores Collected August 2003 (see Figure 2 for locations)

Sample[a]	Zone	Sample Date	Core Interval start (ft)	Core Interval end (ft)	Bottom Sample Depth (ft)	Radio-activity (dry) (dpm)[b]	Moisture Content (wgt %)[c]	Ca (mg/kg)	Fe (mg/kg)	U (mg/kg)
PEZVI 1-3	ZVI	8/22/2003	4.5	10	10.0	0.00	13.51	11,800	693,000	4.6
PEZVI 1-4	ZVI	8/22/2003	10	11.4	10.4	0.00	13.38	9,760	674,000	4.1
PEZVI 1-5	ZVI	8/22/2003	10	11.4	10.7	0.00	13.61	4,700	771,000	0.5
PEZVI 1-6	ZVI	8/22/2003	10	11.4	11.1	0.00	13.90	46,200	653,000	1.7
PEZVI 2-4	ZVI	8/22/2003	6	11	8.9	3,000	9.45	34,900	643,000	59.0
PEZVI 2-5	ZVI	8/22/2003	6	11	9.6	0.00	10.27	82,200	558,000	7.3
PEZVI 2-6	ZVI	8/22/2003	6	11	10.3	0.00	11.17	27,200	699,000	1.1
PEZVI 3-3	ZVI	8/22/2003	6	9.7	8.2	0.00	8.84	15,400	691,000	1.3
PEZVI 3-4	ZVI	8/22/2003	6	9.7	9.0	0.00	11.60	66,600	563,000	0.9
PEZVI 3-5	ZVI	8/22/2003	6	9.7	9.7	0.00	12.93	51,700	558,000	0.6
Mean						**300**	**12**	**35,046**	**650,300**	**8**
PEBC 1-4	BC	8/22/2003	6	11	9.3	9,000	37.62	266,000	1,010	503.0
PEBC 1-5	BC	8/22/2003	6	11	10.2	28,500	31.77	246,000	3,780	3,130.0
PEBC 2-4	Fill/BC	8/22/2003	6	11	10.0	3,000	26.53	246,000	1,200	206.0
PEBC 2-5	BC	8/22/2003	6	11	11.0	1,500	38.00	271,000	1,740	144.0
Mean						**10,500**	**33**	**257,250**	**1,933**	**996**
PEAFO 1-4	AFO	8/22/2003	4.5	11.5	10.1	3,000	12.13	13,000	170,000	257.0
PEAFO 2-3	AFO	8/22/2003	4	11	8.2	1,000	13.84	24,300	103,000	237.0
PEAFO 2-4	AFO	8/22/2003	4	11	9.6	2,000	12.89	11,100	171,000	275.0
PEAFOA 2-6	AFO	8/22/2003	9	13	11.0	1,000	8.52	35,300	10,400	19.0
Mean						**1,750**	**12**	**20,925**	**113,600**	**197**

[a] PEZVI = ZVI PRB, PEBC = bone charcoal PRB, and PEAFO = AFO PRB.
[b] dpm = disintegrations per minute.
[c] wgt % = weight percent.

Table 9. U to Fe Ratios for AFO PRB Samples

Sample	Collection Date	U:Fe (mg/g)
PEAFO1-4	August 2003	1.51
PEAFO2-3	August 2003	2.30
PEAFO2-4	August 2003	1.61
PEAFO2-6	August 2003	1.83
AFO13	September 1999	0.85
AFO14-14.2	September 1999	0.77
Batch Test[a]	Not Applicable	19

[a]Laboratory batch test conducted with Fry Canyon site water containing 2 mg/L uranium.

Table 10. Summary of Reactivity Values (compiled from data in Appendix D)

Category	Mean	Standard Deviation	Count
Standard: Peerless ZVI –8 +20 mesh	4.4	0.9	7
Standard: Fisher ZVI 40 mesh	7.9	1.6	3
Standard: Cercona ZVI Pellets	2.9	-	1
Monticello: Feb. 2002, ZVI zone	3.0	1.1	25
Monticello: Aug. 2003, ZVI zone	3.7	1.1	49
Monticello: Feb. 2002, gravel/ZVI zone	1.7	0.8	11
Monticello: Aug. 2003, gravel/ZVI zone	1.3	1.0	47
Fry Canyon: ZVI pellets	1.3	0.7	10

Table 11. Summary of Fission Track Analysis

Site	Sample Number	Media	U (mg/kg)	Description of Fission Tracks
Monticello	PE 3-7	gravel/ZVI	95.5	Lightly tracked ZVI rims
Monticello	PE 7-8	gravel/ZVI	1,210	Diffuse tracks with hot centers. Some ZVI grains with heavily tracked rims
Monticello	PE 8-9	gravel/ZVI	1,640	Moderately tracked ZVI rims. Only ZVI grains have tracked rims. Some diffuse tracks in matrix.
Monticello	PE 11-8	ZVI	2.1	No tracks
Monticello	PE 17-11	gravel/ZVI	345	Many diffuse tracks, some grain boundaries are hot
Monticello	PE 18-17	ZVI	5.6	Few tracks, a few diffuse bands
Fry Canyon	PEAFO 1-4	AFO	257	Diffuse tracks and hot grains in AFO
Fry Canyon	PEAFOA 2-6	AFO	19	Few tracks
Fry Canyon	PEZVI 1-2	ZVI	na	No tracks
Fry Canyon	PEZVI 2-6	ZVI	1.1	No tracks
Fry Canyon	PEBC 1-4	BC	503	Moderate track density completely penetrates bone charcoal grains
Fry Canyon	PEBC 2-5	BC	144	Light to moderate tracks completely penetrates bone charcoal grains

Table 12. August 2003 Slug Test Results

Well ID	Completion Zone	Test 1 (cm/s)	Test 2 (cm/s)	Test 3 (cm/s)	Test Avg. (cm/s)
R1-M2	alluvium	6.3E-03	5.4E-03	5.0E-03	**5.6E-03**
R1-M3	alluvium	1.5E-02	2.3E-02	2.0E-02	**1.9E-02**
R1-M5	alluvium	1.3E-02	1.3E-02	1.3E-02	**1.3E-02**
R2-M1	gravel/ZVI	1.9E-02	2.1E-02	2.0E-02	**2.0E-02**
R2-M2	gravel/ZVI	1.0E-02	1.0E-02	1.1E-02	**1.0E-02**
R2-M3	gravel/ZVI	1.0E-02	1.1E-02	1.1E-02	**1.1E-02**
R2-M4	gravel/ZVI	6.0E-03	6.8E-03	7.1E-03	**6.6E-03**
R2-M5	gravel/ZVI	2.1E-02	2.2E-01	2.4E-02	**9.0E-02**
R2-M6	gravel/ZVI	3.3E-02	3.4E-02	3.4E-02	**3.4E-02**
R2-M7	gravel/ZVI	1.2E-02	1.2E-02	1.3E-02	**1.2E-02**
R2-M8	gravel/ZVI	2.7E-03	2.8E-03	2.8E-03	**2.7E-03**
R2-M9	gravel/ZVI	3.5E-02	3.7E-02	3.7E-02	**3.7E-02**
R2-M10	gravel/ZVI	4.0E-03	4.4E-03	5.0E-03	**4.5E-03**
R3-M1	gravel/ZVI	4.0E-03	4.2E-03	4.7E-03	**4.3E-03**
R3-M2	gravel/ZVI	6.4E-03	7.0E-03	7.5E-03	**7.0E-03**
R3-M3	gravel/ZVI	8.7E-03	9.6E-03	9.6E-03	**9.3E-03**
R3-M4	gravel/ZVI	2.5E-02	2.7E-02	2.5E-02	**2.5E-02**
R4-M1	ZVI	3.1E-03	3.0E-03	2.9E-03	**3.0E-03**
R4-M2	ZVI	1.3E-02	1.3E-02	1.3E-02	**1.3E-02**
R4-M3	ZVI	1.4E-03	1.4E-03	1.4E-03	**1.4E-03**
R4-M4	ZVI	1.4E-03	1.3E-03	1.4E-03	**1.4E-03**
R4-M5	ZVI	1.2E-02	1.0E-02	1.0E-02	**1.1E-02**
R4-M6	ZVI	4.7E-03	4.8E-03	4.7E-03	**4.8E-03**
R4-M7	ZVI	8.2E-03	8.6E-03	8.7E-03	**8.5E-03**
R4-M8	ZVI	2.8E-03	2.8E-03	2.7E-03	**2.8E-03**
R5-M1	ZVI	1.9E-02	1.8E-02	1.8E-02	**1.9E-02**
R5-M2	ZVI	5.6E-03	5.5E-03	5.5E-03	**5.5E-03**
R5-M3	ZVI	1.2E-02	1.2E-02	1.2E-02	**1.2E-02**
R5-M4	ZVI	2.9E-02	2.8E-02	2.7E-02	**2.8E-02**
R5-M5	ZVI	1.8E-02	1.9E-02	1.9E-02	**1.9E-02**
R5-M6	ZVI	8.4E-02	8.6E-02	8.6E-02	**8.5E-02**
R5-M7	ZVI	6.3E-02	6.3E-02	6.3E-02	**6.3E-02**
R5-M8	ZVI	3.2E-02	3.1E-02	3.2E-02	**3.2E-02**
R5-M9	ZVI	3.0E-03	2.8E-03	2.8E-03	**2.9E-03**
R5-M10	ZVI	4.4E-03	4.6E-03	3.8E-03	**4.3E-03**
T2-D	ZVI	1.6E-02	1.6E-02	1.7E-02	**1.6E-02**
T2-S	ZVI	2.7E-02	2.9E-02	3.0E-02	**2.9E-02**
T3-D	ZVI	3.5E-02	3.1E-02	3.1E-02	**3.2E-02**
T3-S	ZVI	7.1E-03	9.2E-03	9.1E-03	**8.5E-03**
T4-D	ZVI	6.2E-03	6.0E-03	5.3E-03	**5.8E-03**
T4-S	ZVI	6.4E-02	5.5E-02	6.4E-02	**6.1E-02**
T5-D	ZVI	4.0E-03	3.7E-03	3.5E-03	**3.8E-03**
T5-S	ZVI	8.7E-03	8.3E-03	8.9E-03	**8.7E-03**
TW-12	ZVI	3.6E-02	4.3E-02	4.5E-02	**4.1E-02**
TW-13	ZVI	5.1E-02	5.1E-02	6.0E-02	**5.4E-02**

Geometric Mean of Conductivity per Completion Zone [cm/s]	**alluvium**	**gravel/ZVI**	**ZVI**
	1.1E-02	**1.2E-02**	**1.1E-02**
Arithmetic Mean per Completion Zone	**1.3E-02**	**2.0E-02**	**2.1E-02**

Table 13. Hydraulic Conductivity: June 2000 and August 2003

Well	Calculated Hydraulic Conductivity [cm/s]		
	Jun-00	Aug-03	Percent Difference
R1-M2	4.5E-03	5.6E-03	24
R1-M3	2.3E-02	1.9E-02	-15
R4-M2	7.3E-02	1.3E-02	-82
R4-M8	6.0E-02	2.8E-03	-95
T4-D	7.4E-02	5.8E-03	-92

Table 14. Ground Water Velocity in Well Screens (Va)

Well	Start Date	Va ft/day (exclude oscillation)	Va ft/day (include oscillation)	Treatment Zone
R2–M1	8/21/03	0.27	0.33	gravel/ZVI
R2–M2	8/29/03	0.34	0.82	gravel/ZVI
R2–M3	8/29/03	0.21	0.31	gravel/ZVI
R2–M4	8/29/03	0.60	0.90	gravel/ZVI
R2–M5	8/29/03	0.07	0.31	gravel/ZVI
R2–M6	8/28/03	0.58	0.87	gravel/ZVI
R2–M7	8/28/03	0.43	0.77	gravel/ZVI
R2–M7	8/19/03	0.62	1.28	gravel/ZVI
R2–M8	8/28/03	0.43	0.74	gravel/ZVI
R2–M8	8/19/03	0.41	1.03	gravel/ZVI
R2–M9	8/28/03	1.05	1.33	gravel/ZVI
R2–M10	8/18/03	0.68	1.19	gravel/ZVI
R5–M1	8/20/03	0.41	0.34	ZVI
R5–M2	8/29/03	0.60	0.92	ZVI
R5–M3	8/29/03	0.36	0.49	ZVI
R5–M4	8/29/03	0.19	0.50	ZVI
R5–M5	8/29/03	0.21	0.57	ZVI
R5–M6	8/28/03	1.36	1.49	ZVI
R5–M7	8/28/03	0.32	0.37	ZVI
R5–M7	8/18/03	0.59	1.41	ZVI
R5–M8	8/28/03	0.24	0.47	ZVI
R5–M8	8/19/03	0.13	0.20	ZVI
R5–M9	8/28/03	0.22	0.21	ZVI
R5–M10	8/18/03	0.16	0.59	ZVI
Mean gravel/ZVI		0.47	0.82	
Mean ZVI		0.40	0.63	
Mean all		0.44	0.73	
Minimum all		0.07	0.15	
Maximum all		1.36	1.49	

Table 15. Standard Materials Used in Rejuvenation Batch Tests

Name	Vendor	Description
Calcite Powder	Aldrich	Reagent grade. Calcite only (identified by XRD).
AFO	Noah Industries	AFO slurry dried at room temperature
Hematite	Fisher Scientific I-116-3	Reagent grade. Hematite only (identified by XRD).
Magnetite	American Chemical Enterprises A-310	Reagent grade. Magnetite only (identified by XRD).
ZVI	Fisher 40 Mesh	Reagent grade ZVI. Sieved to about 40 mesh.
Gravel/ZVI	ZVI = Peerless –8 +20	Mixture used in Monticello gravel/ZVI zone.

Table 16. Rejuvenation Tests Using Sodium Acetate Buffer

G/Z[a] (g)	Calcite Powder (mg)	Shake Time (hours)	Ca Removed (mg)	Fe Removed (mg)	Final pH
0	50	14	17.6	0.1	5.01
2	0	14	5.1	132.5	5.10
2	0	20	4.6	163.5	5.14
2	0	39	3.8	301.0	5.36

[a]Fresh gravel/ZVI material used at Monticello.

Table 17. Rejuvenation Tests Using EDTA. (50 mL of 0.1 M EDTA)

Test	Solids	EDTA Concentration	Concentration HCl (µL)	Shake Time (hours)	Start pH	Final pH	Ca Removed (mg)	Fe Removed (mg)
1	2 g gravel/ ZVI[a]	0.1 M	0	9	10.85	11.02	7.3	4.2
2	2 g gravel/ ZVI[a]	0.1 M	270	9	9.05	9.70	12.1	49.5
3	2 g gravel/ ZVI[a]	0.1 M	550	9	6.88	8.25	7.1	58.3
4	1 g Calcite	0.1 M	0	7.5	10.85	11.11	191	0.0
5	1 g ZVI[b]	0.1 M	0	7.5	10.85	11.13	0.1	4.0
6	1 g Hematite	0.1 M	0	7.5	10.85	10.76	0.1	0.1
7	1 g Magnetite	0.1 M	0	7.5	10.85	10.85	0.8	0.2
8	1 g Calcite + 1 g ZVI[b]	0.1 M	0	28	10.85	11.11	172.5	0.3
9	1 g Calcite + 1 g ZVI[b]	0.05 M	0	28	nm[c]	11.06	98.5	0.2
10	1 g Calcite + 1 g ZVI[b]	0.025 M	0	28	nm	10.90	46	0.1

[a]Fresh gravel/ZVI material used at Monticello.
[b] –6 + 10 mesh Peerless ZVI.
[c] nm = not measured.

Table 18. Rejuvenation Tests Using 0.2 M Ammonium Oxalate[a]

	Solids[b]	Start Electrical Conductivity (µS/cm)[c]	Final Electrical Conductivity (µS/cm)	Start pH	Final pH	Ca Removed (mg)	Fe Removed (mg)
1	AFO	20,300	20,100	3.00	3.18	0.0	15.8
2	Hematite	20,300	20,100	3.00	3.05	0.0	0.8
3	Magnetite	20,300	20,100	3.00	3.13	0.0	13.8
4	Fisher 40 Mesh ZVI	20,300	20,200	3.00	3.12	0.0	3.9
5	Calcite	20,300	20,200	3.00	3.14	0.0	0.0

[a] Tests conducted with 40 mL of 0.2 M ammonium oxalate buffered to a pH 3 value with 0.2 M oxalic acid and 0.5 g of solids; 2-h agitation at 25 ºC.
[b] Descriptions are provided in Table 15.
[c] µS/cm = microsiemens per centimeter.

Table 19. Rejuvenation Tests Using CBD Type Solutions[a]

Item	Solids[b]	Solvent[c]	Start pH	Final pH	Ca Removed (mg)	Fe Removed (mg)
1	AFO	D	4.53	5.85	0.8	17.4
2	Hematite	D	4.53	4.83	0.0	10.4
3	Magnetite	D	4.53	4.11	0.1	8.2
4	Fisher 40 Mesh ZVI	D	4.53	3.75	0.0	5.6
5	Calcite	D	4.53	4.22	6.8	0.0
6	AFO	CB	8.16	8.49	2.5	0.1
7	Hematite	CB	8.16	8.41	0.1	0.0
8	Magnetite	CB	8.16	8.44	0.7	0.1
9	Fisher 40 Mesh ZVI	CB	8.16	8.57	0.1	2.7
10	Calcite	CB	8.16	8.68	10.0	0.0
11	AFO	CBD	6.98	7.44	2.5	42.0
12	Hematite	CBD	6.98	7.19	0.1	16.2
13	Magnetite	CBD	6.98	7.08	0.5	9.4
14	Fisher 40 Mesh ZVI	CBD	6.98	7.08	0.1	6.0
15	Calcite	CBD	6.98	7.13	8.4	0.0
16	AFO	CCD	9.70	8.58	1.5	15.1
17	Hematite	CCD	9.70	8.56	0.1	2.8
18	Magnetite	CCD	9.70	8.63	0.2	3.0
19	Fisher 40 Mesh ZVI	CCD	9.70	8.83	0.0	4.0
20	Calcite	CCD	9.70	8.44	1.0	0.0

[a]Tests conducted with 40 mL of solution, 0.5 g of solids, and 2-h agitation at 25 ºC.
[b]Descriptions are provided in Table 15.
[c]D = 0.1 M sodium dithionite; CB = 0.27 M sodium citrate with 0.11 M sodium bicarbonate; CBD = same as CB but with 0.1 M sodium dithionite; and CCD = 0.27 M sodium citrate with 0.11 M potassium carbonate and 0.1 M sodium dithionite.

Table 20. Rejuvenation Tests Using Low Strength Sodium Dithionite and EDTA[a]

Item	Solids[b]	Solvent[c]	Start pH	Final pH	Ca Removed (mg)	Fe Removed (mg)
1	AFO	E	10.93	10.61	2.1	0.4
2	Hematite	E	10.93	10.79	0.1	0.0
3	Magnetite	E	10.93	10.82	0.3	0.0
4	Fisher 40 Mesh ZVI	E	10.93	10.88	0.1	1.0
5	Calcite	E	10.93	10.92	11.5	0.0
6	AFO	ED	9.17	9.30	1.7	0.5
7	Hematite	ED	9.17	9.25	0.1	0.0
8	Magnetite	ED	9.17	9.28	0.2	0.1
9	Fisher 40 Mesh ZVI	ED	9.17	9.37	0.0	4.3
10	Calcite	ED	9.17	9.36	9.0	0.0

[a] Tests conducted with 40 mL of solution, 0.5 g of solids, and 2-h agitation at 25 ºC.
[b] Descriptions are provided in Table 15.
[c] E = 0.05 M EDTA; ED = 0.038 M EDTA with 0.025 M sodium dithionite.

Table 21. Rejuvenation Tests Using High Strength Sodium Dithionite and EDTA[a]

Item	Solids[b]	Solvent[c]	Start pH	Final pH	Ca Removed (mg)	Fe Removed (mg)
1	AFO	E	10.95	10.66	2.4	0.4
2	Hematite	E	10.95	10.80	0.1	0.0
3	Magnetite	E	10.95	10.85	0.4	0.1
4	Fisher 40 Mesh ZVI	E	10.95	10.97	0.1	1.1
5	Calcite	E	10.95	10.88	10.1	0.0
6	AFO	ED	9.69	9.21	1.5	6.7
7	Hematite	ED	9.69	9.19	0.1	4.8
8	Magnetite	ED	9.69	9.16	0.3	4.7
9	Fisher 40 Mesh ZVI	ED	9.69	9.16	0.1	4.2
10	Calcite	ED	9.69	9.20	7.3	0.0

[a] Tests conducted with 40 mL of solution, 0.5 g of solids, and 2-h agitation at 25 ºC.
[b] Descriptions are provided in Table 15.
[c] E = 0.1 M EDTA; ED = 0.16 M EDTA with 0.057 M sodium dithionite.

Table 22. Rejuvenation Tests Using Hydroxylamine Hydrochloride[a]

Item	Solids[b]	Start pH	Final pH	Ca Removed (mg)	Fe Removed (mg)
1	AFO	1.48	1.52	1.9	7.4
2	Hematite	1.48	1.32	0.0	0.1
3	Magnetite	1.48	1.33	0.1	0.5
4	Fisher 40 Mesh ZVI	1.48	2.20	0.0	86.4
5	Calcite	1.48	2.67	224.8	0.1

[a]Tests conducted with 40 mL of solution, 0.5 g of solids, and 2-h agitation at 25 ºC.
[b]Descriptions are provided in Table 15.

Table 23. Composition of Well R1-M3 (sampled January 14, 2003) and Synthesized Ground Water Used in Preliminary Column Test

Constituent	Units	Actual Concentration	Synthesized Concentration
Na	mg/L	111.00	150.60
K	mg/L	213.00	222.88
Ca	mg/L	52.80	53.28
MG	mg/L	52.80	53.28
SO_4	mg/L	677.00	655.21
Cl	mg/L	76.60	76.09
TIC[a]	mg/L	76.00[b]	78.57
pH	s.u.	6.65	6.65[c]
Alkalinity	mg/L as $CaCO_3$	317.00	279[c]

[a] Total inorganic carbon.
[b] Estimated from alkalinity.
[c] Varies with CO_2 flow.

End of current text

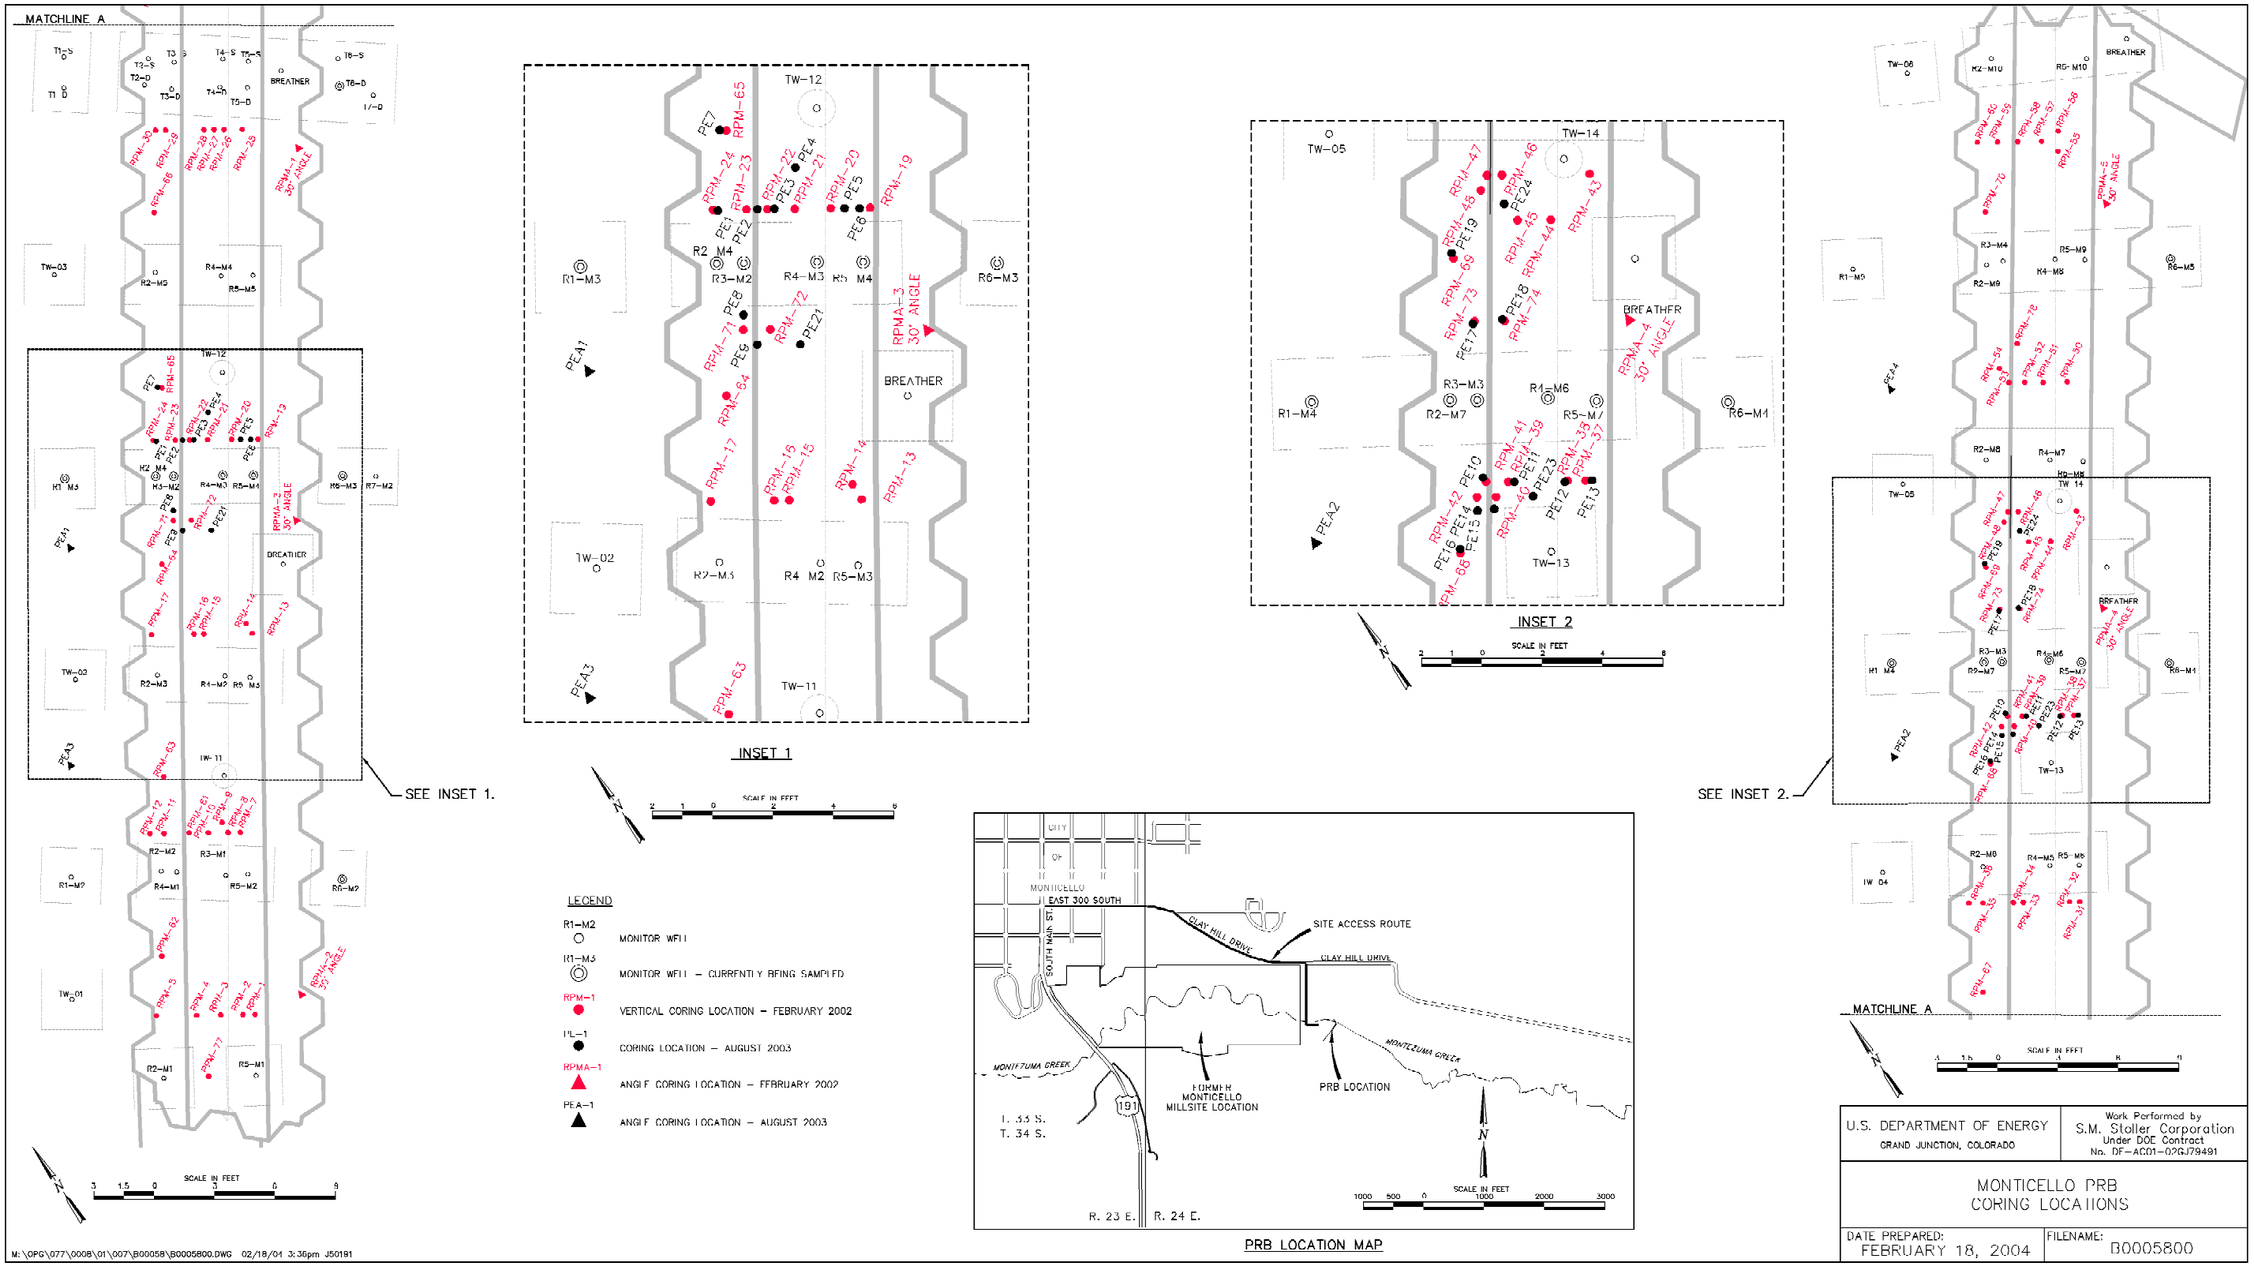

Figure 1.Core Locations at the Monticello, Utah, PRB Site

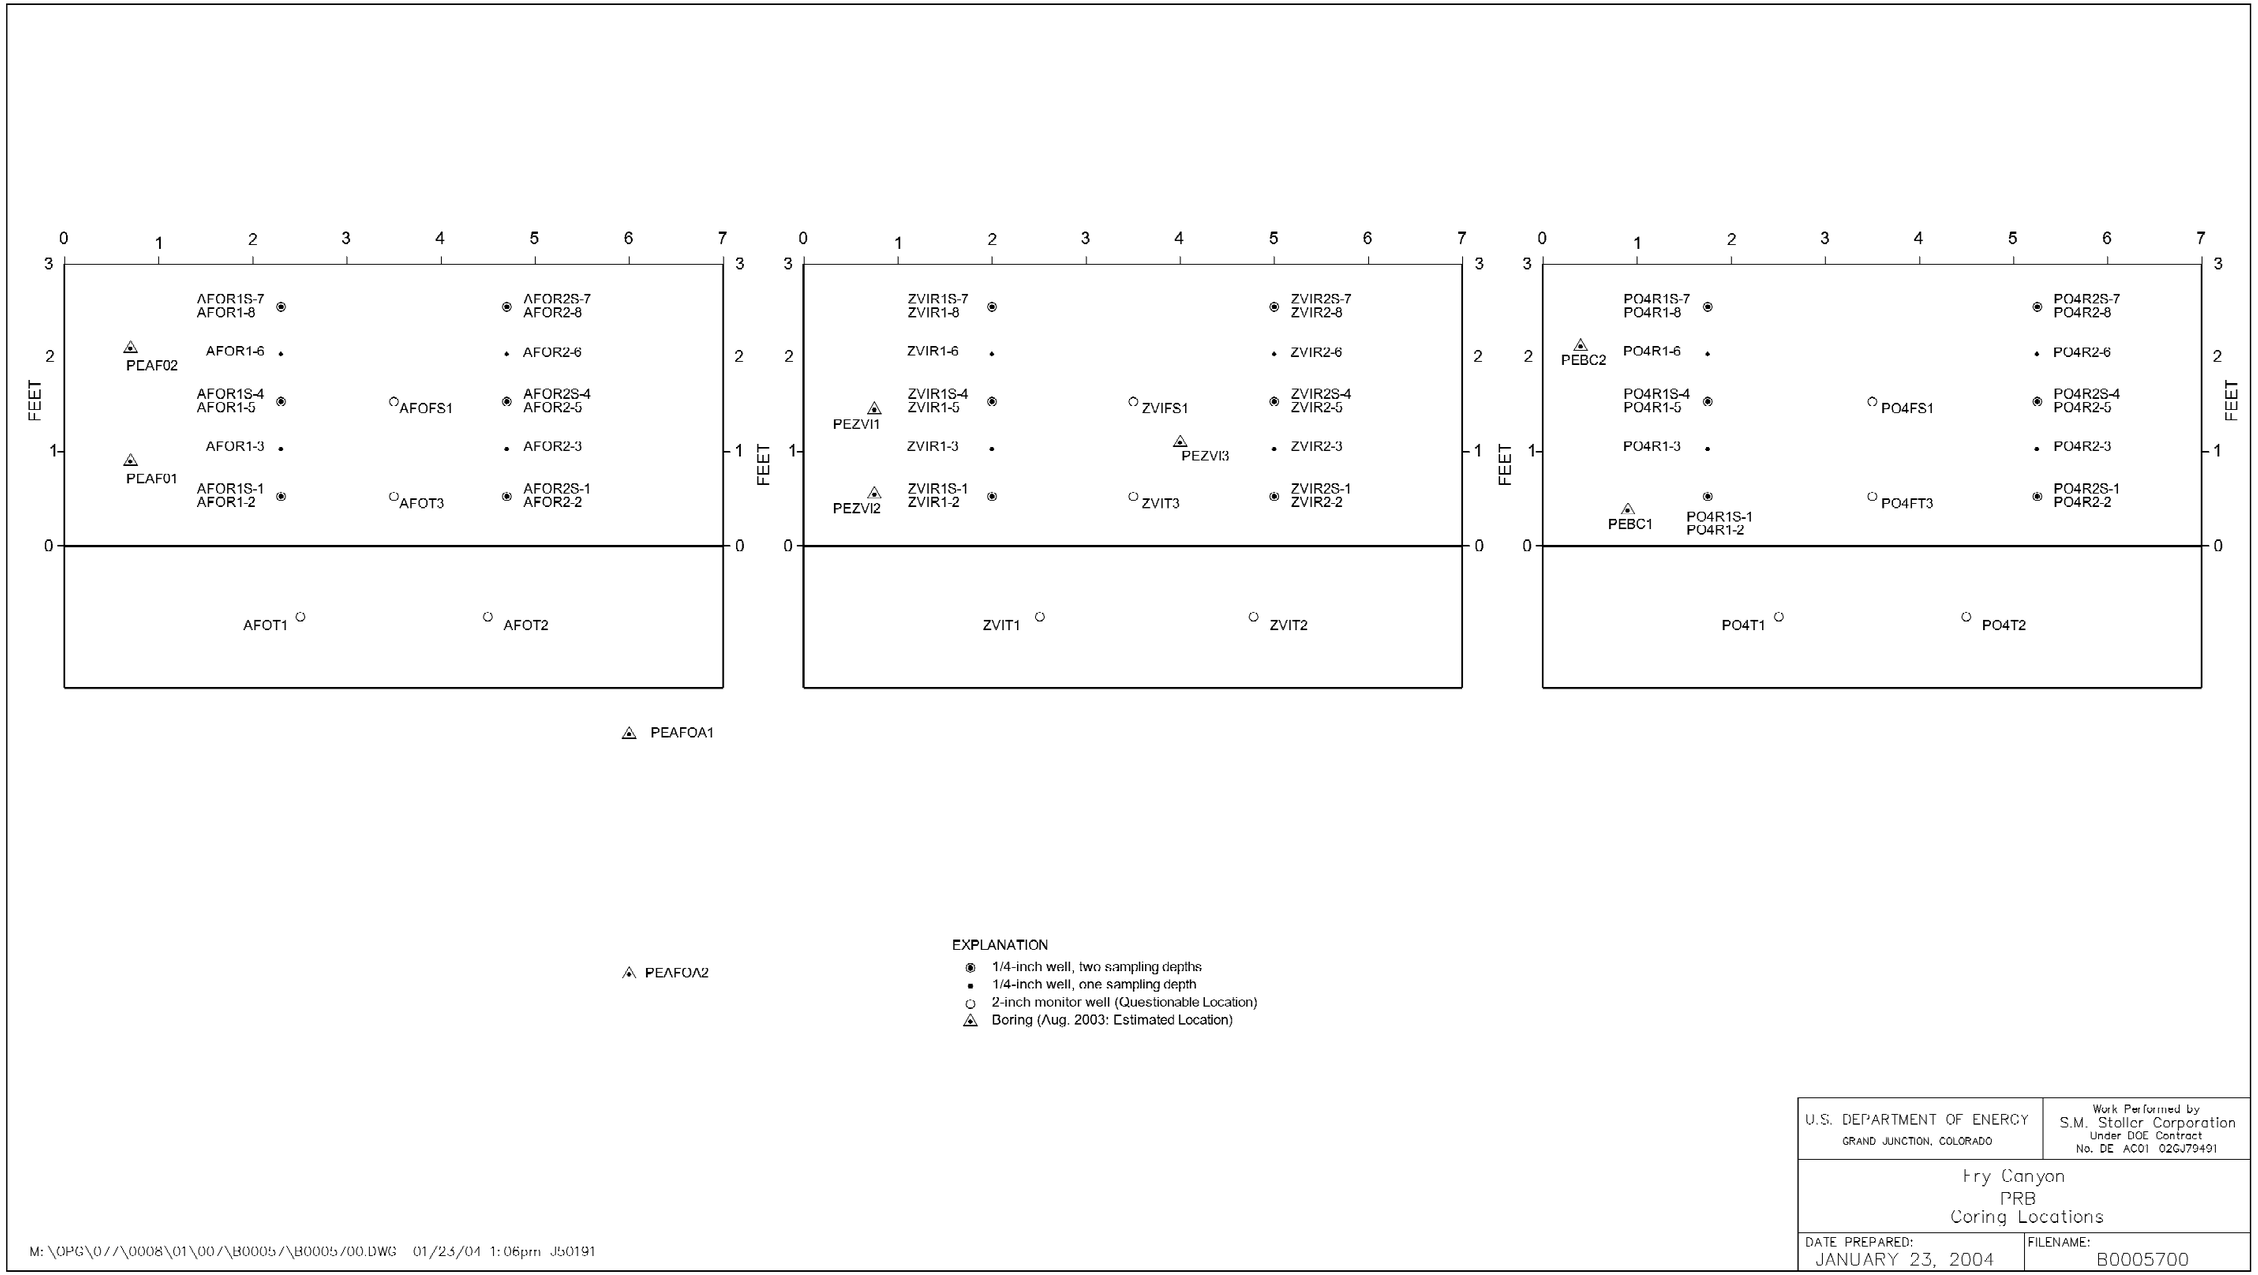

Figure 2. Core Locations at the Fry Canyon, Utah, PRB Site

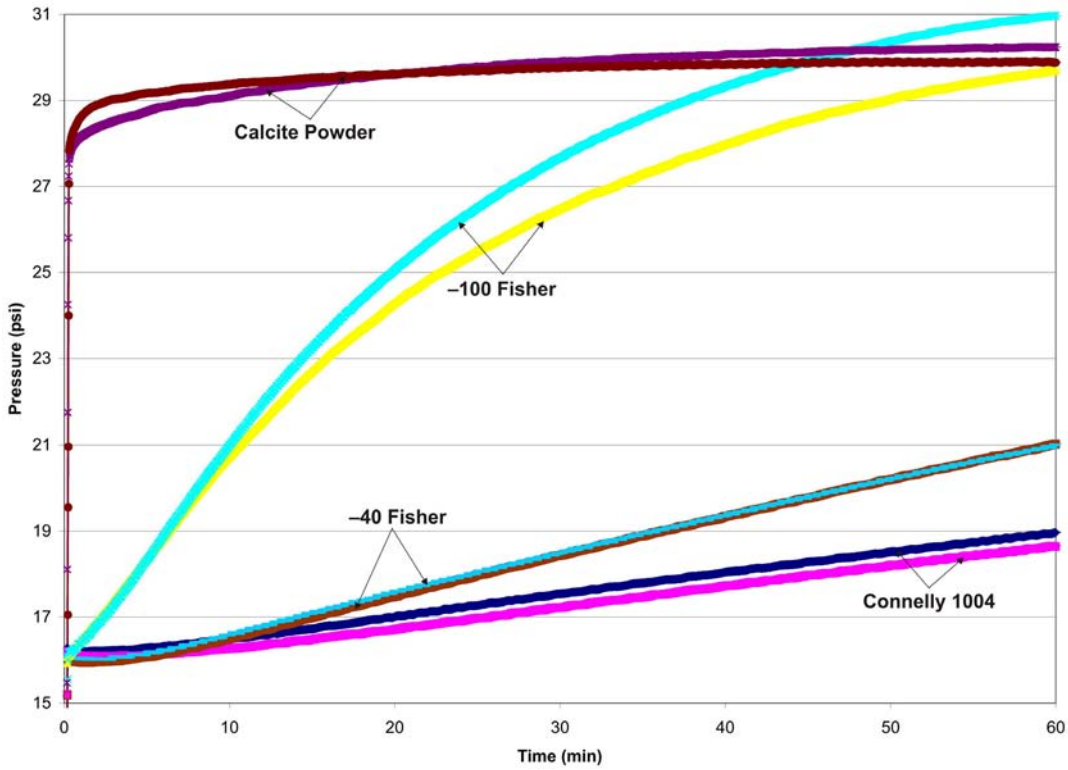

Figure 3. Reproducibility of Reactivity Tests Using Standard ZVI Samples

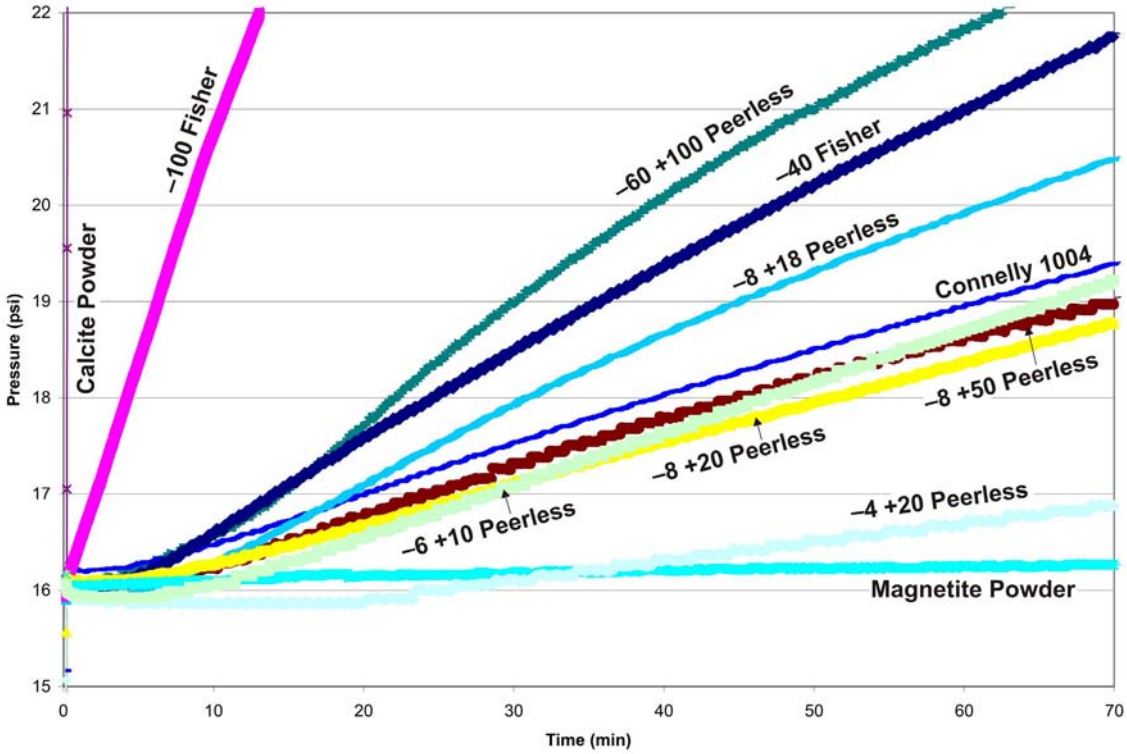

Figure 4. Reactivity Curves for a Variety of ZVI Types

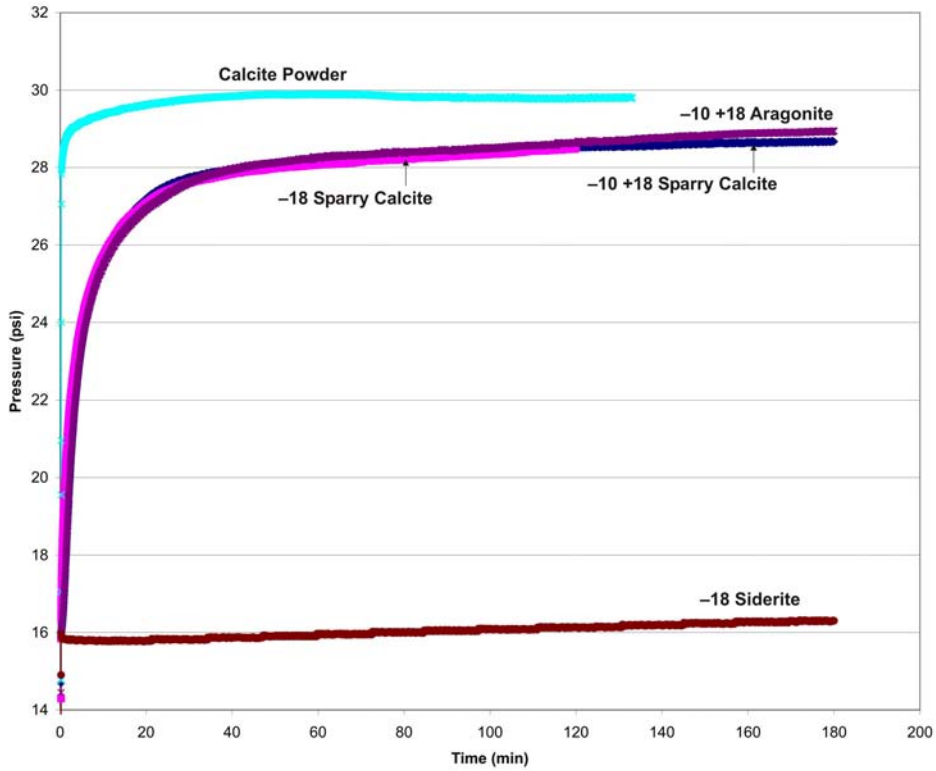

Figure 5. Reactivity Curves for Carbonate Minerals

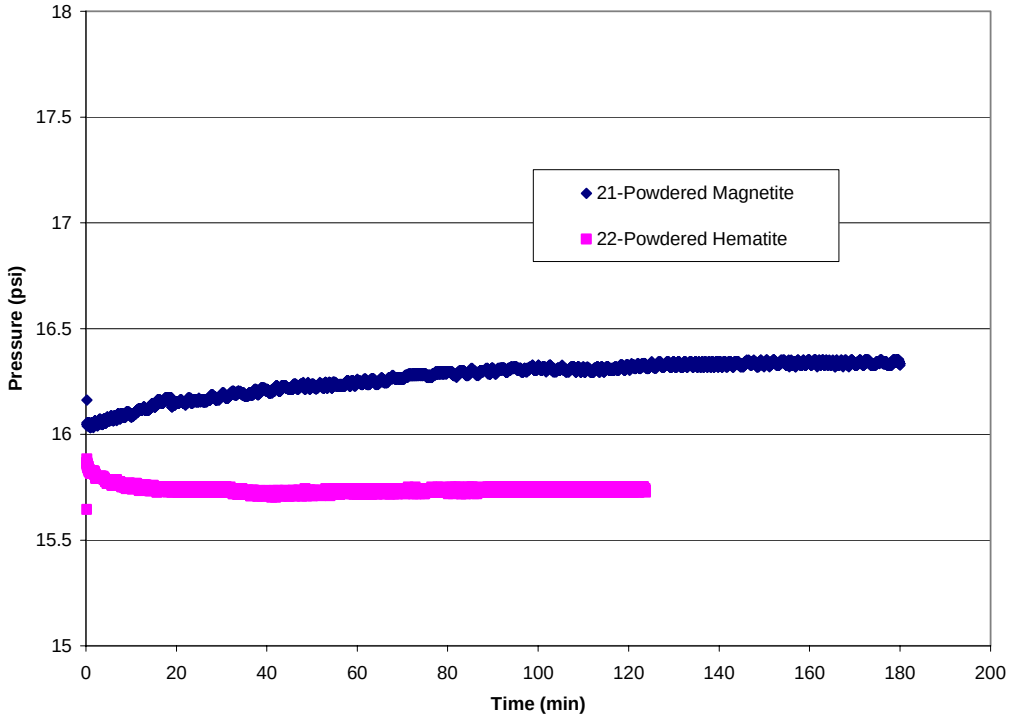

Figure 6. Reactivity Curves for Iron Oxide Minerals

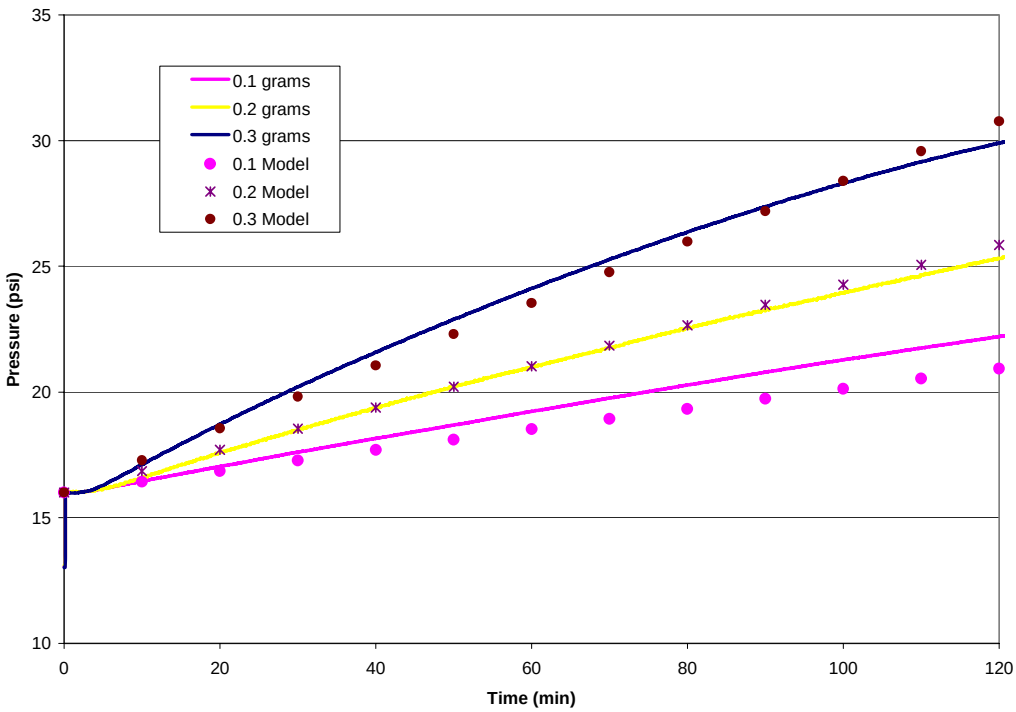

Figure 7. Model Fit to Three Different Masses of Fisher –40 Mesh ZVI

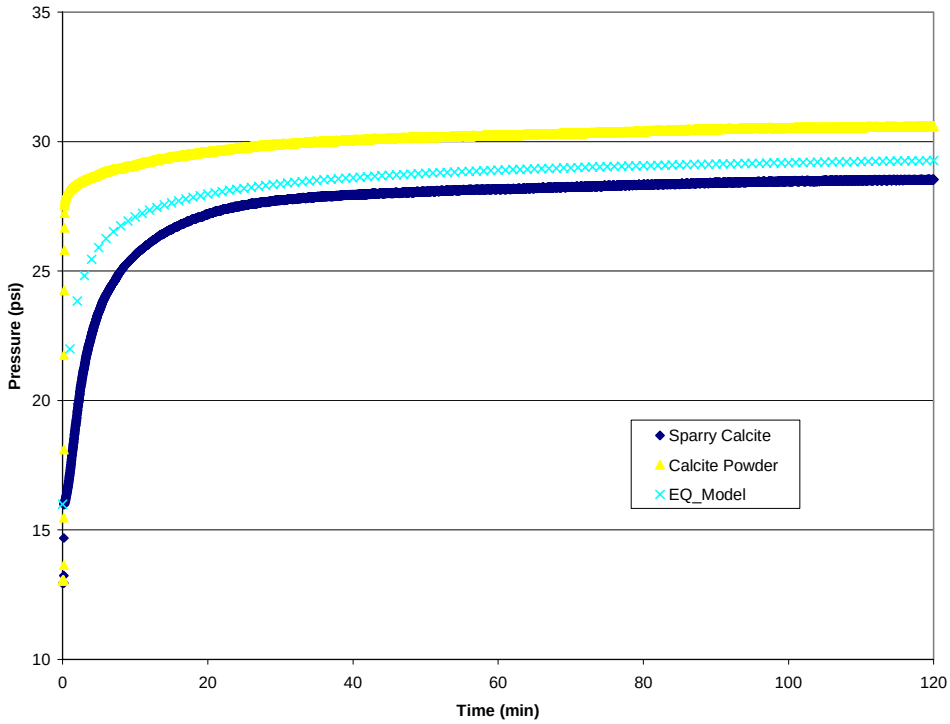

Figure 8. Model Fit to Two Different Crystallinities of Calcite

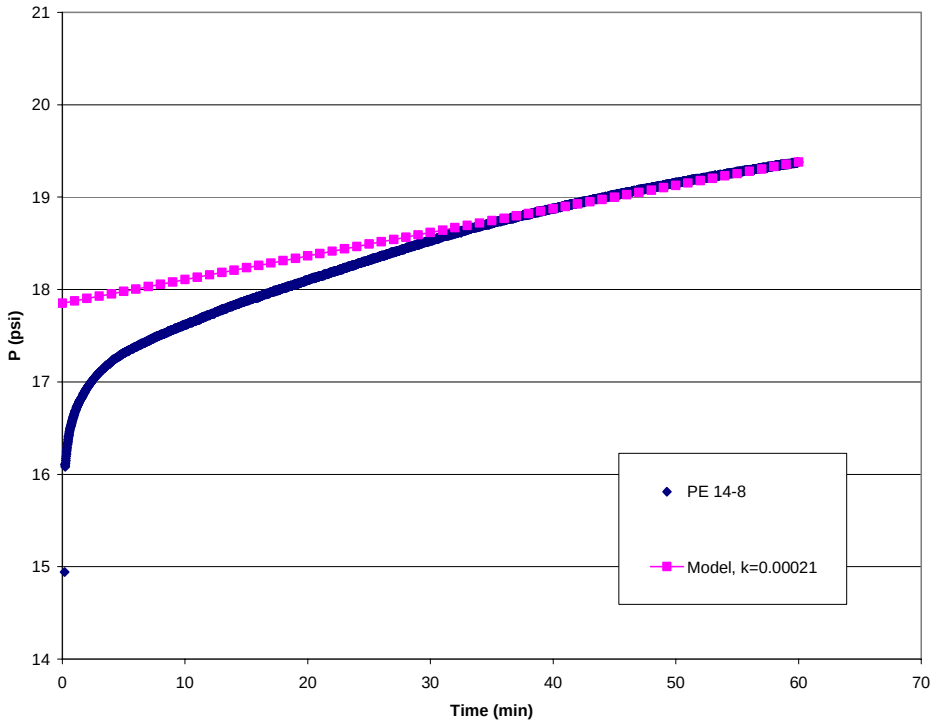

Figure 9. Typical Reactivity Test With Model Curve Fitted to Match Slope at 60 Minutes

(The rate constant in this example is 0.00021/per min. The unitless reactivity value is 2.1. The sample clearly has some carbonate as indicated by the rapid, early increase in pressure.)

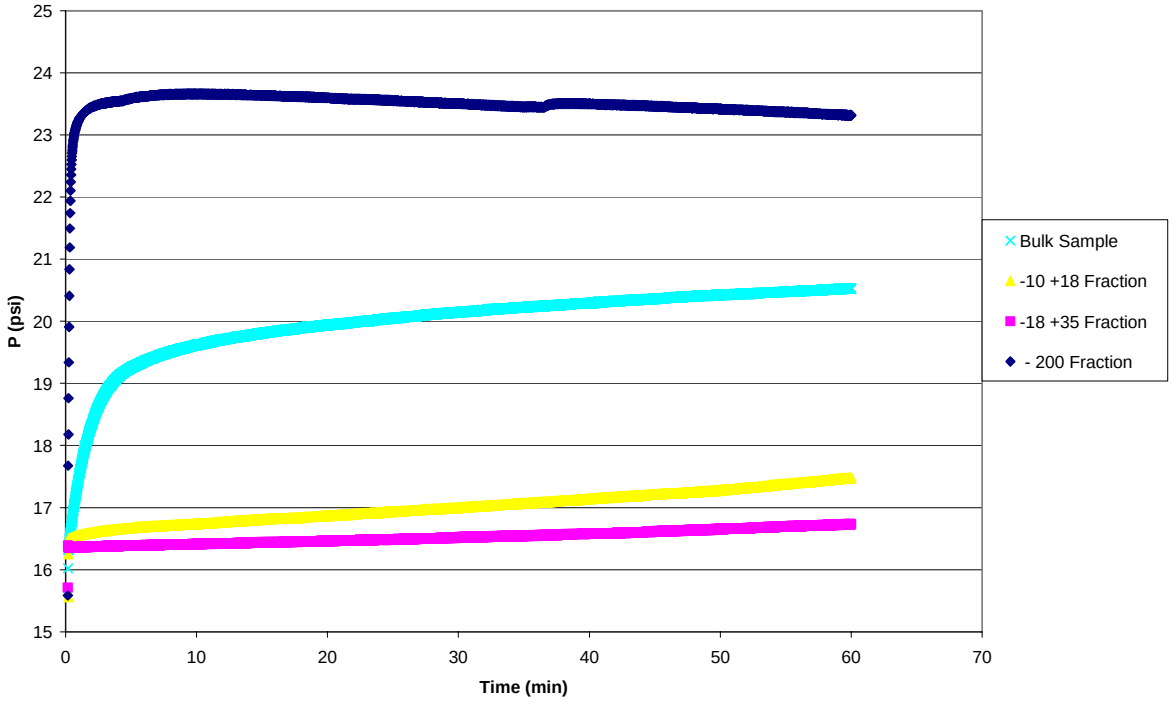

Figure 10. Reactivity Curves for Bulk Sample PE-ZVI-3-4 and Various Size Fractions

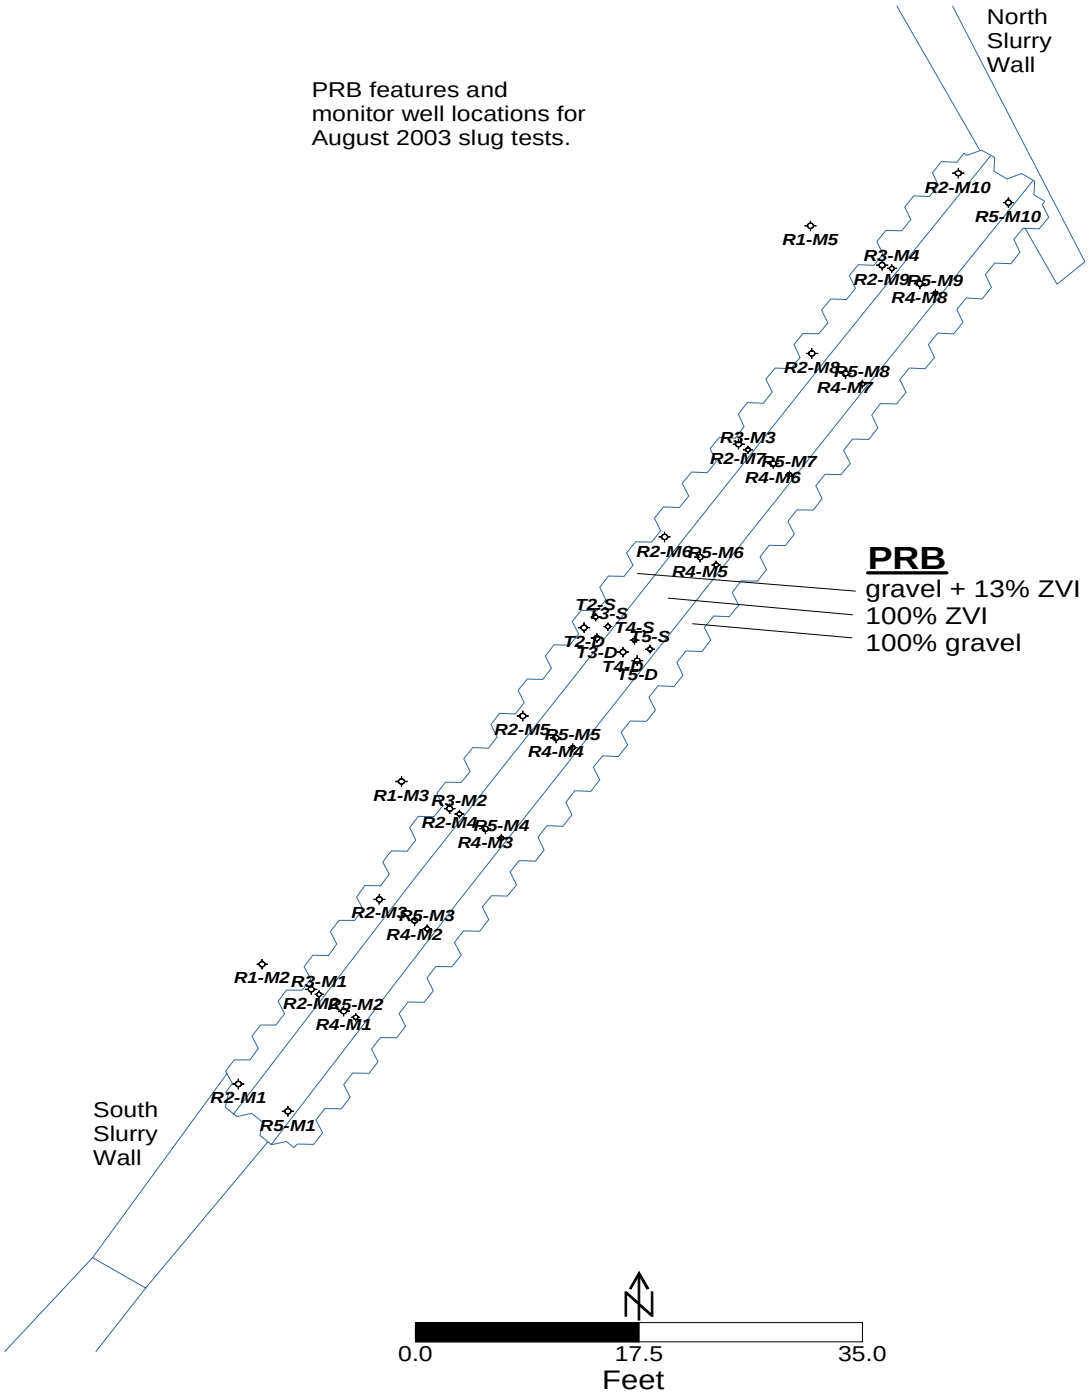

Figure 11. Locations of August 2003 Slug Tests at Monticello PRB

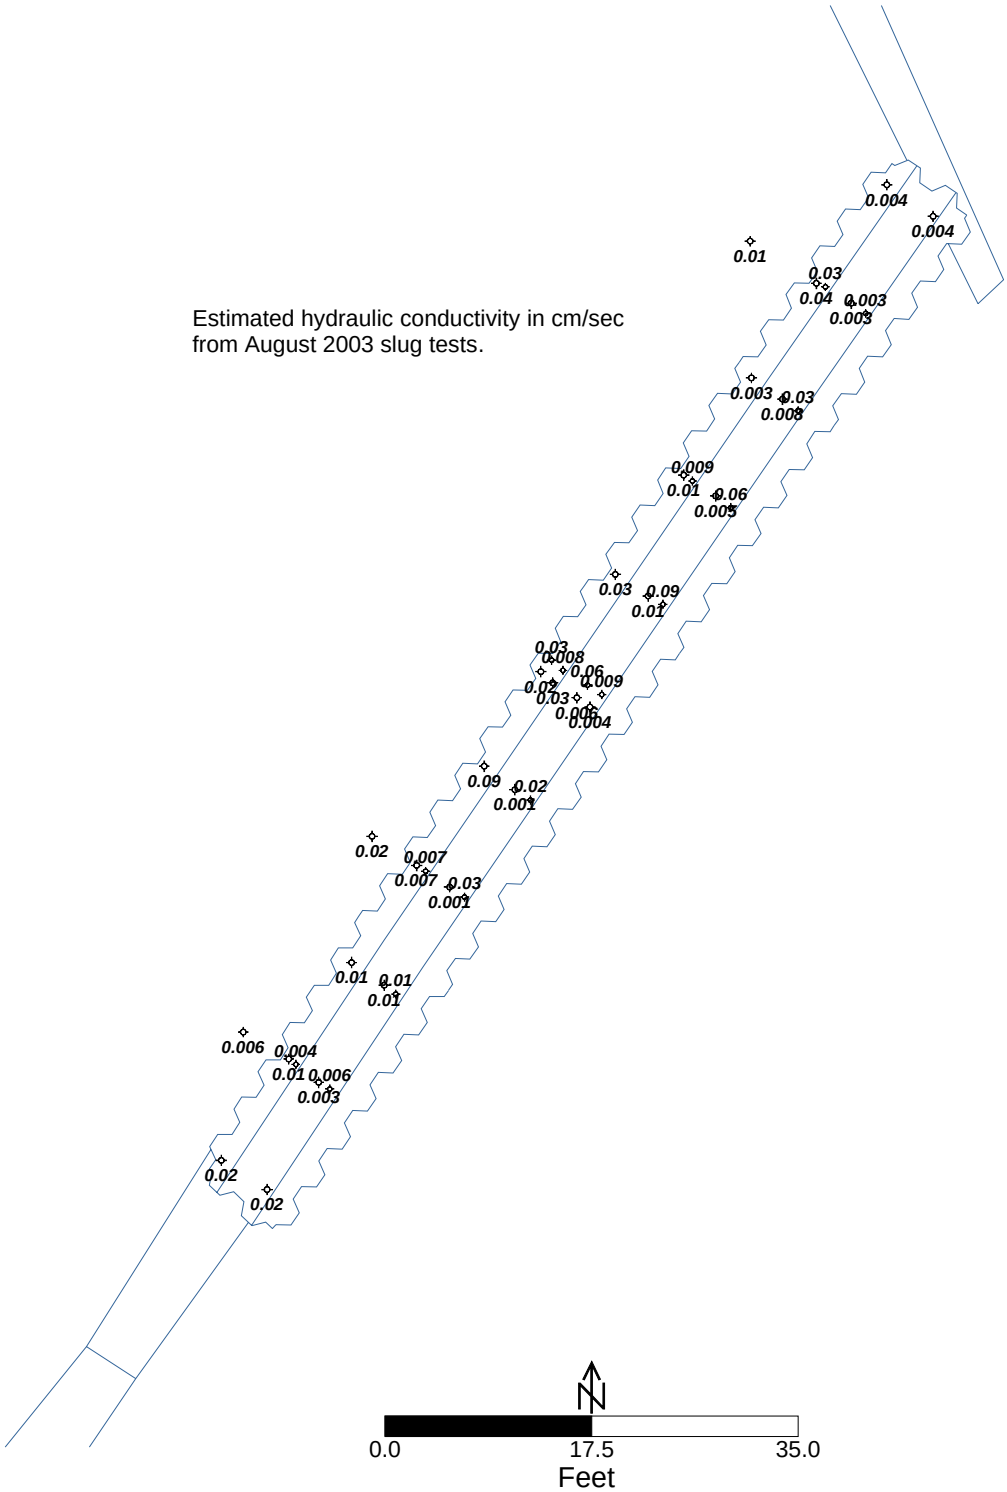

Figure 12. Estimated Hydraulic Conductivity (cm/s) Calculated From August 2003 Slug Tests at Monticello PRB

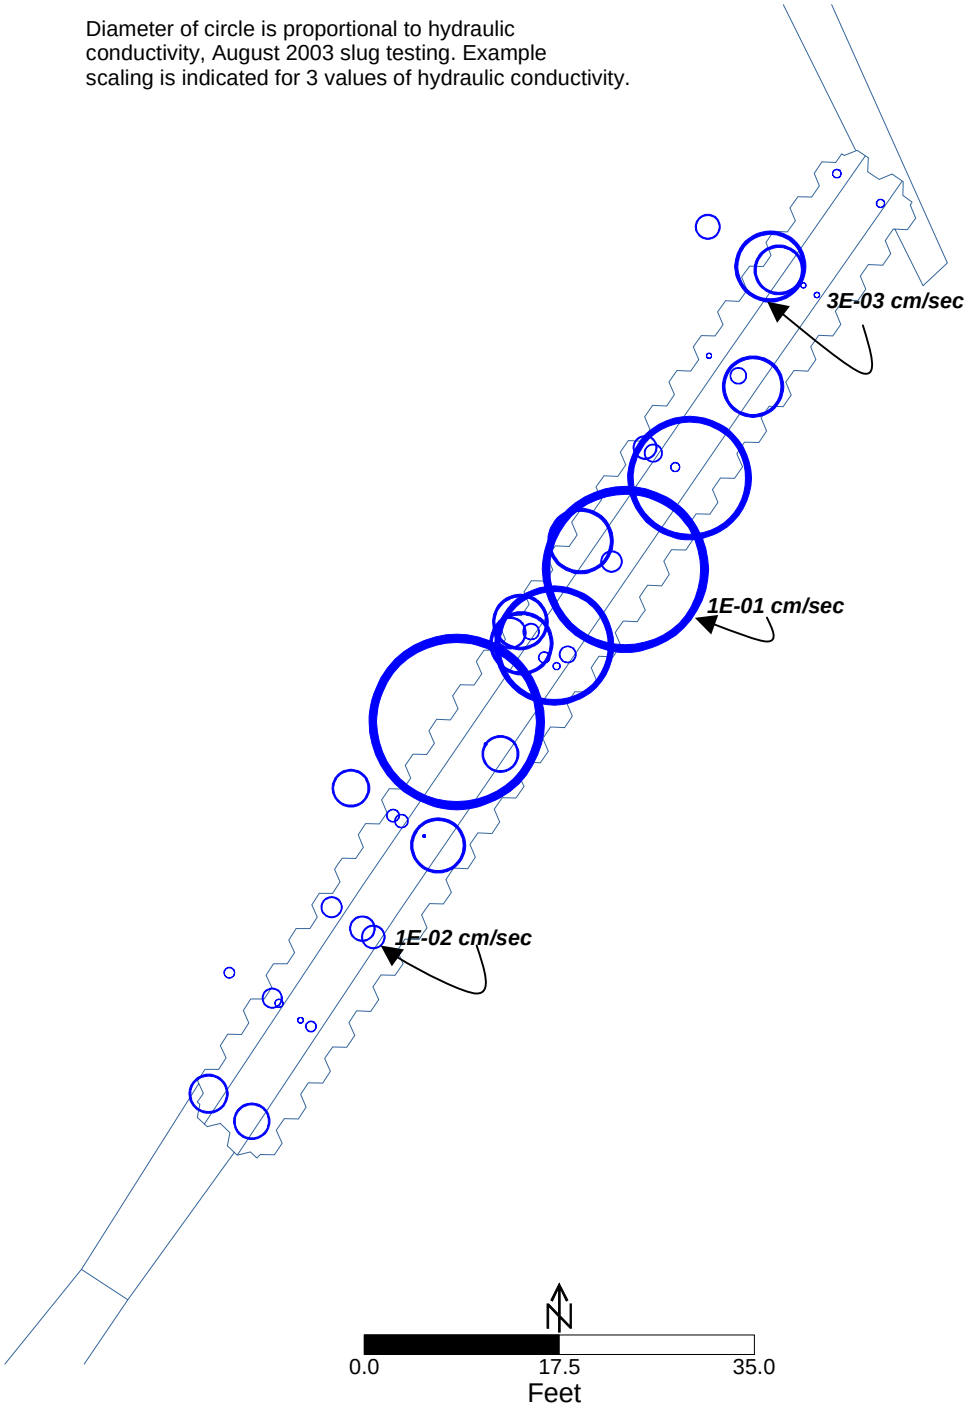

Figure 13. Graphical Representation of Hydraulic Conductivities Determined From August 2003 Slug Tests at Monticello PRB (circle size proportional to hydraulic conductivity)

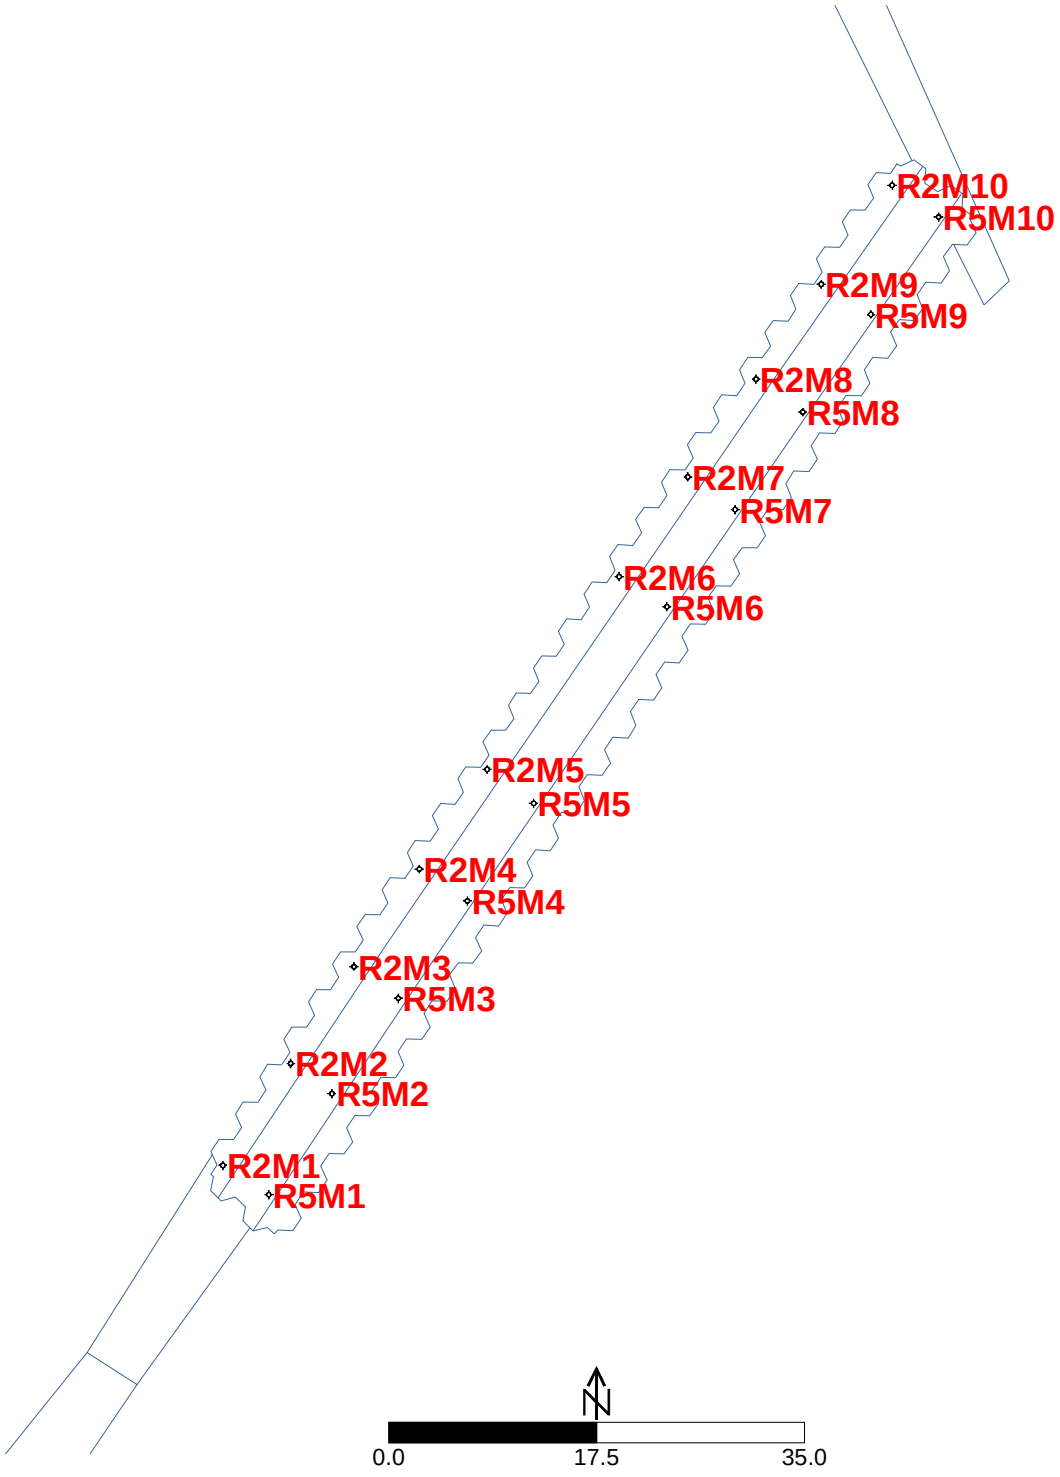

Figure 14. Location of Tracer Tests

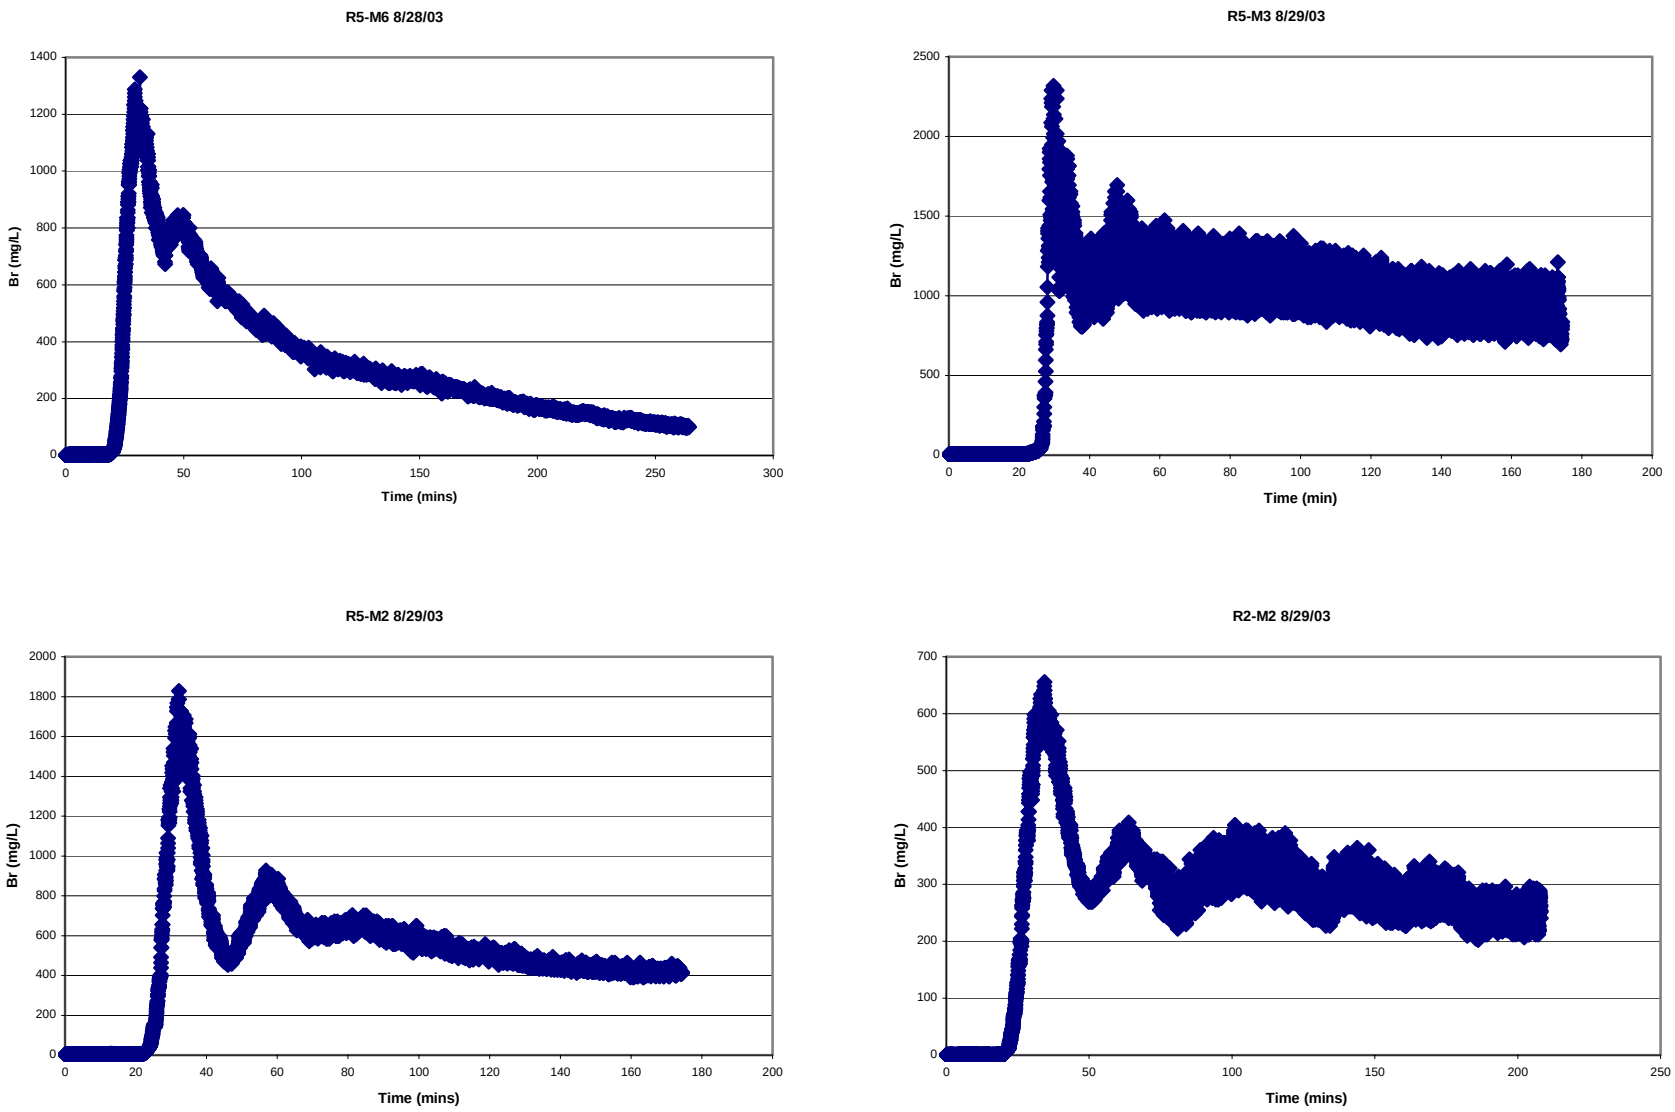

Figure 15. Example Bromide Test Curves

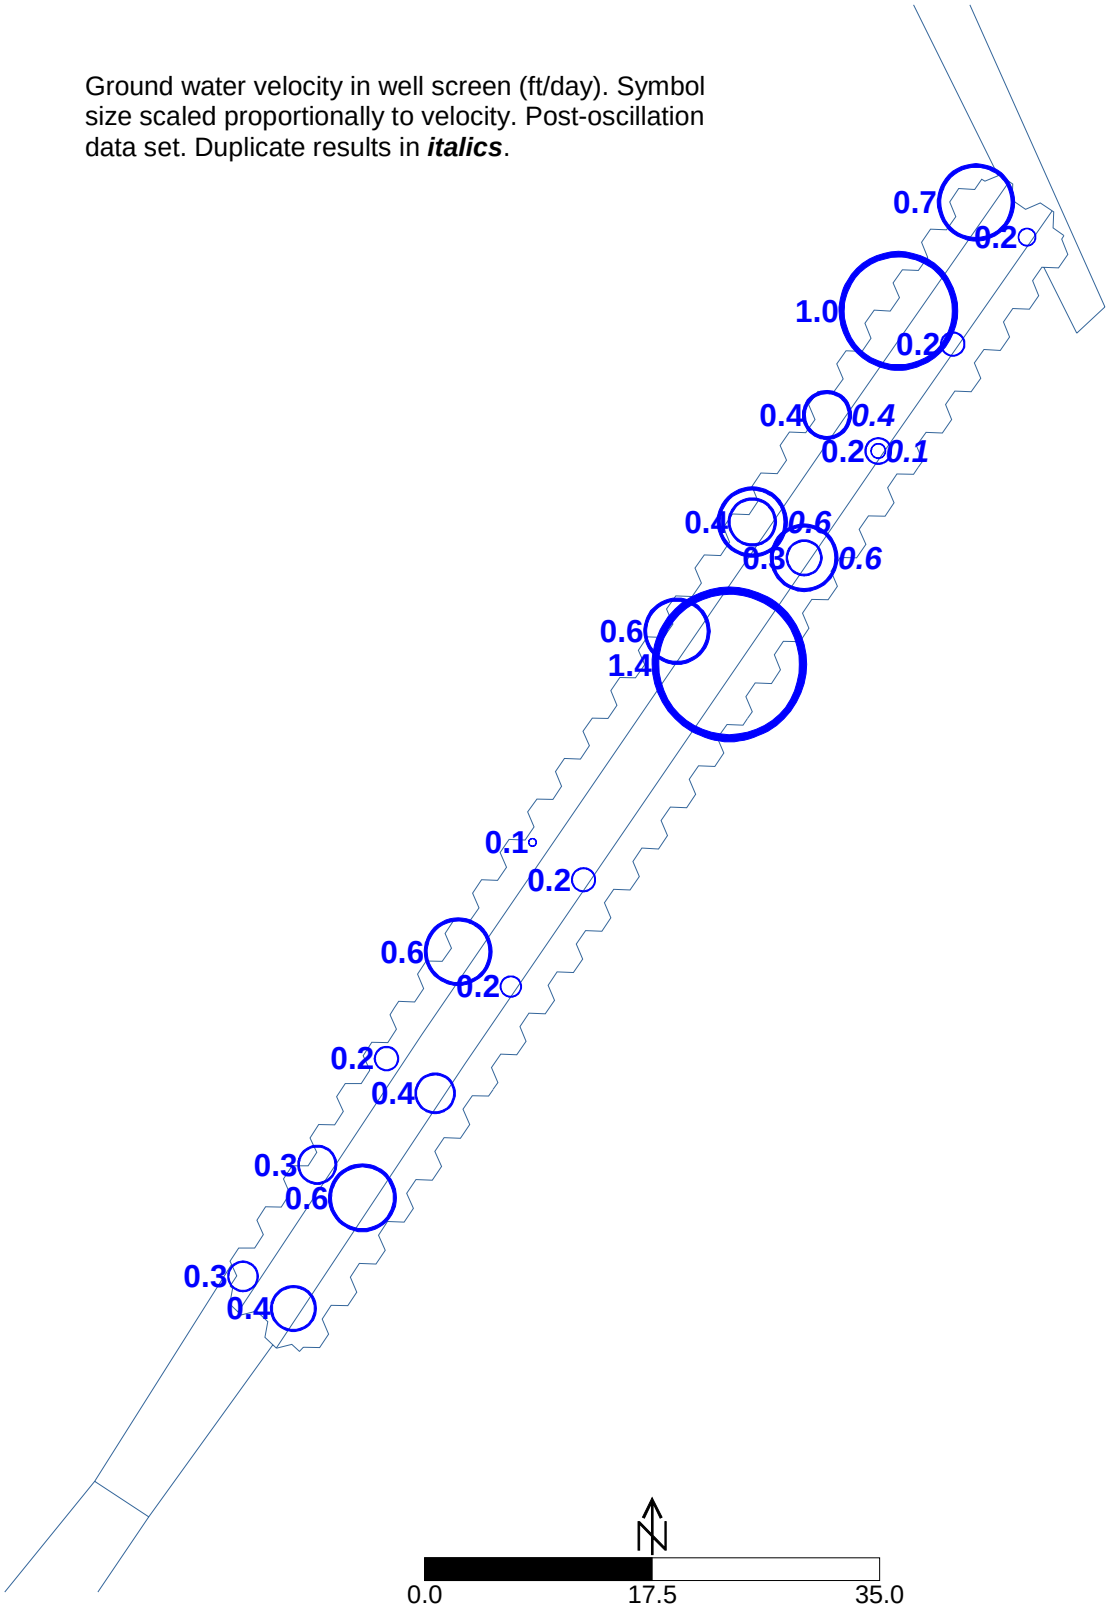

Figure 16. Ground Water Velocity in Well Screen

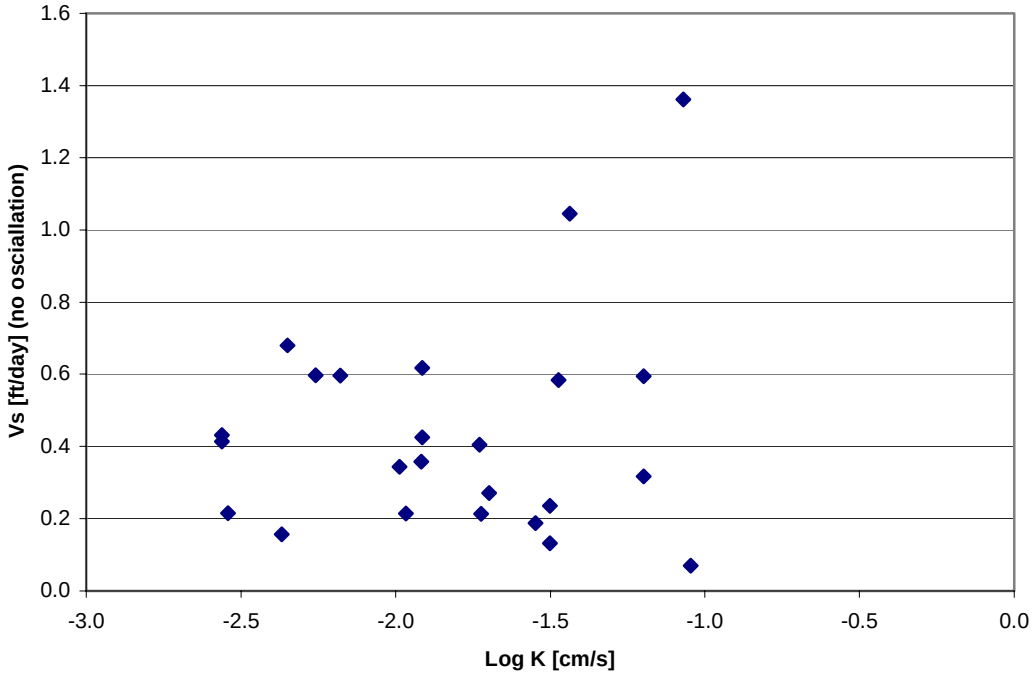

Figure 17. Well Screen Velocity Versus Hydraulic Conductivity Relationship

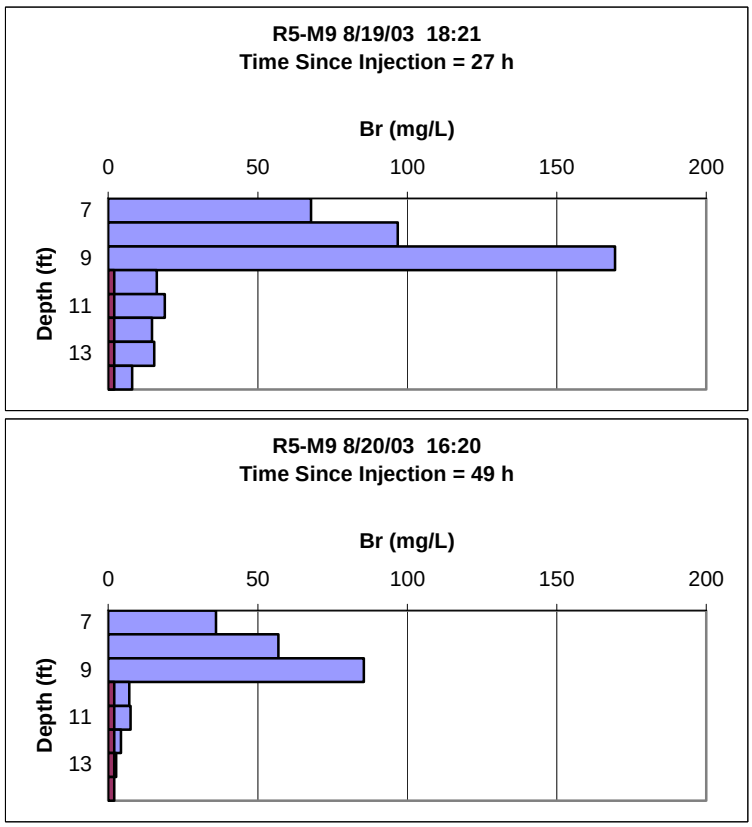

Figure 18. Example Vertical Concentration Profiles

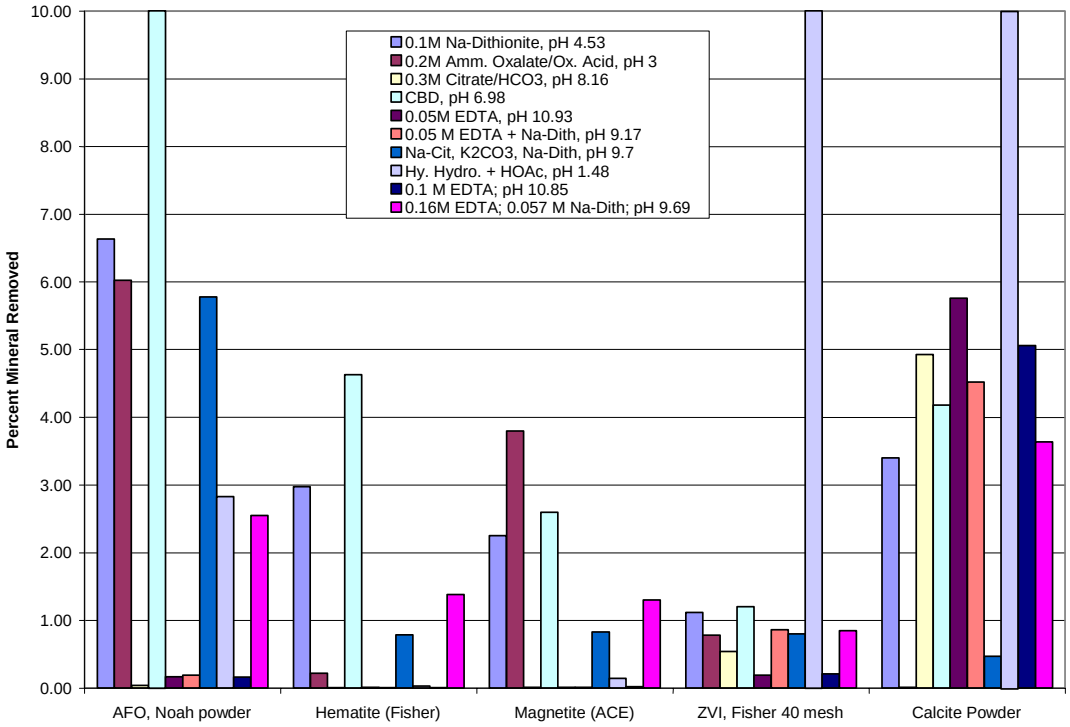

Figure 19. Results of Rejuvenation Batch Tests

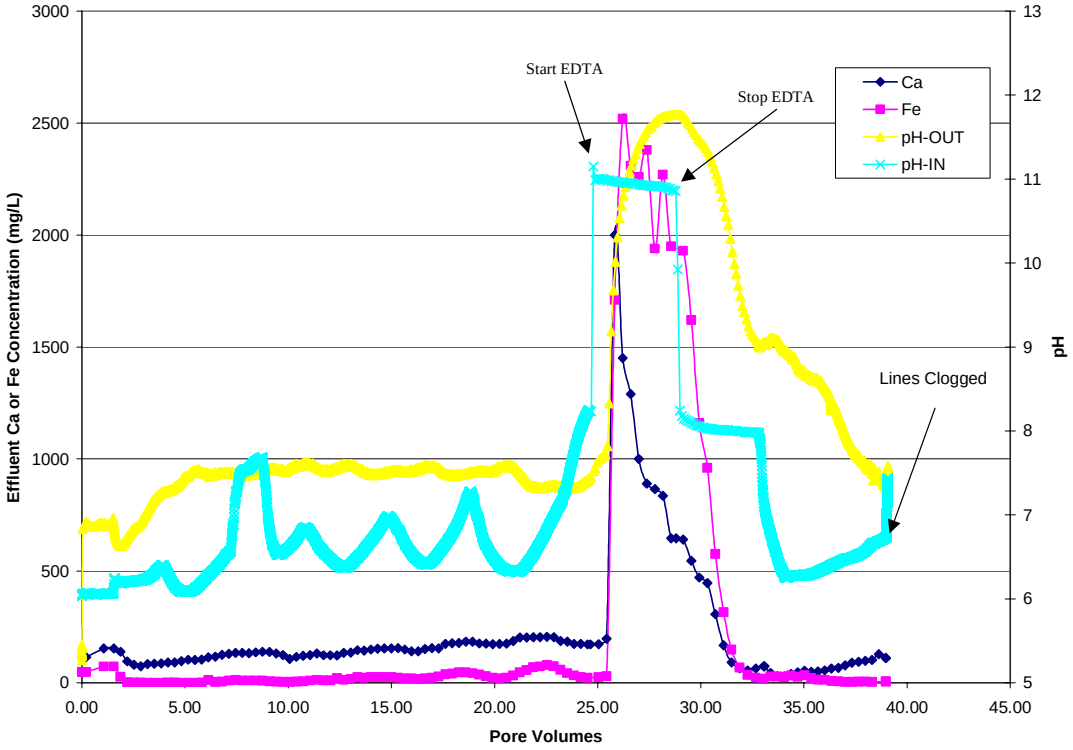

Figure 20. Results of Rejuvenation Column Test Using EDTA

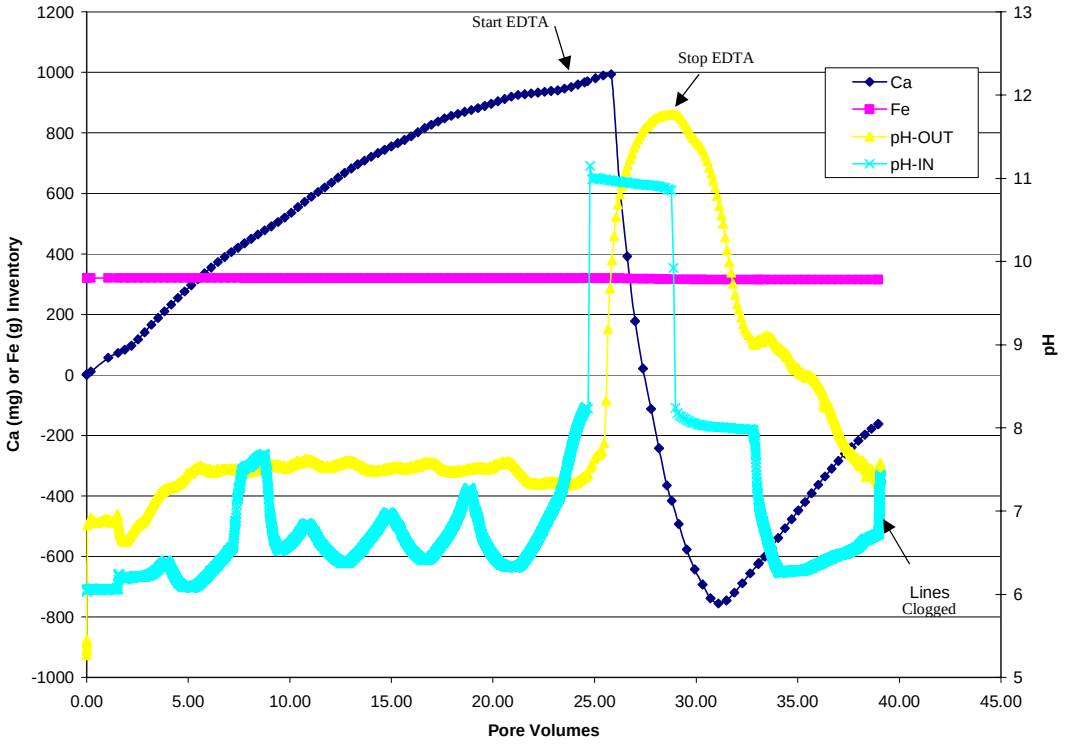

Figure 21. Chemical Inventory in Preliminary Column Test

End of current text

Appendix A

Environmental Sciences Laboratory Notes

End of current text

EFFICIENCY LINE® 22-210

Monticello PeRT Rejuvination

MPERT01-09-01

4/30/03 Pack a 2" diameter column with fresh ZVI/gravel mix like that used in the ZVI/gravel zone @ PeRT well in Monticello. It is a mix of ~ 25 lbs -4/+20 iron to 9 cubic yards of gravel. Net weight of fill is 1602.5g

Prepare 20L RIM 3 synthetic water by adding chemical solids to Milli-Q water

	1L (g)	20L (g)
$NaHCO_3$	0.55	11.0
$CaSO_4 \cdot 2H_2O$	0.7725	15.45
$MgSO_4 \cdot 7H_2O$	0.54	10.8
$CaCl_2 \cdot 2H_2O$	0.1576	3.15
K_2SO_4	0.025	0.5

320g ZVI (assuming 20% by weight)

1600 Place carboy on stir plate. Sparge CO_2 @ ~60cc/min. Monitor pH & data logger. Initial pH = 6.89

1638 CO_2 flow ↓ to 20cc/min

pH and ORP probes calibrated prior to monitoring. pH used 7 and 10 buffer. ORP used zobell @ +230.

5/1/03 0745 Check pH of source tank. pH = 5.908. DC CO_2 flow. alk = 279 mg/L as $CaCO_3$

0850 pH now @ 5.94

Note that data logger channels are:

1 ORP inlet
2 ORP outlet
3 pH inlet
4 pH outlet

file: APR30_03 is monitoring 20L source tank of influent & CO_2 sparged pH only

Slope-intercept for ORP probe calibration (from factory) = intercept -389.76, slope 222.6

EFFICIENCY LINE® 22-210

Monticello PeRT leijunination

MPERT 01-09-02

5/1/03 0945 Start flow to column @ 4ml/min

1125 First outflow. Collect in 50ml cent tube. This is 129 minutes till first programmed collect on fraction collector.

Fraction collector is set @ 234 minute drain, 6 minute collect.

Note outflow pH has not increased as expected.

1144 Change pump heads to ring 16. Flow set @ 0.7ml minute will reprogram frac collector to 35 minute collects, 205 minute drain, 176 minutes left on drain.

flow changed @ [redacted] on data logger pH in 6.071 pH out 6.904

1130 ~~x~~ Slow starts to outflow sensors @ 11:30 [redacted] May01_03

1150 Start drain to beaker.

1339 first collect on fraction collector 6" = 24ml rate = 4ml/min

PV = 512 ml (128 minutes x 4ml/minute)

1535 Start CO_2 flow @ 10 ml/min [redacted]

5/2/03 0847 pH inlet at 6.23. Turned off CO_2 gas (although it was barely flowing if at all). [redacted] MAY01_03

0852 Stopped data logger. Started new file

0930 [redacted] file (with time column)

Lost all data from 0852 – 0930

pH IN Intercept = 13.5801
Slope = -3.7123

pH OUT Intercept = 13.1649
Slope = -3.7520

EFFICIENCY LINE® 22-210

MPERT01-09-03

5/2/03	1930	pH inlet is rising 6.375. Started 10 mL/min CO_2
	Time = 9.833 hours	
	2019	Increased CO_2 to 20 mL/min
5/3/03	1028	Log time = 24.917 hrs. pH in was 6.044. Turned CO_2 off
5/4/03	1151	Log time = 50.333 hrs. pH in was 6.556. Turned CO_2 to 10 mL/min
		Attached Aquarium pump with Aeration stone to add O_2 to source sand
		ORP has drifted down slightly from about 200 to 177 mV
5/5/03	0701	pH in up to 7.675. Turned off air. Turned CO_2 on at 20 mL/min
	Log time = 69.5 hours	
	1224	pH in is 6.792. D/C CO_2 (log time = 74.917 hours)
	1615	pH in is 6.538 (log time 78.667)
5/6/03	0632	Log = 93.000 pH in = 6.796 CO_2 turned on 10 mL/min
5/7/03	0643	Log = 117.25 hr. pH in = 6.875 CO_2 D/C
	0	17:17 Stopped datalogger MA402_03
		17:20 Start MA407_03 (0 hours)
5/8/03	0637	(logger 13.250 hrs) pH in at 6.896, turned CO_2 on 10 mL/min
		Some tubes on fraction collector are not filling all the way. Some are only about ½ full. Lots of Fe staining (red) in lines.
5/9/03	0600	Turned CO_2 off. 100 mL Conc. HNO_3 put in Tubes 31-54
	(logger 36.667)	

EFFICIENCY LINE® 22-210

MPERT 01-09-04

5/10/03	0748	CO_2 started 10 mL/min
	0906	Added 100 mL HNO_3 conc to tubes 50 – 74
	0906	Last tube collected was #57. Logger 63.750 hours
5/11/03	1213	D/C CO_2 [illegible] time = [illegible] (5/11/03) Last tube collected = #60
5/12/03	0619	Last tube collected was [illegible] Log time = 109.000
		Added another 100 mL conc HNO_3 to tubes 50–74 (Total 200 mL)
		Added 200 mL conc HNO_3 to tubes 75 – 93
	0640	Started filling tube #65. Log time = 109.333
	0653	Made 2L of 0.1 M EDTA (41.62 g/L) 83.24 g per 2L
	0712	Ended Tube #65 collect. Log time = 109.833
	0717	Stopped File MAY07_03
	0718	Started File MAY12_03 (1000 hours)
5/13/03	0821	Start flow 6 mL/min of 0.1 M EDTA Log time 0.25.000 + Change collect times to 18 min. drain / 2 min collect to get 20 mL split.
	0839	First collect (tube 72) after start of EDTA Soln is clear. 0.2 mL HNO_3 in test tubes
	0859	tube 73 off – soln is clear
	0919-21	tube 74 off. soln is lugged. bottom 1/3rd green, middle 1/3rd tan, top 1/3rd orange
	0939-41	75 as above
	0959-1001	76 as above
	1019-1021	77 as above

EFFICIENCY LINE® 22-210

MPERT 01-09-05

5/12/03	1039-41	tube 78 off		Looped on above									
	1059-1101	79 off		No acid in test tube									
5/13/03													
	1105	change outlet ORP probe. Check new probe prior to installation											
		Ryslot = +237											
	1119-21	tube 80 off.		Note that tubes without acid are very pale orange with									
		dark orange then large at top. Cloudy orange striation throughout											
		tube											
		Prepare new 20L of R1N3 using dissolved chemical salts to MQH2O											
	50g/L	K_2HPO_4	220										
	1.5g/L	$CaSO_4 \cdot 2H_2O$	1030										
	200g/L	$MgSO_4 \cdot 7H_2O$	54										
	92.72g/L	$CaCl_2 \cdot 2H_2O$	5										
	100g/L	K_2SO_4	34										
		MQH2O	9387										
			20,000										
1153	Switch to new source tank = R1N3. file time = 28.583. Dip manifold left on												
	drain between tubes 81 and 82.												
1159	Start tube 82 collect. file time 28.667												
1400	Column appears to be running well. Samples are lightening in color												
1420	Start CO_2 flow to source tank @ 2.0 ml/min												
1520	↓ flow to 0.7 ml/min. Reprogram frac collector to 205 min drain / 35 min collect												
	add acid to [illegible]												

EFFICIENCY LINE® 22-210

MPERT 01-09-06

5/13/03	1655	(33.583 file time) Columns running well, will leave CO_2 @ 10 ml/min.
5/14/03	0723	Completed Tube 96. File time = 48.083
	1123	Complete tube 97 file time = 52.083
	acidify tubes 79-92 (not acidified @ time of collection) to return Fe, Cu, use 0.5 ml conc HNO_3 add addtl HNO_3 to tubes 74-78 (pH was ~7 prior to addition) all now pH<2
	1502 Stop file collect MAY 14-03 file time 55.50 restart MAY 14-03 pause clock time @ 1502 during RJV098 collect (30 minutes left to collect)

AMRAD EFFICIENCY LINE® 22-210

Ca (source tank) = 219 mg/L (measured)
= 223 mg/L (calculated)

MPERT 01-09-07

Column Rejuvination

Inflow/tube	Vol (ml)	Cum Vol	Rate (ml/min)	FV 1=512	Color	Ca (mg/L)	Fe (mg/L)	8	9	10	11	12	13
1st outflow	25	25	4	0.05	Red	115	47.5						
drain 2	516	541	4	1.06									
RJV 001 3	24	565	4	1.10	Red	153	72.6						
drain 4	224	789	4	1.54									
drain 5	18	807	0.7	1.58									
drain 6	102	909	0.7	1.78									
RJV 002 7	23	932	0.7	1.82	Red	139	26.0						
drain 8	144	1076	0.7	2.10									
RJV 003 9	23	1099	0.7	2.15	clear	96	1.48						
drain 10	144	1243	0.7	2.43									
RJV 004 11	23	1266	0.7	2.47		80	0.91						
drain 12	144	1410	0.7	2.75									
RJV 005 13	23	1433	0.7	2.80		74	0.52						
drain 14	144	1577	0.7	3.08									
RJV 006 15	23	1600	0.7	3.13		84	0.43						
drain 16	144	1744	0.7	3.41									
RJV 007 17	23	1767	0.7	3.45		85	0.21						
drain 18	144	1911	0.7	3.73									
RJV 008 19	23	1934	0.7	3.78		87	0.23						
drain 20	144	2078	0.7	4.06									
RJV 009 21	23	2101	0.7	4.10		90	0.78						
drain 22	144	2245	0.7	4.38									
RJV 010 23	23	2268	0.7	4.43		91	0.99						
drain 24	144	2412	0.7	4.71									
RJV 011 25	23	2435	0.7	4.76		97	0.10						
drain 26	144	2579	0.7	5.04									
RJV 012 27	23	2602	0.7	5.08		103	0.12						
drain 28	144	2746	0.7	5.36									
RJV 013 29	23	2769	0.7	5.41		102	0.42						
drain 30	144	2913	0.7	5.69									
RJV 014 31	23	2936	0.7	5.73		104	0.85						

AMPAD EFFICIENCY LINE® 22-210

②

Column Rejuvination (gal) (gal/min) (mL)

MPERT01-09-08

Outflow	1 Vol (mL)	2 Cum Vol	3 Rate	4 PV 1=512	5 Color	Cu (mg/L)	7 Fe (mg/L)	8	9	10	11	12	13
drain 1	144	3080	0.7	6.02									
RJV015 2	23	3103	0.7	6.06	Red	114	12.3						
drain 3	144	3247	0.7	6.34									
RJV016 4	23	3270	0.7	6.39		117	3.77						
drain 5	144	3414	0.7	6.67									
RJV017 6	23	3437	0.7	6.71		125	5.42						
drain 7	144	3581	0.7	6.99									
RJV018 8	23	3604	0.7	7.04		129	9.6						
drain 9	144	3748	0.7	7.32									
RJV019 10	23	3771	0.7	7.37		133	11.4						
drain 11	144	3915	0.7	7.65									
RJV020 12	23	3938	0.7	7.69		133	10.3						
drain 13	144	4082	0.7	7.97									
RJV021 14	23	4105	0.7	8.02		132	10.0						
drain 15	144	4249	0.7	8.30									
RJV022 16	23	4272	0.7	8.34		136	10.2						
~~RJV 02~~ drain	144	4416	0.7	8.63									
RJV023 18	23	4439	0.7	8.67		139	9.5						
drain 19	144	4583	0.7	8.95									
RJV024 20	24	4607	0.7	9.00		138	6.7						
drain 21	144	4751	0.7	9.28									
RJV025 22	24	4775	0.7	9.33		131	4.78						
drain 23	144	4919	0.7	9.61									
RJV026 24	22	4941	0.6	9.65	pale yellow	124	4.00						
drain 25	144	5085	0.7	9.93									
RJV027 26	25	5110	0.7	9.98		107	3.72						
drain 27	144	5254	0.7	10.26									
RJV028 28	21	5275	0.6	10.30		116	4.15						
drain 29	144	5419	0.7	10.58									
RJV029 30	23	5442	0.7	10.63		120	6.60						
drain 31	144	5586	0.7	10.91									

AMPAD EFFICIENCY LINE® 22-210

③

MPERT01-09-09

Column Regeneration

Outflow/tube	1 Vol (ml)	2 Cum Vol (ml)	3 Rate (ml/min)	PV 1=512	5 Color	6 Ca (mg/L)	7 Fe (mg/L)	8	9	10	11	12	13
RJV030 1	23	5609	0.7	10.96	pale yellow	124	10.0						
drain 2	144	5753	0.7	11.24									
RJV031 3	22	5775	0.6	11.28		131	12.4						
drain 4	144	5919	0.7	11.56									
RJV032 5	23	5942	0.7	11.61		123	10.5						
drain 6	144	6086	0.7	11.89									
RJV033 7	23	6109	0.7	11.93		123	10.5						
drain 8	144	6253	0.7	12.21									
RJV034 9	16	6269	0.5	12.24	rust floes	122	21.1						
drain 10	144	6413	0.7	12.53									
RJV035 11	24	6437	0.7	12.57	pale yellow	134	12.6						
drain 12	144	6581	0.7	12.85									
RJV036 13	26	6607	0.7	12.90		135	16.5						
drain 14	144	6751	0.7	13.19									
RJV037 15	17	6768	0.5	13.22	rust floes	146	25.4						
drain 16	144	6912	0.7	13.50									
RJV038 17	16	6928	0.5	13.53		144	22.3						
drain 18	144	7072	0.7	13.81									
RJV039 19	24	7096	0.7	13.86		149	25.4						
drain 20	144	7240	0.7	14.14									
RJV040 21	23	7263	0.7	14.19		152	25.2						
drain 22	144	7407	0.7	14.47									
RJV041 23	21	7428	0.6	14.51		153	25.2						
drain 24	144	7572	0.7	14.79									
RJV042 25	23	7595	0.7	14.83		154	25.2						
drain 26	144	7739	0.7	15.12									
RJV043 27	24	7763	0.7	15.16		155	22.3						
drain 28	144	7907	0.7	15.44									
RJV044 29	24	7931	0.7	15.49		149	19.0						
drain 30	144	8075	0.7	15.77									
RJV045 31	15	8090	0.4	15.80	rust floes	140	20.4						

AMPAC EFFICIENCY LINE® 22-210

(4)

MPERT01-09-10

Column Regeneration

outflow / tube	1 Vol (ml)	Cum Vol (ml)	2 (ml/min)	PV (1=512)	3 Color	La (mg/L)	7 Fe (mg/L)	8	9	10	11	12	13
drain 1	144	8234	0.7	16.08	clear								
RJV 046 2	17	8251	0.5	16.12		140	16.1						
drain 3	144	8395	0.7	16.40									
RJV 047 4	22	8417	0.6	16.44		151	18.9						
drain 5	144	8561	0.7	16.72									
RJV 048 6	24	8585	0.7	16.77		155	22.3						
drain 7	~~144~~ 144	8729	0.7	17.05									
RJV 049 8	~~144~~ 25	8754	0.7	17.10		154	28.2						
drain 9	144	8898	0.7	17.38									
RJV 050 10	23	8921	0.7	17.42		174 ~~210~~	38.0						
drain 11	144	9065	0.7	17.71									
RJV 051 12	21	9086	0.6	17.75		177	40.8						
drain 13	144	9230	0.7	18.03									
RJV 052 14	22	9252	0.6	18.07		178	46.5						
drain 15	144	9396	0.7	18.35									
RJV 053 16	23	9419	0.7	18.40		184	46.5						
drain 17	144	9563	0.7	18.68									
RJV 054 18	23	9586	0.7	18.72		183	42.8						
drain 19	144	9730	0.7	19.00									
RJV 055 20	25	9755	0.7	19.05		176	36.6						
drain 21	144	9899	0.7	19.33									
RJV 056 22	23	9922	0.7	19.38		175	28.9						
drain 23	144	10066	0.7	19.66									
RJV 057 24	17	10083	0.5	19.69		172	21.5						
drain 25	144	10227	0.7	19.97									
RJV 058 26	22	10249	0.6	20.02		173	20.5						
drain 27	144	10393	0.7	20.30									
RJV 059 28	22	10415	0.6	20.34		175	22.7						
drain 29	144	10559	0.7	20.62									
RJV 060 30	24	10583	0.7	20.67		186	32.0						
drain 31	144	10727	0.7	20.95									

EFFICIENCY LINE® 22-210

(5)

Column Regeneration

Rate

MPERT01-09-11

outflow/time	Vol (ml)	Sum Vol (ml)	(ml/min)	BV (1=512)	Color	Ca (mg/L)	Fe (mg/L)			10	11	12	13
RJV 061 1	28	10755	0.8	21.01	clear	202	46.6						
drain 2	144	10899	0.7	21.29									
RJV 062 3	25	10924	0.7	21.34		202	56.6						
drain 4	144	11068	0.7	21.62									
RJV 063 5	24	11092	0.7	21.66		203	69.0						
drain 6	144	11236	0.7	21.95									
RJV 064 7	20	11256	0.6	21.98		204	73.2						
drain 8	144	11400	0.7	22.27									
RJV 065 9	23	11423	0.7	22.31		205	79.2						
drain 10	144	11567	0.7	22.59									
RJV 066 11	24	11591	0.7	22.64		204	73.6						
drain 12	144	11735	0.7	22.92									
RJV 067 13	25	11760	0.7	22.97		187	51.4						
drain 14	144	11904	0.7	23.25									
RJV 068 15	21	11925	0.6	23.29		184	42.4						
drain 16	144	12069	0.7	23.57									
RJV 069 17	23	12092	0.7	23.62		173	33.0						
drain 18	144	12236	0.7	23.90									
RJV 070 19	21	12257	0.6	23.94		174	24.6						
drain 20	144	12401	0.7	24.22									
RJV 071 21	23	12424	0.7	24.27		171	21.6						
drain 22	73	12497	0.7	24.41									
drain 23	180	12677	10.0	24.76		~~172~~	~~25.4~~			only 105 min, Δ to EDTA, 10ml			
RJV 072 24	20	12697	10.0	24.80		172	25.4			max 18° 2"	fill time 25.333+	@ 08:39	
drain 25	180	12877	10.0	25.15									
RJV 073 26	19	12896	9.5	25.19		197	29.1				25.667+	@ 08:59	
drain 27	180	13076	10.0	25.54									
RJV 074 28	19	13095	9.5	25.58	liquid green	2000	1710			clump when pt bottom			
drain 29	180	13275	10.0	25.93	drain								
RJV 075 30	20	13295	10.0	25.97		1450	2520			clump	26.333+	@ 9:29	
drain 31	180	13475	10.0	26.32									

AMPAC EFFICIENCY LINE® 22-210

6

Column Regeneration Data

MPERT01-09-12

outflow/tube	Vol (ml)	Cum Vol (ml)	Rate (ml/min)	RV (1=5L)	Color	Ca (mg/L)	Fe (mg/L)	8	9	10	11	12	13
RJV 076 1	20	13495	10.0	26.36	Begins	1290	2310		clump white ppt.				
drain 2	180	13675	10.0	26.71									
RJV 077 3	20	13695	10.0	26.75		1000	2260		clump white ppt				
drain 4	180	13875	10.0	27.10									
RJV 078 5	19	13894	9.5	27.14		890	2380		clump white ppt				
drain 6	180	14074	10.0	27.49									
RJV 079 7	19	14093	9.5	27.53	cloudy orange	865	1940		C1059 - 27.667 + fill time J/c acid in tubes				
drain 8	180	14273	10.0	27.88	not ppt				change DEP current probe cloudy orange				
RJV 080 9	20	14293	10.0	27.92		835	2270						
drain 10	180	14473	10.0	28.27									
RJV 081 11	19	14492	9.5	28.30		645	1950		C1139 - 28.333				
drain 12	180	14672	10.0	28.66					change back to R1 M3 @ 6" left on drain fill @ 28.58				
RJV 082 13	19	14691	9.5	28.69		640	1930						
drain 14	180	14871	10.0	29.04									
RJV 083 15	20	14891	10.0	29.08		545	1620						
drain 16	180	15071	10.0	29.44									
RJV 084 17	19	15090	9.5	29.47		470	1160						
drain 18	180	15270	10.0	29.82									
RJV 085 19	19	15289	9.5	29.86		446	960						
drain 20	180	15469	10.0	30.21									
RJV 086 21	20	15489	10.0	30.25		306	575						
drain 22	180	15669	10.0	30.60									
RJV 087 23	19	15688	9.5	30.64	Clearing	108	315						
drain 24	180	15868	10.0	30.99	pale orange								
RJV 088 25	19	15887	9.5	31.03		91	128						
drain 26	180	16067	10.0	31.38									
RJV 089 27	16	16083	8.0	31.41		645	68						
drain 28	180	16263	10.0	31.76									
RJV 090 29	19	16282	9.5	31.80		55.9	35.5						
drain 30	180	16462	10.0	32.15									
RJV 091 31	19	16481	9.5	32.19	clear	63.5	22.8						

Column Regeneration

MPERT01-09-13

outflows / tubes	Vol (mL)	Cum Vol (mL)	Rate (mL/min)	BV (1=512)	Color	Ca (mg/L)	Fe (mg/L)	8	9	10	11	12	13
drain 1	180	16661	10.0	32.54									
RJV 092 2	19	16688	9.5	32.59	clear	73.5	169		first collected ↑ flow				
drain 3	144	16824	0.7	32.86				filtration = 32,000	Δ collect time 205 drain / 35 collect				↓ flow 0.7 ml/min
RJV 093 4	23	16847	0.7	32.90		44	27.4		resume acid addition				
drain 5	144	16991	0.7	33.19					0.2 mL HNO3 in each tube				
RJV 094 6	23	17014	0.7	33.23		29.2	27.8						
drain 7	144	17158	0.7	33.51									
RJV 095 8	23	17181	0.7	33.56		29.3	25.9						
drain 9	144	17,325	0.7	33.84									
RJV 096 10	25	17350	0.7	33.89		39.7	31.6						
drain 11	144	17494	0.7	34.17									
RJV 097 12	23	17517	0.7	34.21		46.2	26.6						
drain 13	144	17661	0.7	34.49		53.5	33.3						
RJV 098 14	25	17686	0.7	34.54		55.750	5/12	stop @ 15:02, start 5/14 @ 15:02				~~MAY 15~~	MAY14_0
drain 15	144	17830	0.7	34.82									
RJV 099 16	19	17849	0.5	34.86		49.0	21.0						
drain 17	144	17993	0.7	35.14									
RJV 100 18	21	18014	0.6	35.18		51.0	13.9						
drain 19	144	18158	0.7	35.46									
RJV 101 20	18	18176	0.5	35.50		55.5	12.4						
drain 21	144	18320	0.7	35.78									
RJV 102 22	22	18342	0.6	35.82		64.0	7.4						
drain 23	144	18486	0.7	36.11									
RJV 103 24	25	18511	0.7	36.15		66.5	6.5						
drain 25	144	18655	0.7	36.44									
RJV 104 26	26	18681	0.7	36.49		78.0	3.95						
drain 27	144	18825	0.7	36.77									
RJV 105 28	25	18850	0.7	36.82		89.0	3.80						
drain 29	144	18994	0.7	37.10									
RJV 106 30	25	19019	0.7	37.15		94.0	4.50						
drain 31	144	19163	0.7	37.43	↓								

AMPAC EFFICIENCY LINE® 22-210

Column Regeneration Rate

8

MPERT01-09-14

oxygen/tube	Vol (ml)	Cum volume	(ml/min)	BV (1=512)	Color	Ca (mg/L)	Fe (mg/L)	8	9	10	11	12	13
RJV 107 1	15	19178	0.4	37.46	clear	98.5	4.75						
drain 2	82	19260	0.4	37.62									
RJV 108 3	15	19275	0.4	37.65		102.0	3.40						
drain 4	82	19357	0.4	37.81									
RJV 109 5	28	19385	0.8	37.86	rust ppt.	127.5	33.5						
drain 6	164	19549	0.8	38.18									
RJV 110 7	16	19565	0.4	38.21		110.0	4.45						
drain 8	82	19647	0.4	38.37									
RJV 111 9	3	19650	0.09	38.38		110.0	5.93		shut down - plugged.		Column tubing		
drain 10	18	19668	0.09	38.41									
RJV 112 11	3	19671	0.09	38.42									
drain 12	18	19689	0.09	38.46									
RJV 113 13	2	19691	0.06	38.46									
drain 14	12	19703	0.06	38.48									
RJV 114 15	1	19704	0.03	38.48									
drain 16	6	19710	0.03	38.50									
RJV 115 17	1	19711	0.03										
drain 18	6	19717	0.03	38.51									
RJV 116 19	1	19718	0.03										
drain 20	6	19724	0.03	38.52									
RJV 117 21	1	19725	0.03										
drain 22	6	19731	0.03	38.53									
RJV 118 23	1	19732	0.03										
drain 24	6	19738	0.03	38.54									
RJV 119 25	1	19739	0.03										
drain 26	6	19745	0.03	38.56									
RJV 120 27	<1		0										
drain 28	—												
RJV 121 29	<1												
drain 30	—												
RJV 122 31	<1												

EFFICIENCY LINE® 22-210

Rejuvenation Batch Tests

MPERT 01-10-01

5 4/2/03 0924 19:41 Made 500 mL of NaOAc Buffer (JACKSON recipe)
41 g NaOAc and 18.5 mL glacial Ac. Acid in 500 mL

20:00 pH of NaOAc Buffer = 4.95 (Should be 5 - close enough)

Testing to see if NaOAc Buffer removes calcite from ZVI w/o removing Fe

	Tube #	Granular (g)	Calcite Powder (g)	Phase Buffer	Start Time	Stop Time	Time Shake (HR)	Cu mg/L	Fe mg/L	Final pH
RJV-B1	1	0	50 mg	50 mL	2016 4/2/03	4/3/03 10:22	~14	352*	1.01	5.01
RJV-B2	2	2.0	0	↓	↓	4/3/03 10:22	~14	102	2650	5.10
RJV-B3	3	2.0	0	↓	↓	4/3/03 16:54	~20	92	3270	5.14
RJV-B4	4	2.0	0	↓	↓	4/4/03 11:38	~39	76	6020	5.36

5 4/3/03 Tubes # 2, 3, 4 (those w/ granular ZVI) had pressured up and leaked slightly
Removed # 1 and 2 Centrifuged @ 3820 rpm for 22 min. Decanted ~15 mL and Added 100 mL conc HNO3
Appears to be a small amount of powder in Tube 1 (why didn't it pressure up?)
Must be H_2 that is causing P buildup.

pH of Conc. Glacial Acetic Acid = 0.25, Does not fizz when powdered calcite added

16:54 Tubes 3 and 4 pressured up and leaked - released pressure
Centrifuged tube 3 20 min @ 3820 rpm. Preserved (after decanting) with 100 mL HNO_3

1731 Made EDTA Solution 100 mg EDTA in 50 mL DI (~0.005M). Looks like it dissolved immediately. pH = 10.57 Added 100 mg powdered $CaCO_3$.
Placed on stir bar 1737. (Cloudy (i.e. $CaCO_3$ has not dissolved)

5 4/4/03 1138 Tube #4 had pressured up and leaked again
Centrifuged Tube #4, EDTA + $CaCO_3$, and HOAc + Calcite 20 min @ 3820 RPM

RJV-B5	EDTA + Calcite: There is undissolved powder in the EDTA									pH = [illegible]			Cu = 175 mg/L	Fe = 0.41
RJV-B6	HOAc + Calcite: " " " " " " HOAc									pH = 0.28			Cu = 50 mg/L	Fe = 1.01

EFFICIENCY LINE® 22-210

MPERT 01-10-02

3/5/03 0701 Tubes 2, 3, 4 (w/grav ZVI), after centrifugation have turned red

RJV-01 * NaOAc Buffer (50mL) had 352 mg/L Ca

0.050 L × 352 mg/L = 17.6 mg

17.6 mg Ca × 100 mg $CaCO_3$ / 40 mg Ca = 44 mg $CaCO_3$ (44/50 = 88% dissolved)

RJV-B5 EDTA (50mL) had 175 mg/L Ca

0.050 L × 175 mg/L = 8.75 mg Ca

8.75 mg Ca × 100 mg $CaCO_3$ / 40 mg Ca = 21.9 mg $CaCO_3$ (21.9/100 = 21.9% dissolved)

3/7/03 0645 made solution of EDTA, tetra sodium salt Baker I693-7

FW = 416.2 $(NaOCOCH_2)_2NCH_2CH_2N(CH_2COONa)_2 \cdot 2H_2O$

0.25 M = 0.25 × 416.2 = 104 g/L

0.10 M = 41.62 g/L

MADE 1L of 0.10 M. Solution had yellow cast. pH = 10.85

	0.1M EDTA	gr Au/ZVI	START time	START pH	CONC NaCl	END date	FINAL pH	Ca (mg/L)	Fe (mg/L)	Sulfate (mg/L)
RJV B7	50 mL	2g	0753	10.85	0	4/9/03 1640	11.02	145	84	9
RJV B8	50 mL	2g	0753	9.05	270	"	9.70	242	940	"
RJV B9	50 mL	2g	0753	6.88	550	"	8.25	142	1165	"

* END over END

** Solution - no grav/ZVI

MPERT 01-10-03

5/7/03	1640	Removed RJV B7 - B9 from shaker. Centrifuged 20 m at 3780 RPm											
		No pressuring (ie no leakage, no swelling caps)											
5/8/03	0725	Prepared new leach tests:											
		0.1M EDTA	Material (1g each)			Start Time	Stop Time	Shake Time (hr)	Final pH	Ca (mg/L)	Fe (mg/L)		
	RJV B10	50 mL	$CaCO_3$ Powder			0742	0516	1.5	11.11	5820	0.36		
	RJV B11		ZVI -6 +10 (Mont)						11.13	1.67	80		
	RJV B12		~~Fe(OH)$_3$~~ Hematite						10.76	2.38	1.21		
	RJV B13	50 mL	MAGNETITE	ALE					10.85	15.4	4.88		
	ALL tubes had residual solids after treatment.												
	1516	D/C Samples from Shaker. Centrifuged 3780 RPm 22 mins											
	0.1 M NaOAc	FW = 82.03	(Aldrich 241245)			8.2 g/L			made 1L. pH = 7.32				
5/9/03	Analyzed Ca and Fe.												
5/10/03	0735	Made new batches with EDTA (different concentrations) + 1g Calcite powder + 1g ZVI -6 +10 (Mont). End over End											
		50 mL	1g Calcite	1g ZVI		Start Time	Stop Time	Shake Time (hr)	Final pH	Ca (mg/L)	Fe (mg/L)		
	RJV B14	0.1 M EDTA						2.5	11.11	[illegible]	5.20		
	RJV B15	0.05M EDTA							11.06	1970	4.10		
	RJV B16	0.025M EDTA							10.90	930	[illegible]		
	RJV B17	0.1M NaOAc*							9.64	10.4	0.69		
	* pH 7.32 (no HOAc)												
5/11/03	1215	D/C shaker. Centrifuged 40 min @ 3780 RPm											

EFFICIENCY LINE® 22-210

Phase II - Rejuvenation Extractions

MPERT 01-10-04 PJT

9/30/03 Set up. Precision Model 25 Temperature controlled shaker bath. Using 500 mL - glass erlenmeyer flasks. Bath will hold up to 16 flasks. Powdered NOAH AFO (DRIED) in mortar/pestle. This (DRIED NOAH AFO) was made 9/18/00 BY DRYING NOAH AFO SLURRY on bread pans. Made solution of 0.2M Ammonium oxalate and 0.2M oxalic acid. Mixed these together (see ESL Proc) to yield pH 3 (400 mL Am-Ox + 300 mL Ox Acid). Call this Amm. Oxalate - pH 3. Set temperature bath to 25°C (distilled H_2O - says not to use deionized H_2O). EDTA solution was made 5/7/03 from Baker EDTA Tetrasodium Salt Dihydrate. pH = 10.71, cond = 18,470 uS/cm

Amm. Oxalate pH 3 Cond. 20,300 uS/cm

Flask	Sample No. (40 mL)	2 L 8 WD (40 mL)	Solid (0.5 g)	pH initial	pH final	Cond initial (uS/cm)	Cond final	mg/L Ca	mg/L Fe	Eff. Color	Shake Time
1	RE 12 - 1	0.1M EDTA (Na Dithionite)	NOAH AFO Powder	10.714	5.85	18,470	16,130	21.0	434	clear	2 hr
2	13 - 2		Hematite Powder	4.53	4.83	15,960	15,960	0.40	260	lgt. susp. pink	
3	14 - 3		magnetite powder		4.11		15,960	2.12	204	Clear	
4	15 - 4		Fisher 40 mesh ZVI		3.75		15,910	0.26	140	Clear	
5	16 - 5		Calcite Powder		4.22		16,070	170	0.50	Clear	
6	17 - 6	0.2M Amm. Oxalate - pH 3 (in dark)	NOAH AFO Powder	3	3.18	20,300	20,100	<0.1	394	green/yel.	
7	18 - 7		Hematite Powder		3.05		20,100	0.31	~~<0.1~~ 19.1	pink	
8	19 - 8		magnetite powder		3.13		20,100	0.45	~~19.1~~ 344	lgt. green	
9	20 - 9		Fisher 40 mesh ZVI		3.12		20,200	0.18	98	"	
10	21 - 10		Calcite Powder		3.14		20,200	0.50	0.48	clear	

STARTED SHAKE 10/1/03 @ 0644 * Shaker bath keeps them in the dark

Stopped 10/1/03 @ 0844 Shaker at 60 RPM

24 Solid materials

(17) NOAH AFO Powder - see above

(32) Hematite Powder - Fisher Fe_2O_3 Ferric Oxide Red-Anhydrous I116-3, XRD confirmed hematite

(37) MAGNETITE Powder - ACE A-310, magnetic ferric oxide black; XRD confirmed as magnetite

(44) Fisher 40 mesh ZVI - Fisher Iron Metal, Filings About 40 mesh, I57-500

(50) CALCITE powder - Aldrich 23,921-6 $CaCO_3$; confirmed as calcite by XRD

30

Made 0.1 m Sodium Dithionite (Cond = 15,650 uS/cm, pH = 4.53)

EFFICIENCY LINE® 22-210

MPERT 01-10-05

	10/1/03	2	3	4	5	6	7	8	9	10	11	12	13
1	0844	Stopped shaker bath. Decant into 50mL plastic centrifuge tubes.											
2		Centrifuged 20 m @ 3500 RPM											
3													
4		Analyzed for Ca and Fe by AA											
5													
6													
7													
8													
9													
10													
11													
12													
13													
14													
15													
16													
17													
18													
19													
20													
21													
22													
23													
24													
25													
26													
27													
28													
29													
30													
31													

EFFICIENCY LINE® 22-210

Rejuvenation Tests

MPERT 01-10-06

10/2/03

0813 Prepared 0.3 M Na-citrate (pH = 8.40); 1 M $NaHCO_3$ (pH = 7.95)

Mixture of 200 mL 0.3 M Na-citrate + [redacted] $NaHCO_3$ (pH = 8.16)

Mixture of 200 mL 0.3 M Na-citrate + 25 mL 1 M $NaHCO_3$ + 3.917 g Na Dithionite (pH = 6.98)

Fizzes when dithionite is added [redacted] (0.1 M [redacted])

Flask	Sample No.	Liquid (40 mL)	Solid*	pH[c]	pH[f]	Ca (mg/L)	[redacted] (mg/L)	Shaking Time (hr)	Controlled Temp.
1	RE-11	0.3 M Na-citrate + 1 M $NaHCO_3$ (RATIO 1:0.5 mL)	NOAH AFO [redacted]	[redacted]	8.49	63.0	[redacted]	[redacted]	25°C
2	-12		Hematite Powder		8.41	2.08	0.58		
3	-13		magnet[redacted]		8.44	16.4	1.45		
4	-14		Fisher 40 mesh ZVI		8.57	1.44	68		
5	-15		Ca[redacted]		8.68	246.5	0.15		
6	-16	Same as RE-11 - 15 but + 3.917 g Na Dithionite	NOAH AFO Powder	6.98	7.44	62.8	1050		
7	-17		Hematite Powder		7.19	2.41	405		
8	-18		Magnetite Powder		7.08	13.0	235		
9	-19		Fisher 40 mesh ZVI		7.08	1.49	150		
10	-20		Calcite Powder		7.13	209	0.40		

*See previous day chart for product designations

0841 Start shaking in T-controlled bath 60 RPM

1022 Stopped shaker. Decanted into 50 mL plastic centrifuge tubes. Centrifuged 20 m @ 350 RPM

RE-16 AFO w/ dithionite turned brown (Fe being reduced); however, hematite RE-2 does not appear to have been reduced.

AMPAD EFFICIENCY LINE® 22-210

MPERT 01-10-07

10/3/03

Made 0.05 M EDTA Tetrasodium Salt Solution (20.81 g/L) pH = 10.92

Made mixture of 0.05M EDTA 50% and 0.1M Na. Dithion. 50% pH = 6.97

Flask	Sample No.	Liquid (40mL)	Solids	pH	Eh	Ca mg/L	Fe mg/L	Shake Time (min)	Centrifuged
1	RE-21	0.05M EDTA (Tetra)	NOAH AFO Powder	10.93	10.61	52.5	11.2	2	25°C
2	-22		Hematite Powder		10.79	1.88	0.66		
3	-23		MAGNETIT Powder		10.82	7.9	1.22		
4	-24		Fisher 40 ZVI		[illegible]	1.45	24.0		
5	-25		CALCITE Powder		10.92	288	0.14		
6	-26	200 mL 0.05 EDTA + 65mL 0.1M Na-DTH	NOAH AFO Powder	9.17	9.30	4.9	12.5		
7	-27		Hematite Powder		9.25	1.76	0.64		
8	-28		magnetite Powder		9.23	5.8	1.45		
9	-29		Fisher 40 ZVI		9.37	1.16	107.5		
10	-30		Calcite Powder		9.36	236	<0.1		

Started shaking (60 RPM) 0704 10/6/03. Stopped 0904 (2 Hr). Centri. @ 3500 RPM, 20 min Decanted

10/03/03 0839 Titration of 0.1 M EDTA (Tetra) w/ 0.1 M Na Dithionite (Start w/ 200 mL of EDTA)

Add	Add Na DTH (mL)	pH	Add.	Cum	pH	Add	Cum	pH
0	0	10.74	5	20	10.13	10	90	9.36
1	1	10.70	10	30	9.97	10	100	9.28
2	3	10.60	10	40	9.84	10	110	9.20
2	5	10.53	10	50	9.73	20	130	9.02
5	10	10.36	10	60	9.63	20	150	8.83
5	15	10.24	10	70	9.54	20	170	8.59
			10	80	9.45	20	190	8.26
						10	200	8.07

AMPAD EFFICIENCY LINE® 22-210

mPERT-01-10-08

10/6/03* Made 200 mL 0.05 EDTA (Tetra-Na) + 65 mL 0.1 M Na-Dithionite (pH = 9.17)
This solution is based on the titration (see mPERT-01-10-07) to achieve approx. pH 9. The thought is that since EDTA (pH 10.93) is effective at removing Ca but also removes some Fe; perhaps by adding a reductant (Na-Dith) the proportion of Fe corrosion would be reduced.

10/7/03* Made solutions for next tests:

Soln 10-7-1 1M Hydroxylamine Hydrochloride in 25% Acetic acid (see Landa 1982)
pH = 1.48

Soln 10-7-2 200 mL 0.3 M Na Citrate, 25 mL 1M K_2CO_3, 3.917 g Na-Dithionite
pH (before Na Dith) = [illegible]
pH (after Na Dith) = 9.70

START Shaker @ 15:35 10/7/03
Stop Shaker @ 17:35 10/7/03

Flask	Sample NO	Liquid (40 mL)	Solid*	pH i	pH f	Ca (mg/L)	Fe (mg/L)	Shaker Time	Controlled T °C	
1	RE-31	200 mL 0.3 M Na Citrate, 25 mL 1M K_2CO_3, 3.917 g Na-Dithionite	NOAH AFO Powder	9.70	8.58	36.6	378	2 hr	25	
2	-32		Hematite Powder		[illegible]	1.46	69			
3	-33		Magnetite Powder		8.63	4.38	75			
4	-34		Fisher 40 mesh ZVI		[illegible]	0.85	100			
5	-35		Calcite Powder		8.44	23.4	0.75			
6	-36	1M Hydroxylamine hydrochloride in 25% Acetic Acid	NOAH AFO Powder	1.48	1.52	46.8	185			
7	-37		Hematite Powder		1.32	0.96	2.51			
8	-38		Magnetite Powder		1.33	3.37	13.3			
9	-39		Fisher 40 mesh ZVI		2.20	0.33	2160			
10	-40		Calcite Powder		2.67	5620	1.33			* Formed - nearly overflowed

EFFICIENCY LINE® 22-210

MPERT-01-10-09

10-9-03

Results to date suggest that EDTA is good at removing calcite but not good at removing Fe-oxide corrosion products. Na-Citrate + Dithionite appears to be good at removing Fe oxides. High pH appears to minimize ZVI removal.

Therefore we will try mixing Na-Citrate EDTA and Dithionite.

10:03 Start with 200 mL EDTA (1M), pH = 11.85

Added 4g Na-Dith, pH = 9.13

Added 100 mL EDTA (1M), pH = 11.40

Added 100 mL EDTA (0.1M), pH = 9.58

Added 1g EDTA, pH = 9.58

Added 9g EDTA, pH = 9.69

Solution Composition:

400 mL EDTA, 41.62g/L = 16.648g

110g = 26.648g EDTA

$\frac{26.648g}{.4L} = 66.62g/L \times \frac{mol}{416.2g} = 0.16M$ EDTA

$\frac{4g\ DTH}{.4L} \times \frac{mol}{174\ 1g} = 0.057M$ DTH

FLASK	Sample No	Liquid (40mL)	Solid*	pH i	pH f	Ca mg/L	Fe mg/L	SHAKE Time	Controlled T.o.C
1	RE-41	0.1M EDTA (Tetra Na)	NOAH AFO Powder	10.95	10.66	59.5	10.8	2hr	25
2	-42		Hematite Powder		10.80	2.15	0.53		
3	-43		MAGNETITE Powder		10.85	9.0	1.76		
4	-44		Fisher 40 mesh ZVI		10.97	1.6	26.6		
5	-45		CALCITE Powder		10.88	253	0.34		
6	-46	0.16M EDTA (Tet. Na) 0.057M DTH.	NOAH AFO Powder	9.69	9.21	37	167		
7	-47		Hematite Powder		9.19	2.04	121		
8	-48		magnetite Powder		9.16	8.7	118		
9	-49		Fisher 40 mesh ZVI		9.16	1.9	106		
10	-50		CALCITE Powder		9.20	182	0.53		

Started shaker 12:41 10/9/03

Stopped " 14:41 10/9/03

EFFICIENCY LINE® 22-210

EPA PRB Drilling

MPERT02-01-01

1

0745 6/19/03 Offset between PE5 + PE6, attempt to sample virgin material not sampled 2/02.
- Push w/ open tube, to 9' easy push
- Collapses to ~6' => DTW
- Push closed tube to 12' easy push
- Pin released early during push
- Pull + re-[illegible]
Push to 11.5 w/ closed tube — becomes difficult @ 11.5'
Pull pin @ 11.5'
Pushed to 15.5' — easy push

0850 Bedrock @ 14 ft
Collected PE5' sample ~12.1' to 14'.
Hole PE5' is 0.5' east of PE5.

0900 Offset rig ~1' north of original sample transect
Start PE4
0-3.5' discard soil backfill + dry firm
3.5-6.5' recovery easy push with ZVI; collapse to 5.5'
~~6.5-9.5'~~ closed pin
6-10' 6-inch recovery easy push
Closed pin push to 10' Pull pin @ 10/11
Push 10 to 14' easy push v easy @ ~13-14'
Bedrock @ ~13.5' gray/black mudstone

0945 Set up on PE3 PE2
0-3.5 backfill to ~3' dry ZVI 2.5-3.5'
3.5-6.5' Open tube push poor recovery ZVI + pea gravel mix
Rename hole PE-2
3.5-6.5 ~~9.5~~ Closed tube push — Not difficult push.
6.5-7.5 Open pin [illegible] to collect sample
- Pin [illegible] 3.5 + 6.5' Pull tools.

EFFICIENCY LINE® 22-210

MPERT-02-01-02 2

8/19/03

1025 Continue PE2 - thread problems w/ top cap
Resume
~~3.5-6.5 closed tube jack to~~ abort too dense to push

1115 PE3 - 0-3.5' backfill to 3' dry ZVI 3-3.5
3.5-~~7.0~~ ~~open tube~~ discard
6.5-9.5 discard top 6" sample
9-12.5 discard top 6" sample
3 attempts to clean hole + drive w/ closed tube >12' not successful
~~Sta~~ Insert 2.25 in probe rod to 7' then drive - no sampling tool.

1345 7-14 Recovered 4'
Saving sample from 12.5 to 14' ~~#6,7~~ 6,7,8

1400 Resume at PE2 2.25" rods w/o sampler
Drive to 14'

1500 Move to PE1 2.25" rod from ~4' to TD
Refusal @ ~9-10' w/ 3' of sample in rod
Retrieved single sample 25 ft ~ 8" 6" compact/moist ZVI/gravel

1620 Move to PE9 0-3.5 backfill discard
3.5-6.5 cobbles
6.5-9.5 sample
9-12.5 [illegible]
12.5-14 [illegible] sample

EFFICIENCY LINE® 22-210

3

MPERT02-01-03

8/20/03 Set upon PE-20 ~1' E of PE-9 Push to 6.5 discard

Sample 6.5-9.5

no sample 9.5-12.5

back to 9.5-14 Bk @ 13.5

8/20/03 Setup on PE-13 (~6" so of original flag) push to 3.5 discard

Sample 3.5-6.5 per Paul M. 0-3

6.5-11 5 samples 4-8

11-14 no recovery

11-14 Trip back down hole - 3 samples 9-11 - Sample 9 short by 3"

1040 Set upon PE-14 - (6" so of original flag) push to 3.5 ZVI @ 3'

0→3.5 discard

3.5→7 samples 1-5

7-11 samples

11-13 7-9 Block @ 13

1245 Set upon PE11 (6" so of original flag) push to 3.5 discard

0→3.5 discard

3.5-6.5 ZVI @ 5 3 samples 1st day

6.5-10 5 samples #8 short sample

Trip back down - stop @ 9' can't go further

Move 6" south PE22 (open per P. Mitchove)

attempt to go to 16' to duplicate PE11, refusal @ 9

D/C attempt.

Move 6" east (1' south 8" east of original PE11 flag) PE23

0-3.5 discard

3.5-8 5 samples

EFFICIENCY LINE® 22-210

4

MPERT02-01-04

8/20/03	PE13 cont	12 – 13.5		4 samples		#13 @ 4"			just tag bedrock @ 13.5				
	PE20	move 8" east of flag		0-3.5 discard 3.5-7 3 samples into sand pack from TW14									
	PE24	move 24" south of PE20		0-3.5 discard 3.5-6.5 1-5 dry @ top ~2" fill discarded 6.5 10 6-10 6-9 10 – 13 11-16 10-16 16 ~2" tag BR ~1/2"									
8/25	PE19	as marked on map		0-3.5 discard 3.5-13 continuous coring ~~3 samples 1-7~~ dry @ top black bottom									
8/00	PE17	as marked on map		0-3.5 discard 3.5-13 ~~[illegible] samples~~									
8/21/03	PE16	~~as marked on map~~		0-3.5 ~~[illegible]~~ 3.5-13.5 continuous push 15 SAMPLES									
	PE10	6" south of original mark		3.5 – 14 Continuous push 11 Samples									

EFFICIENCY LINE® 22-210

MPERT02-01-05

8/21/03

PE14
0-3.5 discard
3.5-14 continuous push 6' core recovered 9 samples
6" south of original point 1st foot of core (top, samples 1,2) look like sandpaper

PE15 6" south of original point
0-3.5 discard
3.5-14 continuous push 5' core recovery samples 1-8
some fine sorted sand 1st 2 samples

PE18 as marked on map (should be 6" inside ZVI) use continuous push,
no sample sleeves
0-3.5 discard
3.5-14 18 samples

PE7 as marked on map 0-3.5 discard
3.5-13.2 continuous core ~ 4' core recovered
8 samples

PE8 6" south of ~~as~~ marked on map. 9 samples

PEA1 Measure 0.5' W of PE14 then 4' south then 3.8' W
set azimuth @ 70/60°

EFFICIENCY LINE® 22-210

6

MPERT02-01-06

8/21/03: PEA1 Cont. Continuous push on 12' recover 7.5 feet.

Bags 1-3 ZV1 3 contact & G/ZV1 Dist sample
4,5,6,7 G/ZV1
8 contact soil / G/ZV1

Remember 1 = contact soil / G
2,3,4,5 G/ZV1
6,7,8 ZV1



send sampler & sleeve @ 12' - 16'

PEA2 core sample with sleeves. Take samples starting from Ground surface.
0.6' west RZW7, 4.6' south, then 3.8' west

EFFICIENCY LINE® 22-210

MPERT02-01-07 7

8/22 Move to new location PEAT 3. Hole is 5.5' N of RIMS 60° angle

Effort is to try new dual wall sampling tubes

Well push 1st 4' with 2" tool.

put new runner assembly ~~down~~ drive to 8' Only 1' recovery into Gravel

Switch to 2" core c̄ 1" tip. drive to 13' 4 samples

1 G/ZVI Contact

2-4 ZVI

Move to PEAT hole is 6' south, 1'½ East of RIMS 58° angle

Continuous push from surface c̄ 2" pipe, ~~to~~ to 11'6"

8 samples 1 = soil

2,3 = soil/G interface

4-6 G

7,8 ZVI

EFFICIENCY LINE® 22-210

Monticello EPA - PHASE II
Borehole Dilution Tests MERT02-02-01

①

8-13-03 Worked all day developing apparatus for tests. Got electrical interference from computer + mV meter w/ Orion data collect. Went to Vernier data collect system = no interference.

8-14-03 Calibration: File = ~~calibration Br1~~. Br probe #2 (Cole-Palmer)

Br Conc (in DI)	mV
0	+133
1	+133
10	+91
100	+31
1000	-25

FIRST TRIAL

0835 LAB TEST of System File = "in1AB_2". 100 mL/min

Circulated tap water ~130 mV, fairly steady for 16 min

At ~~16~~ 18 min injected 60 mL of 10,000 mg/L Br.

Ends of Tubes are separated by 5". Top flow 1"

PVC casing in 4" column. No sand - only H_2O.

~52 min - Removed outflow tube (to start dilution). Conc decreasing, apparently mixing was limited w/ water outside of pipe

70.6 min - Added TAP WATER (~Went down - hot water?)

91.8 min - added "

~118 min - Added mQ

~165 - went Down. Added mQ

~169 - start recirculation



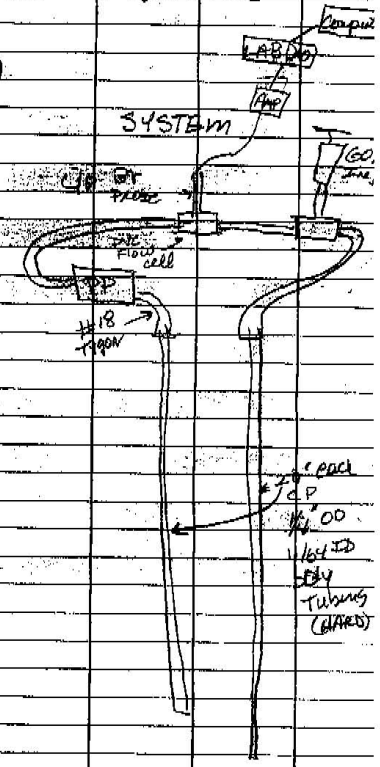

EFFICIENCY LINE® 22-210

(2)

MPERT02-02-02

11:24 Calibration: File = Calibrate_Br2

Log Time (min)		Volume (ml)
0 – 11	mili-Q	~170 (dropping)
11 – 17	1 mg/L Br	18
17 – 21	10 mg/L Br	90
21 – 24	100 mg/L Br	29
24 – 27.5	1000 mg/L Br	-26
27.5 – 30	10000 mg/L Br	-33
~30	10000 mg/L Br (E)	-81
30 – 33	10000 mg/L Br (F)	-81
	10000 mg/L Br (G)	-81
33 – 36	1000 mg/L	-28
36 – 41	MQ	+137
41 – 45	Cold TAP H_2O	+143
45 – 48	Hot TAP H_2O (cold)	+151

(mV) = -55.2 (log Br) + 140.6

R^2 = 0.999

12:22 2nd Trial: MQ, same set up as 1st Trial but up flow instead of down flow

File = TILLAB_3 Probe #2 ~100 mL/min pump rate

Circulating (Log time 0 – 62 min; constant @ 138 mV)

Inject 60 mL of 10,000 mg/L Br @ 62 min. - as exact as possible

62.744 min = First Arrival 2.744 min ÷ 274 mL of Dead Space (6" separation)

66.2 min = -40 mV Bottomed Out (~2000 mg/L ?)

100 mins – removed outflow (start purging)

pushed inflow to bottom.

[illegible] mins – Added 2L MQ

EFFICIENCY LINE® 22-210

MPERT02-02-03

(3)

143 mins removed probe; Calibrate w/ 10 mg/L Br. 86 mV (not bad)
150 mins Back on line. Went back to valve before calibn. so appears to be functioning fine.

165 mins Added 3 1/2 L mQ Brought system to 114 mV (~8 ppm)
203 mins Added 3 L mQ

16:00 Check 100 mg/L Br calibration = 286 mV (good)

Start new Test (3rd Lab Trial) File = INLAB_4

14 min Inject 60 mL 10,000 mg/L (Probe came out (forgot to shut pump off).
45.3 min Removed Outlet. Pushed Inlet to bottom - Start flush.

8/15/05 Tried an OMNI glass column for injection. The injection did not go as plug flow - there must be a preferential flow path through the middle. Need a smaller diameter

Tried using a coil of #15 Tygon

EFFICIENCY LINE® 22-210

MPERT02-02-04

(4)

8/18/03

0932 Start R5-M10 - BH dilution test. Water in surface cracking - oil film.

CALIBRATION Probe #2 File = CALIBRATE 3R3

mg/L Br	mV
0	140
1	126
10	81
100	25
1000	-29
10000	-82
1000	-32

mV

Solid kept on file for

mg/L Br	Site water	mV
1000	Site water	-34
10,000	"	-86

temp difference

(mV) = -52.4 (log Br) + 128.8

R^2 = 0.9986

Inlet positioned at 14.4', outlet at 11.4' in testing top 3' of screen

Made site water standard. Water very gacy (not filtered)

File = R5M10a Pump Rate 250 mL/min. Using syring injector

10:00 INJECT @ 10.7 mins. Contained red food color.
60 mL of 10,000 mg/L Br

112 mins Pushed in-tube to 16 ft (from 14.4)
We lift the sampling tube in so will need to do this time.

130 mins. Pulled sampling tube out.
145 mins. Steady signal ~-15 mV. Shut down.

Flushed tubing w/ DI to Decon



EFFICIENCY LINE® 22-210

MPERT 02-02-05

(5)

(ie top 3' of screen)

13:30 R2/m10 Inlet 13', Outlet 10' 230 ml/min File = R2M10a

Inject 60 mL 10,000 mg/L Br w/ Food color.

21.2 mins Injection of Br

15:06 94.8 mins stopped -96 mV constant

Well R5mQa Inject at 15.1 mins 15:31 60 mL 10,000 mg/L Br + red Food color

258 230 mL/min Top at 9.6' Bottom at 12.6' ie

Top 3' of screen. File = R5mQa

61.7 mins shut down 27 mV steady

16:25 Well R2mQ. File R2mQa. Inj. 60 mL of 10,000 mg/L Br + red food color

Top at 9.6' Bottom at 12.6' ie top 3' of screen.

Start Inj @ 20.0 mins (16:45)

8-19-03 Calibration of Probe #2

Br (mg/L) DI	mV
0	139
1	124
10	78
100	21
1000	-34
10000	-85
[illegible]	-35

(mV) = -53 (Log Br) + 126.8

R^2 = 0.999

EFFICIENCY LINE® 22-210

MPERT 02-02-06

(6)

Well R5M8

0825 Start circulating. Start Data logger 0825. File = R5M8a. Probe #2

Log 335 time min 0859 - Inject 120 ml of 10,000 mg/L Br. + Red Food color
Injection at 12.9 ft, Outlet @ 7.9 ft (ie full 5' of screen)

~~1210~~ 1225 log time 241.383 DC experiment I

Well R2M8 probe #2 with Vernier. tubing @ 7.6' and 12.6' pumped @ 3 gal/min

1250 Inject 120 ml @ 12.6' (with red food coloring) 10,000 mg/L Br
log time 9.5

1310 DC experiment I Log time 148.480

Well R5M7

1515 Start circulating, Start data logger file R5M7a, Probe #2

1530 Inject 120 ml of 10,000 mg/L Br + Red food color
Inject @ 13.11', outlet @ 8.11'

~~1530~~ Log time 12.999 inject.

1713 Stopped log time ~ 118 min

Well R2M7a Probe #2, Injection 120 ml 10,000 mg/L Br + Food color

1723 Started circulating Inlet at screen top bottom

1729 " data logger Outlet at " top

1925 Shut down (log time ~ 115 min)

EFFICIENCY LINE® 22-210

MPERT02-02-07

(3)

8/20/03	Cal Probe 2		Calibrate Br 5										
0930		-MV											
	MQ=0	145											
	1	130											
	10	80											
	100	20											
	1000	-33											
	10000	-82											
0945	Start circulation RSM1 file = RSM1a. Start called 0947												
	100S inject Cosfume 18.115 inject 120ml 10,000mg/L Br & Red food color												
	pump set @ 230 ml/min (actual probably ~75ml)												
1600	D/c Data collect Cosfume 373												
	restart immediately to RSM1b @ 1602												
1800	D/c data collect Cosfume 117.496												
8/21/03	Cal probe #2		Calibrate Br 6										
		MV											
	MQ=0	146											
	1	~~146~~ 118											
	10	118 71											
	100	~~8~~ 18											
	1000	18 -35											
	10000	-85											

EFFICIENCY LINE® 22-210

By Tracy

MAERT02-02-08

(8)

		1	2	3	4	5	6	7	8	9	10	11	12	13
8/21/03	1	Start circulation RZM1 0857 file RZM1 Alert called @ 0858												
	2	0907 log time 14.399 inject 120 ml 10,000 mg/l Br Fred food color												
	4													
	5	pump set @ 230 ml min												
	6													
	7	1503 070.550 log time off RZM1 1505 restarted RZM1 B.												
	8													
	9	1710 124.214 shutdown rain												
	10													
	11													
	12													
	13													
	14													
	15													
	16													
	17													
	18													
	19													
	20													
	21													
	22													
	23													
	24													
	25													
	26													
	27													
	28													
	29													
	30													
	31													

MPERT02-02-089 Sm

(9)

8-27-03 CALIBRATION

	BR	PROBE 2 (Output 1) 287	PROBE 3 Output 2	PROBE 4 Output 3	PROBE 5 Output 4
		[CALIBRATION-OR8]		[CALIBRATION-OR8]	
~11:00	0	129	97	123	119
	1	129	103	160	161
	10	90	73	125	125
	100	37	24	58	58
	1000	-14	-30	27	25
	10,000	-59	-77	-56	-56

(mV) = -48(Br) + 1326 R^2 = 0.9979

(mV) = -46.3(Br) + 111.2 R^2 = 0.9908

(mV) = ~~-55.2(Br) + 168.6~~ R^2 = 0.9995

(mV) = -55.65(Br) + 169.4 R^2 = 0.9934

(mV) = -55.43(Br) + 168.5 R^2 = 0.9928

PROBE #1 is leaking Cell soln.

Honda generator stopped. Running off Schlosser's power.

Raining

15:00 Stopped raining

15:19 Set up for 1ST 4 tests. Joe went for electrical cords.

File = AUG27_1

channel	well	Probe
2	R5 m10	2
1	R5 m9	3
3	R5 m8	4
4	R5 m7	5

~16:07 started circulating. The injector on R5m10 was left open so 60 ml went in.

17:13 (240 log time) exp. stopped

MPERT 02-02-10

8-28-03 0746 Set up for 4 wells. File = Aug 28_1 (Logger Pro file)

Channel	Well	Probe
1	R5 m9	2
2	R5 m8	3
3	R5 m7	4
4	R5 m6	5

0750 Started pumps ~~Logtime 0:3~~.
0812 (Logtime 12.5 at end of injection) injected 120mL of 10,000 mg/L Br- into each well. Took about 2.5 mins. Started with R5m9, then R5m8, R5[redacted]m6.
Pumps set at 220mL/min. Channels 1-2 record data from 1 pump (2 heads per pump). Used 25' cable [redacted] Br probes to data acquisition module (Vernier) via electrode amplifiers.

R5m6 appears to be getting lighter (less red - more pink) in color. consistent with faster release of [redacted]

12:24 (Logtime 264 mins) Stopped experiment

13:14 (Logtime 0) Started new test File = Aug 28_2 (Logger Pro file)

Channel	Well	Probe
1	R2 m9	2
2	R2 m8	3
3	R2 m7	4
4	R2 m6	5

13:31 (Logtime 17.5) Injected 120mL 10,000 mg/L Br (w/ red color) into each well. Started pumps at 1:31 (17.5)

R2M6 and R2M6 did not get nearly as red as the others. Consistent w/ less Br signals. Never mind! It just took longer.

14:09 (Log time 54) Probe 2 (channel 1) ran low on fill soln. Gave erratic signal. Refilled all probes

17:44 CALIBRATION_BRO

BR	Probe 2	3	4	5
0	148	9074	194	211
1	133	84	165	163
10	95	63	127	125
100	37	16	56	55
1000	-16	-34	-5.4	-5.6
10000	-63	-81	-59	-61

Probe	Equation	
#3	(mV) = -42.7(Br) + 95	R^2 = 0.9836
#2	(mV) = -50.3(Br) + 137.8	R^2 = 0.9965
#4	(mV) = -58.04(Br) + 172.8	R^2 = 0.9933
#5	(mV) = -57.86(Br) + 171	R^2 = 0.9936

8/29/03 Set up for 4 tests.

0814 (13.4 Log time) Injected 120 mL 10,000 mg/L Br (red) into each

0815 I had the valve turned wrong on channel 2. Line broke - repaired.

	Channel	Well	Probe
pink -	1	R5M5	2
deep orange -	2	R5M4	3
orange -	3	R5M3	4
some orange -	4	R5M2	5

File = aug29_1 (Logger Pro file)

R5M4 color is deep orange (Fe^3). R5M3 is also orange. R5M2 also but not as deep orange.

10:55 Stopped Test. (Log time 174)

MPERT02-02-12 (12)

11:25 New Test

Channel	Well	Probe
1	R2 m5	2
2	R2 m4	3
3	R2 m3	4
4	R2 m2	5

File = aug29_2 (Logger Pro file)

11:33 (LOG 8.3) Injected 120mL 10,000 mg/L Br (red) into each well
There was some air going into R2m2. Subdued signal may be due to air bubbles causing high Br to go up the well.

14:53 (LOG 208). Stopped.

CALIBRATION BR10 CAL BR10

Br	Probe 2	PROBE 3	PROBE 4	PROBE 5
0	124	66	174	195
1	125	68	144	151
10	87	55	119	120
100	33	13	51	52
1000	-19	-39	-5	3
10000	-69	-87	-64	-62

Probe		
2	(mV) = -49.4 (Br) + 130.2	R^2 = 0.9971
3	(mV) = -40.4 (Br) + 82.8	R^2 = 0.9665 *
4	(mV) = -54 (Br) + 157	R^2 = 0.9847
5	(mV) = -54.3 (Br) + 161.4	R^2 = 0.9888

* Use previous day's calibration!

EFFICIENCY LINE® 22-210

MPERT02-03-01

DP-1

Mont Pert Well Br⁻ tracer test: Measurements with Downhole Probe

	1	2	3	4	5	6	7	8	9	10	11	12	13
8/19/03 1	Cal Br probe #3				Hand-held meter 25' cord.								
0830 2	Br(mg/L)	DI	0890 mV	0920 mV	0950 mV	1342 mV	15:20 mV	1630 mV	1752 mV				
3	MQ =		~~mV~~ 175	160	156	126			126				
4	1		148	144	136	126			121				
5	10		117	110	100	93		91	95				
6	100		72	59	54	48	47	53	51				
7	1000		24	5	3.8	-1.8			0.5				
8	10000		-18	-41	-42	-50			-47				
9	1000	site H_2O											
10													
11													
12	Readings from	Wells											
13													
DATE 14	Time	Well	Depth	mV	Br(mg/L)								
8/19/03 15	0950	~~R2M10~~	10	185	0								
16		R5M9	12.5	250	0								
17			8	86	17								
18			7	90	14								
19	1003	R2M9	9	101	8								
20			11	268	0								
21			13	384	0								
22			14.5(Bot)	554	0								
23	10:09	R5M10	7	19	~~25~~								
24			8	78	25								
25			9	76	28								
26			10	178	0								
27			12	182	0								
28			14	253	0								
29	10:14	R2M10	7	106	7								
30			8	103	9								
31			9	[illegible]	[illegible]								
			10	216	0								

Data Invalid! Interference

c. (mV) = -43.05 (Log Br) + 130.2
R^2 = 0.9883

b. (mV) = -44.68 (Log Br) + 132.4
R^2 = 0.9947

a. (mV) = -46.22 Log (Br) + 140.8
R^2 = 0.997

EFFICIENCY LINE® 22-210

DP-2

MPERT02-03-02

	1	2	3	4	5	6	7	8	9	10	11	12	13
Date	Time	Well	Depth	mV									
8/19/03	14:02	R5M8	7	40									
			8	24									
			9	13									
			10	210									
			12	400									
			13	400									
	15:20	R2M8	7	40									
			8	40	Data invalid! Interference								
			9	31									
			10	200↑									
			12	300↑									
			13	330↑									
	15:23	R5M8	7	60									
			8	54									
			9	39									
			10	196									
			12	340↑									
			13	375↑									

16:42 Tape the hand held Br Probe (#3) to the downhole Tygon pumping on the R5M8 test. The probe (#3) read ~250 mV whereas the pumping probe (#2) read ~-3 mV. There is an interference. Removing the metal rod that #2 was attached to and place electrical tape over the BNC connector. Reading now 28 mV for #3. (still ~0.0 mV on #2.)

EFFICIENCY LINE® 22-210

DP-3

MPERT02-03-03

	1	2	3	4	5	6	7	8	9	10	11	12	13
Date	time	Well	Depth	mV		Date	Time	Well	Depth	mV			
8/19/03	17:27	R5 M7	7 ft	32		8/19/03	1808	R5M8	7	39			
			8	31			Screen		8	36			
			9	21			7.9' - 12.9'		9	29	mean = 48mV		
			10	15.5			INJ time =		10	58	(112 mg/L Br)		
			10.5	57			8/19/03 08:59		11	57			
	17:34	R5 M8	7 ft	42			(9.2 hrs)		12	62			
			8	40				Bottom	13	23			
			9	35									
			10	57			18:12	R2M8	7	47			
			11 -	65			Screen 7.6-12.6		8	58			
							INJ @		9	52			
	17:39	R2 M8	7	47			8/19/03 1250		10	105	mean = 91 mV		
			8	47			Time from Inj = 5.4		11	122	(12.6 mg/L Br)		
			9	40					12	118			
			10	80 +				Bottom	13	137			
			11	105 +									
			12	117 +			18:16	R5M7	7	31			
							Screen 8.1 - 13.1		8	33	242 mg/L Br		
	17:44	R5 M7	7	31			Inj @ 8/19/03		9	38			
			8	31			15:20		10	79	mean = 84 mV		
			9	32					11	103			
			10	69 +			Time from Inj = 2.76		12	122	(18 mg/L Br)		
			11 -	100 +					13	130			
									13.5 Bottom				
							18:21	R5M9	7	58			
							Screen		8	51			
							Inj @ 8/19/03		9	40			
							17:27		10	86	mean = 72.5 mV		
									11	83			
							Time from Inj = 26.8		12	88			
									13	87	14.5 Bottom		

EFFICIENCY LINE® 22-210

DP-4

MPERT 02-03-04

Date	1 Time	2 Well	3 Depth	4 mV	5	6 mV (Repeat)		8	9	10	11	12	13
8/19/03	18:25	R2m9	7	92		92							
Screen 9.6 – 14.6			8	85		86							
Circulation 9.6 – 12.6			9	75		83							
4 Inj. Time:			10	139	drift								
5 8/18/03	16:25		11	143	"		no						
6			12	223	"		Good						
7			13	237	"								
8			14	285	"								
9			14.7 Bot	158									
10													
11	18:31	R2m10	7	80									
12 Screen 10–15'			8	76									
13 Circulation 10–13'			9	61									
14			10	90		97							
Inj. Time =			11	93	mean =	97 mV							
16 8/18/03	13:30		12	109									
17			13	95									
Time Since Inj =			14	111									
19	29 hrs		15	110									
20			15.5 Bot	102									
21													
22	18:34	R5m10	7	69									
23			8	68									
24 Screen = 11.4 – 16.4			9	63									
25 Circulation = 11.4 – 14.4			10	84									
26 Inj. Time =			11	66									
27 8/18/03	10:00		12	66	mean = 73 mV								
28			13	77									
29 Time Since Inj =			14	83									
30	20.3		15	103									
31			16	123									

EFFICIENCY LINE® 22-210

a. (mV) = -45.02 (Br) + 143 R^2 = 0.9885

b. (mV) = -45.35 (Br) + 145.6 R^2 = 0.9908

c. (mV) = -44.7 (Br) + 148 R^2 = 0.9833

MPERT02-03-05

DP-5

	1	2			5	6 Date	7 Time	8 well	9 depth	10 mV	11	12	13
8/20/03 1	CAL Br	PROBE 43				✓8/20/03	9:00	R2 M9	7 ft	93			
2	Br (mg/L)	mV 8:15	mV 1345	mV 1720					8 ft	88			
8: 3	MQ	146	150	148					9	83			
4	1	134	137	137					10	168			
5	10	106	110	117					11	148			
6	100	61	58	62					12	210			
7	1000	3.8	8.5	10					13	236			
8	10000	-40	-39	-33					14	281			
9													
Date 10	Time	Well	Depth	mV		✓8/20/03	9:10	R5 M7	7	38			
✓8/20/03 11	8:36	R2-M10	7 ft	85					8	38			
12			8	79					9	40			
13			9	64					10	105			
14			10	93					11	117			
15			11	91					12	136			
16			12	101					13	152			
17			13	89									
18			14	98		✓8/20/03	9:19	R2 M7	7	71			
19			15	99					8	67			
20									9	75			
✓8/20/03 21	8:44	R5 M10	7 ft	69					10	153			
22			8	69					11	167			
23			9	62					12	198			
24			10	95					13	242			
25			11	85									
26			12	84		✓8/20/03	9:28	R5 M8	7	52			
27			13	92					8	51			
28			14	103					9	50			
29			15	129					10	79			
30			16	146					11	82.			
31									12	91			
									13	63.			

EFFICIENCY LINE® 22-210

DP-6

MPERT02-03-06

	1 time	2 well	3 depth	4 mV	5	6	7 time	8 well	9 depth	10 mV	11	12	13
1 ✓8/20/03	9:38	R2 M8	7 (+)	87		✓8/20/03	11:40	R5M10	7	71			
2			8	88					8	68			
3			9	90					9	62			
4			10	146					10	89			
5			11	174					11	83			
6			12	183					12	81			
7			13	205					13	92			
8									14	97			
9 ✓8/20/03	7:42	R5 M9	7	62					15	113			
10			8	53					16	123			
11			9	42									
12			10	84		✓8/20/03	11:55	~~R5M9~~	7	48			
13			11	92				R5M7	8	50			
14			12	100					9	52			
15			13	101					10	110			
16			14	122					11	122			
17									12	138			
18 ✓8/20/03	11:20	R2M7	7	73					13	150			
19			8	67					14	?			
20			9	51									
21			10	81		✓8/20/03	12:10	R2M7	7	66			
22			11	78					8	64			
23			12	86					9	72			
24			13	66					10	148			
25			14	89					11	162			
26			15	84					12	195			
27									13	[illegible]			
28													
29													
30													
31													

EFFICIENCY LINE® 22-210

DP-7

MPERT 02-03 -07

Date	1 Time	2 Well	3 Depth	4 mV	5	6	7 Date	8 Time	9 Well	10 Depth	11 mV	12	13
8/20/03	1230	R2M8	7	100			8/20/03	1530	R2M10	7	60		
✓			8	103		✓				8	46		
			9	100						9	32		
			10	155						10	172		
			11	185						11	173		
			12	200						12	199		
										13	197		
8/20/03	1252	R5M8	7	61						14	209		
✓			8	61						15	230		
			9	56									
			10	98			8/20/03	1600	R5M10	7	66		
			11	105			✓			8	62		
			12	119						9	54		
			13	97						10	126		
										11	119		
8/20/03	1307	R5M9	7	78						12	112		
✓		R5M9	8	68						13	123		
			9	58						14	140		
			10	103						15	130		
			11	107						16	150		
			12	116									
			13	123			8/20/03	1620	R5M9	7	75		
			14	152					R5M9	8	66		
										9	58		
8/20/03	1318	R2M9	7	110						10	107		
✓			8	104						11	106		
			9	101						12	117		
			10	177						13	126		
			11	183						14	150		
			12	211									
			13	[illegible]									
			14	300									

EFFICIENCY LINE® 22-210

MPERT02-03-08

DP-8

	Date	1 Time	2 Well	3 Depth	4 mV	5	6	7 Date	8 Time	9 Well	10 Depth	11 mV	12	13
1	8/20/03	1635	R2M9	7	114			8/20/03	1745	R2M7	7	77		
2	✓			8	107			✓			8	77		
3				9	104						9	88		
4				10	172						10	161		
5				11	152						11	170		
6				12	213						12	192		
7				13	243						13	255		
8				14	288									
9														
10	8/20/03	1650	R2M8	7	119									
11	✓			8	121									
12				9	119									
13				10	166									
14				11	192									
15				12	209									
16														
17	8/20/03	1705	R5M8	7	82									
18	✓			8	81									
19				9	81									
20				10	112									
21				11	122									
22				12	141									
23				13	124									
24														
25	8/20/03	1730	~~R5M9~~ R5M7	7	58									
26	✓			8	57									
27				9	58									
28				10	100									
29				11	107									
30				12	114									
31				13	[illegible]									
				14	[illegible]									

EFFICIENCY LINE® 22-210

~~2a. (mV) = -31.371 (Br) + 183.13 R^2 = 0.9968~~ (-37.6, 137) *used

~~b. (mV) = -39.96 (Br) + 158.26 R^2 = 0.9854~~

(mV) = -42.7 (Br) + 141 R^2 = 0.9788

~~c. mV = -36.9 (Br) + 137.4 R^2 = 0.967~~

MPERT02-03-09

DP-9

	1	2	3	4	5	6	7 Date	8 Time	9 Well	10 Depth	11 mV	12	13
8/21/03	CAL Br- PROBE #3												
	Br (mg/l)	mV 805	mV 1030	mV 1330	mV 1015								
	MQ	131	155	124	125								
	1	127	152	129	124								
	10	110	131	111	113								
	100	67	74	63	70								
	1000	22	35	8	30								
	10000	-17	0.7	-33	-19								
Date	Time	Well	Depth	mV									
8/21/03	825	~~RSM10~~	7	45									
✓		RSM1	8	47			8/21/03	925	RSM9	7	73		
			9	46						8	74		
			10	49						9	68		
			11	129						10	105		
			12	118						11	98		
			13	161						12	97		
			14	138						13	100		
			15	168						14	106		
✓	850	RZM10	7	87			8/21/03	940	RSM8	7	97		
			8	73						8	95		
			9	61						9	75		
			10	83						10	84		
			11	94						11	77		
			12	103						12	81		
			13	85						13	50		
			14	94									
			15	88									

EFFICIENCY LINE® 22-210

MPERT02-03-10 DP-10

Date	1 Time	2 Well	3 Depth	4 mV	5	6	7 Date	8 Time	9 Well	10 Depth	11 mV	12	13
8/21/03 1	1010	R5M1	7	40			8/21/03	1345	R5M1	7	29		
2			8	40						8	27		
3			9	40						9	27		
4			10	42						10	39		
5			11	103						11	151		
6			12	92						12	140		
7			13	110						13	158		
8			14	119						14	171		
9			15	138						15	204		
10													
8/21/03 11	1045	~~R5M2~~ R5M7	7	82			8/21/03	1405	R2M10	7	113		
12			8	78						8	98		
13			9	82						9	88		
14			10	118						10	126		
15			11	133						11	127		
16			12	137						12	135		
17			13	181						13	124		
18										14	130		
8/21/03 19	1055	R2M7	7	81						15	126		
20			8	88									
21			9	103			8/21/03	1430	R5M10	7	92		
22			10	139						8	85		
23			11	149						9	77		
24			12	172						10	98		
25			13	193						11	92		
26										12	94		
27										13	104		
28										14	110		
29										15	122		
30										16	136		
31													

EFFICIENCY LINE® 22-210

MPERT02-03-11 DP-11

Date	1 Time	2 Well	3 Depth	4 mV	5	6	7 Date	8 Time	9 Well	10 Depth	11 mV	12	13
8/21/03 1	1450	R5M9	7	78			8/21/03	1600	R5M10	7	42		
2			8	69					R5M1	8	42		
3			9	60						9	42		
4			10	86						10	43		
5			11	84						11	110		
6			12	84						12	100		
7			13	98						13	107		
8			14	107									
9													
8/21/03 10	1510	R5M8	7	81									
11			8	81									
12			9	78									
13			10	91									
14			11	89									
15			12	94									
16			13	69									
17													
8/21/03 18	1530	R5M7	7	78									
19			8	81									
20			9	83									
21			10	134									
22			11	145									
23			12	186									
24			13	214									
25													
8/21/03 26	1545	R2M7	7	86									
27			8	86									
28			9	93									
29			10	145									
30			11	154									
31			12	175									
			13	218									

EFFICIENCY LINE® 22-210

(mV) = -41.3 (Br) + 140.8 R^2 = 0.9936
used this one

MPERT02-03-12

DP-12

	1	2	3	4	5	6	7 Date	8 Time	9 Well	10 Depth	11 mV	12	13
8/22/03	CAL Br	Probe #3		(mV) = -35.55(Br) + 10.18			8/22/03	855	R2M10	7	63		
	Br (mg/l)	mV 805	mV 1005		R^2 = 0.9967					8	61		
	MQ	138	107							9	55		
	1	136	106							10	122		
	10	106	79							11	132		
	100	61	40							12	153		
	1000	11	1.5							13	144		
	10000	-23	-33							14	159		
										15	162		
Date	Time	Well	Depth	mV									
8/22/03	825	R2M1	7	52			8/22/03	905	R5M10	7	53		
			8	58						8	49		
			9	51						9	46		
			10	58						10	104		
			11	74						11	103		
			12	226						12	104		
			13	201						13	120		
			14	232						14	133		
			15	230						15	155		
										16	172		
8/22/03	845	R5M1	7	15									
			8	15			8/22/03	920	R5M9	7	56		
			9	11						8	51		
			10	20						9	44		
			11	225						10	115		
			12	242						11	120		
			13	265						12	130		
			14	272						13	150		
			15	305						14	175		

EFFICIENCY LINE® 22-210

MPERT02-03-13

DP-13

Date	1 Time	2 Well	3 Depth	4 mV	5	6	7 Date	8 Time	9 Well	10 Depth	11 mV	12	13
8/22/03 1	940	R5M8	7	60			CONT		R2M1	15	176		
2			8	72									
3			9	62			8/22/03	1035	R5M1	7	32		
4			10	107						8	31		
5			11	174						9	31		
6			12	150						10	33		
7			13	125						11	162		
8										12	158		
8/22/03 9	1000	R5M7	7	71						13	176		
10			8	71						14	199		
11			9	74						15	235		
12			10	138									
13			11	163									
14			12	195									
15			13	212									
16													
8/22/03 17	1010	R2M7	7	55									
18			8	62									
19			9	79									
20			10	167									
21			11	180									
22			12	208									
23			13	275									
24													
8/22/03 25	1025	R2M1	7	32									
26			8	30									
27			9	27									
28			10	46									
29			11	164									
30			12	156									
31			13	147									
			14	184									

EFFICIENCY LINE® 22-210

DP-14

MAEST02-03-14

	1	2	3	4	5	6	7	8	9	10	11	12	13
8-27-03	CAL	Probe	#3										
2	Br(mg/L)	mV 10:03											
3	0	106											
4	1	120		(mV) = -43.79 (Br) + 129.2				R^2 = 0.9887					
5	10	94											
6	100	48											
7	1000	-3.9											
8	10000	-50											
9													
10	note: B. Schlosser has been out yesterday and today slug testing northern wells												
11	Date	Time	Well	Depth	mV	Probe		Date	Time	Well	Depth	mV	
12	8-27-03	10:58	R5 M10	5'	54	3		8-27-03	11:14	R2 M10	5	73	
13				6	53			Screen 10.4-15.4			6	72	
	Screen 11.4-16.4			7	51			DTW = 4.85			7	71	
15	DTW = 4.9'			8	48						8	70	
16				9	48						9	71	
17				10	126						10	140	
18				11	126						11	151	
19				12	127						12	165	
20				13	145						13	165	
21				14	153						14	155	
22				15	162						15	150	
23				16	185								
24													
25													
26													
27													
28													
29													
30													
31													

EFFICIENCY LINE® 22-210

MPERT02-03-15

DP-15

	1	2	3	4	5	6	7	8	9	10	11	12	13
DATE	Time	Well	Depth	mV		[illegible]	Time	Well	Depth	mV			
8/27/03	11:25	R5m9	5	62		8/27/03	11:45	R5m8	5	92			
Screen 9.6 - 14.6			6	63		Screen 7.9 - 12.9			6	94			
DTW =			7	63					7	96			
			8	63					8	95			
			9	63					9	106			
			10	123					10	157			
			11	126					11	164			
			12	134					12	177			
			13	136					13	104			
			14	145									
						8/27/03	11:52	R5m7	5	83			
8/27/03	11:35	R2m9	5	108					6	83			
Screen 9.7 - 14.7			6	114		Screen	8.1 - 13.1		7	83			
			7	115					8	83			
			8	118					9	81			
			9	124					10	128			
			10	184					11	134			
			11	165					12	153			
			12	209					13	170			
			13	233									
			14	272									

EFFICIENCY LINE® 22-210

Monticello PRB MPERT02-04-01
Fission Track Analysis

9/15/03 CALLED Mike De Pangher. (Spectrum Petrographics). Mike out for the week. Talked to Bob (partner). They can probably cut the sections (or grind them) to fit 3/4" Triage tubes. Radioactivity in samples probably not an issue. Mike will call me Monday.

9/16/03 12:44 Placed 50% of sample PE 4-7 w/ Acetone in 100mL glass beaker. Inverted a 4L glass beaker and placed over it. Evacuating large beaker with Ar during drying. All under fume hood

13:55 Added PE 5-10 and PE 6-9 to drying jar.

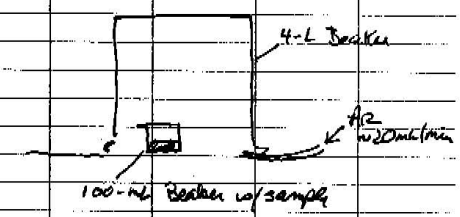

9/17/03 0738 only PE 4-7 was dry. Argon ran out last night. This really doesn't work.

0740 Put small splits (~1g) of each sample PE 5-10, 6-9, and 4-7 on glass cover glasses. Added acetone to dilute H_2O that may be present. Let evaporate with fume hood fan on.

0818 Evaporation complete. Samples are dry. Samples have a dull gray appearance. While wet, at least one sample had a distinctive H_2S odor. ZVI grains have disintegrated cf. original material (or more fines); there are still many large laths and curls of ZVI however. Under a binocular scope the grains appear very corroded (dull gray color, sooty appearance). Also, there are occasional red brown rust spots on the surfaces

mPERT02-04-02

10/20/03 Received polished thin sections back from Spectrum Petrographic. Samples were dried by flushing with acetone and then evaporating the acetone

Polished thin sections

Spectrum #[5]	ESC #	Site	media	U (mg/kg)	RAD (DPM) nem (m)
OTA 001[6]	PE 3-7	MONT PRB	ZVI/Sand Gr	45.5	2160
002[7]	PE 7-8		G/Z	1210	11,000
003[8]	PE 8-9		G/Z	1640	7000
004[9]	PE 11-8		Z	2.1	nd
005[10]	PE 17-11		G/Z	345	3000
006[11]	PE 18-17		Z	5.6	nd
007[12]	PEAFD 1-4	Fry Canyon	AFD	257.0	3000
008[13]	PEAFD A2-6		AFD	19.0	1000
009[14]	PEZVI 1-2		Fill/ZVI pellet	N/A	nd
010[15]	PEZVI 2-6		ZVI (pellet)	1.1	nd
011[16]	PE BC 1-4		pellet Bone char.	503.0	9000
012[17]	PEBC 2-5		pellet Bone char.	144.0	7500

Notes: (1) U values were not known when selecting samples for fission tracking

Irradiation dose is about 0.75×10^{16} n/cm^2 (for 1 hour of irradiation)

11/26/03 Received samples back from USGS. M. Reid conducted rad survey. Max counts on outside of cardboard box was 200 μrem/hr. They were irradiated for 1 hour on Lazy Susan.

12/1/03 M. Reid survey of cardboard box. Max about 100 μrem/hr. Opened box. Samples read up to 3 mRem/hr. Placed back in rad material storage at 1000.

Sarah Morris

From: Stan Morrison
nt: Wednesday, September 24, 2003 9:48 AM
: Sarah Morris
Subject: FW: Release of samples

-----Original Message-----
From: Michael Hurshman
Sent: Wednesday, September 24, 2003 9:06 AM
To: Stan Morrison
Subject: Release of samples

Stan, based on our surveys of the individual samples, they can be released without radiological controls. The surveys indicated values lower than our release limits.

****
***** INTERFERENCE CORRECTED REPORT *****
****

	Nuclide Name	Nuclide Id Confidence	Wt mean Activity (uCi/gram)	Wt mean Activity Uncertainty
	NA-24 15hr	0.431	2.081531E+003	6.078844E+001
?	CR-51 27dr	0.992	4.208311E-002	4.664678E-003
	FE-59 44.5dr	0.825	3.113260E-002	1.509375E-003
	AS-76 26hr	0.704	5.399611E+001	7.290850E-001
?	~~RH-105~~	0.543	7.799364E-001	8.573441E-002
	SB-122 2.7dr	0.870	3.997373E-002	9.793491E-003
X	~~I-124~~	0.527		
	SB-124 60dr	0.319	7.157738E-004	1.085697E-003
	~~TE-132~~	0.877	2.349579E-002	2.500721E-003
	~~CS-134~~	0.758	1.158076E-002	8.032226E-004

? = nuclide is part of an undetermined solution
X = nuclide rejected by the interference analysis
@ = nuclide contains energy lines not used in Weighted Mean Activity

Errors quoted at 1.000 sigma

EFFICIENCY LINE® 22-210

Fry Canyon

FC401-02-01

8

8/22/03 1330 Arrive @ Site. D. Mapes here. Move van to allow access to Pert well

1530 Set up on barrier for drilling

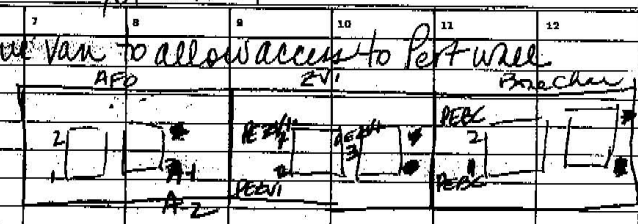

PE-AFO-1

push to 4.5' discard

core to ~~3~~ 11" - bedrock 11.5'

3'3.5", 3"

5 samples 30" recovery

1,2 Muky

3-5 AFO gravel

PE-AFO-2

push to 4' discard

core to 11'

8/23/03 PE AFO-A1 push to 4' discard

push to 8.5' 3 samples

1 fill
2 fill
3 AFO
} no sieve

8.5 - 14' FOBR 4-9 Ae

PE AFO A2 push to 4.5' discard

4.5 - 9' discard 30"

1-3 parent

4 [illegible]

27" recovery

9-13

4 samples 5- [illegible]

EFFICIENCY LINE® 22-210

FC401-02-02 9

8/25/03 Move to ZVI Barnes

PE-ZVI-1 push to 4.5 4-10' 3 samples fill discard
1 fill
2 fill ZVI contact
3 ZVI
4-6 ZVI
7 ZVI, plug B

PE-ZVI-2 push to 6 6-11' discard @BC
1,2 fill
3 fill/ZVI contact
4-7 ZVI plug @ end of 7

PE-BC-1 push to 6 6-11 discard to BC 5 samples
1,2 fill
3 fill/BC contact
4,5 BC plug @ end of 5

PE-BC-2 (~10' sample) push to 6 6-11' discard to BC - Loose plug
1-3 fill
4 fill/BC contact
5 BC

EFFICIENCY LINE® 22-210

FCY01-02-03 10

8/23/01 Move to 2V1 for 3rd hole

PE-2V1-3 (0° angle)

push to 7 discard
7-11' grout, bentonite, al
abandon – no sample

Move hole to between boxes c-front (Vertical Boring)

No angle

push to 6 discard
6-9.7' 5 samples
1 free
2 free/2V1 contact
3-5 2V1 no plug

EFFICIENCY LINE® 22-210

Fry Canyon 8/22/03 - 8/23/03 FCY01-02-04

AFO Borings

	2	3	4	5	6	7	8	9	10	11	12	13
PEAFO1												
		AFOT1 11" Left		AFOT3 39.25" Left			PEAFOA1 55°		AFOT2			
										16" Straight Back		
PEAFO2										19" Right		
		AFOFS1 32" Left		AFOT1 30" Straight Forward								
							PEAFOA2 60°		AFOT2			
										46" Straight Back		
										14" Right		

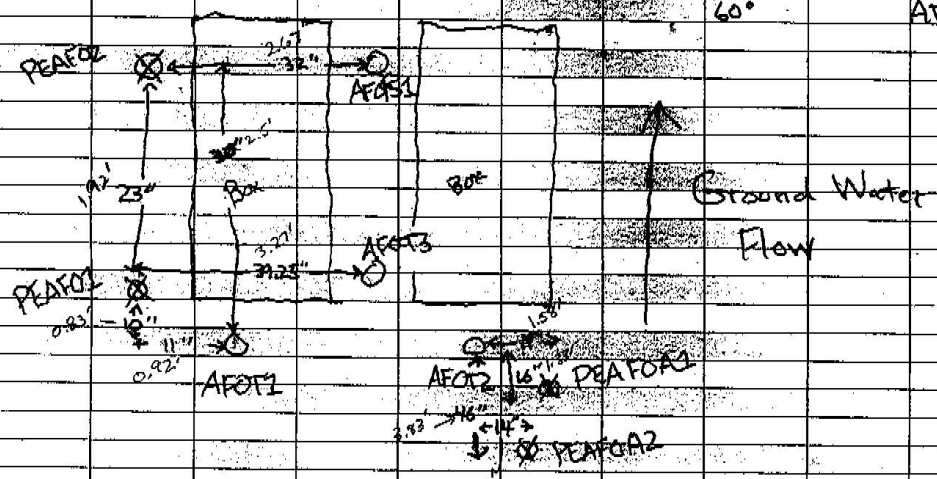

EFFICIENCY LINE® 22-210

Fry Canyon 8/23/03 FCY01-02-05

ZVI Borings

PEZVI1

ZVIFS1
39.25 Left

ZVIT1
26" Straight Forward

10" Left

PEZVI2

ZVIT3
33" Left

ZVIT1
12" Straight Forward

10" Left

PEZVI3

ZVIT3
9" Straight Forward

9.5" Right

ZVIFS1
7" Straight Back

11" Right

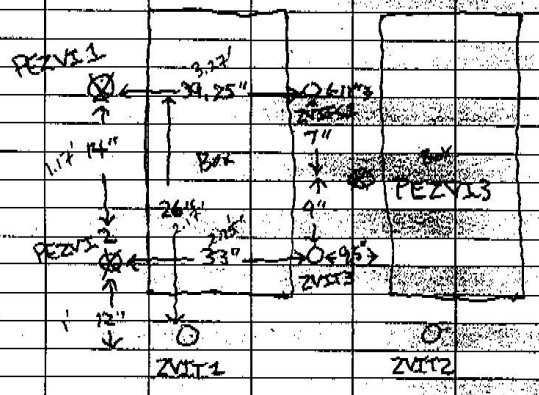

EFFICIENCY LINE™ 22-210

Fry Canyon 8/23/03 FCY01-02-06

BC Borings

	1	2	3	4	5	6	7	8	9	10	11	12	13
3	PEBC1												
4			P04FS1		P04T1								
5			31.5" left		11.5" Straight Forward								
8						PEBC2							
9								P04FS1		P04T1			
10								39" Left		23.5" Straight Forward			
12										8" Left			

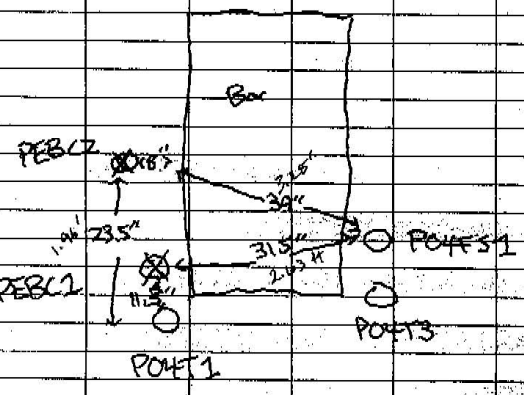

EFFICIENCY LINE® 22-210

Reactivity Tests P1

REACT001-01-01

1/21/03 Runs #1 through #35 were made 12/30/02 → today.

Vol = 7.26 ml, includes column and all tubing measured by injecting water into the system

0850 Pressure tested: Held at 30 psi for 30 min.

1/29/03 Continue tests (on angle cores)

All reactivity models have been calculated

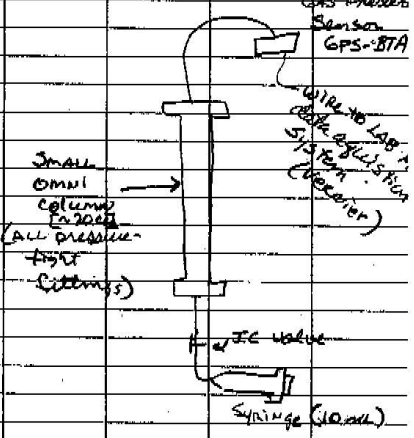

3/26/03 Many runs have been made on Monticello samples.
They are filed in F:\Home\morrison\Reactivity Tests

Preparing solutions to treat ZUT to improve reactivity.
Under a microscope it is apparent that when treated with 5% HCl, a fresh ZUT sample (Peerless-10 from Lake Sach in yard) has a short (~3 min) lag period with only a small amount of H_2 release. As time goes on the H_2 release increases substantially; however, there are portions of a single grain that have far less H_2 release than other portions. Is this due to an oxide coating, and can we remove the oxide coating?

0930 Prepared 0.1m (0.2N) Oxalic Acid solution. 12.6 g of $H_2C_2O_4 \cdot 2H_2O$ crystals in 1L

0900 Prepared 0.2M H_2SO_4 (5.56 ml Conc (36N) H_2SO_4 in 1 L)

EFFICIENCY LINE® 22-210

Reactivity Tests P.2

REACT001-01-02

3/26/03 10:32 20mL of 0.2N Acetic Acid w/ 1g Peerless -8 +20

20mL of 0.2N H_2SO_4 "

20mL of 0.2N Oxalic Acid "

20mL of 10% HCl "

Placed in open 30mL Cent. tubes. Agitating back and forth. After 10 mins capped and agitated and over end.

1452 Removed from stir bar. HCl had major pressure buildup and smelled. Others did not build up Pressure.

Effluent color

Oxalic v. light gray green

H_2SO_4 } gray green (darker) than oxalic

HCl

Acetic gray green, slightly brown?

1632 Decanted acids. Washed once with acetone. Transferred to tared coarse glasses. Some solids lost.

DRIED Wgts (initially 1g each)

		Reactivity file
Oxalic	0.98g	Treat 1
H_2SO_4	0.86g	Treat 2
HCl	0.54g	Treat 3
Acetic	0.87g	Treat 4

Ran reactivity tests (see computer files)

EFFICIENCY LINE® 22-210

Reactivity Tests p3 REACT001-01-03

4/11/03	1	Prepare the following in glass, round-bottom, screw top 30ml centrifuge											
	2	tubes											
	3						Probe	File					
	4	Peerless-8/+20 fresh 2011				10g	1						
	5	Fisher iron metal ~40 mesh				10g	2						
	6	Mont RPMA 4-1				10g	3						
	7	Mont RPMA 4-3				10g	4						
	8												
1515	9	Attach to Sal Pro Data Logger set for @2min collects x 96hrs. Add 10ml MQ											
	10	Water											
	11												
4/14/03	12	Switched probes (and cups) in #1 and #2 (to check if there is a problem with #1)											
07:20	13	(Time = 64.2 hours on file)											
	14												
1236	15	(69.367 hours) tapped and shook on Vial 1 (Peerless -8+20) to mix.											
1249	16	Shook and tapped other 3 (69.800 hrs)											
	17												
	18												
	19												
	20												
	21												
	22												
	23												
	24												
	25												
	26												
	27												
	28												
	29												
	30												
	31												

EFFICIENCY LINE® 22-210

EPA Reactivity

p4
REACT001-01-04

10/20/03 Obtain ~~200~~ 100g fresh Cerona ZVI (formed iron pellets). This is the ZVI that was used in the Fry Canyon PRB wall. Sieve to determine size fractions.

Sieve	Opening			Mass (g)
10	2mm		+10	6.1
18	1mm	✓	-10/+18	37.4
35	500mic	✓	-18/+35	0.8
140	106mic		-35/+140	0.3
200	75mic		-140/+200	<0.1
			-200	<0.1
				100

Obtain 100g split PE-ZVI-3-4. Spent ZVI from Fry Canyon Dwelling 8/03.

	Mass (g)
+10	55.2
-10/+18	30.3
-18/+35	8.3
-35/+140	4.1
-140/+200	0.5
-200	1.6
	100.0

Retain splits of each fraction
Perform pressure tests on

		Run
Cerona:	-10/+18	171
	-18/+35	172
PE ZVI-3-4:	-10/+18	170
	-200	169

End of current text

Appendix B

Descriptions of Alluvium Samples from Monticello PRB

Core PEA1
Continuous push to 12 ft.

A sample of sticky gray clay was found in this core at a location that should be about 3 ft below grade and within 3 ft of the gravel/ZVI zone. (Tim has this sample that Paul collected)

Sample PEA1-1 (uppermost sample; the upper 3.5 ft or so of core was discarded): This sample was labeled soil/G in the field. It is a very small sample (about 50 mL) composed mostly of dark brown to almost black gravel with thick coatings of sticky, gray, mud (about 2 percent mud). Probably mostly alluvium.

Samples below this are gravel/ZVI and ZVI.

Core PEA2
The upper 7 ft of soil were discarded.
Samples PEA2 5-7: Loose silty sand, red brown. "Soil."
Samples PEA2 8-10: Sticky gray clay (this was labeled "sluff" in field notes).
Samples below this are gravel/ZVI

Core PEA3
No alluvium was recovered.

Core PEA4
Continuous push from 0 to 11.5 ft.
Sample PEA4 –1: Loose soil
Sample PEA 4-2: Gravel. Dark brown. Contains piece of fabric (indicates boring penetrated the top, not the side, of the gravel/ZVI zone). No obvious clay.
Samples below this are gravel/ZVI (samples 3-6) and ZVI (samples 7 and 8).

Summary
Sticky gray clay was encountered in 2 of the 4 borings near or at the contact of alluvium with gravel/ZVI zone. It was not encountered in the other 2 borings but sample collection may have been inadequate. This evidence suggests there could be an impermeable clay zone at the contact, but the evidence is inconclusive.

End of current text

Appendix C

Results of Chemical Analysis of Monticello Cores
(see Figure 1 for locations)

Sample	Zone	Sample Date	Core Interval start ft	Core Interval end ft	Bottom Sample Depth ft	Radioactivity (dry) dpm	Moisture Content (wgt%)	Ca mg/kg	Fe mg/kg	U mg/kg
PE 2-7	G	8/19/2003	6.5	9.5	7.5	540	7.55	8250	141000	46.50
PE 2-10	G	8/19/2003	9.5	11.5	10.2	1620	6.61	15200	115000	255.00
PE 2-13	G	8/19/2003	11.5	12.5	12.0	3240	6.32	21700	116000	435.00
PE 2-14	G	8/19/2003	11.5	12.5	12.5	3780	8.04	30700	196000	359.00
PE 3-1	Z	8/19/2003	7	9.5	7.8	1080	16.01	10800	668000	78.50
PE 3-3	Z	8/19/2003	7	9.5	9.5	nd	21.85	28300	686000	11.50
PE 3-4	Z	8/19/2003	9	12.5	10.8	nd	18.33	38500	663000	62.70
PE 3-5	Z	8/19/2003	9	12.5	12.5	4860	19.26	32800	652000	186.00
PE 3-7	Z	8/19/2003	12.5	14	13.5	2160	7.74	16500	659000	95.50
PE 4-1	Z	8/19/2003	6	10	10.0	nd	19.29	19300	708000	2.00
PE 4-2	Z	8/19/2003	10	14	10.7	nd	18.71	16400	705000	0.10
PE 4-4	Z	8/19/2003	10	14	12.0	nd	21.44	24600	700000	0.19
PE 4-7	Z	8/19/2003	10	14	14.0	nd	20.29	50100	614000	0.15
PE 5-2	Z	8/18/2003	6.5	9.5	7.7	nd	19.32	19800	724000	2.00
PE 5-3	Z	8/18/2003	6.5	9.5	8.3	nd	16.37	21600	751000	3.20
PE 5-5	Z	8/18/2003	6.5	9.5	9.5	nd	17.45	26300	731000	0.58
PE 5-10	Z	8/19/2003	12.1	15.5	14.7	nd	21.80	35300	723000	0.02
PE 6-1	Z	8/18/2003	6.5	9.5	7.5	nd	17.31	18700	723000	0.02
PE 6-2	Z	8/18/2003	6.5	9.5	8.5	nd	18.66	24100	759000	0.02
PE 6-3	Z	8/18/2003	6.5	9.5	9.5	nd	18.07	16000	778000	0.02
PE 6-9	Z	8/18/2003	9.5	13	13.0	nd	19.77	33600	708000	0.02
PE 7-5	G	8/21/2003	3.5	13.2	9.6	3000	9.42	19800	236000	822.00
PE 7-6	G	8/21/2003	3.5	13.2	10.8	3000	9.05	19200	184000	392.00
PE 7-7	G	8/21/2003	3.5	13.2	12.0	10500	9.60	28800	227000	792.00
PE 7-8	G	8/21/2003	3.5	13.2	13.2	11000	57.28	34800	252000	1210.00
PE 8-4	G	8/21/2003	3.5	13	7.3	500	6.08	9100	181000	94.70
PE 8-7	G	8/21/2003	3.5	13	10.2	3500	9.04	29200	117000	563.00
PE 8-8	G	8/21/2003	3.5	13	11.1	7500	9.86	40000	132000	990.00
PE 8-9	G	8/21/2003	3.5	13	12.1	7000	11.49	23900	162000	1640.00
PE 9-3	G	8/19/2003	6.5	9.5	8.8	38500	20.52	27700	681000	1400.00
PE 9-4	G	8/19/2003	6.5	9.5	9.5	18500	11.66	38700	636000	968.00
PE 9-6	G	8/19/2003	9.5	13.5	11.1	7500	13.48	26600	220000	2020.00
PE 9-7	G	8/19/2003	9.5	13.5	11.9	6000	10.75	41500	208000	3330.00
PE 9-8	G	8/19/2003	9.5	13.5	12.7	13500	10.21	49600	161000	4630.00
PE 9-9	G	8/19/2003	9.5	13.5	13.5	18500	9.95	58700	365000	4100.00
PE 10-5	G	8/21/2003	3.5	14	8.3	1500	8.28	21700	192000	184.00
PE 10-6	G	8/21/2003	3.5	14	9.2	2500	9.85	41800	295000	354.00
PE 10-7	G	8/21/2003	3.5	14	10.2	2500	9.56	37300	261000	567.00
PE 10-9	G	8/21/2003	3.5	14	12.1	3500	12.37	68800	272000	515.00
PE 11-5	Z	8/20/2003	6.5	10	7.9	nd	21.88	42500	661000	11.60
PE 11-6	Z	8/20/2003	6.5	10	8.6	nd	21.61	46200	653000	2.70
PE 11-7	Z	8/20/2003	6.5	10	9.3	nd	23.18	43200	672000	7.90

Sample	Zone	Sample Date	Core Interval start ft	Core Interval end ft	Bottom Sample Depth ft	Radioactivity (dry) dpm	Moisture Content (wgt%)	Ca mg/kg	Fe mg/kg	U mg/kg
PE 11-8	Z	8/20/2003	6.5	10	10.0	nd	21.26	32900	711000	2.10
PE 12-5	Z	8/20/2003	3	7	7.0	nd	16.30	13600	746000	0.05
PE 12-6	Z	8/20/2003	7	11	11.0	nd	20.30	9320	754000	0.03
PE 12-7	Z	8/20/2003	11	13	11.7	nd	16.95	9000	763000	0.04
PE 12-9	Z	8/20/2003	11	13	13.0	nd	20.55	23700	664000	0.06
PE 13-5	Z	8/20/2003	6.5	11	8.3	nd	93.60	10000	702000	0.05
PE 13-8	Z	8/20/2003	6.5	11	11.0	nd	18.30	7310	747000	0.20
PE 13-9	Z	8/20/2003	11	14	12.0	nd	15.57	17000	759000	0.05
PE 13-10	Z	8/20/2003	11	14	13.0	nd	13.69	3080	766000	0.03
PE 13-11	Z	8/20/2003	11	14	14.0	nd	13.50	11500	770000	0.04
PE 14-4	G	8/21/2003	3.5	14	8.2	1000	9.07	13100	205000	274.00
PE 14-6	G	8/21/2003	3.5	14	10.5	4000	9.00	48000	212000	751.00
PE 14-7	G	8/21/2003	3.5	14	11.7	4000	10.34	58700	212000	931.00
PE 14-8	G	8/21/2003	3.5	14	12.8	1500	10.59	43400	222000	179.00
PE 15-3	G	8/21/2003	3.5	14	7.4	8500	11.50	7090	659000	289.00
PE 15-5	G	8/21/2003	3.5	14	10.1	2500	10.12	39800	280000	545.00
PE 15-6	G	8/21/2003	3.5	14	11.4	3500	9.23	42000	223000	483.00
PE 15-7	G	8/21/2003	3.5	14	12.7	2500	9.94	42500	209000	134.00
PE 16-8	G	8/21/2003	3.5	13.5	8.8	2000	9.46	24200	213000	117.00
PE 16-12	G	8/21/2003	3.5	13.5	11.5	3500	9.38	46800	236000	484.00
PE 16-13	G	8/21/2003	3.5	13.5	12.2	2500	9.16	43400	214000	135.00
PE 16-14	G	8/21/2003	3.5	13.5	12.8	6000	11.67	45100	261000	427.00
PE 17-5	G	8/20/2003	3.5	13.5	8.0	1000	8.41	15600	201000	151.00
PE 17-6	G	8/20/2003	3.5	13.5	9.0	500	8.01	19700	289000	91.90
PE 17-8	G	8/20/2003	3.5	13.5	10.8	6000	9.00	30200	215000	1190.00
PE 17-11	G	8/20/2003	3.5	13.5	13.5	3000	10.43	27900	104000	345.00
PE 18-4	Z	8/21/2003	3.5	14	5.8	500	14.01	6440	735000	10.00
PE 18-7	Z	8/21/2003	3.5	14	7.6	nd	13.95	19100	723000	0.47
PE 18-10	Z	8/21/2003	3.5	14	9.3	nd	17.06	17400	741000	3.00
PE 18-12	Z	8/21/2003	3.5	14	10.5	nd	16.50	24100	715000	5.10
PE 18-17	Z	8/21/2003	3.5	14	13.4	nd	16.36	30400	719000	5.60
PE 19-4	G	8/20/2003	3.5	13	8.9	4500	9.78	23700	244000	745.00
PE 19-5	G	8/20/2003	3.5	13	10.3	5500	13.19	28100	258000	747.00
PE 19-6	G	8/20/2003	3.5	13	11.6	2000	10.31	29000	187000	266.00
PE 19-7	G	8/20/2003	3.5	13	13.0	nd	10.46	31000	256000	34.50
PE 21-6	Z	8/20/2003	9.5	14	10.6	nd	12.04	5710	800000	0.09
PE 21-7	Z	8/20/2003	9.5	14	11.8	nd	13.99	26800	711000	0.23
PE 21-8	Z	8/20/2003	9.5	14	12.9	nd	13.46	9400	740000	0.25
PE 21-9	Z	8/20/2003	9.5	14	14.0	nd	16.89	16800	772000	1.30
PE 23-6	Z	8/20/2003	8	12	9.0	nd	18.95	18400	768000	0.20
PE 23-7	Z	8/20/2003	8	12	10.0	nd	20.42	14300	763000	0.43
PE 23-8	Z	8/20/2003	8	12	11.0	nd	21.55	16900	689000	0.44
PE 23-13	Z	8/20/2003	12	13.5	13.5	nd	20.49	38900	679000	11.80

Sample	Zone	Sample Date	Core Interval start ft	Core Interval end ft	Bottom Sample Depth ft	Radioactivity (dry) dpm	Moisture Content (wgt%)	Ca mg/kg	Fe mg/kg	U mg/kg
PE 24-8	Z	8/20/2003	6.5	10	8.6	nd	21.54	5350	606000	0.03
PE 24-11	Z	8/20/2003	10	13	10.5	nd	19.33	22500	721000	1.20
PE 24-12	Z	8/20/2003	10	13	11.0	nd	21.74	20700	734000	0.41
PE 24-13	Z	8/20/2003	10	13	11.5	nd	19.14	26100	737000	4.90
PE 24-15	Z	8/20/2003	10	13	12.5	nd	17.76	79900	475000	6.50

Zones: G = gravel/ZVI, Z = ZVI. nd = not detected, dpm = disintegrations per minute

End of current text

Appendix D

Reactivity Values for All Samples

0.2 g samples except where noted	Run No.	Zone	Mesh Size	Reactivity No.	Water Table
Standards					
Cercona Pellets, -10/+18 fraction	171	na	pellets	**2.6**	na
Cercona Pellets, -18/+35 fraction	172	na	pellets	**3.2**	na
Connelly 1004	9	na	-8 +50	**4.5**	na
Fisher	12	na	~40	**7.0**	na
Fisher	117	na	~40	**9.8**	na
Fisher	209	na	~40	**7.0**	na
Fisher	13	na	-100	**38.0**	na
Peerless	32	na	-6 +10	**4.3**	na
Peerless	14	na	-8 +50	**3.2**	na
Peerless	7	na	-60 +100	**9.5**	na
Peerless	11	na	-8 +18	**7.0**	na
Peerless	16	na	-8 +20	**3.5**	na
Peerless	90	na	-8 +20	**6.1**	na
Peerless	91	na	-8 +20	**4.5**	na
Peerless	92	na	-8 +20	**5.0**	na
Peerless	100	na	-8 +20	**4.0**	na
Peerless	101	na	-8 +20	**3.7**	na
Peerless	102	na	-8 +20	**3.8**	na
180 mg Peerless, 20 mg powdered calcite	114	na	-8 +20	**4.8**	na
Peerless New WSR	51	na	-8 +50	**4.7**	na
Peerless Traditional	52	na	-8 +50	**4.1**	na
Peerless, grav/ZVI parent	24	na	-4 +20	**1.5**	na
160 mg Fisher, 40 mg powdered calcite	123	na	~40	**9.1**	na
180 mg Peerless, 20 mg powdered calcite	114	na	-8 +20	**4.8**	na
50 mg Fisher	121	na	~40	**7.6**	na
Hematite	22	na	powder	**0.0**	na
Siderite	23	na	-18	**0.3**	na
a Corrected for 100 percent ZVI (0.2 g)					
TREATED ZVI Standards					
Peerless, treated with 0.2 N Oxalic Acid	86	na	-8 +20	**3.5**	
Peerless, treated with 0.2 N H2SO4	87	na	-8 +20	**5.4**	
Peerless, treated with10 percent HCl	88	na	-8 +20	**4.4**	
Peerless, treated with 0.2 N acetic acid	89	na	-8 +20	**6.1**	
MONTICELLO					
Feb 2002 Angle Core Samples					
RPMA 1-4	49	ZVI	-8 +20	**4.1**	Above
RPMA 1-5	50	ZVI	-8 +20	**2.1**	Above
RPMA 2-1	46	ZVI	-8 +20	**3.9**	Above
RPMA 3-1	43	ZVI	-8 +20	**3.5**	Above
RPMA 4-1	40	ZVI	-8 +20	**3.8**	Above
RPMA 5-1	55	ZVI	-8 +20	**3.6**	Above
RPMA 1-6	53	ZVI	-8 +20	**2.4**	Below
RPMA 1-7	54	ZVI	-8 +20	**2.5**	Below
RPMA 2-2	47	ZVI	-8 +20	**2.5**	Below
RPMA 2-3	48	ZVI	-8 +20	**1.7**	Below
RPMA 3-2	44	ZVI	-8 +20	**2.3**	Below
RPMA 3-3	45	ZVI	-8 +20	**2.5**	Below
RPMA 4-2	41	ZVI	-8 +20	**1.2**	Below
RPMA 4-3	42	ZVI	-8 +20	**1.8**	Below
RPMA 5-2	56	ZVI	-8 +20	**1.7**	Below

0.2 g samples except where noted	Run No.	Zone	Mesh Size	Reactivity No.	Water Table
MONTICELLO					
Feb. 2002 Verticle Core Samples					
RPM 64-1	66	grav/ZVI	-4 +20	**2.8**	Above
RPM 64-1, 2nd HCl	67	grav/ZVI	-4 +20	**2.3**	Above
RPM 64-1, 3rd HCl	68	grav/ZVI	-4 +20	**0.4**	Above
RPM 11-7, mag/sonic coarse split	25	grav/ZVI	-4 +20	**2.0**	Below
RPM 11-7, mag/sonic coarse split, acid wash	26	grav/ZVI	-4 +20	**2.0**	Below
RPM 42-7	28	grav/ZVI	-4 +20	**2.0**	Below
RPM 48-4, as run 62 but 2nd HCl	63	grav/ZVI	-4 +20	**0.7**	Below
RPM 48-4, mag split, red powder	31	grav/ZVI	-4 +20	**0.6**	Below
RPM 48-4, mag split, red powder, dup	62	grav/ZVI	-4 +20	**1.1**	Below
RPM 53-4, 2nd HCl	65	grav/ZVI	-4 +20	**2.1**	Below
RPM 53-4, strange curve	64	grav/ZVI	-4 +20	**3.1**	Below
RPM 65-5, 2nd HCl	70	grav/ZVI	-4 +20	**1.7**	Below
RPM 65-5, 3rd HCl	71	grav/ZVI	-4 +20	**0.9**	Below
RPM 65-5, not good fit	69	grav/ZVI	-4 +20	**2.5**	Below
RPM 10-11	39	ZVI	-8 +20	**3.4**	Below
RPM 10-2	35	ZVI	-18	**3.5**	Below
RPM 10-2	36	ZVI	-8 +20	**2.7**	Below
RPM 10-2, coarse	33	ZVI	+10	**1.4**	Below
RPM 10-7	37	ZVI	-8 +20	**3.0**	Below
RPM 10-9	38	ZVI	-8 +20	**2.0**	Below
RPM 13-2	72	ZVI	-8 +20	**4.5**	Below
RPM 13-5	73	ZVI	-8 +20	**3.3**	Below
RPM 13-6	74	ZVI	-8 +20	**3.1**	Below
RPM 13-7	75	ZVI	-8 +20	**3.5**	Below
RPM 16-1	77	ZVI	-8 +20	**4.2**	Below
RPM 16-3	78	ZVI	-8 +20	**3.7**	Below
RPM 16-4	79	ZVI	-8 +20	**5.4**	Below
RPM 16-5	80	ZVI	-8 +20	**4.8**	Below
RPM 61.2	81	ZVI	-8 +20	**3.7**	Below
RPM 61-3	82	ZVI	-8 +20	**3.7**	Below
RPM 61-6	83	ZVI	-8 +20	**4.8**	
RPM 61-8	85	ZVI	-8 +20	**5.0**	
RPM 61-8, cemented lump	84	ZVI	-8 +20	**5.0**	
MONTICELLO					
August 2003, Samples					
PE 2-7, oven dried, rad. Fines.	174	grav/ZVI	-4 +20	**0.0**	
PE 2-7, oven dried, rad. Fines.	178	grav/ZVI	-4 +20	**0.1**	
PE 2-10, oven dried, rad. Fines.	179	grav/ZVI	-4 +20	**0.3**	
PE 2-13, oven dried, rad. Fines.	180	grav/ZVI	-4 +20	**0.2**	
PE 2-14, oven dried, rad. Fines.	181	grav/ZVI	-4 +20	**0.6**	
PE 3-1, oven dried, rad. Fines.	182	grav/ZVI	-4 +20	**2.9**	
PE 3-5, oven dried, rad. Fines.	183	grav/ZVI	-4 +20	**3.7**	
PE 3-7, oven dried, rad. Fines.	184	grav/ZVI	-4 +20	**3.9**	
PE 7-5, oven dried, rad. Fines.	185	grav/ZVI	-4 +20	**1.0**	
PE 7-6, oven dried, rad. Fines.	186	grav/ZVI	-4 +20	**1.0**	
PE 7-7, oven dried, rad. Fines.	187	grav/ZVI	-4 +20	**0.6**	
PE 7-8, oven dried, rad. Fines.	188	grav/ZVI	-4 +20	**1.2**	
PE 8-4, oven dried, rad. Fines.	189	grav/ZVI	-4 +20	**0.5**	
PE 8-7, oven dried, rad. Fines.	190	grav/ZVI	-4 +20	**0.5**	
PE 8-8, oven dried, rad. Fines.	191	grav/ZVI	-4 +20	**0.6**	
PE 8-9, oven dried, rad. Fines.	192	grav/ZVI	-4 +20	**0.9**	
PE 9-3, oven dried, rad. Fines.	193	grav/ZVI	-4 +20	**3.1**	
PE 9-4, oven dried, rad. Fines.	194	grav/ZVI	-4 +20	**2.6**	
PE 9-6, oven dried, rad. Fines.	195	grav/ZVI	-4 +20	**0.1**	
PE 9-7, oven dried, rad. Fines.	196	grav/ZVI	-4 +20	**0.5**	
PE 9-8, oven dried, rad. Fines.	197	grav/ZVI	-4 +20	**0.5**	

0.2 g samples except where noted	Run No.	Zone	Mesh Size	Reactivity No.	Water Table
PE 9-9, oven dried, rad. Fines.	198	grav/ZVI	-4 +20	**2.4**	
PE 10-5, oven dried, rad. Fines.	199	grav/ZVI	-4 +20	**0.8**	
PE 10-6, oven dried, rad. Fines.	200	grav/ZVI	-4 +20	**1.8**	
PE 10-7, oven dried, rad. Fines.	201	grav/ZVI	-4 +20	**1.0**	
PE 10-9, oven dried, rad. Fines.	202	grav/ZVI	-4 +20	**2.4**	
PE 14-4, oven dried, rad. Fines.	203	grav/ZVI	-4 +20	**0.1**	
PE 14-6, oven dried, rad. Fines.	204	grav/ZVI	-4 +20	**1.3**	
PE 14-7, oven dried, rad. Fines.	205	grav/ZVI	-4 +20	**1.3**	
PE 14-8, oven dried, rad. Fines.	206	grav/ZVI	-4 +20	**2.1**	
PE 15-3, oven dried, rad. Fines.	207	grav/ZVI	-4 +20	**0.6**	
PE 15-5, oven dried, rad. Fines.	208	grav/ZVI	-4 +20	**1.6**	
PE 15-6, oven dried, rad. Fines.	210	grav/ZVI	-4 +20	**0.6**	
PE 15-7, oven dried, rad. Fines.	211	grav/ZVI	-4 +20	**2.0**	
PE 16-12, oven dried, rad. Fines.	213	grav/ZVI	-4 +20	**2.0**	
PE 16-13, oven dried, rad. Fines.	214	grav/ZVI	-4 +20	**2.4**	
PE 16-14, oven dried, rad. Fines.	215	grav/ZVI	-4 +20	**2.1**	
PE 16-8, oven dried, rad. Fines.	212	grav/ZVI	-4 +20	**1.0**	
PE 17-11, oven dried, rad. Fines.	219	grav/ZVI	-4 +20	**0.2**	
PE 17-5, oven dried, rad. Fines.	216	grav/ZVI	-4 +20	**0.1**	
PE 17-6, oven dried, rad. Fines.	217	grav/ZVI	-4 +20	**1.0**	
PE 17-8, oven dried, rad. Fines.	218	grav/ZVI	-4 +20	**0.3**	
PE 18-4, oven dried, rad. Fines.	220	grav/ZVI	-4 +20	**2.6**	
PE 19-4, oven dried, rad. Fines.	221	grav/ZVI	-4 +20	**0.5**	
PE 19-5, oven dried, rad. Fines.	222	grav/ZVI	-4 +20	**0.4**	
PE 19-6, oven dried, rad. Fines.	227	grav/ZVI	-4 +20	**1.3**	
PE 19-7, oven dried, magnetic fraction	144	grav/ZVI	-4 +20	**2.7**	
PE 1-odd, oven dried	158	ZVI	-8 +20	**0.5**	
PE 3-3, oven dried	105	ZVI	-8 +20	**4.3**	
PE 3-4, oven dried	106	ZVI	-8 +20	**4.2**	
PE 4-1, oven dried	107	ZVI	-8 +20	**5.4**	
PE 4-2, oven dried	108	ZVI	-8 +20	**5.7**	
PE 4-4, oven dried	109	ZVI	-8 +20	**4.7**	
PE 4-7, acetone dried	98	ZVI	-8 +20	**4.7**	
PE 4-7, oven dried	97	ZVI	-8 +20	**3.6**	
PE 5-10, acetone dried	104	ZVI	-8 +20	**3.8**	
PE 5-10, oven dried	103	ZVI	-8 +20	**3.5**	
PE 5-2, oven dried	110	ZVI	-8 +20	**1.5**	
PE 5-3, oven dried	111	ZVI	-8 +20	**4.9**	
PE 5-5, oven dried	112	ZVI	-8 +20	**3.8**	
PE 6-1, oven dried	113	ZVI	-8 +20	**3.5**	
PE 6-2, oven dried	124	ZVI	-8 +20	**5.1**	
PE 6-3, oven dried	125	ZVI	-8 +20	**3.8**	
PE 6-9, acetone dried	96	ZVI	-8 +20	**5.5**	
PE 6-9, oven dried	94	ZVI	-8 +20	**4.2**	
PE 6-9, oven dried	95	ZVI	-8 +20	**3.6**	
PE 11-5, oven dried	126	ZVI	-8 +20	**3.6**	
PE 11-6, oven dried	127	ZVI	-8 +20	**3.6**	
PE 11-7, oven dried	128	ZVI	-8 +20	**3.6**	
PE 11-8, oven dried	129	ZVI	-8 +20	**4.0**	
PE 12-5, oven dried	131	ZVI	-8 +20	**2.4**	
PE 12-6, oven dried	132	ZVI	-8 +20	**3.5**	
PE 12-7, oven dried	133	ZVI	-8 +20	**3.5**	
PE 12-9, oven dried	134	ZVI	-8 +20	**2.0**	
PE 13-10, oven dried	138	ZVI	-8 +20	**3.0**	
PE 13-11, oven dried	139	ZVI	-8 +20	**2.8**	
PE 13-5, oven dried	135	ZVI	-8 +20	**2.1**	
PE 13-8, oven dried	136	ZVI	-8 +20	**2.3**	
PE 13-9, oven dried	137	ZVI	-8 +20	**1.1**	
PE 18-10, oven dried	141	ZVI	-8 +20	**3.9**	

0.2 g samples except where noted	Run No.	Zone	Mesh Size	Reactivity No.	Water Table
PE 18-12, oven dried	142	ZVI	-8 +20	**3.7**	
PE 18-17, oven dried	143	ZVI	-8 +20	**3.4**	
PE 18-7, oven dried	140	ZVI	-8 +20	**2.9**	
PE 21-6, oven dried	145	ZVI	-8 +20	**3.5**	
PE 21-7, oven dried	146	ZVI	-8 +20	**3.0**	
PE 21-8, oven dried	147	ZVI	-8 +20	**3.5**	
PE 21-9, oven dried	148	ZVI	-8 +20	**4.4**	
PE 23-13, oven dried	152	ZVI	-8 +20	**3.4**	
PE 23-6, oven dried	149	ZVI	-8 +20	**4.4**	
PE 23-7, oven dried	150	ZVI	-8 +20	**3.8**	
PE 23-8, oven dried	151	ZVI	-8 +20	**3.0**	
PE 24-11, oven dried	154	ZVI	-8 +20	**4.4**	
PE 24-12, oven dried	155	ZVI	-8 +20	**3.9**	
PE 24-13, oven dried	156	ZVI	-8 +20	**5.0**	
PE 24-15, oven dried	157	ZVI	-8 +20	**6.5**	
PE 24-8, oven dried	153	ZVI	-8 +20	**3.7**	
Fry Canyon					
Aug. 2003 Samples					
PE ZVI 1-3, oven dried	159	ZVI	pellets	**0.8**	
PE ZVI 1-4, oven dried	160	ZVI	pellets	**1.0**	
PE ZVI 1-5, oven dried	161	ZVI	pellets	**1.0**	
PE ZVI 1-6, oven dried	162	ZVI	pellets	**1.7**	
PE ZVI 2-6, oven dried	163	ZVI	pellets	**2.3**	
PE ZVI 2-5, oven dried	164	ZVI	pellets	**0.8**	
PE ZVI 3-3, oven dried	166	ZVI	pellets	**0.2**	
PE ZVI 3-4, oven dried	167	ZVI	pellets	**1.2**	
PE ZVI 3-5, oven dried	168	ZVI	pellets	**1.9**	
PE ZVI 2-4, oven dried, rad.	228	ZVI	pellets	**2.2**	
PE ZVI 3-4, oven dried, -200 fraction	169	ZVI	pellets	**0.3**	
PE ZVI 3-4, oven dried, -10/+18 fraction	170	ZVI	pellets	**0.5**	
PE ZVI 3-4, oven dried, -10/+18 fraction	170	ZVI	pellets	**0.5**	
Summary Categories	**Mean**	**Sdev**	**Count**		
Peerless -8 +20 Standards	4.4	0.9	7.0		
Fisher ~40 Standards	7.9	1.6	3.0		
Mont. RPMA ZVI, above water table	3.5	0.7	6.0		
Mont. RPMA ZVI, below water table	2.1	0.5	9.0		
Mont. RPM ZVI, below water table	3.7	1.1	19.0		
Mont. PE G/Z, fines	1.3	1.0	47.0		
Mont. PE ZVI	3.7	1.1	49.0		
Fry Canyon PE ZVI - pellets	1.3	0.7	10.0		
Mont. Feb 2002 ZVI, Below water table	3.0	1.1	25.0		
Mont. Feb. 2002 G/Z, Below water table	1.7	0.8	11.0		
Mont. August 2003. ZVI Zone	3.7	1.1	49.0		
Mont. August 2003. G/Z Zone	1.3	1.0	47.0		

Appendix E

Bromide Concentration Vertical Profiles

Well R2M1

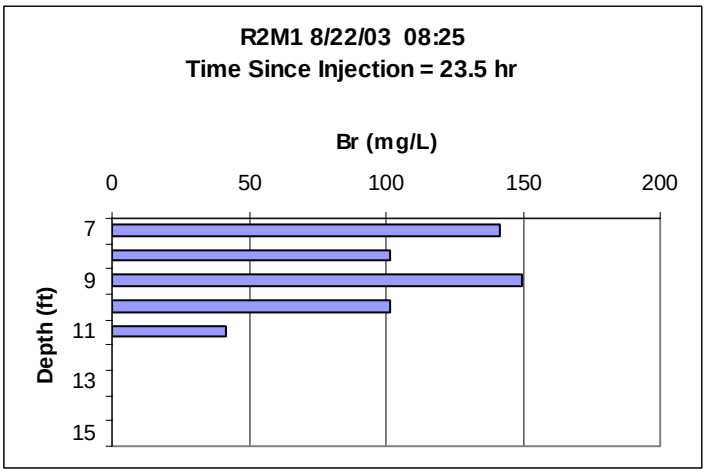
R2M1 8/22/03 08:25
Time Since Injection = 23.5 hr
Br (mg/L)
0
50
100
150
200
Depth (ft)
7
9
11
13
15

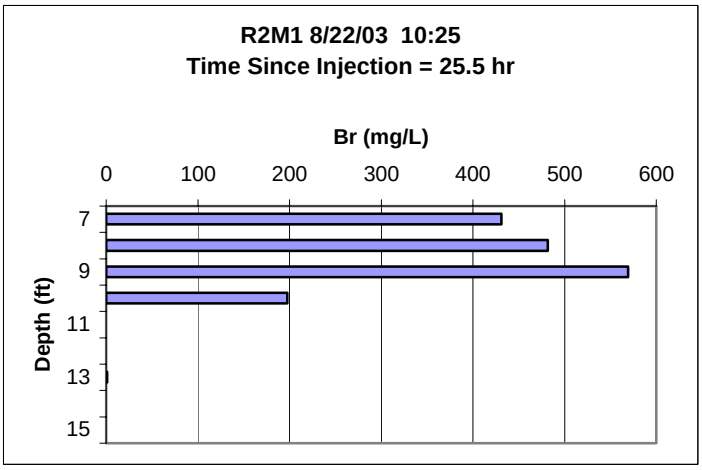
R2M1 8/22/03 10:25
Time Since Injection = 25.5 hr
Br (mg/L)
0
100
200
300
400
500
600
Depth (ft)
7
9
11
13
15

Well R2M7

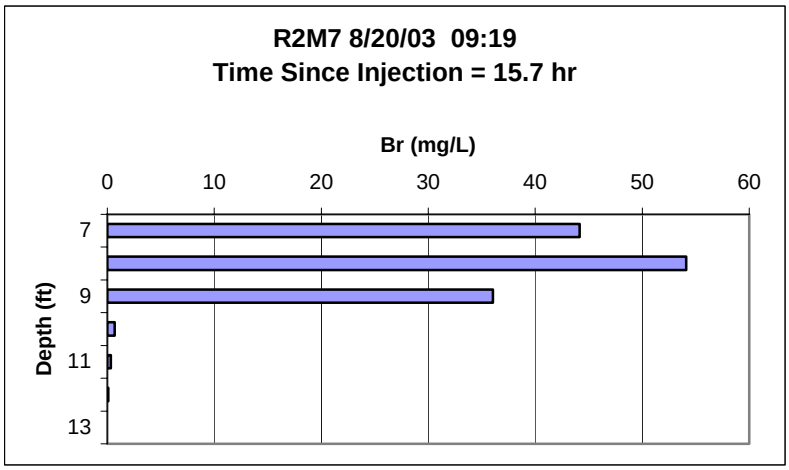
R2M7 8/20/03 09:19
Time Since Injection = 15.7 hr
Br (mg/L)
0
10
20
30
40
50
60
Depth (ft)
7
9
11
13

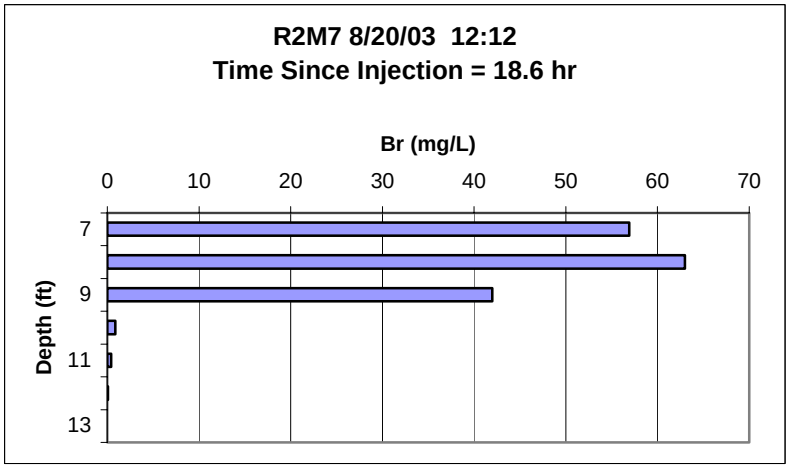
R2M7 8/20/03 12:12
Time Since Injection = 18.6 hr
Br (mg/L)
0
10
20
30
40
50
60
70
Depth (ft)
7
9
11
13

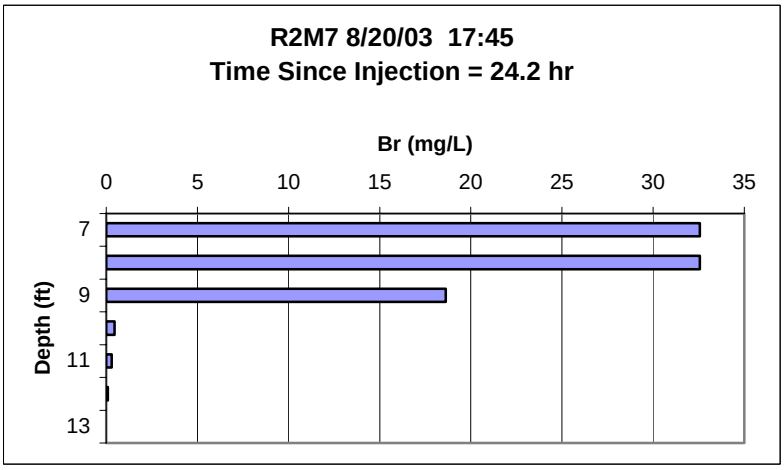
R2M7 8/20/03 17:45
Time Since Injection = 24.2 hr
Br (mg/L)
0
5
10
15
20
25
30
35
Depth (ft)
7
9
11
13

Well R2M7 (continued)

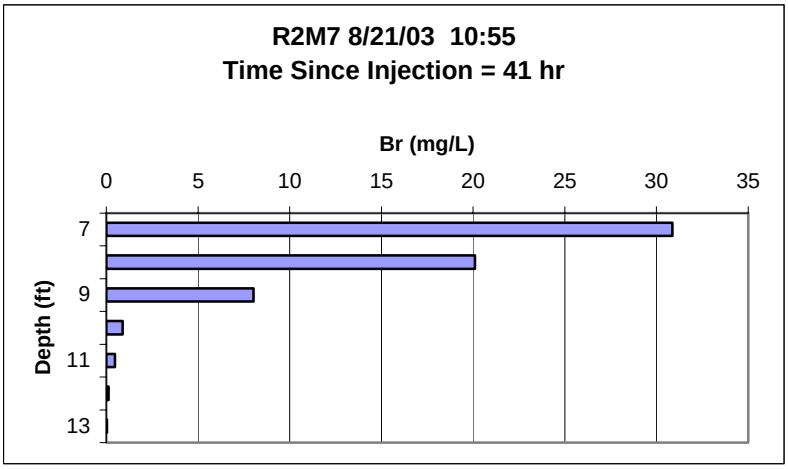

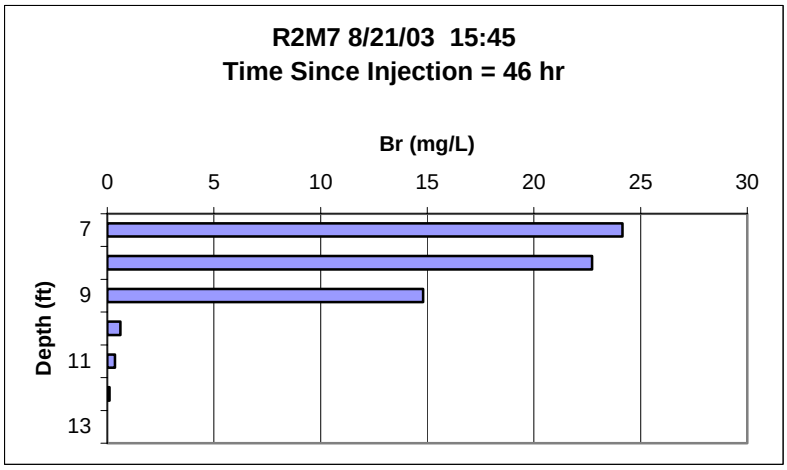

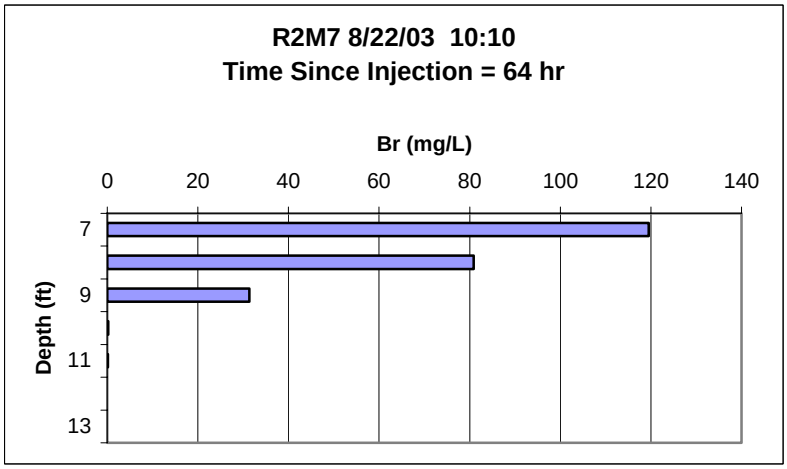

Well R2M8

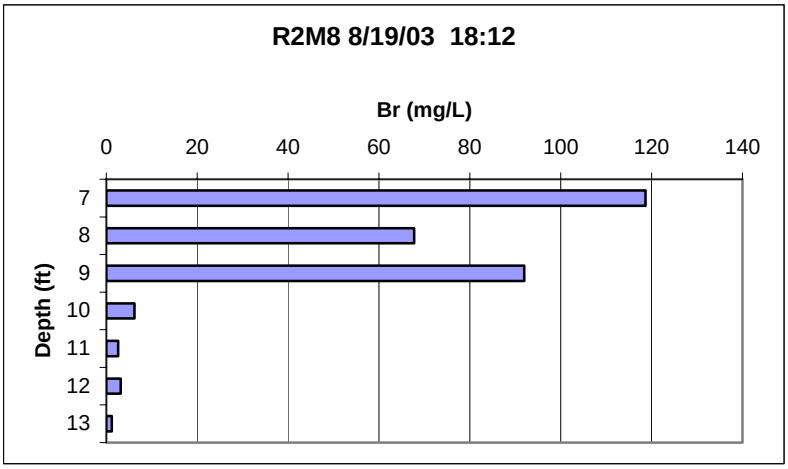
R2M8 8/19/03 18:12
Br (mg/L)
0
20
40
60
80
100
120
140
Depth (ft)
7
8
9
10
11
12
13

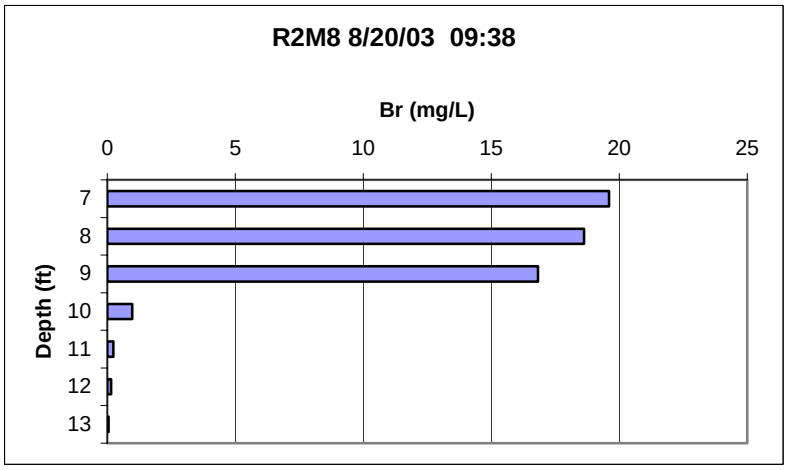
R2M8 8/20/03 09:38
Br (mg/L)
0
5
10
15
20
25
Depth (ft)
7
8
9
10
11
12
13

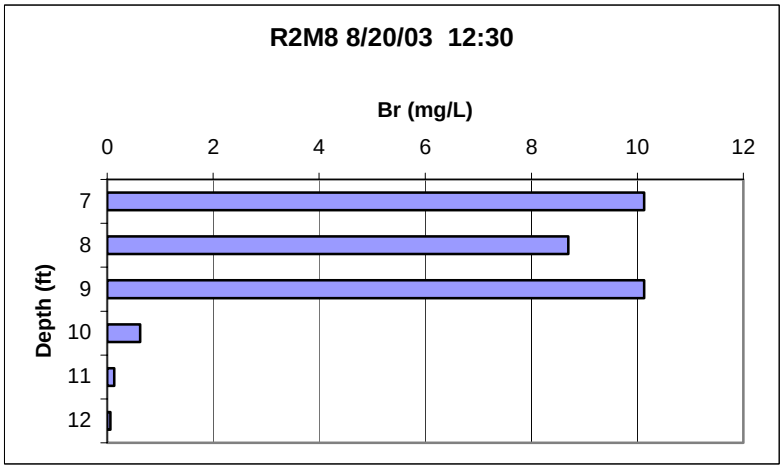
R2M8 8/20/03 12:30
Br (mg/L)
0
2
4
6
8
10
12
Depth (ft)
7
8
9
10
11
12

Well R2M8 (continued)

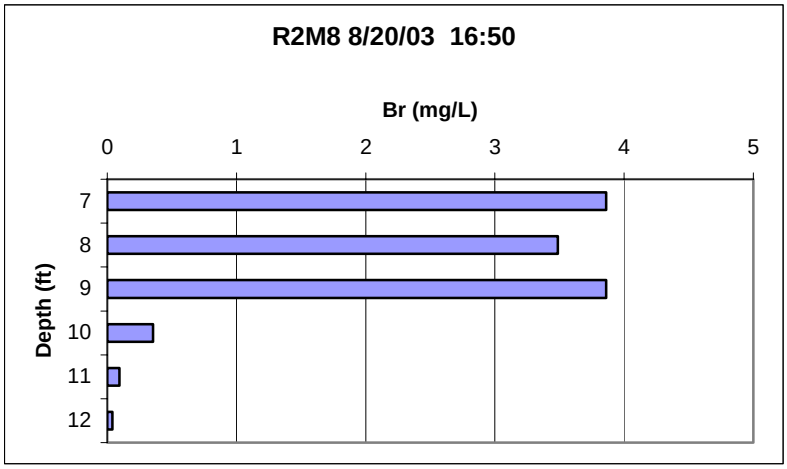

Well R2M9

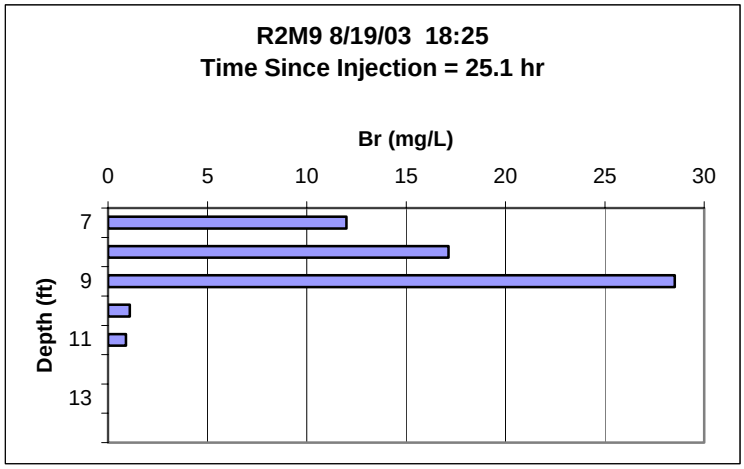
R2M9 8/19/03 18:25
Time Since Injection = 25.1 hr
Br (mg/L)
0
5
10
15
20
25
30
Depth (ft)
7
9
11
13

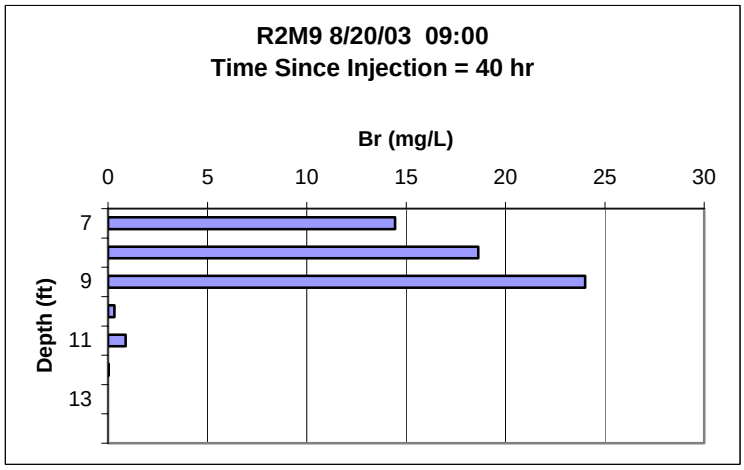
R2M9 8/20/03 09:00
Time Since Injection = 40 hr
Br (mg/L)
0
5
10
15
20
25
30
Depth (ft)
7
9
11
13

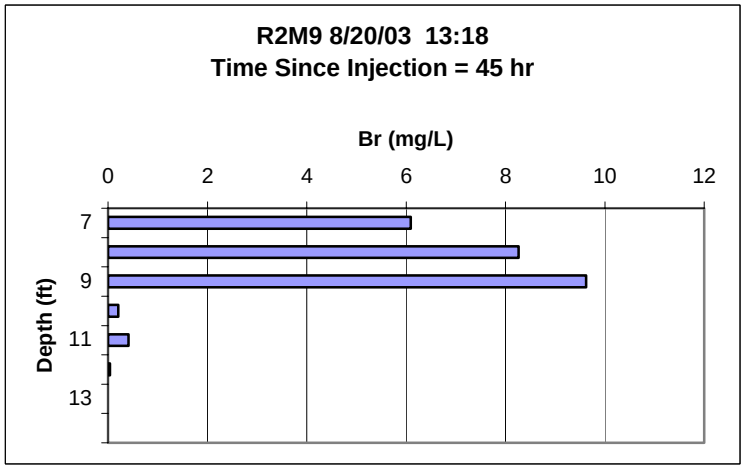
R2M9 8/20/03 13:18
Time Since Injection = 45 hr
Br (mg/L)
0
2
4
6
8
10
12
Depth (ft)
7
9
11
13

Well R2M9 (continued)

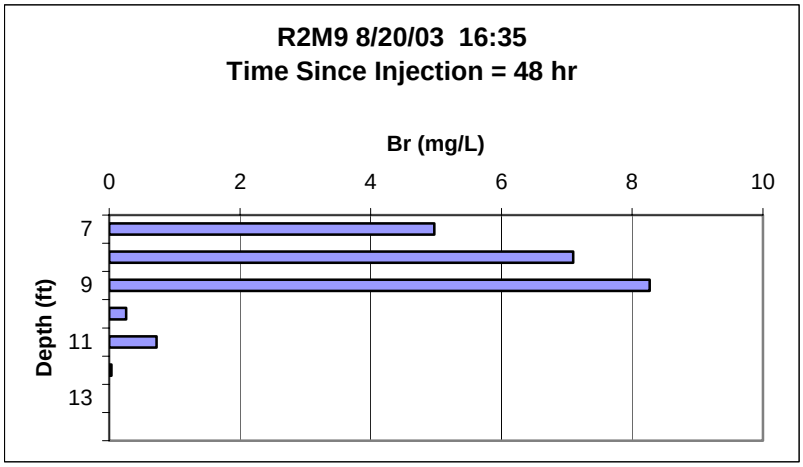

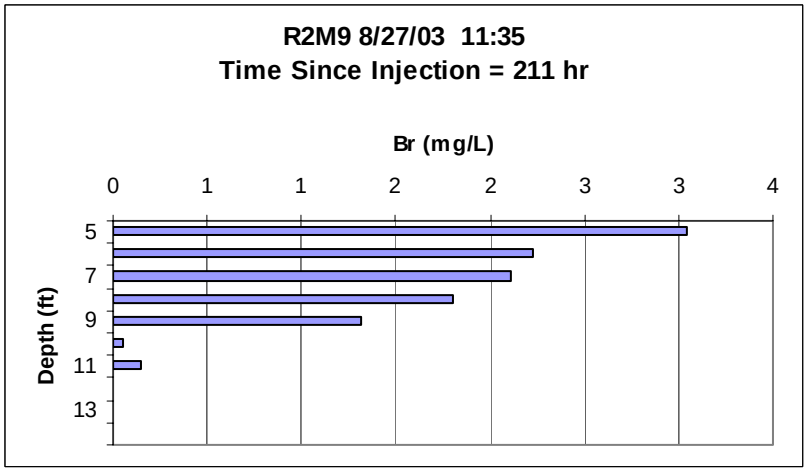

Well R2M10 (continued)

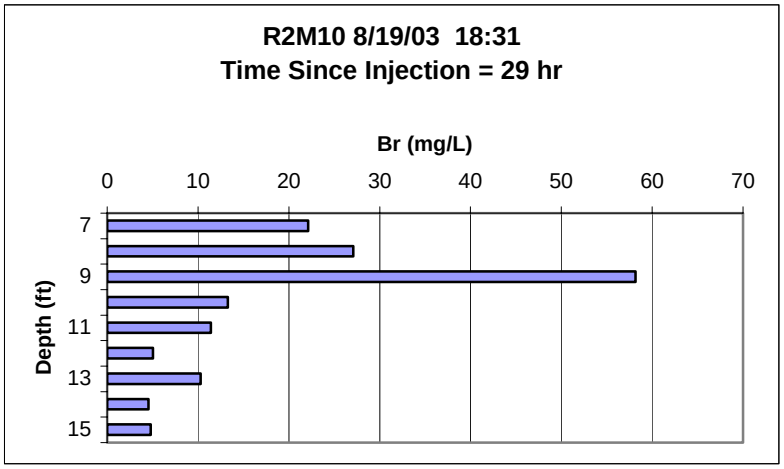

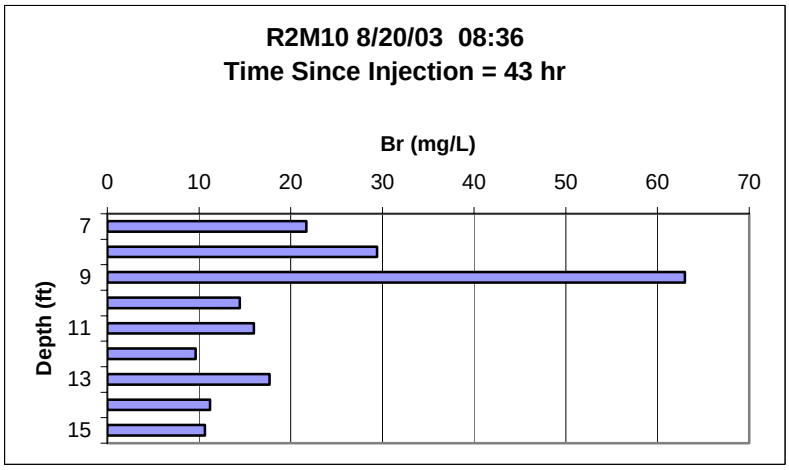

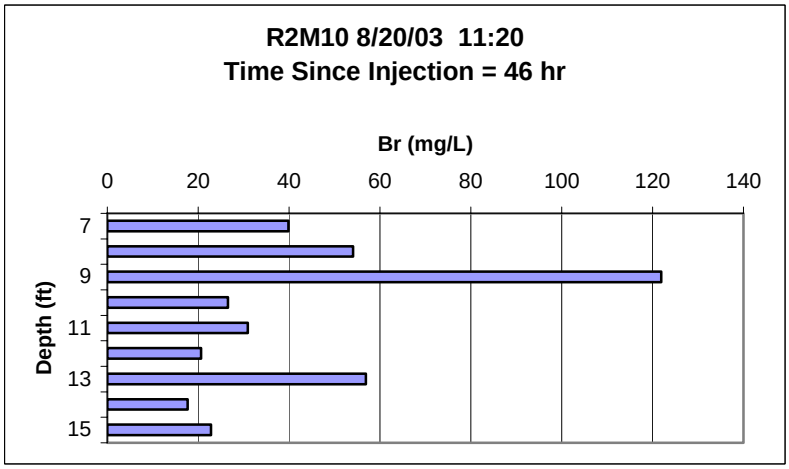

Well R2M10 (continued)

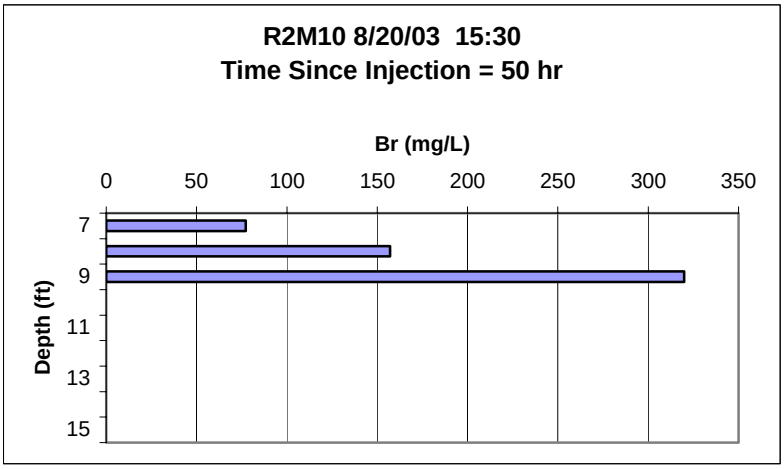

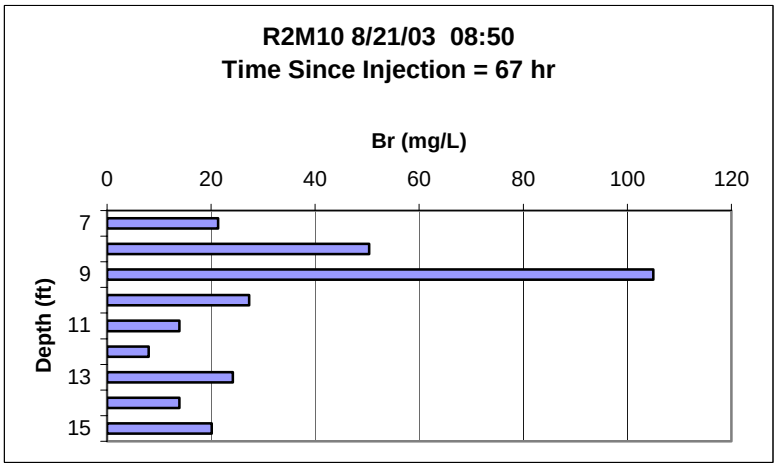

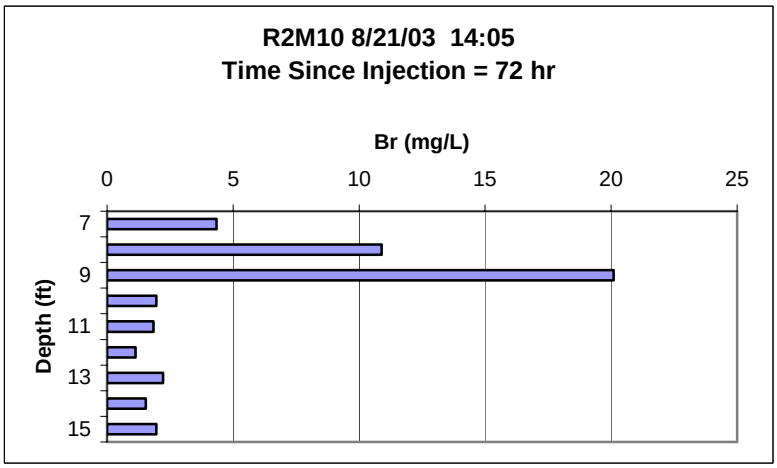

Well R2M10 (continued)

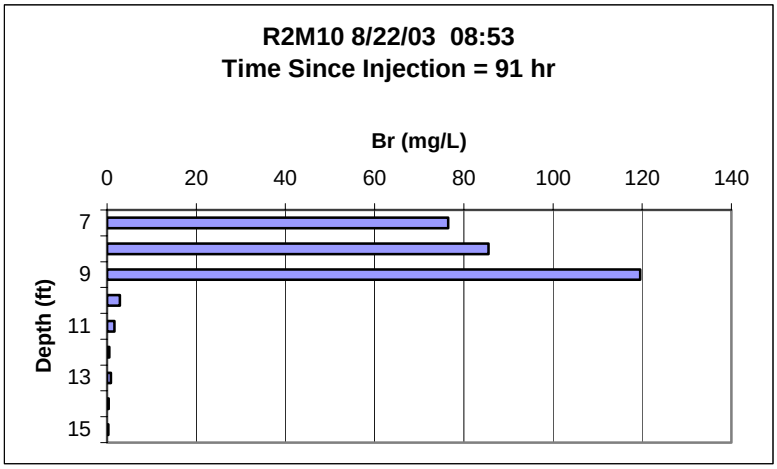

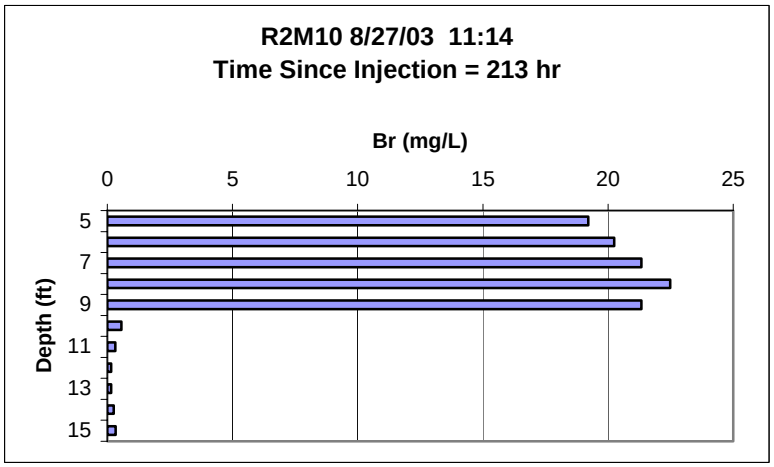

Well R5M1

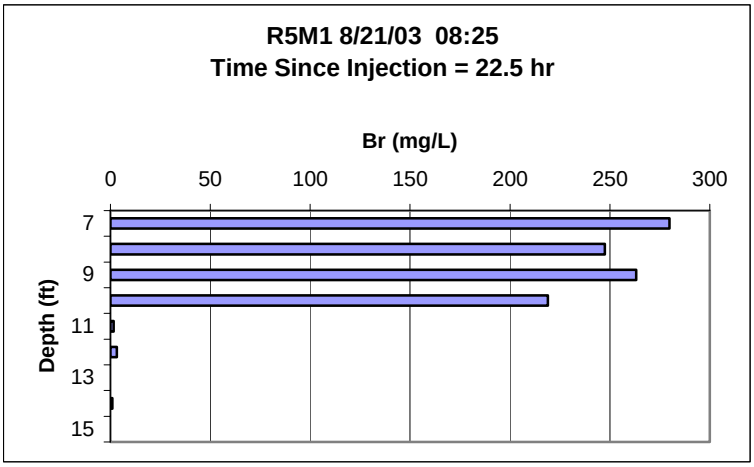
R5M1 8/21/03 08:25
Time Since Injection = 22.5 hr
Br (mg/L)
0
50
100
150
200
250
300
Depth (ft)
7
9
11
13
15

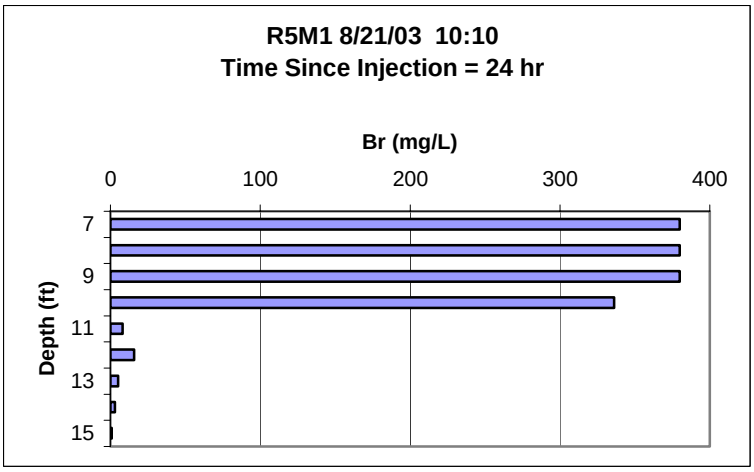
R5M1 8/21/03 10:10
Time Since Injection = 24 hr
Br (mg/L)
0
100
200
300
400
Depth (ft)
7
9
11
13
15

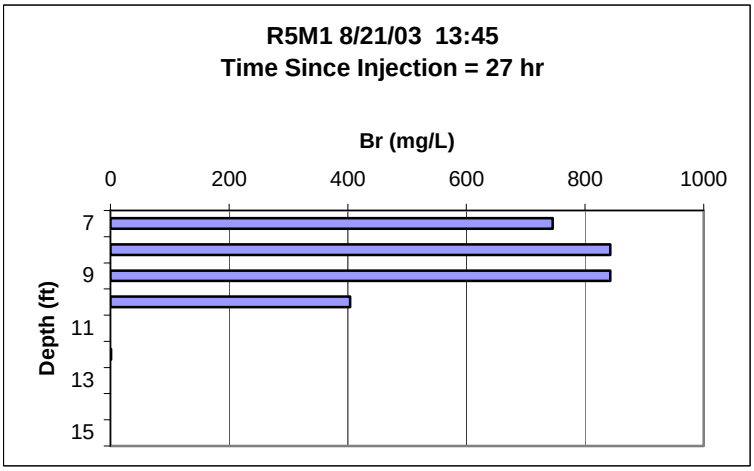
R5M1 8/21/03 13:45
Time Since Injection = 27 hr
Br (mg/L)
0
200
400
600
800
1000
Depth (ft)
7
9
11
13
15

Well R5M1 (continued)

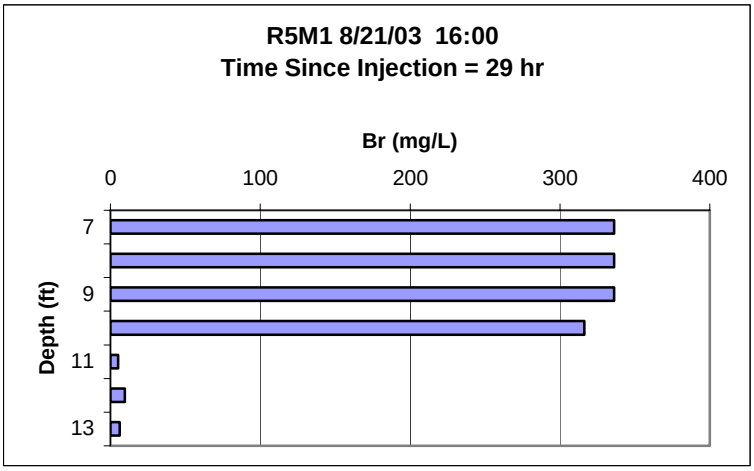

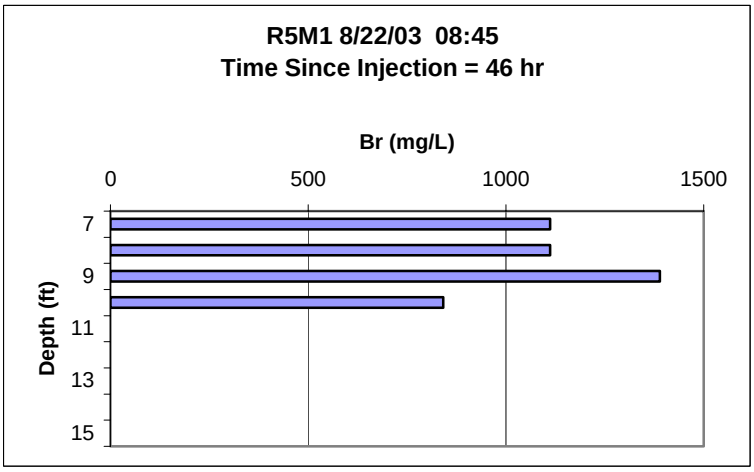

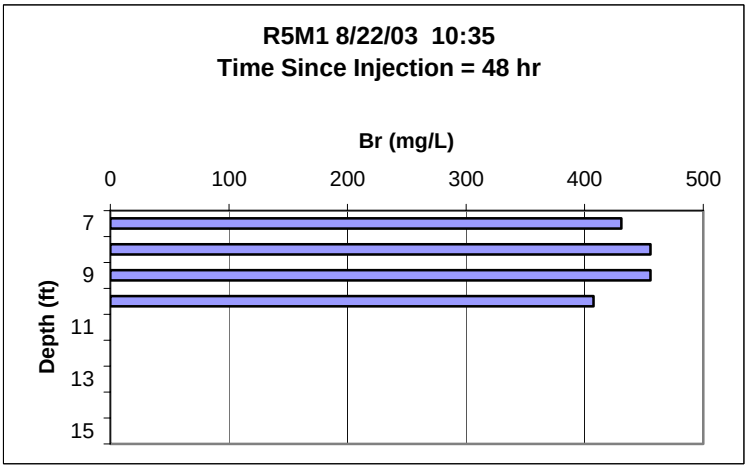

Well R5M7

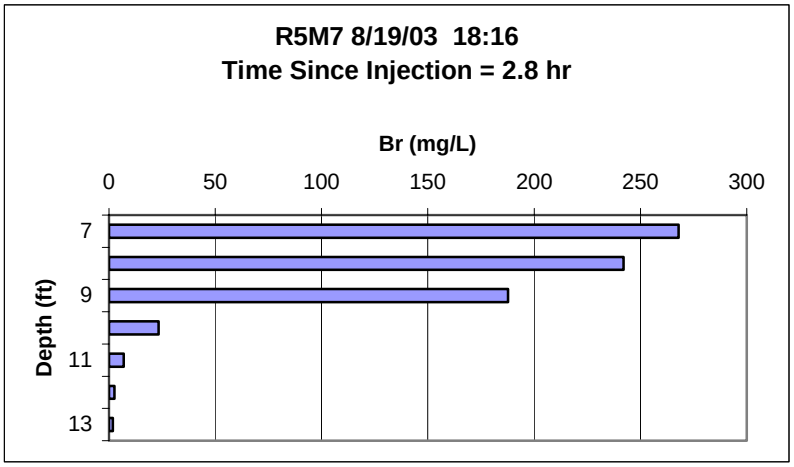
R5M7 8/19/03 18:16
Time Since Injection = 2.8 hr
Br (mg/L)
0
50
100
150
200
250
300
Depth (ft)
7
9
11
13

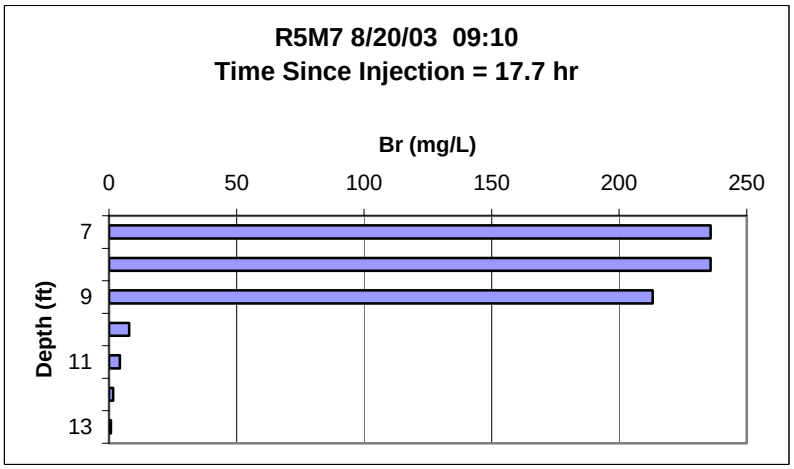
R5M7 8/20/03 09:10
Time Since Injection = 17.7 hr
Br (mg/L)
0
50
100
150
200
250
Depth (ft)
7
9
11
13

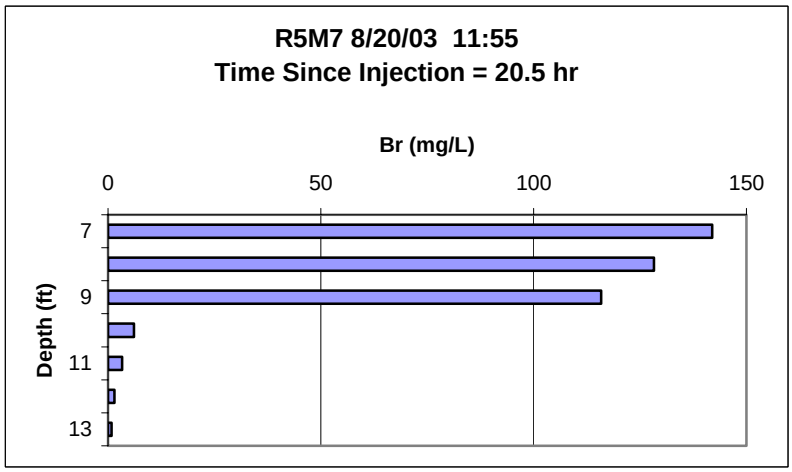
R5M7 8/20/03 11:55
Time Since Injection = 20.5 hr
Br (mg/L)
0
50
100
150
Depth (ft)
7
9
11
13

Well R5M7 (continued)

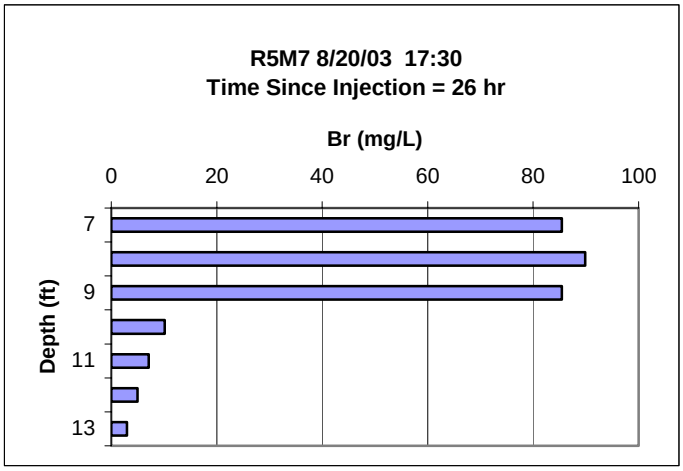

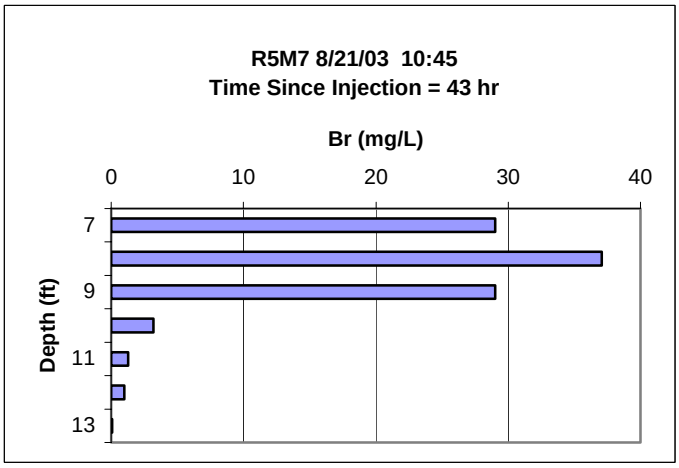

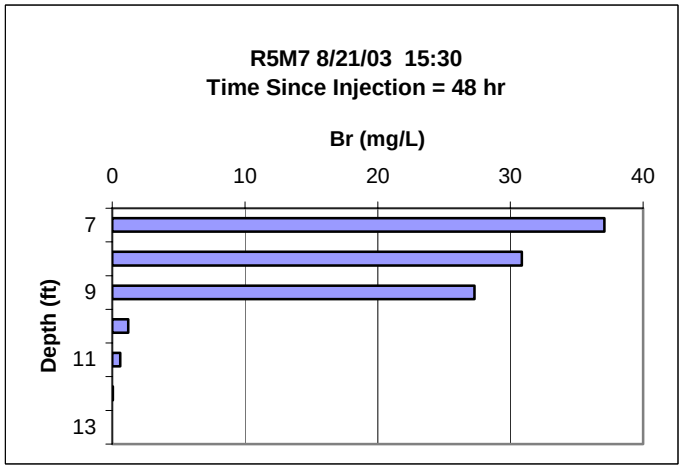

Well R5M7 (continued)

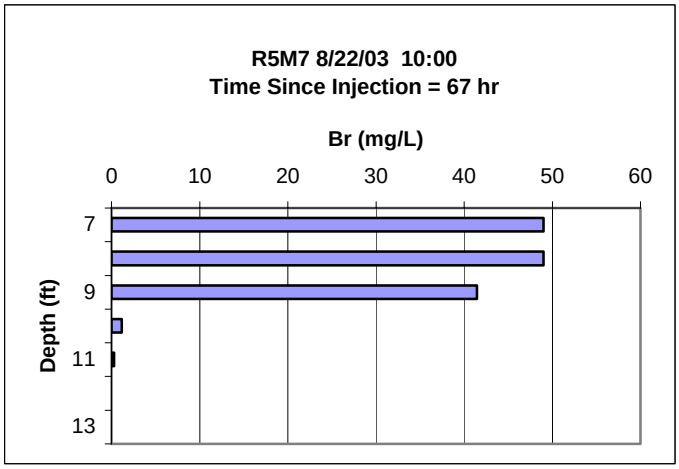

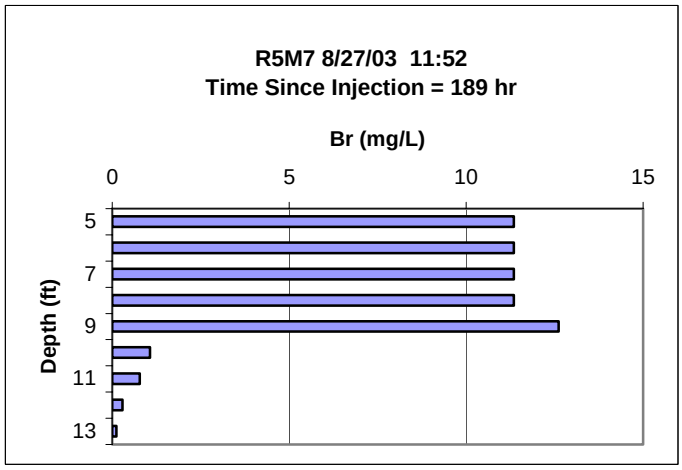

Well R5M8

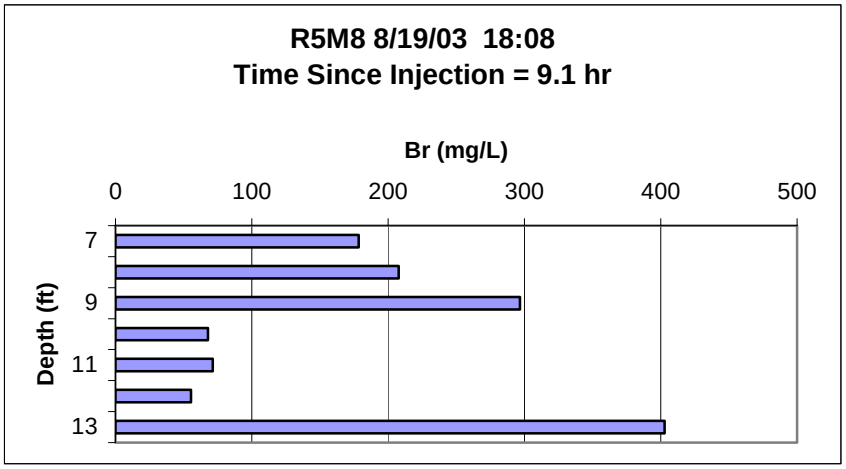
R5M8 8/19/03 18:08
Time Since Injection = 9.1 hr
Br (mg/L)
0
100
200
300
400
500
Depth (ft)
7
9
11
13

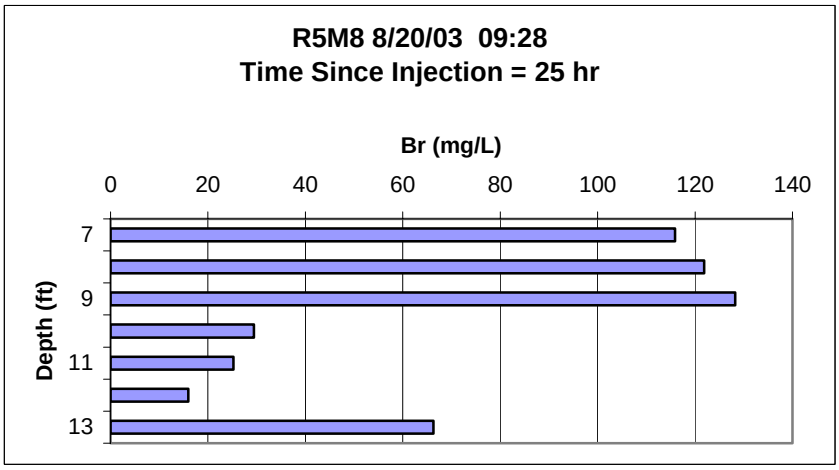
R5M8 8/20/03 09:28
Time Since Injection = 25 hr
Br (mg/L)
0
20
40
60
80
100
120
140
Depth (ft)
7
9
11
13

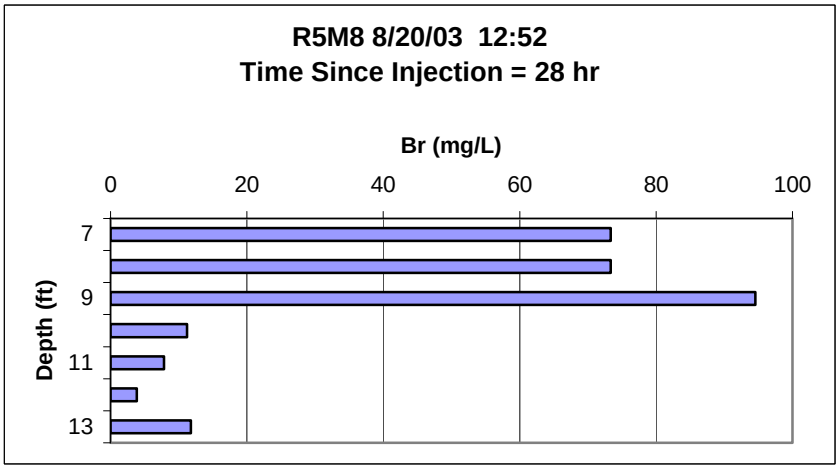
R5M8 8/20/03 12:52
Time Since Injection = 28 hr
Br (mg/L)
0
20
40
60
80
100
Depth (ft)
7
9
11
13

Well R5M8 (continued)

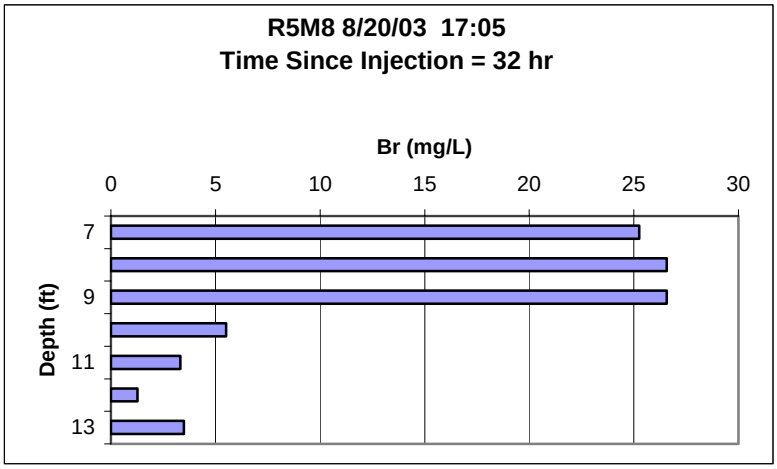

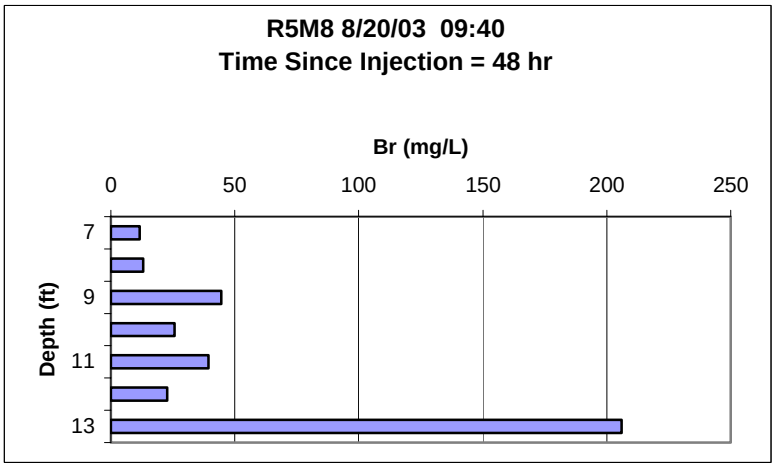

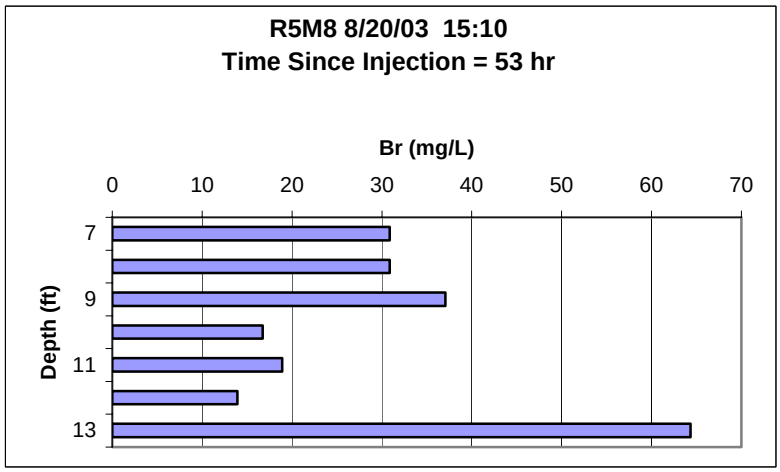

Well R5M8 (continued)

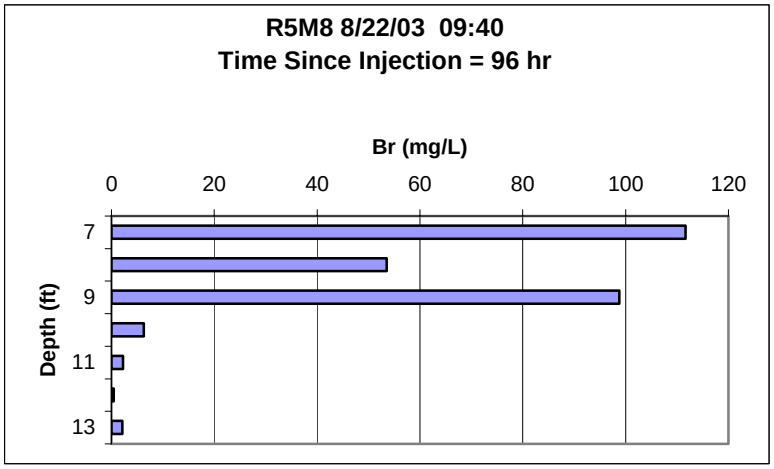

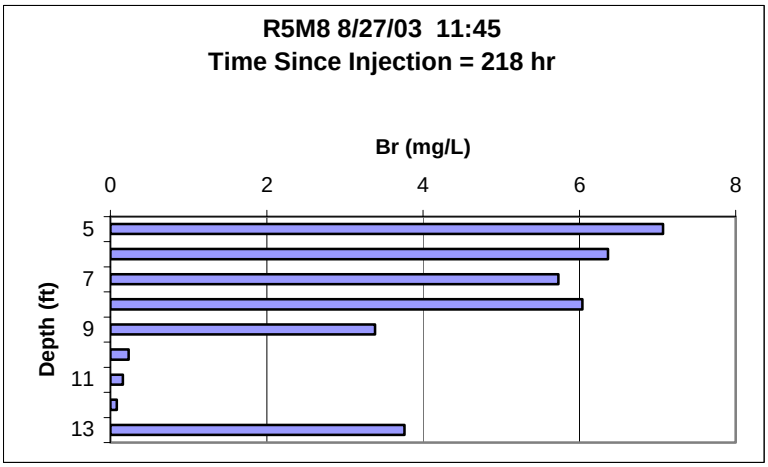

Well R5M9

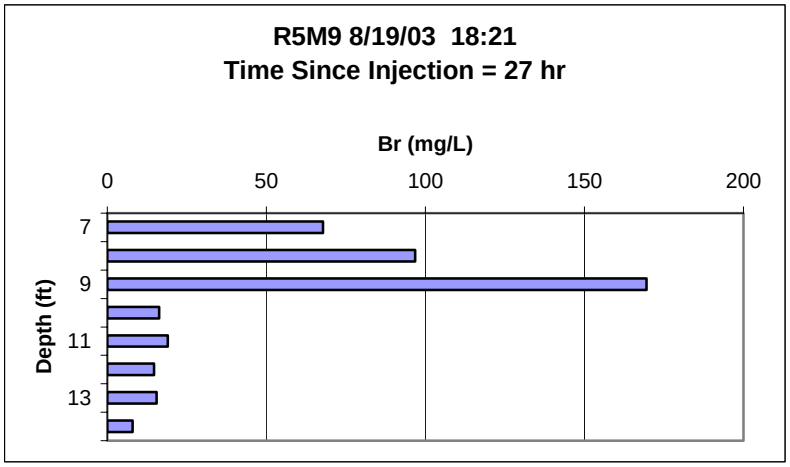
R5M9 8/19/03 18:21
Time Since Injection = 27 hr
Br (mg/L)
0
50
100
150
200
Depth (ft)
7
9
11
13

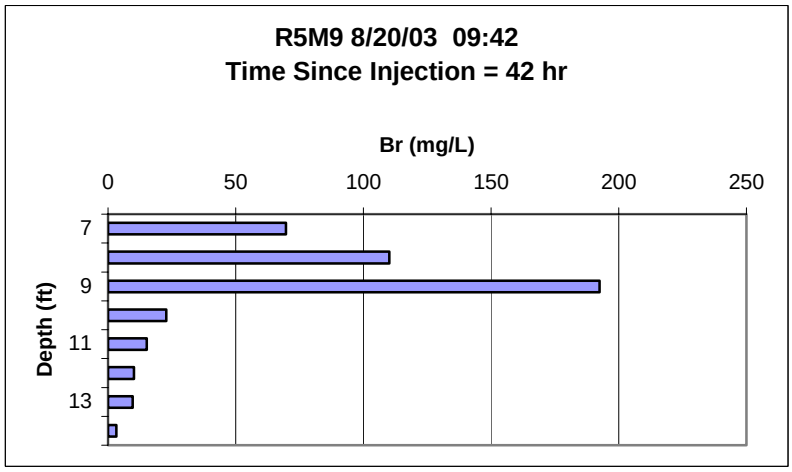
R5M9 8/20/03 09:42
Time Since Injection = 42 hr
Br (mg/L)
0
50
100
150
200
250
Depth (ft)
7
9
11
13

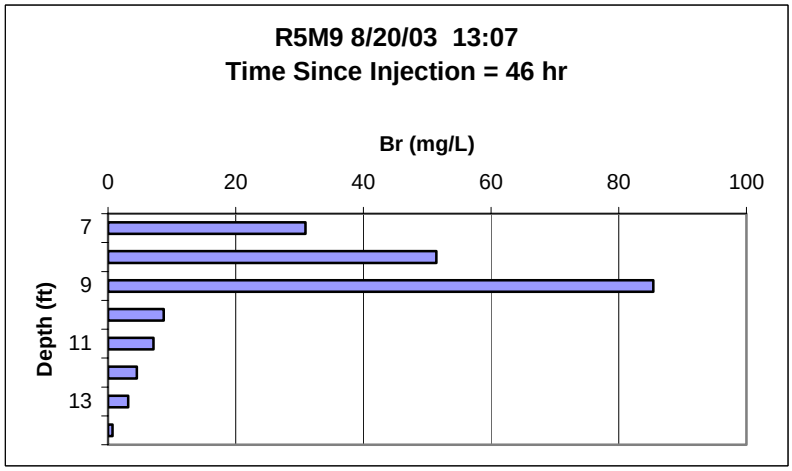
R5M9 8/20/03 13:07
Time Since Injection = 46 hr
Br (mg/L)
0
20
40
60
80
100
Depth (ft)
7
9
11
13

Well R5M9 (continued)

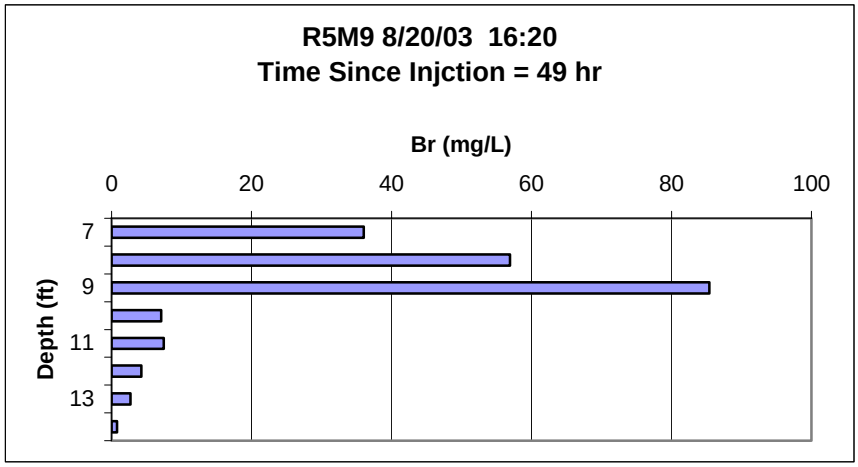

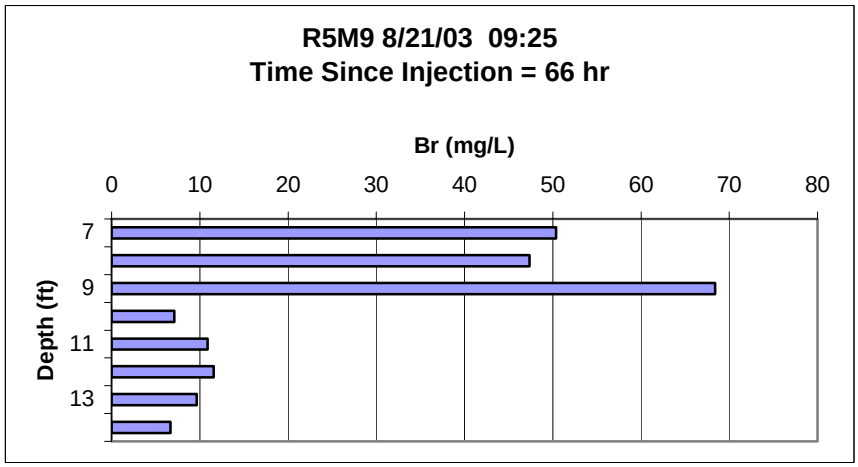

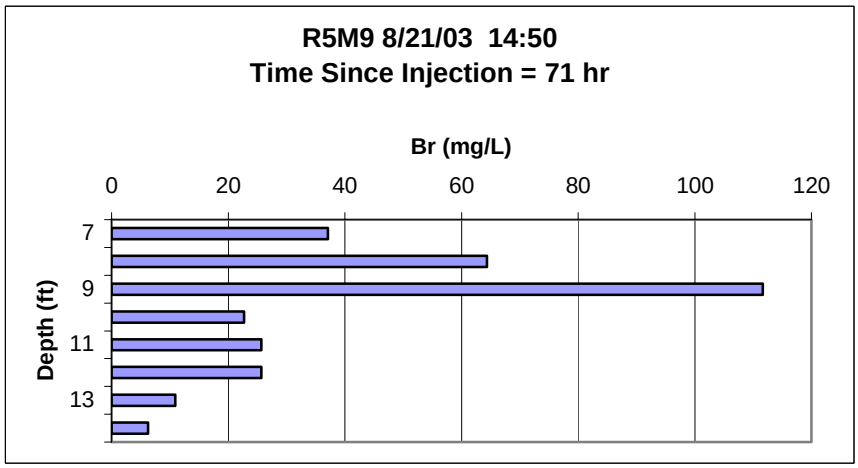

Well R5M9 (continued)

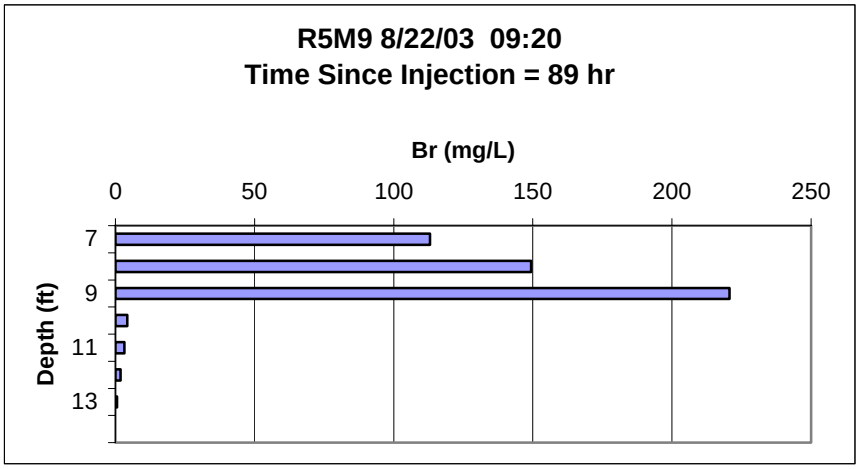

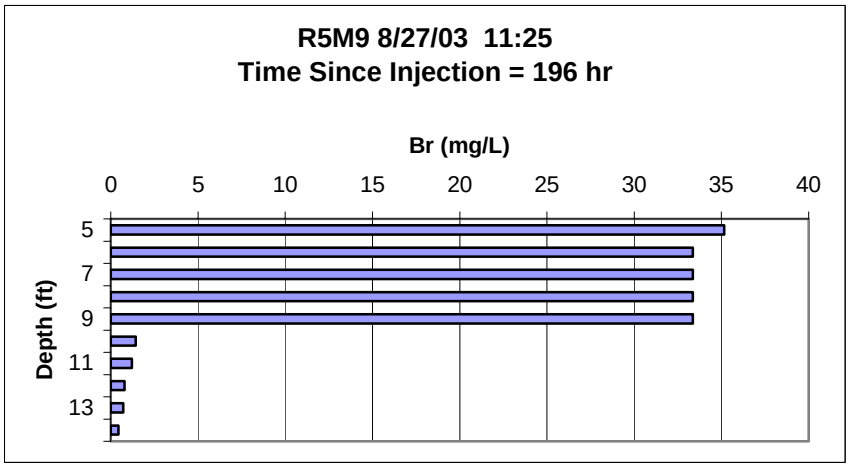

Well R5M10

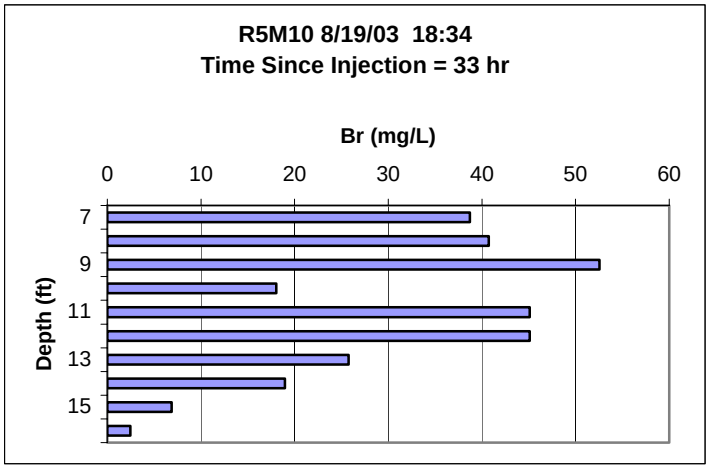
R5M10 8/19/03 18:34
Time Since Injection = 33 hr
Br (mg/L)
0
10
20
30
40
50
60
Depth (ft)
7
9
11
13
15

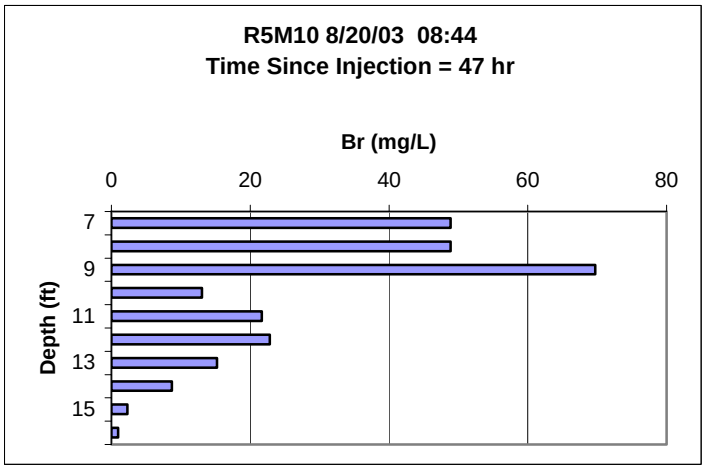
R5M10 8/20/03 08:44
Time Since Injection = 47 hr
Br (mg/L)
0
20
40
60
80
Depth (ft)
7
9
11
13
15

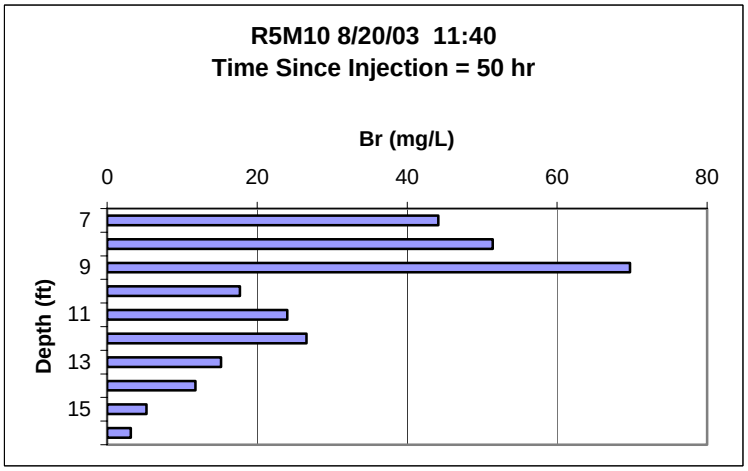
R5M10 8/20/03 11:40
Time Since Injection = 50 hr
Br (mg/L)
0
20
40
60
80
Depth (ft)
7
9
11
13
15

Well R5M10 (continued)

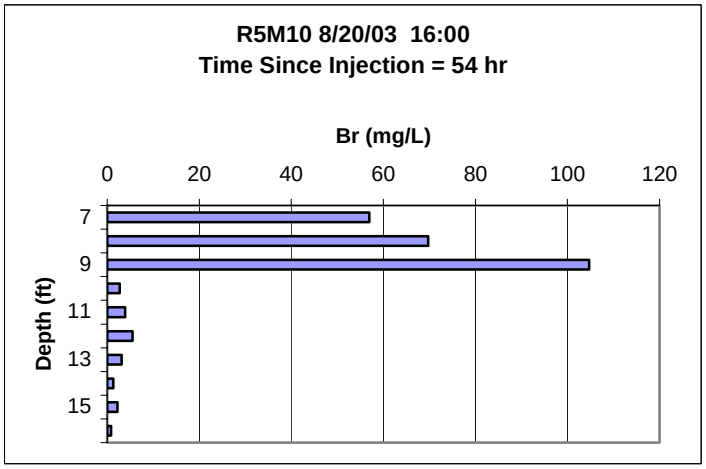

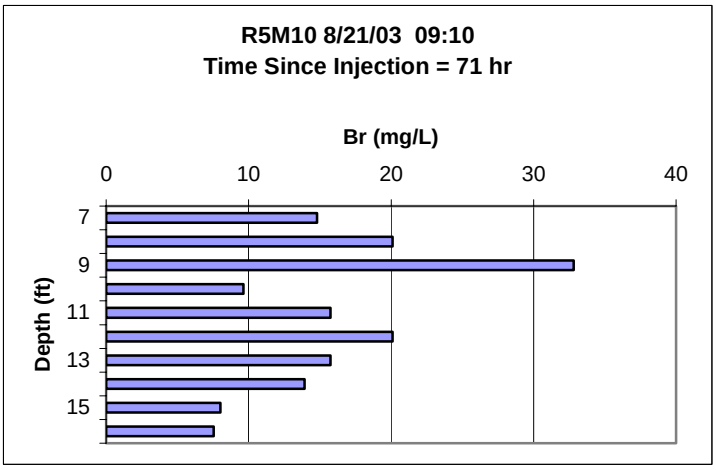

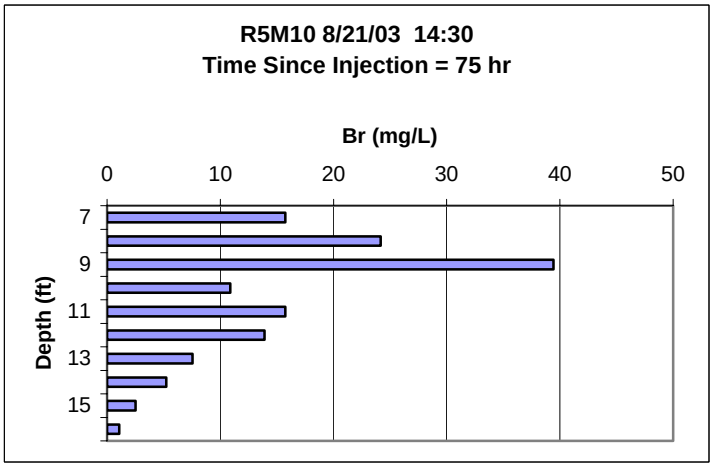
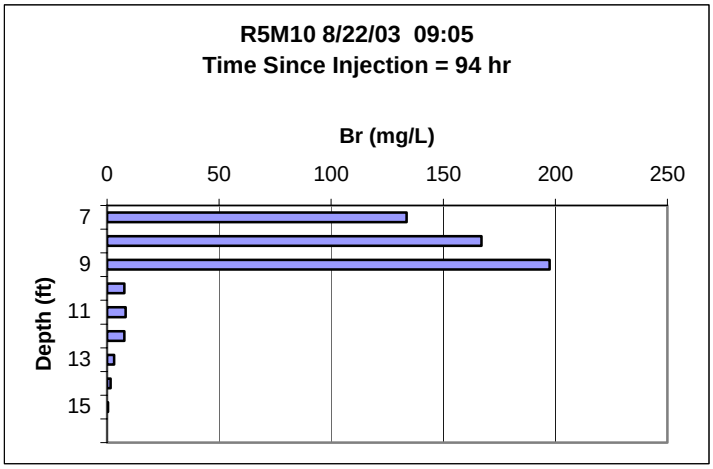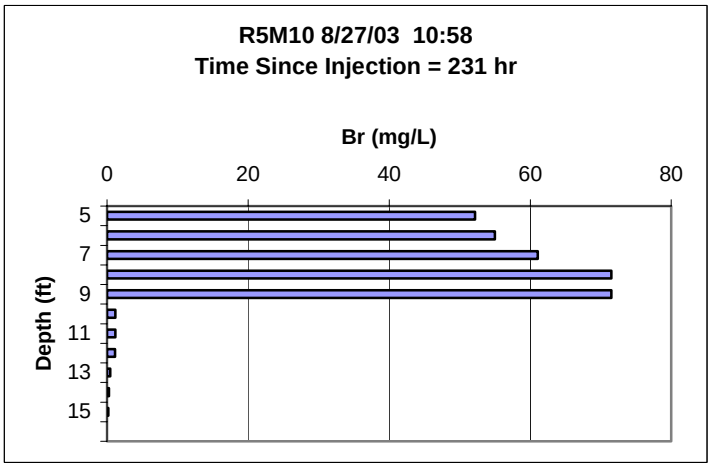
Well R5M10 (continued)