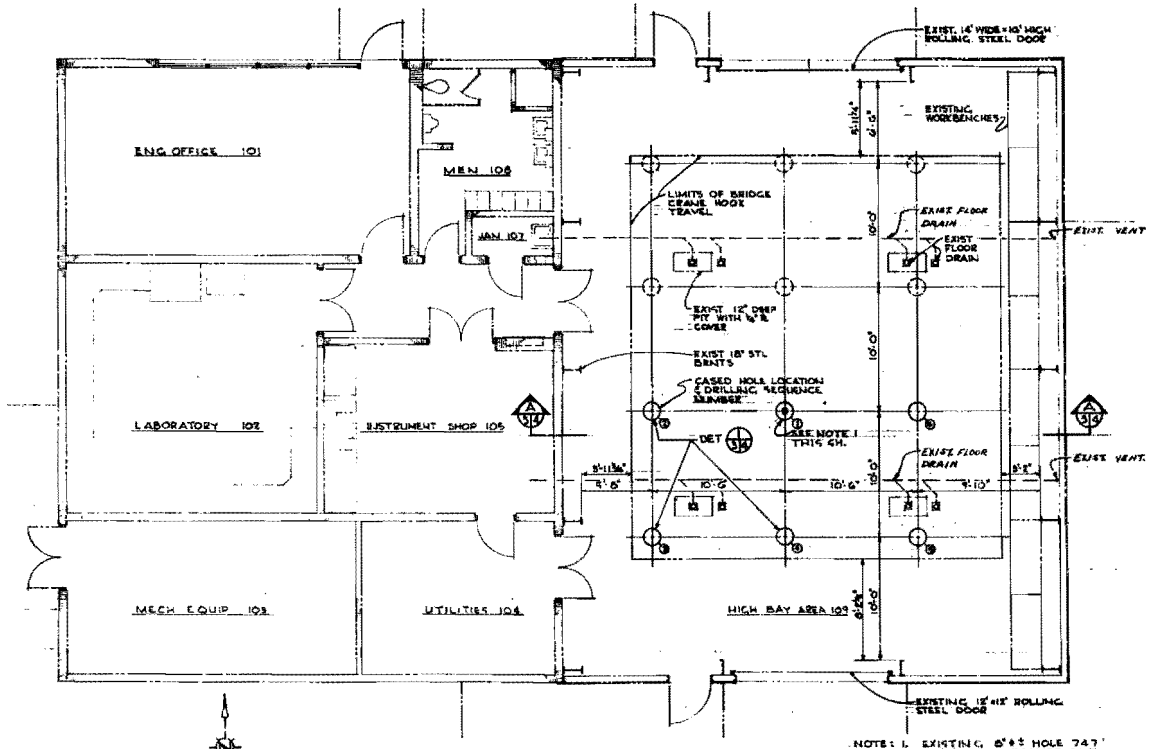

FLOOR PLAN BUILDING WA-88

SCALE: 1/4" = 1'-0"

NOTE: THE BUILDING FLOOR DRAINS, DRAIN VENTS, HYDRAULIC LINES AND ELECTRICAL CONDUIT WHICH ARE A PART OF THE BUILDING UTILITY SYSTEM ARE LOCATED AT THE BOTTOM OF THE CONCRETE FLOOR SLAB. THE CONTRACTOR WILL IMMEDIATELY NOTIFY THE CONTRACTING OFFICER UPON ENCOUNTERING ANY OF THESE LINES DURING ANY OF THE DRILLING OPERATIONS.

NOTE: 1. EXISTING 8" ϕ ± HOLE 747' DEEP TO BE REAMED OUT TO 18" ϕ AND 14" ϕ CASING INSTALLED TO T.D. GROUT BETWEEN EXIST CMP & CASING AND BACKFILL BETWEEN CMP & SOIL.

2. THE BLDG. 5 TON CAPACITY BRIDGE CRANE IS AVAILABLE FOR USE BY THE CONTRACTOR. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE TO THE CRANE.

3. PROTECT FLOOR DRAINS & PITS FROM DRILLING MUD.

GRAPHIC SCALE

1/4" = 1'-0"

CLASS UNCLASSIFIED

REVIEWER E. J. Stephens DATE 11-21-71

U. S. ATOMIC ENERGY COMMISSION
LOS ALAMOS AREA OFFICE
LOS ALAMOS, NEW MEXICO

EXPANDED CARBON 13 FACILITY

FLOOR PLAN

BLDG. WA-88 TA-46

ENG-C 39824

LOS ALAMOS SCIENTIFIC LABORATORY
UNIVERSITY OF CALIFORNIA
LOS ALAMOS, N.M.

LA-JT-51 3 4

ENTERED

110888

34151