

33

#68554

NEW MEXICO ENVIRONMENT DEPARTMENT
Hazardous Waste Bureau
and
Ground Water Quality Bureau
Voluntary Remediation Program

**TECHNICAL BACKGROUND DOCUMENT FOR DEVELOPMENT OF SOIL
SCREENING LEVELS**

December 18, 2000

MAR 02 2001



3601

[Handwritten signature]

Volume 1

**TIER 1: SOIL SCREENING GUIDANCE TECHNICAL
BACKGROUND DOCUMENT**

Table of Contents

VOLUME 1 TIER 1: SOIL SCREENING GUIDANCE TECHNICAL BACKGROUND DOCUMENT

1. Introduction.....	1
1.1 Organization of the Document.....	1
1.2 Scope of the Soil Screening Guidance.....	2
1.2.1 Exposure Pathways.....	3
1.2.2 Exposure Assumptions.....	3
1.2.3 Target Risk and Hazard.....	4
1.2.4 SSL Model Assumptions.....	4
2. Development of Pathway Specific Soil Screening Levels.....	5
2.1 Human Health Basis.....	5
2.1.1 Additive Risk.....	5
2.1.2 Acute Exposures.....	6
2.1.3 Route-to-Route Extrapolation.....	6
2.1.4 Direct Ingestion.....	7
2.1.5 Dermal Absorption.....	7
2.1.6 Inhalation of Volatiles and Fugitive Dusts.....	8
2.2 Residential land uses.....	8
2.2.1 Residential Receptors.....	9
2.3 Non-residential land uses.....	12
2.3.1 Commercial/Industrial Worker.....	13
2.3.2 Construction Worker.....	15
2.3.3 Alternative Evaluation for Lead.....	16
2.4 Site Assessment and Characterization.....	16
2.4.1 Development of Data Quality Objectives.....	17
2.4.2 Identification of COPCs.....	17
2.4.3 Development of a Preliminary Conceptual Site Model.....	18
2.4.4 Compare COPC Maximum Concentrations With SSLs.....	18
3. Chemical-Specific and Physical-Chemical Parameters.....	18
3.1 Volatilization Factor.....	19
3.2 Soil Saturation Limit.....	20

3.3 Particulate Emission Factor 21

Table of Contents (con't)

3.4 Physical-Chemical Parameters 22

 3.4.1 Solubility, Henry's Law Constant, and K_{ow} 23

 3.4.2 Soil Organic Carbon/Water Partition Coefficients (K_{oc}) 23

 3.4.3 Soil/Water Partition Coefficients (K_d) 24

4. Migration of Contaminants to Groundwater 25

 4.1.1 Overview of the SSL Model Approach 26

 4.1.2 Model Assumptions 26

 4.1.3 Soil Water Partition Equation 27

 4.1.4 Dilution Attenuation Factor 27

 4.1.5 Limitations on the Use of the Dilution Attenuation Factor 29

 4.1.6 Generic SSLs for Protection of Groundwater 30

 4.1.7 Development of Site Specific SSLs for Protection of Groundwater 30

 4.1.8 Detailed Model Analysis for SSL Development 33

 4.1.9 Summary of the Migration to Groundwater Pathway SSLs 34

5. Use of the SSLs 34

Appendix A:

 Table A-1: NMED Soil Screening Levels

 Table A-2: Default Exposure factors

Appendix B

 Table B-1: Physical-Chemical Properties

Appendix C

 Table C-1: Human Health Benchmarks Used for calculating SSLs

**VOLUME 2 TIER 1: SCREENING-LEVEL ECOLOGICAL RISK ASSESSMENT
 PHASE I SCOPING ASSESSMENT**

1. Introduction 1

2. Scoping Assessment 2

 2.1 Compile and Assess Basic Site Information 2

 2.2 Site Visit 3

 2.3 Identify Contaminants of Potential Ecological Concern 4

 2.4 Developing the Preliminary Conceptual Site Exposure Model 4

2.5 Assembling the Scoping Assessment Report.....6

3. Site Exclusion Criteria 9

4. Technical Decision Point: Is Ecological Risk Suspected?..... 9

Attachment A: Screening-Level Ecological Risk Assessment Scoping Assessment: Site Assessment Checklist

Table 1: Examples of Sensitive Environments

Attachment B: Ecological Site Exclusion Checklist and Decision Tree

1. INTRODUCTION

The New Mexico Environment Department (NMED) Hazardous Waste Bureau (HWB) and the Ground Water Quality Bureau (GWQB) have developed this soil screening guidance (SSG) for internal department use for corrective action programs. The SSG discusses the methodology used to derive chemical-specific soil screening levels (SSLs). In addition, guidance is provided to assist in identifying and evaluating appropriate exposure pathways and receptors. Finally, this document provides generic SSLs for chemicals commonly found at contaminated sites based on default exposure parameters under residential and non-residential land-use scenarios.

The SSG provides site managers with a framework for developing and applying the SSLs, and is likely to be most useful for determining whether areas or entire sites are contaminated to an extent that warrants further investigation. It is intended to assist and streamline the site investigation and corrective action process by focusing resources on those sites or areas that pose the greatest risk to human health and the environment. Implementation of the methodologies outlined within this SSG may significantly reduce the time necessary to complete site investigations and cleanup actions at certain sites, as well as improve the consistency of these investigations.

Between various sites there can exist a wide spectrum of contaminant types and concentrations. The level of concern associated with those concentrations depends on several factors, including the likelihood of exposure to levels of potential concern to human health or to ecological receptors. At one end of the spectrum are levels that clearly warrant a response action; at the other end are levels that are below regulatory concern. Appropriate cleanup goals for a site may fall anywhere within this range depending on site-specific conditions. It is important to note that SSLs do not in themselves represent cleanup standards, and the SSLs alone do not trigger the need for a response action or define "unacceptable" levels of contamination in soil. Screening levels such as SSLs identify the lower end of this spectrum - levels below which there is generally no need for further concern--provided the conditions associated with the development of the SSLs are consistent.

1.1 ORGANIZATION OF THE DOCUMENT

The NMED SSG is organized into five major sections with supporting appendices. The remainder of Section 1 addresses the purpose of the NMED SSLs and outlines the scope of the document. Section 2 outlines the receptors, exposure pathways, and exposure assumptions used in calculating the NMED SSLs. It also discusses the risk levels on which the SSLs are predicated and presents the SSL model assumptions. Finally, Section 2 discusses site assessment/characterization activities that should be completed prior to comparing site contaminant concentrations with SSLs. These activities include development of data quality objectives, conducting site sampling, preparation of a preliminary conceptual site model (CSM), and identification of contaminants of potential concern (COPCs).

Section 3 provides a detailed description of the process used to develop pathway-specific SSLs. Included in this section is a discussion of the human health basis for the SSLs, additive risk, and acute exposures. Additional topics discussed in Section 3 include chemical specific parameters used to develop the SSLs and calculating volatilization factors, particulate emission factors and soil saturation limits. Section 4 presents methodologies for assessing the potential for migration of contaminants to groundwater from contaminated soil in concert with generic and site-specific leaching models. Finally, Section 5 addresses special use considerations for addressing contaminant concentrations in soil and notes specific problems that can arise when applying the SSLs to specific sites. Generic SSLs for contaminants that have Water Quality Control Commission (WQCC) Standards for ground water in the State of New Mexico are presented in Table A-1 of Appendix A. In addition, Table A-1 also includes additional compounds which are some of the RCRA regulated constituents. Table A-2 of Appendix A presents the default exposure factor values used in the generation of the NMED SSLs. Physical-chemical values in the calculation of the SSLs are presented in Table B-1 of Appendix B. Toxicity criteria are presented in Table C-1 of Appendix C.

1.2 SCOPE OF THE SOIL SCREENING GUIDANCE

The SSG incorporates readily obtainable site data and utilizes methods from various United States Environmental Protection Agency (US EPA) risk assessment guidance and derives site-specific screening levels for selected contaminants and exposure pathways. Key attributes of the SSG include default values for generic SSLs where site-specific information is unavailable, and the identification of parameters for which site-specific information is needed for the development of site-specific SSLs. The goal of the SSG is to provide a consistent approach for developing site-specific SSLs for evaluating facilities under the auspices of the corrective action process within NMED.

The NMED SSLs are generally based on a 10^{-5} target risk for carcinogens, or a hazard quotient of 1 for noncarcinogens. In instances where an individual contaminant has the capacity to elicit both types of responses, the SSLs preferentially report the screening value representative of the lowest (most stringent) contaminant concentration in environmental media. SSLs for migration to groundwater are based on (in order of preference): State of New Mexico Water Quality Control Commission (WQCC) standards, US EPA Region 9 Preliminary Remediation Goals (PRGs) for tap water (modified to reflect a target risk of 10^{-5} in instances where the PRG is based on a carcinogenic endpoint), maximum contaminant levels (MCL), and nonzero maximum contaminant level goals (MCLG). As such, the NMED SSLs serve as a generic benchmark for screening level comparisons of contaminant concentrations in soil. NMED anticipates that the SSLs will be used as a tool to facilitate prompt identification of those contaminants and areas that represent the greatest risks to human health and the environment. While concentrations above the NMED SSLs presented in this document do not automatically designate a site as "contaminated" or trigger the need for a response action, detected concentrations in site soils exceeding screening levels suggest that further evaluation is appropriate. Further evaluation may include additional sampling to further characterize the nature and extent of contamination, consideration of background levels, reevaluation of contaminants of potential concern (COPCs) or associated risk and hazard using site-specific parameters, and/or a reassessment

of the assumptions associated with the generic SSLs (e.g., appropriateness of route-to-route extrapolations, use of chronic toxicity values to evaluate childhood and construction-worker exposures).

1.2.1 Exposure Pathways

A complete exposure pathway consists of (1) a source, (2) a mechanism of contaminant release, (3) a receiving or contact medium, (4) a potential receptor population, and (5) an exposure route. All five elements must be present for the exposure pathway to be considered complete.

SSLs have been developed for use in evaluating three discrete exposure scenarios representing a variety of potential land uses: residential, commercial/industrial, and construction. The SSG presents lists of potential pathways for each scenario, though these lists are not intended to be exhaustive. Instead, each list represents a set of typical exposure pathways likely to account for the majority of exposure to contaminants in soil at a given site. These include:

- Direct (or incidental) ingestion of soil
- Dermal contact with soil
- Inhalation of volatiles and fugitive dusts from contaminated soil
- Migration of chemicals through soil to an underlying potable aquifer or water-bearing unit

Under some site-specific situations, additional complete exposure pathways may be identified. In these cases, a site-specific evaluation of risk is warranted in which additional exposure pathways can be considered. If other land uses and exposure scenarios are determined to be more appropriate for a site (e.g., Native American land use), the exposure pathways addressed in this document should be modified accordingly or a site-specific risk assessment should be conducted. Early identification of the need for additional information is important because it facilitates development of a defensible sampling and analysis strategy.

The exposure pathways evaluated, by land-use scenario, are presented in Table 1-1.

Table 1-1

Exposure Pathways Evaluated in Soil Screening Guidance			
Potential Exposure Pathway	Residential	Commercial/Industrial	Construction
Direct ingestion	✓	✓	✓
Dermal contact	✓	✓	✓
Inhalation of volatiles outdoors	✓	✓	✓
Inhalation of fugitive dusts outdoors	✓	✓	✓
Inhalation of volatiles indoors	✓		

1.2.2 Exposure Assumptions

SSLs represent risk-based concentrations in soil derived from equations combining exposure assumptions with toxicity criteria developed by US EPA (US EPA, 2000a and 1997a). The models and assumptions used were developed to be consistent with the Superfund concept of "reasonable maximum exposure" (US EPA, 1989). This is intended to provide an upper-

bound estimate of chronic exposure by combining both average and conservative (i.e., 90th to 95th percentile) values in the calculations. The default intake and duration assumptions presented here are intended to be protective of all potentially exposed populations for each land use consideration. Exposure point concentrations in soil should reflect either directly measured or estimated values using fate and transport models. An average concentration is typically used where the focus is on estimating long-term, chronic exposures and there are sufficient site data to allow for an accurate estimation of the mean. Where the potential for acute toxicity may be of concern, estimates based on the maximum exposure may be more appropriate.

The resulting estimate of exposure is then compared with chemical-specific toxicity criteria. To calculate the SSLs, the exposure equations and pathway models are rearranged to backcalculate an "acceptable level" of a contaminant in soil corresponding to a specific level of target risk or hazard.

1.2.3 Target Risk and Hazard

Target risk and hazard levels for human health are risk management-based criteria for carcinogenic and non-carcinogenic responses, respectively, to determine (1) whether site-related contamination poses an unacceptable risk to human health and requires corrective action or (2) whether implemented corrective action(s) sufficiently protects human health. If an estimated risk or hazard falls within the target range, the risk manager may conclude that a site does not pose an unacceptable risk. This decision should take into account the degree of inherent conservatism or level of uncertainty associated with the site-specific estimates of risk and hazard. An estimated risk that exceeds these targets, however, does not necessarily indicate that the current conditions are not safe or that they present an unacceptable risk. Rather, a site risk calculation that exceeds a target value may simply indicate the need for further evaluation or refinement of the exposure model.

For cumulative exposure via the ingestion, inhalation, and dermal pathways, toxicity criteria are used to calculate an acceptable level of contamination in soil. SSLs are based on a carcinogenic risk level of one-in-one-hundred-thousand (1×10^{-5}) and a non-carcinogenic hazard quotient of 1. A carcinogenic risk level is defined as the incremental probability of an individual developing cancer over a lifetime as a result of exposure to a potential carcinogen. The non-carcinogenic hazard quotient assumes that there is a level of exposure below which it is unlikely for even sensitive populations to experience adverse health effects.

1.2.4 SSL Model Assumptions

The models used to calculate inhalation exposure and protection of groundwater based on potential migration of contaminants in soil are intended to be utilized at an early stage in the site investigation process when information regarding the site may be limited. For this reason, the models incorporate a number of simplifying assumptions. For instance, the models assume an infinite contaminant source, i.e. a constant concentration is maintained for the duration of the exposure period. Although this is a highly conservative assumption, finite source models require accurate data regarding source size and volume. Such data are

unlikely to be available from limited sampling efforts. The models also assume that contamination is homogeneous throughout the source and that no biological or chemical degradation occurs. Where sufficient site-specific data are available, more-detailed finite-source models may be used in place of the default assumptions presented in this SSG.

2. DEVELOPMENT OF PATHWAY SPECIFIC SOIL SCREENING LEVELS

The following sections present the technical basis and limitations used to calculate SSLs for residential, commercial/industrial, and construction land use scenarios. The equations used to evaluate inhalation and migration to groundwater include a number of easily obtainable site-specific input parameters. Where site-specific data are not available, conservative default values are presented. The equations used are presented in Sections 2.2 and 2.3. Generic SSLs calculated for 133 chemicals, using these default values, are presented in Table A-1 of Appendix A.

2.1 HUMAN HEALTH BASIS

The toxicity criteria used for calculating the SSLs are presented in Table C-1 of Appendix C. The primary sources for the human health benchmarks are US EPA's Integrated Risk Information System (IRIS) (US EPA, 2000a), the Health Effects Assessment Summary Tables (HEAST) (US EPA, 1997a), and US EPA's National Center for Environmental Assessment (NCEA). Additional sources include the minimal risk levels (MRLs) developed by the Agency for Toxic Substances and Disease Registry (ATSDR). For soil ingestion, inhalation of volatile organic compounds (VOCs) and fugitive dusts, and dermal contact, the NMED SSLs correspond to a 10^{-5} level for carcinogens and/or a hazard quotient of 1 for noncarcinogens, whichever is lower (i.e., more protective).

2.1.1 Additive Risk

It is important to note that no consideration is provided in the calculation of individual NMED SSLs for additive risk when exposures to multiple chemicals occur. The SSG addresses this issue in Section 5. Because the NMED SSLs for carcinogenic effects correspond to a 10^{-5} risk level individually, exposure to multiple contaminants may result in a cumulative site risk that is above the anticipated risk management range. While carcinogenic risks of multiple chemicals are simply added together, the issue of additive hazard is more complex for noncarcinogens because of the theory that a threshold exists for noncarcinogenic effects. This threshold is defined as the level below which adverse effects are not expected to occur, and represents the basis for the reference dose (RfD) and reference concentration (RfC). Since adverse effects are not expected to occur at the RfD or RfC and the SSLs are derived by setting the potential exposure dose to the RfD or RfC, the SSLs do not address the risk of exposure to multiple chemicals at levels where the individual chemicals alone would not be expected to cause any adverse effects. In such cases, the SSLs may not provide an accurate indicator for the likelihood of harmful effects. However, noncarcinogenic effects should only be considered additive for those chemicals with the same toxic endpoint and/or mechanism of action. The sources provided in Section 2.1 should be consulted to determine the endpoint and/or target organ system prior to

attempting to evaluate the additive health effects resulting from simultaneous exposure to multiple contaminants.

Additivity of the SSLs is further complicated by the fact that not all of the SSLs are based on toxicity. SSLs for certain volatile chemicals are determined based on a ceiling limit concentration termed the soil saturation limit (and denoted as C_{sd}) above which these chemicals may occur as nonaqueous phase liquids (NAPLs) in soil. This is discussed further in Section 3.2. Further, for certain inorganic and semivolatile organic compounds (SVOCs) that exhibit relatively low toxicity, a non risk-based maximum concentration of 10^5 mg/kg is given when the risk-based SSL exceeds that level. These are noted as "max" in the tables.

2.1.2 Acute Exposures

The exposure assumptions used to develop the SSLs are based on a chronic exposure scenario and do not account for situations where high-level exposures may result in acute toxic effects. Such situations may arise when contaminant concentrations are very high, or may result from specific site-related conditions and/or behavioral patterns (i.e., pica behavior in children). Such exposures may be of concern for those contaminants that primarily exhibit acute health effects. Toxicological information regarding cyanide and phenol indicate that acute effects may be of concern for children exhibiting pica behavior. Pica is typically described as a compulsive craving to ingest non-food items (such as clay or paint). Although it can be exhibited by adults as well, it is typically of greatest concern in children because they often exhibit behavior (e.g., outdoor play activities and greater hand-to-mouth contact) that results in greater exposure to soil than for a typical adult. In addition, children also have a lower overall body weight relative to the predicted intake.

2.1.3 Route-to-Route Extrapolation

As of January 1991, IRIS and NCEA databases no longer present RfDs or SFs for the inhalation route. These criteria have been replaced with RfCs for noncarcinogenic effects and unit risk factors (URFs) for carcinogenic effects. However, for the purposes of estimating risk and calculating risk-based concentrations, inhalation reference doses (RfD) and inhalation slope factors (SF) are preferred. Route-to-route extrapolations were also frequently used when there were no toxicity values available for a given route of exposure. However, route extrapolations were not performed for inorganics due to portal of entry effects and known differences in absorption efficiency between the oral and dermal routes of exposure. To calculate an RfD, from an RfC, the following equation and assumptions may be used for most chemicals:

$$\text{RfD, } \frac{\text{mg}}{\text{kg} \cdot \text{day}} = \text{RfC (mg / m}^3) \times \frac{20\text{m}^3}{\text{day}} \times \frac{1}{70\text{kg}}$$

The SF was calculated from the URF using the following equation and assumptions:

$$SF \frac{(\text{kg} \cdot \text{day})}{(\text{mg})} = \text{URF} \left(\text{m}^3/\text{mg} \right) \times \frac{\text{day}}{20\text{m}^3} \times 70\text{kg} \times \frac{10^3 \text{ug}}{\text{mg}}$$

An additional route extrapolation is the use of oral toxicity values for evaluating dermal exposures. Because no toxicity data are presently available for evaluating dermal exposure to contaminants, US EPA has developed a methodology for use in dermal assessments. Most oral RfDs and cancer slope factors are based on an administered dose while dermal equations estimate an absorbed dose. Gastrointestinal and pulmonary absorption of many chemicals is typically much greater than absorption through intact skin. Thus, for evaluating the effects of dermal exposure to contaminants in soil, the oral toxicity value should be adjusted from an administered dose to an absorbed dose by accounting for the absorption efficiency of the chemical. Assuming 100 percent absorption via the oral exposure route may result in an overestimation of the absorbed dose, resulting in an overestimation of the dose at the site of toxic injury and underestimating the actual potency of the chemical to exert an observed effect. The magnitude of the underestimation is inversely proportional to the true oral absorption of the compound. Based on the current guidance (US EPA, 2000b), the only chemical for which an adjustment is recommended is cadmium. An oral absorption efficiency of 5 percent is assumed for cadmium which leads to an estimated dermal reference dose (RfD) of 0.000025 mg/kg-day.

2.1.4 Direct Ingestion

Exposure to contaminants through incidental ingestion of soil can result from the inadvertent consumption of soils adhering to the hands, food items, or objects that are placed into the mouth. It can also result from swallowing dust particles that have been inhaled and deposited in the mouth and subsequently swallowed. Commercial/industrial and construction workers and residential receptors may inadvertently ingest soil that adheres to their hands while involved in work- or recreation-related activities. Calculation of SSLs for direct ingestion are based on the methodology presented in US EPA's *Risk Assessment Guidance for Superfund (RAGS): Volume I - Human Health Evaluation Manual (Part B, Development of Risk-Based Preliminary Remediation Goals), Interim* (US EPA, 1991), *Soil Screening Guidance: Technical Background Document* (US EPA, 1996a), and *Supplemental Guidance for Developing Soil Screening Levels for Superfund Sites* (US EPA, 1999a).

2.1.5 Dermal Absorption

Exposure to soil contaminants may result from dermal contact with contaminated soil and the subsequent absorption of contaminants through the skin. Contact with soil is most likely to occur as a result of digging, gardening, landscaping, or outdoor recreation activities. Excavation activities may also be a potential source of exposure to contaminants, particularly for construction workers. Calculation of the screening levels for ingestion of soil under the residential exposure scenario is based on the methodology presented in EPA's *Risk Assessment Guidance for Superfund: Volume I - Human Health Evaluation Manual (Part B, Development of Risk-Based Preliminary Remediation Goals), Interim* (1991), and *Soil Screening Guidance: Technical Background Document* (US EPA, 1996a). The suggested default input values

used to develop the NMED SSLs are consistent with EPA's forthcoming R-4G.S, Part E, *Supplemental Guidance for Dermal Risk Assessment* (US EPA, 2000a).

2.1.6 Inhalation of Volatiles and Fugitive Dusts

EPA toxicity data indicate that risks from exposure to some chemicals via the inhalation pathway far outweigh the risk via ingestion or dermal contact; therefore, the NMED SSLs have been designed to address inhalation of volatiles and fugitive dusts. To address the soil/sediment-to-air pathways, the SSL calculations incorporate volatilization factors (VF) for volatile contaminants and particulate emission factors (PEF) for nonvolatile contaminants. The SSLs follow the procedures for evaluating inhalation of VOCs and fugitive dust particles presented in EPA's *Risk Assessment Guidance for Superfund: Volume I - Human Health Evaluation Manual (Part B, Development of Risk-Based Preliminary Remediation Goals), Interim* (US EPA, 1991), *Soil Screening Guidance: Technical Background Document* (US EPA, 1996a), *Human Health Risk Assessment Protocol for Hazardous Waste Combustion Facilities* (US EPA, 1998), and *Supplemental Guidance for Developing Soil Screening Levels for Superfund Sites* (US EPA, 1999a).

VOCs may adhere to soil particles or be present in interstitial air spaces in soil, and may volatilize into ambient air. This pathway may be particularly significant if the VOC emissions are concentrated in indoor spaces of onsite buildings. For the purpose of calculating the NMED SSLs, VOCs are considered those chemicals having a Henry's Law constant greater than $1 \times 10^5 \text{ atm}\cdot\text{m}^3/\text{mole}\cdot\text{K}$ and a molecular weight less than 200 g/mole.

Inhalation of contaminants via inhalation of fugitive dusts is assessed using a PEF that relates the contaminant concentration in soil/sediment with the concentration of respirable particles in the air due to fugitive dust emissions. It is important to note that the PEF used to address residential and commercial/industrial exposures evaluates only windborne dust emissions and does not consider emissions from traffic or other forms of mechanical disturbance which could lead to a greater level of exposure. The PEF used to address construction worker exposures evaluates windborne dust emissions and emissions from vehicle traffic associated with construction activities. Therefore, the fugitive dust pathway should be considered carefully when developing the CSM at sites where receptors may be exposed to fugitive dusts by other mechanisms. The development of the PEF for both residential and non-residential land uses is discussed further in Section 3.3.

2.2 RESIDENTIAL LAND USES

Residential exposures are assessed based on child and adult receptors. As discussed below, the child forms the basis for evaluation of noncarcinogenic effects incurred under residential exposures, while carcinogenic responses are modeled based upon age-adjusted values to account for exposures averaged over a lifetime. Under most circumstances, onsite residential receptors are expected to be the most conservative receptor basis for risk assessment purposes due to the assumption that exposure occurs 24 hours a day, 350 days per year, extending over a 30 year exposure duration. Table 2-1 provides a summary of the exposure characteristics and parameters associated with a residential land use receptor.

Table 2-1

Summary of the Residential Land Use Receptors	
Exposure Characteristics	<ul style="list-style-type: none"> • Substantial soil exposure (esp. children) • High soil ingestion rate (esp. children) • Significant time spent indoors • Long-term exposure
Default Exposure Parameters	
Exposure frequency (d/yr)	350
Exposure duration (yr)	8 (child)
	24 (adult)
Soil ingestion rate (mg/day)	200 (child)
	100 (adult)
Body Weight (kg)	15 (child)
	70 (adult)
Skin surface area exposed (cm ²)	2,800 (child)
	5,700 (adult)
Skin-soil adherence factor	0.2 (child)
	0.07 (adult)
Air inhalation rate (m ³ /d)	10 (child)
	20 (adult)

2.2.1 Residential Receptors

A residential receptor is assumed to be a long-term receptor occupying a dwelling within the site boundaries and thus is exposed to contaminants 24 hours per day, and is assumed to live at the site for 30 years (representing the 90th percentile of the length of time someone lives in a single location), remaining onsite for 350 days per year. Exposure to soil is expected to occur during home maintenance activities, yard work and landscaping, and outdoor play activities. Contaminant intake is assumed to occur via three exposure pathways – direct ingestion, dermal absorption, and inhalation of volatiles and fugitive dusts. For the residential scenario, both adult and child receptors were evaluated because children often exhibit behavior (e.g., greater hand-to-mouth contact) that can result in greater exposure to soils than those associated with a typical adult. In addition, children also have a lower overall body weight relative to the predicted intake.

Equations 1 and 2 are used to calculate cumulative SSLs for a residential receptor exposed to non-carcinogenic and carcinogenic contaminants via all three exposure pathways. Default exposure parameters are provided for use when site-specific data are not available.

Equation 1
Combined Exposures to Noncarcinogenic Contaminants in Soil
Residential Scenario

$$C = \frac{THQ \times BW_c \times AT_n}{EF_c \times ED_c \left[\left(\frac{1}{RfD_o} \times \frac{IRS_c}{10^6 \text{ mg/kg}} \right) + \left(\frac{1}{RfD_o} \times \frac{SA_c \times AF_c \times ABS}{10^6 \text{ mg/kg}} \right) + \left(\frac{1}{RfD_i} \times \frac{IRA_c}{VF \text{ or PEF}} \right) \right]}$$

Parameter	Definition (units)	Default
C	Contaminant concentration (mg/kg)	Chemical-specific
THQ	Target hazard quotient	1
BW _c	Body weight, child (kg)	15
AT _n	Averaging time, noncarcinogens (days)	ED x 365
EF _c	Exposure frequency, resident (day/yr)	350
ED _c	Exposure duration, child (years)	6
IRS _c	Soil ingestion rate, child (mg/day)	200
RfD _o	Oral reference dose (mg/kg-day)	Chemical-specific
SA _c	Dermal surface area, child (cm ² /day)	2,800
AF _c	Soil adherence factor, child (mg/cm ²)	0.2
ABS	Skin absorption factor (unitless)	Chemical-specific
IRA _c	Inhalation rate, child (m ³ /day)	10
RfD _i	Inhalation reference dose (mg/kg-day)	Chemical-specific
VF	Volatilization factor (m ³ /kg)	See Equation 10
PEF	Particulate emission factor (m ³ /kg)	See Equation 12

Equation 2
Combined Exposures to Carcinogenic Contaminants in Soil
Residential Scenario

$$C = \frac{TR \times AT_c}{EF_c \left[\left(\frac{I^*S_{adj} \times CSF_o}{10^6 \text{ mg/kg}} \right) + \left(\frac{S^*S_{adj} \times ABS \times CSF_o}{10^6 \text{ mg/kg}} \right) + \left(\frac{InhF_{adj} \times CSF_i}{VF \text{ or PEF}} \right) \right]}$$

Parameter	Definition (units)	Default
C	Contaminant concentration (mg/kg)	Chemical-specific
TR	Target cancer risk	1 x 10 ⁻³
AT _c	Averaging time, carcinogens (days)	25,550
EF _c	Exposure frequency, resident (day/yr)	350
I [*] S _{adj}	Age-adjusted soil ingestion factor ((mg-yr)/[kg-day])	114
CSF _o	Oral cancer slope factor (mg/kg-day) ⁻¹	Chemical-specific
S [*] S _{adj}	Age-adjusted dermal factor ((mg-yr)/[kg-day])	361
ABS	Skin absorption factor (unitless)	Chemical-specific
InhF _{adj}	Age-adjusted inhalation factor ((m ³ -yr)/[kg-day])	11
CSF _i	Inhalation cancer slope factor (mg/kg-day) ⁻¹	Chemical-specific
VF	Volatilization factor (m ³ /kg)	See Equation 10
PEF	Particulate emission factor (m ³ /kg)	See Equation 12

Noncarcinogenic contaminants are evaluated based solely on childhood exposures using Equation 1. By combining the higher contaminant intake rates with the lower relative body weight, "childhood only" exposures lead to a lower, or more conservative, risk-based

concentration compared to an adult-only exposure. In addition, this approach is considered conservative because it combines the higher 6-year exposure for children with chronic toxicity criteria.

Unlike non-carcinogens, the duration of exposure to carcinogens is averaged over the lifetime of the receptor because of the assumption that cancer may develop even after actual exposure has ceased. As a result, the total dose received is averaged over a lifetime of 70 years. In addition, to be protective of exposures in a residential setting, the carcinogenic exposure parameter values are age-adjusted to account for exposures incurred in children (1-6 years of age) and adults (7-31 years of age). Carcinogenic exposures are age-adjusted to account for the physiological differences between children and adults as well as behavioral differences that result in markedly different relative rates of exposure. Equations 3, 4, and 5 are used to calculate age-adjusted ingestion, dermal and inhalation factors which account for the differences in soil ingestion rate, skin surface area, soil adherence factors, inhalation rate, and body weight for children versus adults. The age-adjusted factors calculated using these equations were used in Equation 2 to develop generic NMED SSLs for carcinogenic effects.

Equation 3
Calculation of Age-Adjusted Ingestion Factor

$$IFS_{adj} = \frac{ED_c \times IRS_c}{BW_c} + \frac{(ED_r - ED_c) \times IRS_r}{BW_r}$$

Parameter	Definition (units)	Default
IFS_{adj}	Age-adjusted soil ingestion factor for carcinogens [(mg-yr)/(kg-day)]	114
ED_c	Exposure duration, child (years)	6
IRS_c	Soil ingestion rate, child (mg/day)	200
BW_c	Body weight, child (kg)	15
ED_r	Exposure duration, resident (years)	30
IRS_r	Soil ingestion rate, adult (mg/day)	100
BW_r	Body weight, adult (kg)	70

Equation 4
Calculation of Age-Adjusted Dermal Factor

$$SFS_{adj} = \frac{ED_c \times AF_c \times SA_c}{BW_c} + \frac{(ED_r - ED_c) \times AF_r \times SA_r}{BW_r}$$

Parameter	Definition (units)	Default
SFS_{adj}	Age-adjusted dermal factor for carcinogens [(mg-yr)/(kg-day)]	361
ED_c	Exposure duration, child (years)	6
AF_c	Soil adherence factor, child (mg/cm ²)	0.2
SA_c	Dermal surface area, child (cm ² /day)	2,800
BW_c	Body weight, child (kg)	15
ED_r	Exposure duration, resident (years)	30
AF_r	Soil adherence factor, adult (mg/cm ²)	0.07
SA_r	Dermal surface area, adult (cm ² /day)	5,700
BW_r	Body weight, adult (kg)	70

Equation 5
Calculation of Age-Adjusted Inhalation Factor

$$InhF_{adj} = \frac{Ed_c \times IRA_c}{BW_c} + \frac{(ED_r - ED_c) \times IRA_r}{BW_r}$$

Parameter	Definition (units)	Default
$InhF_{adj}$	Age-adjusted inhalation factor for carcinogens [(mg-yr)/(kg-day)]	11
ED_c	Exposure duration, child (years)	6
IRA_c	Inhalation rate, child (m ³ /day)	10
BW_c	Body weight, child (kg)	15
ED_r	Exposure duration, resident (years)	30
IRA_r	Inhalation rate, adult (m ³ /day)	20
BW_r	Body weight, adult (kg)	70

2.3 NON-RESIDENTIAL LAND USES

Non-residential land uses encompass all commercial and industrial land uses and focus on two very different receptors – a commercial/industrial worker and a construction worker. Unlike those calculated for residential land-uses, NMED SSLs for non-residential land uses are based solely on exposures to adults. Consequently, exposures to carcinogens are not age-adjusted. Due to the wide range of activities and exposure levels a non-residential receptor may be exposed to during various work-related activities, it is important to ensure that the default exposure parameters are representative of site-specific conditions. Table 2-2 provides a summary of the exposure characteristics and parameters for non-residential land use receptors.

Table 2-3

Summary of Non-Residential Land Use Receptors		
Receptor	Commercial/Industrial Worker	Construction Worker
Exposure Characteristics	<ul style="list-style-type: none"> • Substantial soil exposures • High soil ingestion rate • Long-term exposure • Exposure to surface and shallow subsurface soils • Adult-only exposure 	<ul style="list-style-type: none"> • Exposed during construction activities only • Short-term exposure • Very high soil ingestion and dust inhalation rates • Exposure to surface and subsurface soils
Default Exposure Parameters		
Exposure frequency (day/yr)	200	30
Exposure duration (yr)	25	1
Soil ingestion rate (mg/day)	100	480
Body Weight (kg)	70	70
Skin surface area exposed (cm ²)	3,300	3,300
Skin-soil adherence factor (mg/cm ²)	0.2	0.3
Air inhalation rate (m ³ /day)	20	20

2.3.1 Commercial/Industrial Worker

The commercial/industrial scenario is considered representative of on-site workers who spend all or most of their workday outdoors. A commercial/industrial worker is assumed to be a long-term receptor exposed during the course of a work day as either (1) a full time employee of a company operating on-site who spends most of the work day conducting maintenance or manual labor activities outdoors or (2) a worker who is assumed to regularly perform grounds-keeping activities as part of his/her daily responsibilities. Exposure to surface and shallow subsurface soils (i.e., at depths of zero to two feet below ground surface) is expected to occur during moderate digging associated with routine maintenance and grounds-keeping activities. A commercial/industrial receptor is expected to be the most highly exposed receptor in the outdoor environment under generic or day-to-day commercial/industrial conditions. Thus, the screening levels for this receptor are expected to be protective of other reasonably anticipated indoor and outdoor workers at a commercial/industrial facility. However, screening levels developed for the commercial/industrial worker may not be protective of a construction worker due to the latter's increased soil contact rate during construction activities. Equations 6 and 7 were used to develop generic SSLs for cumulative exposure to carcinogenic and non-carcinogenic contaminants by all exposure pathways. Default exposure parameters are provided and were used in calculating the NMED SSLs.

Equation 6
Combined Exposures to Carcinogenic Contaminants in Soil
Commercial/Industrial Scenario

$$C = \frac{TR \times BW_a \times AT_c}{EF_{CI} \times ED_{CI} \left[\left(\frac{IRS_{CI} \times CSF_o}{10^6 \text{ mg/kg}} \right) + \left(\frac{SA_{CI} \times AF_{CI} \times ABS \times CSF_o}{10^6 \text{ mg/kg}} \right) + \left(\frac{IRA_{CI} \times CSF_i}{VF \text{ or PEF}} \right) \right]}$$

Parameter	Definition (units)	Default
C	Contaminant concentration (mg/kg)	Chemical-specific
TR	Target Risk	1 x 10 ⁻³
BW _a	Body weight, adult (kg)	70
AT _c	Averaging time, carcinogens (days)	25,550
EF _{CI}	Exposure frequency, commercial/industrial (day/yr)	250
ED _{CI}	Exposure duration, commercial/industrial (years)	25
IRS _{CI}	Soil ingestion rate, commercial/industrial (mg/day)	100
CSF _o	Oral cancer slope factor (mg/kg-day) ⁻¹	Chemical-specific
SA _{CI}	Dermal surface area, commercial/industrial (cm ² /day)	3,300
AF _{CI}	Soil adherence factor, commercial/industrial (mg/cm ²)	0.2
ABS	Skin absorption factor (unitless)	Chemical-specific
IRA _{CI}	Inhalation rate, commercial/industrial (m ³ /day)	20
CSF _i	Inhalation cancer slope factor (mg/kg-day) ⁻¹	Chemical-specific
VF	Volatilization factor (m ³ /kg)	See Equation 10
PEF	Particulate emission factor (m ³ /kg)	See Equation 12

Equation 7
Combined Exposures to Noncarcinogenic Contaminants in Soil
Commercial/Industrial Scenario

$$C = \frac{THQ \times BW_a \times AT_n}{EF_{CI} \times ED_{CI} \left[\left(\frac{1}{RfD_o} \times \frac{IRS_{CI}}{10^6 \text{ mg/kg}} \right) + \left(\frac{1}{RfD_o} \times \frac{SA_{CI} \times AF_{CI} \times ABS}{10^6 \text{ mg/kg}} \right) + \left(\frac{1}{RfD_i} \times \frac{IRA_{CI}}{VF \text{ or PEF}} \right) \right]}$$

Parameter	Definition (units)	Default
C	Contaminant concentration (mg/kg)	Chemical-specific
THQ	Target hazard quotient	1
BW _a	Body weight, adult (kg)	70
AT _n	Averaging time, noncarcinogens (days)	ED x 365
EF _{CI}	Exposure frequency, commercial/industrial (day/yr)	250
ED _{CI}	Exposure duration, commercial/industrial (years)	25
IRS _{CI}	Soil ingestion rate, commercial/industrial (mg/day)	100
RfD _o	Oral reference dose (mg/kg-day)	Chemical-specific
SA _{CI}	Dermal surface area, commercial/industrial (cm ² /day)	3,300
AF _{CI}	Soil adherence factor, commercial/industrial (mg/cm ²)	0.2
ABS	Skin absorption factor (unitless)	Chemical-specific
IRA _{CI}	Inhalation rate, commercial/industrial (m ³ /day)	20
RfD _i	Inhalation reference dose (mg/kg-day)	Chemical-specific
VF	Volatilization factor (m ³ /kg)	See Equation 10
PEF	Particulate emission factor (m ³ /kg)	See Equation 12

2.3.2 Construction Worker

A construction worker is assumed to be a receptor who is exposed to contaminated soil during the work day for the duration of a single on-site construction project. If multiple construction projects are anticipated, it is assumed that different workers will be employed for each project. The activities for this receptor typically involve substantial exposures to surface and subsurface soils (i.e., at depths of zero to 10 feet below ground surface) during excavation, maintenance and building construction projects (intrusive operations). A construction worker is assumed to be exposed to contaminants via the following pathways: incidental soil ingestion, dermal contact with soil, and inhalation of contaminated outdoor air (volatile and particulate emissions). While a construction worker receptor is assumed to have a higher soil ingestion rate than a commercial/industrial worker due to the type of activities performed during construction projects, the exposure frequency and duration are assumed to be significantly shorter due to the short-term nature of construction projects. However, chronic toxicity information was used when developing screening levels for a construction worker receptor. This approach is significantly more conservative than using sub-chronic toxicity data because it combines the higher soil exposures for construction workers with chronic toxicity criteria. Equations 8 and 9 were used to develop generic SSLs for cumulative exposure to carcinogenic and non-carcinogenic contaminants by all exposure pathways. Default exposure parameters are provided and were used in calculating the NMED SSLs.

Equation 8
Combined Exposures to Carcinogenic Contaminants in Soil
Construction Worker Scenarios

$$C = \frac{THQ \times BW_w \times AT_i}{EF_{cw} \times ED_{cw} \left[\left(\frac{IRS_{cw} \times CSF_o}{10^6 \text{ mg/kg}} \right) + \left(\frac{SA_{cw} \times AF_{cw} \times ABS \times CSF_o}{10^4 \text{ mg/kg}} \right) + \left(\frac{IRA_{cw} \times CSF_i}{VF \text{ or PEF}} \right) \right]}$$

Parameter	Definition (units)	Default
C	Contaminant concentration (mg/kg)	Chemical-specific
TR	Target Risk	1 x 10 ⁻⁵
AT _i	Averaging time, carcinogens (days)	25,550
EF _{cw}	Exposure frequency, construction worker (day/yr)	250
ED _{cw}	Exposure duration, construction worker (years)	1
IRS _{cw}	Soil ingestion rate, construction worker (mg/day)	480
CSF _o	Oral cancer slope factor (mg/kg-day) ⁻¹	Chemical-specific
SA _{cw}	Dermal surface area, construction worker (cm ² /day)	3,300
AF _{cw}	Soil adherence factor, construction worker (mg/cm ²)	0.3
ABS	Skin absorption factor (unitless)	Chemical-specific
IRA _{cw}	Inhalation rate, construction worker (m ³ /day)	20
CSF _i	Inhalation cancer slope factor (mg/kg-day) ⁻¹	Chemical-specific
VF	Volatilization factor (m ³ /kg)	See Equation 10
PEF	Particulate emission factor (m ³ /kg)	See Equation 12

Equation 9
Combined Exposures to Noncarcinogenic Contaminants in Soil
Construction Worker Scenario

$$C = \frac{THQ \times HW_c \times AT_c}{EF_{cw} \times ED_{cw} \left[\left(\frac{1}{RfD_o} \times \frac{IRS_{cw}}{10^6 \text{ mg/kg}} \right) + \left(\frac{1}{RfD_o} \times \frac{SA_{cw} \times AF_{cw} \times ABS}{10^3 \text{ mg/kg}} \right) + \left(\frac{1}{RfD_o} \times \frac{IRA_{cw}}{VF \text{ or } PEF_{cw}} \right) \right]}$$

Parameter	Definition (units)	Default
C	Contaminant concentration (mg/kg)	Chemical-specific
THQ	Target hazard quotient	1
AT _c	Averaging time, noncarcinogens (days)	ED x 365
EF _{cw}	Exposure frequency, commercial/industrial (day/yr)	250
ED _{cw}	Exposure duration, commercial/industrial (years)	1
IRS _{cw}	Soil ingestion rate, commercial/industrial (mg/day)	480
RfD _o	Oral reference dose (mg/kg-day)	Chemical-specific
SA _{cw}	Dermal surface area, commercial/industrial (cm ² /day)	3,300
AF _{cw}	Soil adherence factor, commercial/industrial (mg/cm ²)	0.3
ABS	Skin absorption factor (unitless)	Chemical-specific
IRA _{cw}	Inhalation rate, commercial/industrial (m ³ /day)	20
RfD _i	Inhalation reference dose (mg/kg-day)	Chemical-specific
VF	Volatilization factor (m ³ /kg)	See Equation 10
PEF	Particulate emission factor (m ³ /kg)	See Equation 12

2.3.3 Alternative Evaluation for Lead

Exposure to lead can result in neurotoxic and developmental effects. The primary receptors of concern are children, whose nervous systems are still undergoing development and who also exhibit behavioral tendencies that increase their likelihood of exposure (e.g., pica). These effects may occur at exposures so low that they may be considered to have no threshold, and are evaluated based on a blood lead level (rather than the external dose as reflected the RfD/RfC methodology). Therefore, US EPA views it to be inappropriate to develop noncarcinogenic "safe" exposure levels (i.e., RfDs) for lead. Instead, US EPA's lead assessment workgroup has recommended the use of the Integrated Exposure Uptake Biokinetic (IEUBK) model that relates measured lead concentrations in environmental media with an estimated blood-lead level (US EPA, 1994). The model is used to calculate a blood lead level in children when evaluating residential land use and in adults (based on a pregnant mother's capacity to contribute to fetal blood lead levels), or when evaluating occupational scenarios at sites where access by children is reliably restricted. The NMED SSLs presented in Appendix A include values for lead that were calculated by using the IEUBK to backcalculate a soil concentration for each receptor that would not result in an estimated blood-lead concentration of 10 µg/dL or greater.

2.4 SITE ASSESSMENT AND CHARACTERIZATION

The Site Assessment/Site Characterization phase is intended to provide additional spatial and contextual information about the site, which may be used to determine if there is any

reason to believe that receptors and/or complete exposure pathways may exist at or in the locality of the site where a release of hazardous waste/constituents has occurred. In addition, the site assessment phase serves as the initial information gathering phase to determine whether potential exposures are sufficiently similar to those upon which the NMED SSLs are predicated to support comparison. Finally, this phase can help to identify for sites in need of a more detailed assessment of potential risk. The approach outlined herein is discussed in greater detail in the NMED HRMB guidance document *Assessing Human Health Risks Posed by Chemicals: Screening-level Risk Assessment* (NMED, 2000). A conceptual site model (CSM) providing a list of the potentially exposed receptors and potentially complete exposure pathways in the scoping report is used to determine whether further assessment (i.e., a screening level assessment) and/or interim measures are required or whether the site poses minimal threat to human and ecological receptors at or near the site.

The ultimate purpose of the site assessment phase is to address the question: Are exposure pathways complete with regard to contaminant contact by receptors? A complete site assessment will consist of several steps:

- Develop data quality objectives and conduct site sampling
- Identify preliminary contaminants of potential concern (COPCs)
- Develop a preliminary site conceptual exposure model (SCEM)
- Compare maximum (or, if deemed appropriate by NMED, the 95% upper confidence limit (UCL) values) for contaminant concentrations (or detection/quantitation limits for non-detect results) for consideration of complete exposure pathways with SSLs.

2.4.1 Development of Data Quality Objectives

Before any additional environmental samples are collected, data quality objectives (DQOs) should be developed. The DQOs should address the qualitative and quantitative nature of the sampling data, in terms of relative quality and intent for use, to ensure that any data collected will be appropriate for the intended objective. Development of the DQOs should consider not only precision, accuracy, representativeness, completeness, and comparability of the data, but also the sampling locations, types of laboratory analyses used, sensitivity of detection limits of the analytical techniques, the resulting data quality, and the employment of adequate quality assurance/quality control measures.

2.4.2 Identification of COPCs

COPCs are those substances (including transformation or breakdown compounds and companion products) likely to be present in environmental media affected by a release. Identification of COPCs should begin with existing knowledge of the process, product, or waste from which the release originated. For example, if facility operations deal primarily with pesticide manufacturing then pesticides should be considered COPCs. Contaminants identified during current or previous site investigation activities should also be evaluated as COPCs. A site-specific COPC list for soil may be generated based on maximum detected (or, if deemed appropriate by NMED, the 95% upper confidence limit (UCL) values) concentrations and a comparison of detection/quantitation limits for non-detect results to the NMED SSLs. This list may be refined through a site-specific risk assessment.

2.4.3 Development of a Preliminary Conceptual Site Model

A conceptual site model (CSM) is a graphical representation of three-dimensional site conditions that conveys what is known or suspected, at a discrete point in time, about the site-specific sources, releases, release mechanisms, contaminant fate and transport, exposure routes, and potential receptors. The CSM is generally documented by written descriptions and supported by maps, geological cross-sections, tables, diagrams and other illustrations to communicate site conditions. When preparing a CSM, the facility should decide the scope, quantity, and relevance of information to be included, balancing the need to present as complete a picture as possible to document current site conditions and justify risk management actions, with the need to keep the information focused and exclude extraneous data.

As a final check, the CSM should answer the following questions:

- Are there potential land uses present (now or in the foreseeable future) other than those covered by the SSLs (see US EPA, 1989).
- Are there other likely human exposure pathways that were not considered in development of the SSLs (e.g. direct exposure to groundwater, local fish consumption, raising beef, dairy, or other livestock)? (see US EPA, 1989)
- Are there potential ecological concerns? (*Guidance for Assessing Ecological Risks Posed by Chemicals: Screening Level Ecological Risk Assessment*, NMED, 2000)

If any conditions such as these exist, the SSLs may need to be adjusted to reflect this new information.

2.4.4 Compare COPC Maximum Concentrations With SSLs

The final step in the site assessment phase is to compare maximum detected COPC concentrations in soil (or, if deemed appropriate by NMED, the 95% upper confidence limit (UCL) values on the mean of the dataset (US EPA, 1992b)) with SSLs based on the complete exposure pathways identified by the preliminary CSM. These concentrations should also be compared against the SSL leaching values to determine which contaminants present in soil have the capacity to leach to underlying groundwater and impact these resources adversely. As stated earlier, those contaminants exhibiting concentrations in excess of the SSLs represent the initial soil COPC list for a given site. Refinement of this list may be necessary based on a host of factors, including elevated detection or quantitation limits.

3. CHEMICAL-SPECIFIC AND PHYSICAL-CHEMICAL PARAMETERS

Chemical-specific parameters required for calculating SSLs include the organic carbon normalized soil-water partition coefficient for organic compounds (K_{oc}), the soil-water partition coefficient (K_d), water solubility (S), octanol-water partition coefficient (K_{ow}), Henry's Law constant (H), diffusivity in air (D_a), and diffusivity in water (D_w). The following sections describe these values and present methodologies for calculating additional values necessary for calculating the NMED SSLs.

3.1 VOLATILIZATION FACTOR

Volatile chemicals, defined as those chemicals having a Henry's Law constant greater than 1×10^{-5} atm-m³/mole-°K and a molecular weight less than 200 g/mole, were screened for inhalation exposures using a volatilization factor for soils (VF). The soil-to-air VF is used to define the relationship between the concentration of the contaminant in soil and the flux of the volatilized contaminant to ambient air. The emission terms used in the VF are chemical-specific and were calculated from physical-chemical information obtained from several sources including: US EPA's *Soil Screening Guidance: Technical Background Document* (US EPA, 1996a), the US EPA Region 9 *Preliminary Remediation Goals* (US EPA, 1999b), EPA's *Basics of Pump and Treat Groundwater Remediation Technology* (US EPA, 1990), US EPA's *Dermal Exposure Assessment* (US EPA, 1992a), *Superfund Public Health Evaluation Manual* (US EPA, 1986), EPA's *Additional Environmental Fate Constants* (US EPA, 1995), Hazardous Substance Release/Health Effects Database (ATSDR, 2000), and the CHEMFACTS Database (US EPA, 2000c). The VF is calculated using Equation 10.

Equation 10
Derivation of the Volatilization Factor for Residential and Commercial/Industrial Scenarios

$$VF = \frac{Q/C_{m,c} \times (3.14 \times D_a \times T)^{0.5} \times 10^{-3}}{(2 \times \rho_b \times D_a)}$$

Where:

$$D_a = \frac{\left[(\theta_a^{10/3} D_a H' + \theta_w^{10/3} D_w) \right]}{\rho_b K_d + \theta_w + \theta_a H'}$$

Parameter	Definition (units)	Default
VF	Volatilization factor (m ³ /kg)	Chemical-specific
D _a	Apparent diffusivity (cm ² /s)	Chemical-specific
Q/C _{m,c}	Inverse of the mean concentration at the center of a 0.5-acre-square source (g/m ² -s per kg/m ³)	68.18
T	Exposure interval (s)	9.5 x 10 ⁶
ρ _b	Dry soil bulk density (g/cm ³)	1.5
n	Total soil porosity 1 - (ρ _b /ρ _s)	0.43
θ _a	Air-filled soil porosity (n - θ _w)	0.18
θ _w	Water-filled soil porosity	0.26
ρ _s	Soil particle density (g/cm ³)	2.65
D _a	Diffusivity in air (cm ² /s)	Chemical-specific
H'	Dimensionless Henry's Law constant	Chemical-specific
D _w	Diffusivity in water (cm ² /s)	Chemical-specific
K _d	Soil-water partition coefficient (cm ³ /g) = K _{oc} x f _{oc} (organics)	Chemical-specific
K _{oc}	Soil organic carbon partition coefficient (cm ³ /g)	Chemical-specific
f _{oc}	Fraction organic carbon in soil (g/g)	0.0015

While most of the parameters used to calculate apparent diffusivity (D_A) are either chemical-specific or default values, several state-specific values were used which are more representative of soil conditions found in New Mexico. The default values for θ_w , θ_a , and ρ_s in Equation 10 are 0.26, 0.18 and 1.5 g/cm³, respectively. These values represent the mean value from a National Resources Conservation Service (NRCS) soil survey database for New Mexico that includes over 1200 sample points (U.S. Department of Agriculture, 2000).

It should be noted that the basic principle of the VF model (Henry's Law) is applicable only if the soil contaminant concentration is at or below soil saturation, C_{sat} . Above the soil saturation limit, the model cannot predict an accurate VF-based SSL.

3.2 SOIL SATURATION LIMIT

C_{sat} describes a chemical-physical soil condition that integrates certain chemical-specific properties with physical attributes of the soil to estimate the contaminant concentration at which the soil pore water, pore air, and surface sorption sites are saturated with contaminants. Above this concentration, the contaminants may be present in free phase within the soil matrix – as non-aqueous phase liquids (NAPLs) for substances that are liquid at ambient soil temperatures, and pure solid phases for compounds that are solids at ambient soil temperatures (EPA, 1996a). Generic C_{sat} concentrations should not be interpreted as confirmation of a saturated soil condition, but as estimates of when this condition may occur. It should be noted that C_{sat} concentrations are not risk-based values. Instead, they correspond to a theoretical threshold above which free phase contaminant may exist. C_{sat} concentrations, therefore, serve to identify an upper limit to the applicability of generic risk-based soil criteria, because certain default assumptions and models used in the generic algorithms are not applicable when free phase contaminant is present in soil. Equation 11, given below is used to calculate C_{sat} for each volatile contaminant considered within the SSLs.

Equation 11
 Derivation of the Soil Saturation Limit

$$C_{sat} = \frac{S}{\rho_b} (K_d \rho_b + \theta_w + H' \theta_a)$$

Parameter	Definition (units)	Default
C_{sat}	Soil saturation concentration (mg/kg)	Chemical-specific
S	Solubility in water (mg/L-water)	Chemical-specific
ρ_b	Dry soil bulk density (kg/L)	1.5
K_d	Soil-water partition coefficient (L/kg; $K_{oc} \times f_{oc}$)	Chemical-specific
K_{oc}	Soil organic carbon/water partition coefficient (L/kg)	Chemical-specific
f_{oc}	Fraction organic carbon in soil (g/g)	0.0015
θ_w	Water-filled soil porosity	0.26
H'	Dimensionless Henry's Law constant	Chemical-specific
θ_a	Air-filled soil porosity	$n - \theta_w$
n	Total soil porosity	$1 - (\rho_b/\rho_s)$
ρ_s	Soil particle density (kg/L)	2.65

Chemical-specific parameters used in Equation 11 were obtained from: physical-chemical information obtained from several sources including: US EPA's *Soil Screening Guidance: Technical Background Document* (US EPA, 1996a), the US EPA Region 9 *Preliminary Remediation Goals* (US EPA, 1999b), US EPA's *Basics of Pump and Treat Groundwater remediation Technology* (US EPA, 1990), US EPA's *Dermal Exposure Assessment* (US EPA, 1992a), *Superfund Public Health Evaluation Manual* (US EPA, 1986), US EPA's *Additional Environmental Fate Constants* (US EPA, 1995), Hazardous Substance Release/Health Effects Database (ATSDR, 2000), and the CHEMFACTS Database.

3.3 PARTICULATE EMISSION FACTOR

Inhalation of chemicals adsorbed to suspended respirable particles is assessed using a chemical-specific PEF which relates the contaminant concentration in soil to the concentration of respirable particles in the air due to fugitive dust emissions from contaminated soils. This guidance addresses dust generated from open sources, which is termed "fugitive" because it is not discharged into the atmosphere in a confined flow stream. For further details on the methodology associated with the PEF model, the reader is referred to US EPA's *Soil Screening Guidance: Technical Background Document* (US EPA, 1996a), *Supplemental Guidance for Developing Soil Screening Levels for Superfund Sites* (US EPA, 1999a) and *Human Health Risk Assessment Protocol for Hazardous Waste Combustion Facilities* (US EPA, 1998).

It is important to note that the PEF for use in evaluating exposures of the residential and commercial/industrial receptors addresses only windborne dust emissions and does not consider emissions from traffic or other forms of mechanical disturbance which could lead to a greater level of exposure. The PEF for use in evaluating the construction worker exposures considers windborne dust emissions and emissions from vehicle traffic associated with construction activities. Therefore, the fugitive dust pathway should be considered carefully when developing the CSM at sites where receptors may be exposed to fugitive dusts by other mechanisms. Equation 12 is used to calculate a generic PEF value used for both the residential and commercial/industrial exposure scenarios. A scenario-specific PEF value was calculated for a construction worker receptor using Equation 13.

Equation 12
Derivation of the Particulate Emission Factor
Residential and Commercial/Industrial Scenarios

$$PEF = Q/C_{wind} \times \frac{3,600 \text{ sec/hr}}{0.036 \times (1-V) \times \left(\frac{U_m}{U_t}\right)^3 \times F(x)}$$

Parameter	Definition (units)	Default
PEF	Particulate emission factor (m ³ /kg)	1.36 x 10 ⁹
Q/C _{wind}	Inverse of a mean concentration at center of a 0.5-acre-square source (g/m ² -s per kg/m ³)	93.77
V	Fraction of vegetative cover (unitless)	0.5
U _m	Mean annual windspeed (m/s)	4.69
U _t	Equivalent threshold value of windspeed at 7 m (m/s)	11.32
F(x)	Function dependent on U _m /U _t derived using Cowherd et al. (1985) (unitless)	0.194

Equation 13
Derivation of the Particulate Emission Factor
Construction Worker Scenario

$$PEF_{CW} = Q/C_{CW} \times \frac{1}{F_D} \left[\frac{T \times A_R}{556 \times \left(\frac{W}{3}\right)^{0.4} \times \frac{(365 \text{ days/yr} - P)}{365 \text{ days/yr}} \times \sum VKT} \right]$$

Parameter	Definition (units)	Default
PEF _{CW}	Particulate emission factor (m ³ /kg)	81.9
Q/C _{CW}	Inverse of a mean concentration at center of a 0.5-acre-square source (g/m ² -s per kg/m ³)	23.02
F _D	Dispersion correction factor (unitless)	0.185
T	Total time over which construction occurs	250
A _R	Surface area of road segment (m ²)	274.2
W	Mean vehicle weight (tons)	8
P	Number of days with at least 0.01 inches of precipitation (days/yr)	80
ΣVKT	sum of fleet vehicle kilometers traveled during the exposure duration (km)	162

3.4 PHYSICAL-CHEMICAL PARAMETERS

Several chemical-specific parameters are required for calculating SSLs including the organic carbon normalized soil-organic carbon/water partition coefficients for organic compounds (K_{oc}), the soil-water partition coefficient for organic and inorganic constituents (K_d), the solubility of a compound in water (S), Henry's Law constant (H), air diffusivity (D_a), water diffusivity (D_w), and the octanol-water partition coefficient (K_{ow}). Prior to calculating site-specific SSLs, each relevant chemical specific parameter value presented in Appendix B

should be checked against the most recent version of its source to determine if updated data are available. Table B-1 in Appendix B provides the chemical-specific parameters used in calculating the NMED SSLs.

Chemical-specific values were obtained from EPA's *Soil Screening Guidance: Technical Background Document* (US EPA, 1996a), the EPA Region 9 *Preliminary Remediation Goals* (US EPA, 1999b), US EPA's *Basics of Pump and Treat Groundwater remediation Technology* (US EPA, 1990), US EPA's *Dermal Exposure Assessment* (US EPA, 1992a), *Superfund Public Health Evaluation Manual* (US EPA, 1986), US EPA's *Additional Environmental Fate Constants* (US EPA, 1995), Hazardous Substance Release/Health Effects Database (ATSDR, 2000), and the CHEMFACTS Database.

3.4.1 Solubility, Henry's Law Constant, and K_{ow}

The solubility of a contaminant refers to the maximum amount that can be dissolved in a fixed volume of a solvent, usually pure water, at a specific temperature and pH. A chemical with a high solubility readily dissolves in water, while a low solubility indicates an inability to dissolve. Water solubility is generally predicted based on correlations with the octanol-water partition coefficient (K_{ow}). Solubility is used to calculate soil saturation limits for the NMED SSLs.

The octanol-water partition coefficient (K_{ow}) of a chemical is the ratio of a chemical's solubility in octanol versus its solubility in water at equilibrium. Essentially, this chemical-specific property is used as an indication of a contaminant's propensity to migrate from soil to water. It is an important parameter and is used in the assessment of environmental fate and transport for organic chemicals.

The Henry's Law constant (H) is used when evaluating air exposure pathways. For all chemicals that are capable of exchanging across the air-water interface, there is a point at which the rate of volatilization into the air and dissolution to the water or soil will be equal. The ratio of gas- and liquid-phase concentrations of the chemical at this equilibrium point is represented by H, which is used to determine the rate at which a contaminant will volatilize from soil to air. Values for H may be calculated using the following equation and the values for solubility (S), vapor pressure (VP), and molecular weight (MW).

$$H = \frac{VP \times MW}{S}$$

The dimensionless form of Henry's Law constant (H) used in calculating soil saturation limits and volatilization factors for the NMED SSLs was calculated by multiplying H by a factor of 41 to convert the Henry's Law constant to a unitless value.

3.4.2 Soil Organic Carbon/Water Partition Coefficients (K_{oc})

The soil organic carbon-water partition coefficient (K_{oc}) is a measure of a chemical's tendency to adsorb to organic carbon present in soil. High K_{oc} values indicate a tendency for the chemical to adsorb to soil particles rather than remain dissolved in the soil solution. Strongly adsorbed molecules will not unless the soil particle to which they are adsorbed

moves (as in erosion). K_{oc} values of less than 500 indicate weak adsorption and a potential for leaching. K_{oc} is calculated using the following equation:

$$K_{oc} = \frac{\text{conc. adsorbed/conc. dissolved}}{\% \text{ organic carbon in soil}}$$

K_{oc} can also be calculated by dividing the K_d value by the fraction of organic carbon (f_{oc}) present in the soil or sediment. It should be noted that a strong linear relationship exists between K_{oc} and K_{oc} and that this relationship can be used to predict K_{oc} .

3.4.3 Soil/Water Partition Coefficients (K_d)

Soil-water partition coefficient (K_d) for organic chemicals is the ratio of a contaminant's distribution between soil and water particles. The soil-water partitioning behavior of nonionizing and ionizing organic compounds differs because the partitioning of ionizing organics can be influenced by soil pH. K_d values were used in calculating soil saturation limits and volatilization factors used in developing the NMED SSLs.

For organic compounds, K_d represents the tendency of a chemical to adsorb to the organic carbon fraction in soils, and is represented by

$$K_d = K_{oc} \times f_{oc}$$

where

$$K_{oc} = \text{organic carbon partition coefficient (L/kg)}$$

$$f_{oc} = \text{fraction of organic carbon in soil (mg/mg)}$$


This relationship is generally valid for volatile halogenated hydrocarbons as long as the fraction of organic carbon in soil is above approximately 0.001 (0.1 percent) (Piwoni and Banerjee, 1989; Schwarzenbach and Westall, 1981). For low organic carbon soils ($f_{oc} < 0.001$), Piwoni and Banerjee (1989) developed the following empirical correlation for organic chemicals:

$$\log K_d = 1.01 \log K_{oc} - 0.36$$

The use of a fixed K_{oc} value in the soil-water partition equation for the migration to groundwater pathway is only valid for hydrophobic non-ionizing organic chemicals. For organic chemicals that ionize in the soil environment, existing in both neutral and ionized forms within the normal soil pH range, K_{oc} values must consider the relative proportions and differences in sorptive properties of these forms. For the equations and applications of developing K_{oc} values for ionizing organic acids as a function of pH, the reader is referred to US EPA, 1996. The default value used for f_{oc} in development of NMED SSLs is 0.0015 (0.15%). This value represents the median value of 212 data points included in the National

Resource Conservation Service (NRCS) soil survey database for New Mexico (U.S. Department of Agriculture, 2000). Only samples collected from a depth of greater than 5 feet were included in the calculation of the mean f_{oc} value. Shallow soil samples tend to have higher f_{oc} values as shown in Figure 2.1. There is a steady decline in f_{oc} value with depth until approximately 5 feet bgs. Below 5 feet, there is little variability in the f_{oc} value. Because a lower f_{oc} value provides a more conservative calculation of SSL, a value representative of deeper soil conditions is used as the default value.

Figure 2-1 Mean Value - Fraction Organic Carbon (f_{oc}) -
All counties in New Mexico

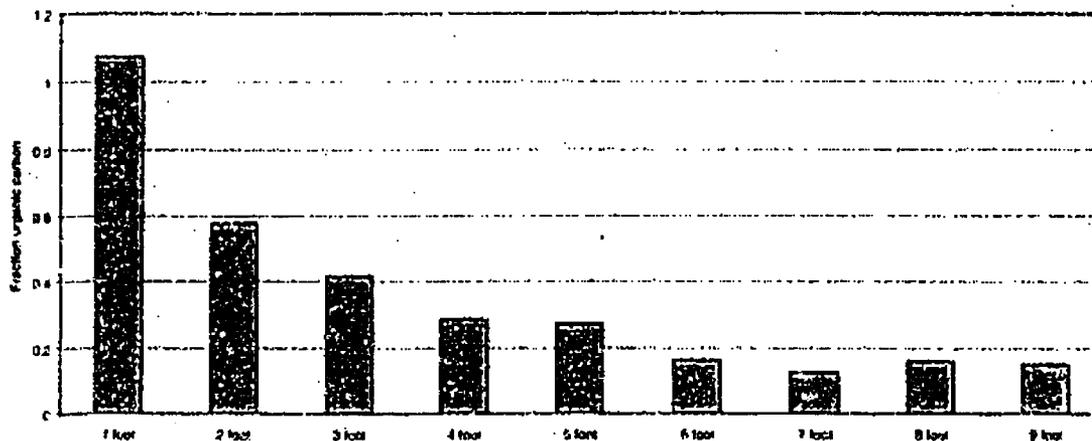

As with organic chemicals, development of the NMED SSLs for inorganic constituents (i.e., metals) requires a soil-water partition coefficient (K_d) for each contaminant. K_d values for metals are affected by a variety of soil conditions, most notably pH, oxidation-reduction conditions, iron oxide content, soil organic matter content, cation exchange capacity and major ion chemistry. US EPA developed default K_d values for metals using either an equilibrium geochemical speciation model (MINTEQ2) or from empirical pH-dependent adsorption relationships developed by EPA/ORD (US EPA, 1996a).

4. MIGRATION OF CONTAMINANTS TO GROUNDWATER

Generic SSLs were developed which address the potential for migration of contaminants from soil to groundwater. The methodology used to calculate generic SSLs addresses the potential leaching of contaminants from the vadose zone to groundwater in excess of New Mexico WQCC standards. This method does not take into account any additional attenuation associated with contaminant transport in groundwater. The SSLs developed from this analysis are based on New Mexico specific values and are protective of groundwater under a wide range of site conditions. This methodology is modeled after US EPA's *Soil Screening Guidance: Technical Background Document* (US EPA, 1996a).

4.1.1 Overview of the SSL Model Approach

Two approaches to developing soil leachate-based SSLs are presented, the generic model and the site-specific model. Both models use the same set of equations to calculate SSLs and are based on leaching to groundwater scenarios that NMED believes are protective of groundwater. The generic model calculates SSLs using default parameter values generally representative of conditions in New Mexico. These values are presented in Table B-1 of Appendix B. The site-specific model provides the flexibility of using site-specific meteorological, soil and hydrological data to calculate SSLs, while retaining the simplicity and ease of use associated with the generic model.

The development of soil leachate SSLs is based upon a two step process. The first step is the development of a Dilution Attenuation Factor (DAF). The DAF accounts for leachate mixing in the aquifer. A leachate concentration that is protective of ground water is back calculated by multiplying the ground water standard for a given constituent by the DAF. That leachate concentration is then used to back calculate an SSL that is protective of groundwater using a simple linear equilibrium soil/water partition equation. For the generic SSL approach, default parameter values are used for all non-chemical specific parameters. At sites that are not adequately represented by the default values and where more site-specific data are available, it may be more appropriate to use the site-specific SSL model. The site-specific model uses the same spreadsheet equations to calculate SSLs as those in the generic look-up table. However, site-specific data are used in the site-specific model.

The following sections of this document provide a general description of the leaching to groundwater pathway SSL model (generic and site-specific) including the assumptions, equations, and input parameters. Justification for the default parameters used in the generic model is also provided. Additionally, a sensitivity analysis was performed on each of the input parameters to provide guidance on when use of the site-specific model may be warranted. Applicability and limitations of the generic and site-specific models are also presented.

4.1.2 Model Assumptions

Assumptions regarding the release and distribution of contaminants in the subsurface that are incorporated into the SSL methodology include the following.

- The source is infinite (a constant concentration is maintained for the duration of the exposure period).
- Contamination is uniformly distributed from the surface to the water table.
- Soil/water partitioning is instantaneous and follows a linear equilibrium isotherm.
- There is no attenuation of the contaminant in soil or the aquifer (i.e., irreversible adsorption, chemical transformation or biological degradation).
- The potentially impacted aquifer is unconfined and unconsolidated with homogenous and isotropic hydrologic properties.

- The receptor well (point of exposure) is at the downgradient edge of the source and is screened within the potentially impacted aquifer.
- Non-aqueous phase liquids (NAPLs) are not present.

4.1.3 Soil Water Partition Equation

US EPA's *Soil Screening Guidance: Technical Background Document* (US EPA, 1996a) developed an equation to estimate contaminant release in soil leachate based on the Freundlich adsorption isotherm. The Freundlich equation was modified to relate the sorbed concentration to the total concentration measured in a soil sample (which includes contaminants associated with solid soil, soil-water and soil-air components) (Feenstra, 1991). Equation 14, given below, is used to calculate SSLs corresponding to target soil leachate concentrations (C_w).

Equation 14
Soil Screening Level For Leaching To Groundwater Pathway

$$SSL = C_w \times \left[K_d + \left(\frac{\theta_w + \theta_a H'}{\rho_b} \right) \right]$$

Parameter	Definition (units)	Default
SSL	Soil Screening Level for migration to groundwater pathway (mg/kg)	Chemical-Specific
C_w	Target soil leachate concentration (mg/L)	Chemical-Specific
K_d	Soil /water partition coefficient (L/kg)	Chemical-Specific
θ_w	Water-filled soil porosity (L_{water}/L_{soil})	0.26
θ_a	Air-filled soil porosity (L_{air}/L_{soil})	$n - \theta_w$
n	Total soil porosity (L_{pore}/L_{soil})	$1 - (\rho_b/\rho_s)$
ρ_s	Soil particle density (g/cm ³)	2.65
ρ_b	Dry soil bulk density (kg/L)	1.5
H'	Dimensionless Henry's Law constant	Chemical Specific

Target soil leachate concentrations (C_w) are equivalent to the WQCC standards multiplied by a Dilution Attenuation Factor (DAF).

$$C_w = WQCC \times DAF$$

The derivation of the DAF is discussed in subsequent sections of this document.

4.1.4 Dilution Attenuation Factor

Contaminants transported as a leachate through soil to groundwater are affected by physical, chemical and biological processes that can significantly reduce their concentration. These processes include adsorption, biological degradation, chemical transformation and dilution from mixing of the leachate with groundwater. The total reduction in concentration between the source of the contaminant (vadose zone soil) and the point of ground water withdrawal is defined as the ratio of contaminant concentration in soil leachate to the

concentration in groundwater at the point of withdrawal. This ratio is termed a dilution/attenuation factor (DAF; US EPA, 1996a and 1996b). The higher the DAF value, the greater the degree of dilution and attenuation of contaminants along the migration flowpath. A DAF of 1 implies no reduction in contaminant concentration occurs.

Development of New Mexico SSLs considers only the dilution of contaminant concentration through mixing with groundwater in the aquifer directly beneath the source. This is consistent with the conservative assumptions used in the SSL methodology including an infinite source, soil contamination extending from surface to groundwater and the point of exposure occurring at the downgradient edge of the source. The ratio of contaminant concentration in soil leachate to the concentration in groundwater at the point of withdrawal that considers only dilution processes is calculated from a simple water balance equation (Equation 15), described below.

Equation 15
Dilution/Attenuation Factor (DAF)

$$DAF = 1 + \left(\frac{K \times i \times D}{i \times L} \right)$$

Where:

$$D = (0.0112 \times L^2)^{0.5} + D_s \left(1 - \exp \left[\frac{-L \times i}{K \times i \times D_s} \right] \right)$$

Parameter	Definition (units)	Default
DAF	Dilution/attenuation factor (unitless)	Site-Specific
K	Aquifer hydraulic conductivity (m/yr)	Site-Specific
i	Hydraulic gradient (m/m)	Site-Specific
D	Mixing zone depth (m)	Site-Specific
I	Infiltration rate (m/yr)	Site-Specific
L	Source length parallel to groundwater flow (m)	Site-Specific
D _s	Aquifer thickness (m)	Site-Specific

Most of these parameters are available from routine environmental site investigations. The mixing zone depth incorporates one additional parameter, the aquifer thickness (D_s).

For the calculation of SSLs, the DAF is used to back calculate the target soil leachate concentration from an appropriate groundwater concentration, such as the WQCC standard (C_w in Equation 14). For example, if the WQCC standard for a constituent is 0.1 mg/L and the DAF is 20, the target soil leachate concentration would be 2 mg/L.

The US EPA conducted an extensive evaluation of the range and distribution of DAF's to select a default value to be used for developing generic SSLs that would be reasonably protective of groundwater quality (US EPA, 1996a and 1996b). The evaluation included a probabilistic modeling exercise using US EPA's Composite Model for Leachate Migration.

with Transformation Products (CMTP). A cumulative frequency distribution of DAF values was developed from the model output. Results of the Monte Carlo modeling analysis indicate that for a 0.5 acre source area a DAF of approximately 170 is protective of groundwater at 90 percent of the sites. Groundwater is protected at 95 percent of the sites with a DAF of 7.

US EPA applied the simple SSL water balance dilution model (Equation 15) to 300 sites included in surveys of hydrogeologic investigations to further evaluate the range and distribution of DAF values. Results of this analysis indicated that a DAF of 10 was protective of groundwater for a 30-acre source and that a DAF of 20 was protective of groundwater for a 0.5 acre-source (US EPA, 1996a and 1996b).

An assessment was performed of US EPA's methodology to determine whether a default DAF value of 20 for a 0.5 acre source, and a DAF of 10 for a 30 acre source, would be appropriate for use as default values for sites in New Mexico. Typical New Mexico conditions may be notably different than conditions represented by areas included in the US EPA analysis of DAFs. For example, infiltration rates across much of New Mexico are substantially less than the average range of 0.15 to 0.24 m/yr reported for many of the hydrogeologic regions used in the US EPA analysis. In addition, effective porosity was assumed to be 0.35, presumably because this value is representative of the most prevalent aquifer type in the databases used (US EPA, 1996a). However, the regions included in the EPA analysis also contain extensive glacial, regolith, lacustrine, swamp and marsh deposits which have high percentages of fine-grained sediments and thus are not representative of typical New Mexico sandy soils. Sandy soils typically have higher hydraulic conductivities than more fine-grained soils and subsequently higher Darcian velocities, under equal hydraulic gradient. According to the DAF equation (Equation 15), soils with relatively greater hydraulic conductivities will tend to result in a higher calculated DAF.

An assessment was made of input parameters to the DAF equation. In order to support a DAF that is protective of the most vulnerable groundwater environments in New Mexico (i.e. areas close to perennial streams or where ground water is very shallow), environmental parameters typical of those areas in New Mexico were used to assess the DAF. This assessment indicated that the DAF is most sensitive to variations in hydraulic conductivity. This is because this value shows such large variations in the natural environment. If a hydraulic conductivity value representative of a fine grained sand is used in the DAF equation, along with an infiltration rate representative of New Mexico's arid to semi-arid environments, then the result is a DAF of approximately 20. NMED believes that a DAF of 20 for a 0.5 acre source area is protective of groundwater in New Mexico. If the default DAF is not representative of conditions at a specific site, then it is appropriate to calculate a site-specific DAF based upon available site data.

4.1.5 Limitations on the Use of the Dilution Attenuation Factor

Because of assumptions used in SSL model approach, use of the DAF model may be inappropriate for certain conditions, including sites where:

- adsorption or degradation processes are expected to significantly attenuate contaminant concentrations in the soil or aquifer media;
- Saturated thickness is significantly less than 12 meters thick;
- fractured rock or karst aquifer types exist (violates the unconfined, unconsolidated, homogeneous, isotropic assumptions);
- facilitated transport is significant (colloidal transport, transport via dissolved organic matter, or transport via solvents other than water);
- NAPLs are present.

For sites that have these types of conditions, consideration should be given to application of a more detailed site-specific analysis than either the generic or site specific models described herein. A discussion of these types of models is presented in Section 4.1.9.

4.1.6 Generic SSLs for Protection of Groundwater

The migration to groundwater pathway model, incorporating the assumptions, soil-water partition equation and the DAF, was used to develop NMED SSLs. Default values based on conditions predominant in New Mexico were used for the input parameters in the soil-water partition equation. The NMED SSLs were developed using default DAF values of 1 and 20.

Target soil leachate concentrations (C_s) are equivalent to the appropriate groundwater standards multiplied by a DAF. To maintain an approach that is protective of groundwater quality in the development of generic SSLs, a DAF of 20 is selected as reasonably protective. However SSLs are provided for two DAFs in Appendix A. The use of the SSL listed for a DAF of 20 is advised unless site-specific data on hydrologic conditions are available, and these indicate that the generic DAF is not representative of site conditions. As will be demonstrated in the sensitivity analysis section of this document, calculation of an SSL using the migration to groundwater pathway model is most sensitive to the DAF. The inclusion of the SSL for a DAF of 1 is provided for convenience to the user. If data on hydrologic conditions are readily available, a site specific DAF can be calculated and multiplied by the generic SSL for a DAF of 1 to provide a site-specific SSL.

The generic approach may be inappropriate for use at sites where conditions are substantially different from the default values used to develop the generic soil leachate SSLs.

4.1.7 Development of Site Specific SSLs for Protection of Groundwater

New Mexico, as with any other state, offers a variety of geologic and hydrologic conditions that may not be readily represented by a single default parameter value.

Site specific conditions may differ considerably from the typical or average conditions represented by the default values used to calculate generic SSLs. The site-specific model can

be used to address the variability inherent in environmental conditions across and within the state.

Application of the site-specific model to develop soil leachate SSLs is the same as the generic approach except that site-specific values are used. Use of the site-specific model approach may incorporate replacement of all default values used for the generic SSLs with site-specific values, or may only include substitution of a single key parameter, such as hydraulic conductivity. The decision to use the site-specific model approach instead of the generic approach should be based on consideration of the sensitivity of the calculated SSL to specific parameters and the availability of those parameters as site-specific data. Sufficient site-specific data may be available such that each of the default values used for developing generic SSLs can be readily substituted with a more representative site-derived value. Conversely, limited site-specific data may restrict the number of default values to be replaced.

The NMED SSLs are generally more sensitive to the dilution factor than to other parameters in the soil-water partition equation. Fortunately, information needed to derive the DAF is usually available for sites that have undergone even the most basic levels of environmental investigation. Apart from the dilution factor, SSLs are most sensitive to the soil-water partition coefficient (K_d) as the values for this parameter can range over several orders of magnitude, particularly for metals. Although the K_d term may be critical in developing protective SSLs, information required to evaluate this parameter is more difficult to obtain and less likely to be available. Porosity and bulk density are not particularly sensitive because of the relatively small range of values encountered in subsurface conditions.

Using benzene as a representative contaminant, a sensitivity analysis was performed to compare a generic soil leachate SSL to site-specific model results simulating a range of model input parameters that might be representative of different conditions in New Mexico. The generic soil leachate SSL calculated using the New Mexico default values and a DAF of 1 is 2.8 $\mu\text{g}/\text{kg}$. These results are summarized in Table 4-1. As shown, the resulting SSLs for benzene range from 1.3 to 6.1 $\mu\text{g}/\text{kg}$ for the various sensitivity simulations compared to the generic SSL of 2.8 $\mu\text{g}/\text{kg}$. These results indicate that the calculation of SSLs using the site-specific approach is not overly sensitive to the reasonable range of porosity (air and water filled), bulk density and fraction of organic carbon expected for New Mexico or even for a range of values for chemical-specific properties. The generic SSL for benzene of 2.8 $\mu\text{g}/\text{kg}$ is representative of values that could be calculated using a spectrum of input parameters, exclusive of the DAF term. Unless there are sufficient data to calculate a site-specific DAF, there is little benefit derived from using the site-specific model approach instead of the generic SSL.

Table 4-1

Input Parameters and Resulting SSLs for the Sensitivity Analysis of the Soil-Water Partition Equation - Migration to Groundwater Pathway Model		
Input parameter (NMED default value)	Sensitivity Analysis Values	Resulting SSLs
Bulk density (default value = 1.55 gm/cm ³)	Lower Limit = 1.20 Upper Limit = 1.90	3.4 2.5
Air filled porosity (default value = 0.18)	Lower Limit = 0.04 ^a Upper Limit = 0.25 ^b	1.3 3.5
Fraction organic carbon (default value = 0.0015)	Lower Limit = 0.0005 Upper Limit = 0.007	2.2 6.1
Volume water content (default value = 0.26)	Lower Limit = 0.05 ^c Upper Limit = 0.40 ^c	1.8 3.5
K _{oc} (default value = 58.9 ml/g)	Lower Limit = 30 Upper Limit = 120	2.4 3.7
Dimensionless Henry's Law constant (default value = 0.228)	Lower Limit = 0.1 Upper Limit = 0.4	2.7 3.0

^a total porosity was reduced from 0.44 to 0.10 for this simulation
^b total porosity was increased from 0.44 to 0.6 for this simulation
^c total porosity remained at 0.44 for this simulation.

As previously stated, calculation of SSLs is most sensitive to the DAF term. The input parameter values and resulting DAFs for the sensitivity analysis are included in Table 4-2. Effects on the DAFs are, from greatest to least, the Darcian velocity (hydraulic conductivity multiplied by the hydraulic gradient), infiltration rates, size of the contaminated area, and the aquifer thickness. Corresponding effects on DAFs for each of these parameters and discussion of the relevance of the use of default values versus site-specific conditions are summarized below:

Table 4-2

Input Parameters and Resulting DAFs for the Sensitivity Analysis of the Dilution Attenuation Factor - Migration to Groundwater Pathway Model						
Parameter	Groundwater Velocity (m/yr)	Infiltration Rate (m/yr)	Source Length (m)	Aquifer thickness (m)	Mixing Zone Depth (m)	Dilution Attenuation Factor (DAF)
Groundwater velocity	2.2	0.13	45	12	7.15	3.7
Groundwater velocity	22	0.13	45	12	5.03	19.9
Groundwater velocity	220	0.13	45	12	4.79	181.1
Infiltration Rate	22	0.065	45	12	4.89	37.8
Infiltration Rate	22	0.13	45	12	5.03	19.9
Infiltration Rate	22	0.26	45	12	5.28	10.8
Source Length	22	0.13	22.5	12	2.51	19.9
Source Length	22	0.13	45	12	5.03	19.9
Source Length	22	0.13	348.4	12	38.76 ^c	6.8
Aquifer Thickness	22	0.13	45	3	5.02 ^c	12.3
Aquifer Thickness	22	0.13	45	12	5.03	19.9
Aquifer Thickness	22	0.13	45	48	5.03	19.9

Note: If mixing zone depth calculation is greater than aquifer thickness, then aquifer thickness is used to calculate the DAF.

Higher Darcian velocity results in higher DAFs. Slower mixing of groundwater with soil leachate occurs at lower groundwater velocity. Thus, using a lower velocity will be a more conservative approach. Sandy soils typically have higher hydraulic conductivities than more fine grained soils and subsequently higher Darcian velocity (under equal hydraulic gradient).

Use of a sandy soil type will generally be less conservative (result in higher DAFs) with respect to protection of groundwater quality.

Lower infiltration rates result in higher DAFs. Therefore, using a higher infiltration rate is a more conservative approach (results in a lower DAF).

Larger source sizes result in lower DAFs. The default DAF used to develop SSLs for a 0.5 acre source may not be protective of groundwater at sites larger than 0.5 acre. However, the selection of a second source size is arbitrary. If generic SSLs are developed for a 30 acre source, then those values are considered overly conservative for a 12 acre source. Conversely, SSLs developed for a 30 acre source will be less protective of a 40 acre source. Rather than develop a separate set of generic SSLs for a second (or third or fourth) source size, the following two approaches are proposed.

- As the size of the source area increases, the assumptions underlying the generic model are less applicable. One of the conservative assumptions in the generic SSL approach is the uniform distribution of contaminants throughout the vadose zone. There are few sites that have relatively uniform soil contamination (both laterally and vertically) of a single constituent in an area of greater than 0.5 acres (22,000 ft²). Soil contamination at large facilities (such as federal facilities) are usually concentrated in discrete portions of the site. Contamination at large sites is commonly the result of multiple sources. It is advisable to attempt to subdivide the facility by source and contaminant type and then apply generic SSLs to those smaller source areas.
- If this approach is not practical, calculation of site specific DAFs is recommended. Most of the parameters required for these calculations are available from routine environmental site investigations or can be reasonably estimated from general geologic and hydrologic studies.

Thin aquifers will result in lower DAFs. The nominal aquifer thickness used in the sensitivity analysis was 12 m. Reducing the aquifer thickness to 3 m results in a 40 percent reduction in the DAF. Increasing the aquifer thickness beyond the nominal value has very little impact.

The significant effects of the DAF on the calculation of SSLs, coupled with the common availability of site-specific data used to calculate the DAF, suggest that use of the site specific modeling approach should at least incorporate recalculation of the DAF term. If data are available that indicate soil properties significantly different than the default values (such as high or low f_{oc} for organic contaminants, or highly acidic or basic conditions for metal contaminants) the K_d term should also be evaluated and recalculated.

4.1.8 Detailed Model Analysis for SSL Development

Sites that have complex or heterogeneous subsurface conditions may require more detailed evaluation for development of SSLs that are reasonably, but not overly, protective of

groundwater and surface water resources. These types of sites may require more complex models that can address a wide range of variability in environmental site conditions including soil properties, contaminant mass concentration and distribution, contaminant degradation and transformation, recharge rates and recharge concentration, and depth to the water table. Model codes suitable for these types of more detailed analysis range from simple one-dimensional analytical models to complex three-dimensional numerical models. Resource requirements (data, time and cost) increase for the more complex codes. The selection of an appropriate code needs to balance the required accuracy of the output with the level of effort necessary to develop the model.

4.1.9 Summary of the Migration to Groundwater Pathway SSLs

SSLs for New Mexico have been developed for the migration to groundwater pathway, and are provided in Table A-1 of Appendix A. The NMED SSLs were developed using default parameter values representative of environmental conditions in New Mexico and utilize a DAF of 20. This approach maintains the conservative approach of the SSL methodology and is protective of groundwater quality under a wide range of site conditions. Soil contaminant concentrations can be compared directly to the generic SSLs to determine if additional investigation is necessary to evaluate potential leaching and migration of contaminants from the vadose zone to groundwater in excess of WQCC standards.

Site-specific SSLs can be developed by substituting site-related data for the default values in the leaching to groundwater pathway model. SSLs developed from this model are most sensitive to the DAF. SSLs are also provided in the lookup table for a DAF of 1. If data on hydrologic conditions are readily available, a site specific DAF can be calculated and multiplied by the generic SSL for a DAF of 1 to provide a site specific SSL.

5. USE OF THE SSLs

For screening sites with multiple contaminants, the following procedure should be followed: take the site-specific concentration (represented by the maximum reported concentration or, if deemed appropriate by NMED, the 95% upper confidence limit (UCL) value for the concentration) and divide by the SSL concentration for each analyte. For multiple contaminants, simply add the ratio for each chemical.

$$\text{Site Risk} = \left(\frac{\text{conc}_1}{\text{SSL}_1} + \frac{\text{conc}_2}{\text{SSL}_2} + \frac{\text{conc}_3}{\text{SSL}_3} + \dots + \frac{\text{conc}_n}{\text{SSL}_n} \right)$$

If the total ratio is greater than 1, then the concentrations at the site warrant further, site-specific evaluation. A ratio less than 1 indicates that the concentrations at the site are unlikely to result in adverse health impacts, or contaminate groundwater above State of New Mexico water quality standards.

As with any risk-based tool, the potential exists for misapplication. In most cases the root cause will be a lack of understanding of the intended use of NMED SSLs. In order to prevent misuse of SSLs, the following should be avoided:

- Applying SSLs to a site without adequately developing a conceptual site model that identifies relevant exposure pathways and exposure scenarios.
- Use of SSLs as cleanup levels without verifying numbers with a toxicologist or risk assessor, and
- Not considering the effects of additivity when screening multiple chemicals.

It is important to note that the generic NMED SSLs were developed assuming distinct soil horizons for each receptor. The soils of interest differ according to the exposure pathway being addressed. For direct ingestion, dermal, and fugitive dust pathways, the primary soil horizon of concern are surface soils. For inhalation of volatiles and migration to groundwater, subsurface soils are of primary concern. Both a residential receptor and a commercial/industrial worker are typically exposed only to surface soil, which may be defined as extending to a depth of approximately two feet below ground surface, depending on site-specific conditions and the amount of intrusive activity that may occur. Construction workers will typically have much greater exposures to subsurface soils. Therefore, when generic SSLs are used for screening level evaluations at a facility, site-specific conditions must be evaluated for each receptor to determine if the assumptions associated with the generic SSLs are appropriate for comparison with the available site data.

References

- Scharwzenbach, R.P. and J.C. Westall. 1981. *Transport of non-polar organic compounds from surface water to groundwater*. Environmental Science Technology, vol. 15, no.1, pp. 1360-1367.
- Enfield, C. G., R.F. Carsel, S.E. Cohen, T. Phan, and D.M. Walters. 1982. *Approximating Pollutant Transport to Ground Water*. Groundwater, vol. 20, no. 6, pp. 711-722.
- United States Environmental Protection Agency. 1986. *Superfund Public Health Evaluation Manual*. Office of Emergency and Remedial Response and Office of Solid Waste and Emergency Response. Washington, D.C.
- United States Environmental Protection Agency. 1988. *Superfund Exposure Assessment Manual* (EPA/540/1-88/001). Office of Emergency and Remedial Response, Washington, D.C.
- Piwoni, M.D., and P. Banerjee. 1989. *Sorption of organic solvents from aqueous solution onto subsurface solids*. Journal of Contaminant Hydrology, vol. 4, no. 2, pp 163-179.
- United States Environmental Protection Agency. 1989. *Risk Assessment Guidance for Superfund, Volume I, Human Health Evaluation Manual, Interim Final* (EPA/540/1-89/002). Office of Emergency and Remedial Response, Washington, D.C.
- United States Environmental Protection Agency. 1990. *Basics of Pump and Treat Groundwater remediation Technology* (EPA/600/8-90/003) Office of Research and Development. March.
- Feenstra, S., D.M. Mackay and J.D. Cherry, 1991. *A method for assessing residual NAPL based on organic chemical concentrations in soil samples*. Groundwater Monitoring Review, vol. 11, no. 2, pp 128-136.
- United States Environmental Protection Agency. 1991. *Risk Assessment Guidance for Superfund: Volume I - Human Health Evaluation Manual (Part B, Development of Risk-Based Preliminary Remediation Goals), Interim Final* (EPA 9285.6-03). Office of Emergency and Remedial Response, Washington, D.C.
- United States Environmental Protection Agency. 1992a. *Dermal Exposure Assessment: Principles and Applications* (EPA600/8-91/011B). Office of Health and Environmental Assessment, Washington, D.C.
- United States Environmental Protection Agency. 1992b. *Supplemental Guidance to RAGS: Calculating the Concentration Term* (9285.7-081). Office of Solid Waste and Emergency Response, Washington, D.C.
- United States Environmental Protection Agency. 1994. *Revised Interim Soil Lead Guidance for CERCLA Sites and RCRA Corrective Action Facilities* (EPA/540/F-94/043). Office of Solid Waste and Emergency Response. Washington, D.C.

United States Environmental Protection Agency. 1995. *Additional Environmental Fate Constants*. Office of Emergency and Remedial Response, Washington D.C.

United States Environmental Protection Agency. 1996a. *Soil Screening Guidance. Technical Background Document* (EPA/540/R95/128). Office of Emergency and Remedial Response, Washington D.C.

United States Environmental Protection Agency. 1996b. *Soil Screening Guidance. Users Guide, Second Edition* (EPA 9355.4-23). Office of Emergency and Remedial Response, Washington D.C.

United States Environmental Protection Agency. 1996c. *Recommendations of the Technical Review Workgroup for Lead for an Interim Approach to Assessing Associated with Adult to Lead in Soil*. December.

United States Environmental Protection Agency. 1997a. *Health Effects Assessment Summary Tables: FY 1997 Update* (HEAST). National Center for Environmental Assessment, Office of Research and Development and Office of Emergency and Remedial Response, Washington, D.C.

United States Environmental Protection Agency. 1997b. *Exposure Factors Handbook*, (EPA/600/P-95/002Fa). Office of Research and Development, Washington, D.C.

United States Environmental Protection Agency. 1998. *Human Health Risk Assessment Protocol for Hazardous Waste Combustion Facilities, Peer Review Draft* (EPA/530/D-98/001a). Office of Solid Waste and Emergency Response, Washington, D.C.

United States Environmental Protection Agency. 1999a. *Supplemental Guidance for Developing Soil Screening Levels for Superfund Sites, Internal Draft*. Office of Emergency and Remedial Response, Washington, D.C.

United States Environmental Protection Agency, Region 9. 1999b. *EPA Region 9 Preliminary Remediation Goals*. San Francisco, California.

Center for Disease Control, Agency for Toxic Substances and Disease Registry. 2000. *Hazardous Substances Database*. <http://www.atsdr.cdc.gov/hazdat.html>

New Mexico Environment Department, Hazardous and Radioactive Materials Bureau. 2000. *Assessing Human Health Risks Posed by Chemicals: Screening-level Risk Assessment*. Santa Fe, New Mexico.

United States Department of Agriculture, 2000. *National Resources Conservation Service, Soil Survey Laboratory Database New Mexico-All counties*.

United States Environmental Protection Agency. 2000a. *Integrated Risk Information System (IRIS)*. <http://www.epa.gov/iris/>

NMED Soil Screening Levels
December 18, 2000
Revision 1.0

United States Environmental Protection Agency. 2000b. *Risk Assessment Guidance for Superfund: Volume 1 - Human Health Evaluation Manual (Part E, Supplemental Guidance for Dermal Risk Assessment), Interim Guidance*. Office of Solid Waste and Emergency Response, Washington, D.C.

United States Environmental Protection Agency. 2000c. *CHEMFACT Database*. <http://www.epa.gov/chemfact/>. Office of Pollution Prevention and Toxics. Washington, D.C.

Appendix A

State of New Mexico Soil Screening Levels

Table A-1 provides State of New Mexico Soil Screening Levels (SSLs), as developed by the New Mexico Environment Department (NMED) Hazardous Waste Bureau (HWB) and the Ground Water Quality Bureau Voluntary Remediation Program for 133 chemicals most commonly associated with environmental releases within the state. These NMED SSLs are derived using default exposure parameter values (as presented in Table A-2) and chemical- and State of New Mexico-specific physical parameters (as presented in Table B-1 of Appendix B). These default values are assumed to be appropriately conservative in the face of uncertainty and are likely to be protective for the majority of site conditions relevant to soil exposures within New Mexico.

However, the NMED SSLs are not necessarily protective of all known human exposure pathways, reasonable land uses or ecological threats. Thus, before applying NMED SSLs at a site, it is extremely important to compare the conceptual site model (CSM) with the assumptions upon which the NMED SSLs are predicated to ensure that the site conditions and exposure pathways match those used to develop the NMED SSLs. If this comparison indicates that the site at issue is more complex than the corresponding SSL scenarios, or that there are significant exposure pathways not accounted for by the NMED SSLs, then the NMED SSLs are insufficient for use in a defensible assessment of the site. A more detailed site-specific approach will be necessary to evaluate the additional pathways or site conditions.

TABLE A-1

Column 1:	The first column in Table A-1 presents the names of the 133 chemicals for which NMED has developed SSLs.
Column 2:	The second column presents NMED SSLs predicated on residential soil exposures.
Column 3:	The third column presents indicator categories for the NMED SSL residential basis, whether predicated on carcinogenic effects (ca), noncarcinogenic effects (nc), soil saturation limits (sat) or a non-risk based "max" determination. NMED SSLs predicated on a carcinogenic endpoint reflect age-adjusted child-to-adult exposures. NMED SSLs predicated on a noncarcinogenic endpoint reflect child-only exposures. Detected concentrations above the "sat" value may indicate the presence of nonaqueous phase liquid (NAPL). For certain inorganic and semivolatile organic compounds (SVOCs) that exhibit relatively low toxicity, a non risk-based maximum concentration of 10^3 mg/kg is given when the risk-based SSL exceeds that level. These are noted as "max" in the tables.
Columns 4 and 6:	The fourth and sixth columns present NMED SSLs analogous to Column 1, with the exception that these values correspond to Industrial/Occupational and Construction worker (adult-only) exposures, respectively.
Columns 5 and 7:	The fifth and seventh columns present endpoint bases analogous to Column 3

for the Industrial/Occupational and Construction worker receptor populations, respectively. Unlike the Residential population, noncarcinogenic endpoint notes for these receptor populations are predicated on adult-only exposures.

Column 8: The eighth column notes which chemicals are considered VOCs (for inhalation considerations). Those chemicals not considered VOCs are evaluated within the SSLs relative to inhalation of particulate emissions.

Columns 9 and 10: The ninth column presents NMED SSLs for the migration to groundwater pathway developed using a default dilution attenuation factor (DAF) of 1, which assumes no effective dilution or attenuation. These values can be considered at sites where little or no dilution or attenuation of soil leachate concentrations is expected (e.g., shallow water tables, karst topography). Column 10 presents NMED SSLs for the migration to groundwater pathway developed using a DAF of 20 to account for natural processes that reduce contaminant concentrations in the subsurface.

As noted above, separate NMED SSLs are presented for use in evaluating three discrete potential receptor populations: Residential, Industrial/Occupational, and Construction. Each NMED SSL considers incidental ingestion of soil, inhalation of volatiles (limited to those chemicals noted as volatile organic compounds [VOCs] within Table A-1) or particulate emissions from impacted soil, and dermal contact with soil.

Generally, if a contaminant is detected at a level in soil exceeding the most relevant NMED SSL, and the site-specific CSM is in general agreement with the underlying assumptions upon which the NMED SSLs are predicated, this result indicates the potential for adverse human health effects to occur. Conversely, if no contaminants are detected above the most relevant NMED SSL, this tends to indicate to the user that environmental conditions may not necessitate remedial action of the surface soil or the vadose zone.

A detection above an NMED SSL does not indicate that unacceptable exposures are, in fact, occurring. The NMED SSLs are predicated on relatively conservative exposure assumptions and an exceedance only tends to indicate the potential for adverse effects. The NMED SSLs do not account for additive exposures, whether for carcinogenic or noncarcinogenic endpoints. Section 5 of Part A addresses a methodology by which an environmental manager may determine whether further site-evaluation is warranted, however, this methodology does not replace the need for defensible risk assessment where indicated.

The NMED SSLs address a basic subset of exposures fundamental to the widest array of environmentally-impacted sites within the State of New Mexico. The NMED SSLs cannot address all relevant exposure pathways associated with all sites. The utility of the NMED SSLs depends heavily upon the understanding of site conditions as accurately reflected in the CSM and nature and extent of contamination determinations. Consideration of the NMED SSLs does not preclude the need for site-specific risk assessment in all instances.

NMED Soil Screening Levels
December 18, 2000
Revision 1.0

Table A-1

NMED Soil Screening Levels									
Chemical	Residential Soil	Endpoint	Industrial/Occupational	Endpoint	Construction	Endpoint	VOC	DAF 1	DAF 20
	(mg/kg)		Soil		Worker Soil				
Acenaphthene	2.8E+03	nc ^a	4.9E+03	nc ^a	1.1E+04	nc ^a	X	3.E+03	6.E+04
Acrolein	9.9E-02	nc	7.7E-02	nc	4.1E-01	nc	X	8.E-06	2.E-04
Acrylonitrile	1.9E+00	ca	4.5E+00	ca	2.8E+01	nc	X	7.E-05	1.E-03
Aldrin	2.9E-01	ca	1.2E+00	ca	1.6E-02	nc		6.E-03	1.E-01
Aluminum	7.4E+04	nc	1.0E+05	max	7.5E-01	nc		9.E-01	2.E+01
Anthracene	1.6E+04	nc ^a	3.4E+04	nc ^a	6.2E+04	nc ^a	X	6.E+01	1.E+03
Antimony	3.0E+01	nc	9.2E+01	nc	1.1E+02	nc		3.E+03	5.E-02
Arsenic	3.9E+00	ca	1.7E+01	ca	1.9E-02	ca		3.E+00	6.E+01
Barium	5.2E+03	nc	1.5E+04	nc	7.7E-02	nc		4.E-01	8.E+02
Benzene	6.4E+00	ca	5.6E+00	nc	2.9E+01	nc	X	3.E-03	6.E-02
Benzidine	2.1E-02	ca	8.9E-02	ca	1.3E-03	ca		5.E-07	1.E-05
Benzo(a)anthracene	6.2E+00	ca	2.6E+01	ca	9.4E-01	ca		2.E+00	4.E+01
Benzo(a)pyrene	6.2E-01	ca	2.6E+00	ca	9.4E-02	ca		6.E+00	1.E+02
Benzo(b)fluoranthene	6.2E+00	ca	2.6E+01	ca	9.4E-01	ca		8.E-01	2.E+01
Benzo(k)fluoranthene	6.2E+01	ca	2.6E+02	ca	9.4E+00	ca		8.E+00	2.E+02
Beryllium	1.5E+02	nc	4.4E+02	nc	3.1E-03	nc		1.E-02	2.E-01
γ-BHC	9.0E-01	ca	3.9E+00	ca	4.6E-02	ca		2.E-05	4.E-04
α-BHC	3.2E+00	ca	1.4E+01	ca	1.6E-01	nc		2.E-03	4.E-02
β-BHC	4.4E+00	ca	1.9E+01	ca	1.6E-01	nc		4.E-04	7.E-03
Bis(2-chloroethyl) ether	4.4E+00	ca	1.9E+01	ca	2.5E-01	ca		2.E-05	3.E-04
Bis(2-chloroisopropyl) ether	6.9E+01	ca	2.9E+02	ca	8.3E+00	ca		5.E-04	9.E-03
Bis(chloromethyl) ether	2.2E-02	ca	9.3E-02	ca	1.3E-03	ca		9.E-08	2.E-06
Boron	5.5E+03	nc	1.3E+04	nc	3.1E+00	nc		1.E-01	3.E+00
Bromodichloromethane	9.6E+00	ca	2.2E+01	ca	4.5E+02	ca	X	3.E-02	7.E-01
Bromomethane	3.7E+00	nc	3.0E+00	nc	1.5E+01	nc	X	2.E-03	4.E-02
2-Butanone	3.7E+04	nc	8.9E+04	nc	1.5E+02	nc		3.E-01	7.E+00
tert-Butyl methyl ether	6.1E+03	nc	1.5E+04	nc	4.5E+02	nc		4.E-03	6.E-02
Cadmium	7.0E+01	nc	1.9E+02	nc	4.7E-02	ca		8.E-01	2.E+01
Carbon tetrachloride	1.6E+00	nc	1.3E+00	nc	6.8E+00	nc	X	5.E-03	1.E-01
Chlordane	1.6E+01	ca	7.0E+01	ca	1.1E-01	nc		4.E-01	8.E+00
Chlorobenzene	1.4E+02	nc	1.2E+02	nc	1.9E+02	sat	X	5.E-02	1.E+00
Chloroform	3.8E-01	nc	3.0E-01	nc	1.6E+00	nc	X	3.E-02	5.E-01
Chloromethane	1.2E+01	ca	2.5E+01	ca	6.0E+02	ca	X	5.E-04	1.E-02
Chromium III	1.0E+05	max	1.0E+05	max	1.0E+05	max		9.E+00	2.E+02
Chromium VI	2.3E+02	nc	6.6E+02	ca	1.0E-03	ca		1.E+00	2.E+01
Chrysene	6.1E+02	ca ^a	2.5E+03	ca ^a	6.4E+03	nc ^a	X	5.E+01	1.E+03
Cobalt	4.5E+03	nc	1.3E+04	nc	1.6E-01	nc		8.E-03	2.E-01

Table A-1

NMED Soil Screening Levels									
Chemical	Residential Soil (mg/kg)	Endpoint	Industrial/Occupational Soil (mg/kg)	Endpoint	Construction Worker Soil (mg/kg)	Endpoint	VOC	DAF 1 (mg/kg)	DAF 20 (mg/kg)
Copper	2.8E+03	nc	8.5E+03	nc	1.0E+04	nc		4.E+02	7.E+03
Cyanide	1.2E+03	nc	3.0E+03	nc	1.1E+01	nc		5.E-02	1.E+00
DDD	2.4E+01	ca	1.0E+02	nc	2.7E-01	nc		3.E+00	6.E-01
DDT	1.7E+01	ca	7.5E+01	ca	2.7E-01	nc		1.E+01	3.E+02
DDT	1.7E+01	ca	7.5E+01	ca	2.7E-01	nc		7.E-01	1.E-01
Di(2-ethylhexyl) phthalate	3.5E+02	ca	1.5E+03	ca	1.2E+01	nc		4.E-01	9.E+00
Dibenz(a,h)anthracene	6.2E-01	ca	2.6E+00	ca	9.4E-02	ca		5.E-01	9.E+00
1,2-Dibromoethane	5.3E-02	ca	2.1E-01	ca	1.4E+00	ca	X	2.E-05	4.E-04
1,2-Dichlorobenzene	8.5E+01	sat	8.5E+01	sat	8.5E+01	sat	X	4.E-01	9.E+00
1,3-Dichlorobenzene	1.2E+01	nc	1.1E+01	nc	5.0E+01	nc	X	4.E-03	8.E-02
1,4-Dichlorobenzene	3.2E+01	ca	5.7E+01	sat	5.7E+01	sat	X	8.E-02	2.E+00
3,3-Dichlorobenzidine	1.1E+01	ca	4.5E+01	ca	6.5E-01	ca		3.E-04	5.E-03
Dichlorodifluoromethane	9.0E+01	nc	7.1E+01	nc	3.8E+02	nc	X	6.E+00	1.E+02
1,1-Dichloroethane	5.6E+02	nc	4.6E+02	nc	1.2E+03	sat	X	7.E-03	1.E-01
1,2-Dichloroethane	3.3E+00	ca	7.2E+00	ca	4.3E+01	nc	X	1.E-03	2.E-02
cis-1,2-Dichloroethene	4.1E+01	nc	3.3E+01	nc	1.7E+02	nc	X	2.E-02	4.E-01
trans-1,2-Dichloroethene	6.0E+01	nc	4.9E+01	nc	2.5E+02	nc		2.E-02	4.E-01
1,1-Dichloroethane	8.1E+00	ca	3.4E+01	ca	1.7E+00	ca		3.E-03	5.E-02
Dichloromethane	6.5E+02	ca	2.7E+03	ca	1.8E+02	ca		2.E-02	4.E-01
2,4-Dichlorophenol	1.8E+02	nc	4.4E+02	nc	1.6E+00	nc		2.E-02	4.E-01
1,3-Dichloropropene	7.8E-01	ca	1.7E+00	ca	3.1E+01	nc	X	2.E-04	5.E-03
Dieldrin	3.0E-01	ca	1.3E+00	ca	1.8E-02	ca		1.E-04	2.E-03
Diethyl phthalate	4.9E+04	nc	1.0E+05	max	4.3E+02	nc		8.E+00	2.E+02
Dimethyl phthalate	1.0E+05	max	1.0E+05	max	5.4E+03	nc		6.E+01	1.E+03
Dibutyl phthalate	6.1E+03	nc	1.5E+04	nc	5.4E+01	nc		9.E+00	2.E+02
2,4-Dinitro-2-methylphenol	1.2E+02	nc	3.0E+02	nc	1.1E+00	nc		1.E-02	2.E-01
2,4-Dinitrophenol	1.2E+02	nc	3.0E+02	nc	1.1E+00	nc		1.E-02	2.E-01
2,4-Dinitrotoluene	1.2E+02	nc	3.0E+02	nc	1.1E+00	nc		1.E-04	3.E-03
1,2-Diphenylhydrazine	6.1E+00	ca	2.6E+01	ca	3.8E-01	ca		3.E-01	6.E+00
Endosulfan	3.7E+02	nc	8.9E+02	nc	3.2E+00	nc		3.E-04	7.E-03
Endrin	1.8E+01	nc	4.4E+01	nc	1.6E-01	nc		3.E-04	7.E-03
Ethylbenzene	6.8E+01	sat	6.8E+01	sat	6.8E+01	sat	X	4.E-01	8.E+00
Fluoride	3.7E+03	nc	8.9E+03	nc	1.4E+04	nc		3.E-01	5.E+00
Fluoranthene	2.3E+03	nc	5.3E+03	nc	2.1E+01	nc		9.E+01	2.E+03
Fluorene	2.1E+03	nc	4.0E+03	nc	8.0E+03	nc	X	3.E+00	6.E+01
Fluorotrichloromethane	1.2E+04	nc	3.0E+04	nc	3.1E+01	nc		7.E-02	1.E+00
Heptachlor	1.1E+00	ca	4.5E+00	ca	6.4E-02	ca		4.E-03	8.E-02

Table A-1

NMED Soil Screening Levels									
Chemical	Residential Soil (mg/kg)	Endpoint	Industrial/Occupational Soil (mg/kg)	Endpoint	Construction Worker Soil (mg/kg)	Endpoint	VOC	DAF 1 (mg/kg)	DAF 20 (mg/kg)
Hexachlorobenzene	3.0E+00	ca	1.3E+01	ca	1.8E-01	ca		2 E-04	3.E-03
Hexachlorobutadiene	1.2E+01	nc	3.0E+01	nc	1.1E-01	nc		7.E-02	1.E+00
Hexachlorocyclopentadiene	4.2E+02	nc	1.0E+03	nc	1.1E-02	nc		1.E-02	3 E-01
Hexachloroethane	6.1E+01	nc	1.5E+02	nc	5.4E-01	nc		9.E-03	2.E-01
HMX	3.1E+03	nc	7.4E+03	nc	1.1E+04	nc		1.E-03	2.E-02
Indeno(1,2,3-c,d)pyrene	6.2E+00	ca	2.6E+01	ca	9.4E-01	ca		2.E+00	4 E+01
Iron	2.3E+04	nc	6.9E+04	nc	8.0E+04	nc		2.E-01	3.E+00
Isophorone	5.1E+03	ca	2.2E+04	ca	1.1E+02	nc		1.E-01	3 E+00
Lead	4.0E+02	NC	1.0E+03	nc	1.0E+00	nc		8.E-03	2.E-01
Lead (tetraethyl-)	6.1E-03	nc	1.5E-02	nc	2.3E-02	nc		1.E-02	2.E-01
Manganese	7.8E+03	nc	1.4E+04	nc	7.5E-03	nc		3.E-02	7.E-01
Mercury and compounds	2.3E+01	nc	6.9E+01	nc	8.0E+01	nc		1 E-01	2.E+00
Mercury (elemental)	6.5E+00	nc	2.0E+01	nc	4.6E-02	nc		1.E-01	2 E+00
Mercury (methyl)	6.1E+00	nc	1.5E+01	nc	2.3E+01	nc		1.E-03	2.E-02
Molybdenum	3.8E+02	nc	1.2E+03	nc	1.3E+03	nc		2.E-01	3.E+00
Naphthalene	5.3E+01	nc*	4.3E+01	nc*	2.2E+02	nc*	X	1.E-02	2.E-01
Nickel	1.5E+03	nc	4.4E+03	nc	3.1E-02	nc		1.E+01	3.E+02
Nitrate	9.8E+04	nc	1.0E+05	max	8.6E+02	nc		2.E+00	3.E+01
Nitrite	6.1E+03	nc	1.5E+04	nc	5.4E+01	nc		2.E-01	3.E+00
Nitrobenzene	1.7E+01	nc	2.1E+01	nc	5.4E+01	nc	X	9.E-04	2.E-02
Nitroglycerin	3.5E+02	ca	1.5E+03	ca	6.6E+01	ca		3.E-02	6.E-01
N-Nitrosodimethylamine	3.2E-02	ca	1.4E-01	ca	2.1E+01	ca		9.E-07	2.E-05
N-Nitrosodimethylamine	9.5E-02	ca	4.0E-01	ca	1.9E-03	ca		1.E-05	2.E-04
N-Nitrosodi-n-butylamine	2.2E-01	ca	5.4E-01	ca	6.0E-03	ca	X	1 E-05	2.E-04
N-Nitrosodiphenylamine	9.9E+02	ca	4.2E+03	ca	9.3E+00	ca		9.E-02	2.E+00
N-Nitrosopyrrolidine	9.9E+02	ca	4.2E+03	ca	6.0E+01	ca		9.E-02	2.E+00
N-Nitrosopyrrolidine	2.3E+00	ca	9.7E+00	ca	1.4E-01	ca		6.E-06	1.E-04
Aroclor 1016	3.9E+00	nc	8.9E+00	nc	3.8E-02	nc		2 E-04	3.E-03
Aroclor 1221	2.2E+00	ca	9.2E+00	ca	1.5E-01	ca		2.E-04	3.E-03
Aroclor 1232	2.2E+00	ca	9.2E+00	ca	1.5E-01	ca		2.E-04	3.E-03
Aroclor 1242	2.2E+00	ca	9.2E+00	ca	1.5E-01	ca		2.E-04	3.E-03
Aroclor 1248	1.1E+00	nc	2.5E+00	nc	1.1E-02	nc		8.E-01	2.E+01
Aroclor 1254	1.1E+00	nc	2.5E+00	nc	1.1E-02	nc		8.E-01	2.E+01
Aroclor 1260	1.1E+00	nc	2.5E+00	nc	1.1E-02	nc		8.E-01	2.E+01
Pentachlorobenzene	4.9E+01	nc	1.2E+02	nc	4.3E-01	nc		6.E-03	1.E-01
Phenanthrene	1.8E+03	nc	4.4E+03	nc	1.6E+01	nc		4.E+03	8.E+04
Phenol	3.7E+04	nc	8.9E+04	nc	3.2E+02	nc		2.E-03	4.E-02
Pyrene	1.8E+03	nc*	4.3E+03	nc*	6.7E+03	nc*	X	3.E-02	6.E-01

1.6

Table A-1

NMED Soil Screening Levels									
Chemical	Residential Soil (mg/kg)	Endpoint	Industrial/Occupational Soil (mg/kg)	Endpoint	Construction Worker Soil (mg/kg)	Endpoint	VOC	DAF 1 (mg/kg)	DAF 20 (mg/kg)
RDX	4.4E+01	ca	1.9E+02	ca	1.6E+00	nc		2.E-03	4.E-02
Selenium	3.6E+02	nc	1.2E+03	nc	1.3E+03	nc		3.E-01	5.E+00
Silver	3.8E+02	nc	1.2E+03	nc	1.3E+03	nc		4.E-01	8.E+00
Strontium	3.7E+04	nc	8.9E+04	nc	1.0E+05	max		4.E+00	7.E+01
1,2,4,5-Tetrachlorobenzene	1.8E-01	nc	4.4E+01	nc	1.6E-01	nc		2.E-03	4.E-02
1,1,2,2-Tetrachloroethane	3.6E+00	ca	8.2E+00	ca	1.6E+02	ca	X	2.E-03	3.E-02
Tetrachloroethene	4.9E+01	ca	1.0E+02	sat	1.0E+02	sat	X	5.E-03	1.E-01
Thallium	6.1E+00	nc	1.8E+01	nc	2.1E+01	nc		5.E-04	1.E-02
Toluene	1.8E+02	sat	1.8E+02	sat	1.8E+02	sat	X	2.E-01	5.E+00
Toxaphene	4.4E+00	ca	1.9E+01	ca	2.5E-01	ca		5.E-04	1.E-02
Trichloromethane	6.1E-02	ca	2.6E+03	ca	1.1E+01	nc		2.E-02	3.E-01
1,2,4-Trichlorobenzene	5.2E+02	nc	5.3E+02	sat	5.3E+02	sat	X	5.E-01	1.E+01
1,1,1-Trichloroethane	5.1E+02	sat	5.1E+02	sat	5.1E+02	sat	X	3.E-02	5.E-01
1,1,2-Trichloroethane	7.9E+00	ca	1.8E+01	ca	1.6E+02	nc	X	3.E-03	6.E-02
Trichloroethene	1.6E+01	ca	1.8E+01	nc	9.2E+01	nc	X	4.E-02	7.E-01
2,4,5-Trichlorophenol	6.1E+03	nc	1.5E+04	nc	5.4E+01	nc		6.E-01	1.E+01
2,4,6-Trichlorophenol	4.4E+02	ca	1.9E+03	ca	2.7E+01	ca		1.E-02	2.E-01
2,4,6-Trinitrotoluene	3.1E+01	nc	7.4E+01	nc	2.7E-01	nc		4.E+01	7.E+02
Vanadium	5.3E+02	nc	1.6E+03	nc	1.9E+03	nc		4.E-02	9.E-01
Vinyl chloride	2.1E-01	ca	4.5E-01	ca	1.0E+01	ca	X	3.E-04	6.E-03
Xylenes	6.3E+01	sat	6.3E+01	sat	6.3E+01	sat	X	5.E+00	1.E+02
Zinc	2.3E+04	nc	6.9E+04	nc	8.9E+04	nc		6.E+01	1.E+03

ca - carcinogenic effect basis
nc - noncarcinogenic effect basis
sat - soil saturation limit basis
max - low toxicity maximum, health based SSL exceeds [10⁵] mg/kg

NMED - New Mexico Environment Department
VOC - Volatile organic compound
DAF - Dilution attenuation factor
compound is solid at ambient soil temperature, so risk-based level is used even though this level exceeds soil saturation (US EPA, 1996a)

Note: Soil Screening Levels for residential soil, industrial/occupational soil, and construction worker soil are based on the combined exposure through direct soil ingestion, inhalation of fugitive dust (and fumes for VOCs), and dermal exposure to soil.

36

APPENDIX B

Table B-1

Physical-Chemical Properties												
Chemical	MW (g/mole)	H (atm-m ³ /mole)	H' (dimensionless)	D _w (cm ² /s)	D _a (cm ² /s)	K _{oc} (cm ³ /g)	K _d (cm ³ /g)	S (mg/L)	D _s (cm ² /s)	VF (m ³ /kg)	SAT (mg/kg)	VOC
RDX		6.3E-08	2.6E-06			7.0E+01	1.1E-01					
1,2,4,5-Tetrachlorobenzene		1.0E-03	4.1E-02									
1,1,2,2-Tetrachloroethane	168	3.5E-04	1.4E-02	7.1E-02	7.9E-06	7.9E+01	4.7E-01	3.0E+03	9.1E-05	1.3E+04	7.3E+02	X
Tetrachloroethene	165.83	1.8E-02	7.5E-01	7.2E-02	8.2E-06	2.7E+02	1.6E+00	2.0E+02	1.5E-03	3.1E+03	1.0E+02	X
Thallium												
Toluene	92	6.6E-03	2.7E-01	8.7E-02	8.6E-06	1.4E+02	8.4E-01	5.3E+02	1.2E-03	3.4E+03	1.8E+02	X
Toxaphene		6.0E-06	2.5E-04									
Tribromomethane		6.6E-04	2.7E-02									
1,2,4-Trichlorobenzene	181	1.4E-03	5.8E-02	3.0E-02	8.2E-06	1.7E+03	1.0E+01	3.0E+02	9.0E-06	4.0E+04	5.3E+02	X
1,1,1-Trichloroethane	133	1.7E-02	7.1E-01	7.8E-02	8.8E-06	1.4E+02	8.1E-01	1.3E+03	2.7E-03	2.3E+03	5.1E+02	X
1,1,2-Trichloroethane	133	9.1E-04	3.7E-02	7.9E-02	8.8E-06	7.5E+01	4.5E-01	4.4E+03	2.7E-04	7.3E+03	1.1E+03	X
Trichloroethene	131	1.0E-02	4.2E-01	7.9E-02	9.1E-06	9.4E+01	5.7E-01	1.1E+03	2.3E-03	2.5E+03	3.4E+02	X
2,4,5-Trichlorophenol	197.46	4.3E-06	1.8E-04									
2,4,6-Trichlorophenol	197.46	7.8E-06	3.2E-04									
2,4,6-Trinitrotoluene		4.6E-07	1.9E-05			1.6E+03	2.4E+00					
Vanadium												
Vinyl chloride	63	2.7E-02	1.1E+00	1.1E-01	1.2E-06	1.9E+01	1.1E-01	2.8E+03	1.5E-02	9.9E+02	8.7E+02	X
Xylenes	106	7.3E-03	3.0E-01	7.0E-02	7.8E-06	2.0E+02	1.2E+00	1.6E+02	8.2E-04	4.2E+03	6.3E+01	X
Zinc												

MW - Molecular weight
 H' - Dimensionless Henry's Law Constant
 D_w - Diffusivity in water
 K_d - Soil-water partition coefficient
 D_a - Apparent diffusivity
 SAT - Soil saturation limit
 H - Henry's Law Constant
 D_s - Diffusivity in air
 K_{oc} - Soil organic carbon partition coefficient
 S - Solubility in water
 VF - Volatilization factor
 VOC - Volatile organic compound

Note: Values for properties are presented in this table only for those compounds for which the values were used in the soil screening level calculation.

51

10/11/01 10:00 AM

Table C-1

Human Health Benchmarks Used for Calculating SSLs									
Chemical	SF ₁ (mg/kg-day) ⁻¹	Reference	SF ₂ (mg/kg-day) ⁻¹	Reference	RfD ₁ (mg/kg-day)	Reference	RfD ₂ (mg/kg-day)	Reference	ABS
Acenaphthene					6.0E-02	IRIS	6.0E-02	r	0.13
Acrolein					2.0E-02	HEAST	5.7E-05	IRIS	0.1
Acrylonitrile	5.4E-01	IRIS	2.4E-01	IRIS	1.0E-03	HEAST	5.7E-04	IRIS	0.1
Aldrin	1.7E+01	IRIS	1.7E+01	IRIS	3.0E-05	IRIS	3.0E-05	r	0.1
Aluminum					1.0E+00	NCEA	1.4E-03	NCEA	0.01
Anthracene					3.0E-01	IRIS	3.0E-01	r	0.13
Antimony					4.0E-04	IRIS			0.01
Arsenic	1.5E+00	IRIS	1.5E+01	IRIS	3.0E-04	IRIS			0.03
Barium					7.0E-02	IRIS	1.4E-04	HEAST	0.01
Benzene	2.9E-02	IRIS	2.7E-02	IRIS	3.0E-03	NCEA	1.7E-03	NCEA	0.01
Benztidine	2.3E+02	IRIS	2.3E+02	IRIS	3.0E-03	IRIS	3.0E-03	r	0.1
Benz(a)anthracene	7.3E-01	NCEA	3.1E-01	NCEA	3.0E-02	S	3.0E-02	s	0.13
Benzo(a)pyrene	7.3E+00	IRIS	3.1E+00	NCEA	3.0E-02	S	3.0E-02	s	0.13
Benzo(b)fluoranthene	7.3E-01	NCEA	3.1E-01	NCEA	3.0E-02	S	3.0E-02	s	0.13
Benzo(k)fluoranthene	7.3E-02	NCEA	3.1E-02	NCEA	3.0E-02	S	3.0E-02	s	0.13
α-BHC	6.3E+00	IRIS	6.3E+00	IRIS					0.04
β-BHC	1.8E+00	IRIS	1.8E+00	IRIS	3.0E-04	S	3.0E-04	s	0.04
γ-BHC	1.3E+00	HEAST	1.3E+00	r	3.0E-04	IRIS	3.0E-04	r	0.04
Beryllium			8.4E+00	IRIS	2.0E-03	IRIS	5.7E-06	IRIS	0.01
Bis(2-chloroethyl) ether	1.1E+00	IRIS	1.2E+00	IRIS					0.1
Bis(2-chloroisopropyl) ether	7.0E-02	HEAST	3.5E-02	HEAST	4.0E-02	IRIS	4.0E-02	r	0.1
Bis(chloroethyl) ether	2.2E+02	IRIS	2.2E+02	IRIS					0.1
Boron					9.0E-02	IRIS	5.7E-03	HEAST	0.1
Bromodichloromethane	6.2E-02	IRIS	6.2E-02	r	2.0E-02	IRIS	2.0E-02	r	0.1
Bromonethane					1.4E-03	IRIS	1.4E-03	IRIS	0.1
2-Butanone					6.0E-01	IRIS	2.9E-01	IRIS	0.1
tert-Butyl methyl ether					1.0E-01	Cal EPA	8.6E-01	IRIS	0.1
Cadmium			6.3E+00	IRIS	1.0E-03	IRIS			0.001
Carbon tetrachloride	1.3E-01	IRIS	5.3E-02	IRIS	7.0E-04	IRIS	5.7E-04	NCEA	0.1
Chlordane	3.5E-01	IRIS	3.5E-01	IRIS	5.0E-04	IRIS	2.0E-04	IRIS	0.04
Chlorobenzene					2.0E-02	IRIS	1.7E-02	NCEA	0.1
Chloromethane	1.3E-02	HEAST	6.3E-03	HEAST			8.6E-02	NCEA	0.1
Chloroform	6.1E-03	IRIS	8.1E-02	IRIS	1.0E-02	IRIS	8.6E-05	NCEA	0.1
Chromium III					1.5E+00	IRIS			0.01
Chromium VI			2.9E+02	IRIS	3.0E-03	IRIS			0.01

Table C-1

Human Health Benchmarks Used for Calculating SSLs									
Chemical	SF _c (mg/kg-day) ⁻¹	Reference	SF _i (mg/kg-day) ⁻¹	Reference	RfD _c (mg/kg-day)	Reference	RfD _i (mg/kg-day)	Reference	ABS
Cobalt					6.0E-02	NCEA	2.9E-04	NCEA	0.01
Copper					3.7E-02	HEAST			0.01
Chrysene	7.3E-03	NCEA	3.1E-03	NCEA	3.0E-02	S	3.0E-02	s	0.13
Cyanide					2.0E-02	IRIS	2.0E-02	r	0.1
DDD	2.4E-01	IRIS	2.4E-01	r	5.0E-04	S	5.0E-04	s	0.03
DDE	3.4E-01	IRIS	3.4E-01	r	5.0E-04	S	5.0E-04	s	0.03
DDT	3.4E-01	IRIS	3.4E-01	IRIS	5.0E-04	IRIS	5.0E-04	r	0.03
Dibenz(a,h)anthracene	7.3E+00	NCEA	3.1E+00	NCEA					0.13
1,2-Dibromoethane	8.5E+01	IRIS	7.7E-01	IRIS	5.7E-05	H	5.7E-05	HEAST	0.1
Dibutyl phthalate					1.0E-01	IRIS	1.0E-01	r	0.1
1,2-Dichlorobenzene					9.0E-02	IRIS	5.7E-02	HEAST	0.1
1,3-Dichlorobenzene					9.0E-04	NCEA	9.0E-04	r	0.1
1,4-Dichlorobenzene	2.4E-02	HEAST	2.2E-02	NCEA	3.0E-02	NCEA	3.0E-02	IRIS	0.1
3,3-Dichlorobenzidine	4.5E-01	IRIS	4.5E-01	r					0.1
Dichlorodifluoromethane					2.0E-01	IRIS	5.7E-02	HEAST	0.1
1,1-Dichloroethane					1.0E-01	HEAST	1.4E-01	HEAST	0.1
1,2-Dichloroethane	9.1E-02	IRIS	9.1E-02	IRIS	3.0E-02	NCEA	1.4E-03	NCEA	0.1
1,1-Dichloroethene	5.0E-01	IRIS	1.9E-01	IRIS	9.0E-03	IRIS	9.0E-03	r	0.1
cis-1,2-Dichloroethene					1.0E-02	HEAST	1.0E-02	r	0.1
trans-1,2-Dichloroethene					2.0E-02	IRIS	2.0E-02	r	0.1
Dichloromethane	7.5E-03	IRIS	1.6E-03	IRIS	6.0E-02	IRIS	8.6E-01	HEAST	0.1
2,4-Dichlorophenol					3.0E-03	IRIS	3.0E-03	r	0.1
1,3-Dichloropropene	1.8E-01	HEAST	1.3E-01	HEAST	3.0E-04	IRIS	5.7E-03	IRIS	0.1
Dieldrin	1.6E+01	IRIS	1.6E+01	IRIS	5.0E-05	IRIS	5.0E-05	r	0.1
Diethyl phthalate					8.0E-01	IRIS	8.0E-01	r	0.1
Di(2-ethylhexyl) phthalate	1.4E-02	IRIS	1.4E-02	r	2.0E-02	IRIS	2.2E-02	r	0.1
2,4-Dinitrophenol					2.0E-03	IRIS	2.0E-03	r	0.1
Dimethyl phthalate					1.0E+01	HEAST	1.0E+01	r	0.1
2,4-Dinitro-2-methylphenol					2.0E-03	S	2.0E-03	s	0.1
2,4-Dinitrotoluene					2.0E-03	IRIS	2.0E-03	r	0.1
1,2-Diphenylhydrazine	8.0E-01	IRIS	7.7E-01	IRIS					0.1
Endosulfat					6.0E-03	IRIS	6.0E-03	r	0.1
Endrin					3.0E-04	IRIS	3.0E-04	r	0.1
Ethylbenzene					1.0E-01	IRIS	2.9E-01	IRIS	0.1
Fluoranthene					4.0E-02	IRIS	4.0E-02	r	0.13

Table C-1

Human Health Benchmarks Used for Calculating SSLs									
Chemical	SF ₁ (mg/kg-day) ¹	Reference	SF ₁ (mg/kg-day) ¹	Reference	RfD ₁ (mg/kg-day)	Reference	RfD ₁ (mg/kg-day)	Reference	ABS
Fluoreno					4.0E-02	IRIS	4.0E-02	r	0.1
Fluoride					6.0E-02	IRIS			0.1
Fluorotrichloromethane									0.1
Heptachlor	4.5E+00	IRIS	4.6E+00	IRIS	5.0E-04	IRIS	5.0E-04	r	0.1
Hexachlorobenzene	1.6E+00	IRIS	1.6E+00	IRIS	8.0E-04	IRIS	8.0E-04	r	0.1
Hexachlorocyclopentadiene					7.0E-03	IRIS	2.0E-05	HEAST	0.1
Hexachlorostilbene	1.4E-02	IRIS	1.4E-02	IRIS	1.0E-03	IRIS	1.0E-03	r	0.1
Hexachlorobutadiene	7.8E-02	IRIS	7.8E-02	IRIS	2.9E-04	HEAST	2.0E-04	r	0.1
HMX					5.0E-02	IRIS			0.1
Indeno(1,2,3-c,d)pyrene	7.3E-01	NCEA	3.1E-01	NCEA	3.0E-02	S	3.0E-02	s	0.13
Iron					3.0E-01	NCEA			0.01
Iscophorone	9.5E-04	IRIS	9.5E-04	r	2.0E-01	IRIS	2.0E-01	r	0.1
Lead	The effects of lead are evaluated using US EPA's IEUBK model								
Lead (tetraethyl-)					1.0E-07	IRIS			0.1
Manganese					1.4E-01	IRIS	1.4E-05	IRIS	0.01
Mercury and compounds					3.0E-04	IRIS			0.01
Mercury (elemental)							8.6E-05	IRIS	0.01
Mercury (methyl)					1.0E-04	IRIS			0.1
Molybdenum					5.0E-03	HEAST			0.01
Naphthalene					2.0E-02	IRIS	8.6E-04	IRIS	0.1
Nickel					2.0E-02	IRIS	5.7E-05	ATSDR	0.01
Nitrate					1.6E+00	IRIS	1.6E+00	r	0.1
Nitrite					1.0E-01	IRIS	1.0E-01	r	0.1
Nitrobenzene					5.0E-04	IRIS	5.7E-04	HEAST	0.1
Nitroglycerin	1.4E-02	NCEA	1.4E-02	r					0.1
N-Nitroso-n-butylamine	5.4E+00	IRIS	5.6E+00	IRIS					0.1
N-Nitrosodimethylamine	1.5E+02	IRIS	1.5E+02	IRIS					0.1
N-Nitrosodimethylamine	5.1E+01	IRIS	4.9E+01	IRIS					0.1
N-Nitrosodiphenylamine	4.9E-03	IRIS	4.9E-03	r					0.1
N-Nitrosopyrrolidine	2.1E+00	IRIS	2.1E+00	IRIS					0.1
Phenanthrene					3.0E-02	X	3.0E-02	x	0.1
Phenol					6.0E-01	IRIS	6.0E-01	r	0.1
Phenol	1.6E+00	IRIS	1.6E+00	IRIS	8.0E-04	IRIS	8.0E-04	r	0.1
Polychlorinatedbiphenyls									0.14
Aroclor 1016	7.0E-02	IRIS	7.0E-02	IRIS	7.0E-05	IRIS	7.0E-05	r	0.14

Table C-1

Human Health Benchmarks Used for Calculating SSLs									
Chemical	SF _o (mg/kg-day) ⁻¹	Reference	SF _i (mg/kg-day) ⁻¹	Reference	RfD _o (mg/kg-day)	Reference	RfD _i (mg/kg-day)	Reference	ABS
Aroclor 1221	2.0E+00	IRIS	2.0E+00	IRIS					0.14
Aroclor 1232	2.0E+00	IRIS	2.0E+00	IRIS					0.14
Aroclor 1242	2.0E+00	IRIS	2.0E+00	IRIS					0.14
Aroclor 1248	2.0E+00	IRIS	2.0E+00	IRIS	2.0E-05	S	2.0E-05	s	0.14
Aroclor 1254	2.0E+00	IRIS	2.0E+00	IRIS	2.0E-05	IRIS	2.0E-05	r	0.14
Aroclor 1260	2.0E+00	IRIS	2.0E+00	IRIS	2.0E-05	S	2.0E-05	s	0.14
Pentachlorobenzene					8.0E-04	IRIS	8.0E-04	r	0.1
Pyrene					3.0E-02	IRIS	3.0E-02	r	0.1
Selenium					5.0E-03	IRIS			0.01
Silver					5.0E-03	IRIS			0.01
Strontium					6.0E-01	IRIS			0.1
ROX	1.1E-01	IRIS	1.1E-01	r	3.0E-03	IRIS	3.0E-03	r	0.1
1,2,4,5-Tetrachlorobenzene					3.0E-04	IRIS	3.0E-04	r	0.1
1,1,2,2-Tetrachloroethane	2.0E-01	IRIS	2.0E-01	IRIS	6.0E-02	NCEA	6.0E-02	r	0.1
Tetrachloroethene	5.2E-02	NCEA	2.0E-03	NCEA	1.0E-02	IRIS	1.1E-01	NCEA	0.1
Thallium					8.0E-05	IRIS			0.01
Toluene					2.0E-01	IRIS	1.1E-01	HEAST	0.1
Toxaphene	1.1E+00	IRIS	1.1E+00	IRIS					0.1
Trichloromethane	7.9E-03	IRIS	3.9E-03	IRIS	2.0E-02	IRIS	2.0E-02	r	0.1
1,2,4-Trichlorobenzene					1.0E-02	IRIS	5.7E-02	HEAST	0.1
1,1,1-Trichloroethane					3.5E-02	NCEA	2.9E-01	NCEA	0.1
1,1,2-Trichloroethane	5.7E-02	IRIS	5.6E-02	IRIS	4.0E-03	IRIS	4.0E-03	r	0.1
Trichloroethene	1.5E-02	NCEA	1.0E-02	NCEA	6.0E-03	NCEA	6.0E-03	r	0.1
2,4,5-Trichlorophenyl					1.0E-01	IRIS	1.0E-01	r	0.1
2,4,6-Trichlorophenyl	1.1E-02	IRIS	1.1E-02	IRIS					0.1
2,4,6-Trinitrotoluene	3.0E-02	IRIS	3.0E-02	r	5.0E-04	IRIS	5.0E-04	r	0.1
Vanadium					7.0E-03	HEAST			0.01
Vinyl chloride	1.9E+00	HEAST	3.0E-01	HEAST					0.1
Xylenes					2.0E+00	IRIS	2.0E+00	r	0.1
Zinc					3.0E-01	IRIS			0.01

SF_o – Oral cancer slope factor

SF_i – Inhalation cancer slope factor

RfD_o – Oral Reference Dose

RfD_i – Inhalation Reference Dose

ABS – Gastrointestinal absorption coefficient

IRIS – Integrated Risk Information System, US EPA, 2000

HEAST – Health Effects Assessment Summary Tables, USEPA, 1997

NCEA – National Center for Environmental Assessment, Office of Research and Development

r – Route-to-route extrapolation

S – Surrogate value selected on basis of structure-activity relationship