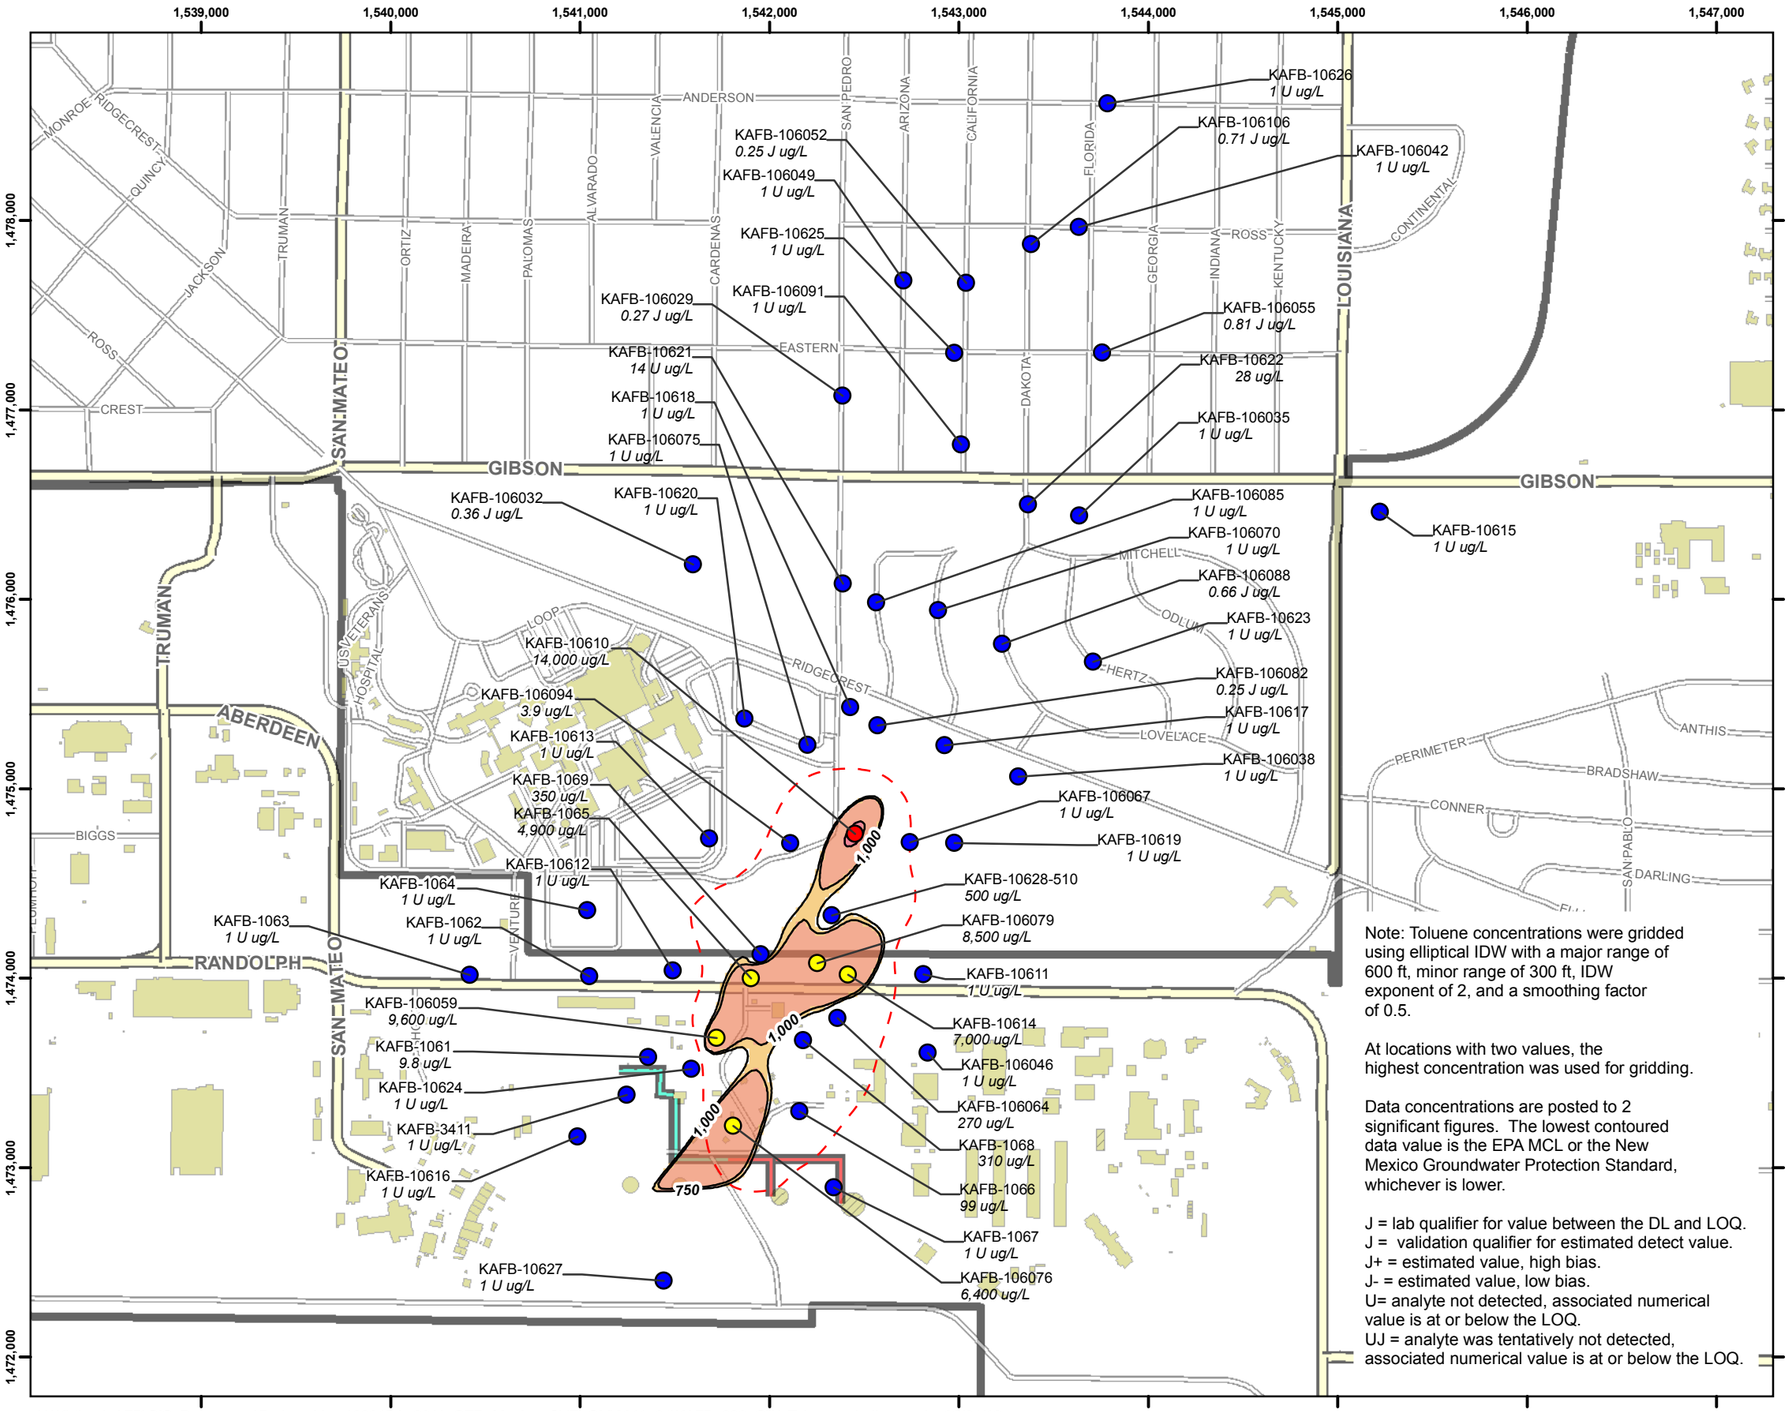

Note: Toluene concentrations were gridded using elliptical IDW with a major range of 600 ft, minor range of 300 ft, IDW exponent of 2, and a smoothing factor of 0.5.

At locations with two values, the highest concentration was used for gridding.

Data concentrations are posted to 2 significant figures. The lowest contoured data value is the EPA MCL or the New Mexico Groundwater Protection Standard, whichever is lower.

J = lab qualifier for value between the DL and LOQ.
J = validation qualifier for estimated detect value.
J+ = estimated value, high bias.
J- = estimated value, low bias.
U= analyte not detected, associated numerical value is at or below the LOQ.
UJ = analyte was tentatively not detected, associated numerical value is at or below the LOQ.

Legend

Toluene Result (ug/L)
- 0.25 - 750
- 760 - 1,000
- 1,100 - 10,000
- 11,000 - 14,000
- Historical Area of Observed NAPL (July 2009)
- Toluene Concentration Contour (ug/L)

Toluene Concentration (ug/L)
- 0.30 - 750
- 750 - 1,000
- 1,000 - 10,000
- 10,000 - 14,000

- Major Road
- Road
- Aboveground Fuel Transfer Line
- Underground Fuel Transfer Line
- Previously Existing Structure
- Existing Structure
- Installation Boundary



N

Revision Date: 02/24/12

0 400 800 1,600
Feet
1 inch = 800 feet

Projection : NAD83 State Plane New Mexico Central FIPS3002 Feet

2011 QUARTERLY REPORT 04
BULK FUELS FACILITY
KIRTLAND AIR FORCE BASE, NEW MEXICO

FIGURE 5-27

TOLUENE CONCENTRATIONS IN SHALLOW GROUNDWATER

H:\Kirtland_AFB\GIS_Documents\Project_Maps\2001BA_2011_QTR_Monitor_SVE_OM\2011_04\KAFB_036_GW_Toluene_shallow.mxd 02/24/12

THIS PAGE INTENTIONALLY LEFT BLANK