



National Nuclear Security Administration
Sandia Site Office
P.O. Box 5400
Albuquerque, New Mexico 87185-5400



APR 20 2007

CERTIFIED MAIL – RETURN RECEIPT REQUESTED

Mr. James Bearzi
Chief
New Mexico Environment Department
Hazardous Waste Bureau
2905 Rodeo Park Road, Bldg. E
Santa Fe, New Mexico 87505



Dear Mr. Bearzi:

On behalf of Sandia Corporation and the Department of Energy (DOE), DOE is submitting a Monitoring Well Plug and Abandonment Plan and Replacement Well Construction Plan; Decommissioning of Groundwater Monitoring Well TAV-MW1; Installation of Replacement Groundwater Monitoring Well TAV-MW10. This Plug and Abandonment Plan is required under Section VIII.C of the Compliance Order on Consent.

If you have any questions regarding this submittal, please contact me at (505) 845-6036, or Dan Pellegrino of my staff, at (505) 845-5398.

Sincerely,

Dan Pellegrino
for Patty Wagner
Manager

Enclosure

cc w/enclosure:

W. Moats, NMED (Via Certified Mail)
L. King, EPA, Region 6 (Via Certified Mail)
T. Skibitski, NMED-OB

cc w/o enclosure:

A. Blumberg, SNL/NM, Org. 11100, MS 0141
D. Miller, SNL/NM, Org 6765, MS 0718
P. Freshour, SNL/NM, Org. 6765, MS 1089
M. Skelly, SNL/NM, Org. 6765, MS 1089
M. Davis, SNL/NM, Org. 6765, MS 1089
T. Goering, SNL/NM, Org. 6765, MS 1089
Records Center, SNL/NM, Org.6765, MS 1089
T. Longo, HQ/GTN, NA-56
J. Estrada, SSO, MS 0184

CERTIFICATION STATEMENT FOR APPROVAL AND FINAL RELEASE OF DOCUMENTS

**Document title: Plug and Abandonment/Replacement Plan for TAV-MW1, April
2007**

Document author: Mike Skelly, Dept. 6765

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision according to a system designed to ensure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment for knowing violations.

Signature: 
Les E. Shephard
Vice President
Energy, Security & Defense Technologies Division 6000
Sandia National Laboratories/New Mexico
Albuquerque, New Mexico 87185
Operator

4/10/07
Date

and

Signature: 
Patty Wagner
Manager
U.S. Department of Energy
National Nuclear Security Administration
Sandia Site Office
Owner and Co-Operator

4/19/07
Date

**Monitoring Well Plug and Abandonment Plan
and
Replacement Well Construction Plan**

**Decommissioning of
Groundwater Monitoring Well TAV-MW1**


**Installation of Replacement
Groundwater Monitoring Well TAV-MW10**

**Environmental Restoration Project
Sandia National Laboratories, New Mexico**


Plan Authorization and Implementation

Prepared by 
Michael Skelly, 6765
Assistant Task Leader


Date 09 APR 07

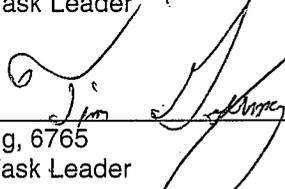Reviewed by 
Tim Goering, 6765
Assistant Task Leader

Date 4-9-07

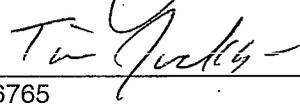Reviewed by 
Tim Jackson, 6765
Assistant Task Leader

Date 4-9-07

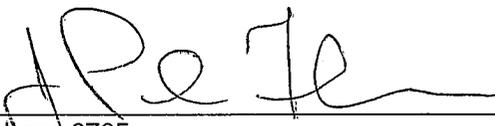Approved by 
Paul Freshour, 6765
ER/LTS Project Manager

Date 4/9/07

Table of Contents

	Page:
Documentation:	
1 Project and Site Information	1
2 Regulatory Criteria	1
3 Existing Well Information	2
4 Plugging and Abandonment	2
4.1 Goal	4
4.2 Objective	4
4.3 Implementation	4
5 Monitoring Well Installation	5
5.1 Objective	5
5.2 Implementation	5
5.2.1 Borehole Drilling	5
5.2.2 Well Construction	6
5.2.3 Well Development	8
6 Equipment Decontamination	8
7 Health and Safety	8
8 Pre-field Activities	8
9 Mobilization and Site Setup	8
10 Reporting	9
10.1 Decommissioning Records	9
10.2 Well Installation Records	10
11 References	10
Figures:	
Figure 1 Location of TAV-MW1 and proposed well TAV-MW10	3
Figure 2 TAV-MW1 Groundwater Elevations Over Time	7
Tables:	
Table 1 Applicable Operating Procedures	4
Attachments:	
Attachment 1--Monitoring Well Completion Diagram for TAV-MW1	
Attachment 2--Groundwater Well Abandonment Diagram	
Attachment 3--Well Plug and Abandonment Form	
Attachment 4--Groundwater Monitoring Well Data Sheet	

1 Project and Site Information

Task Description: Sandia National Laboratories/New Mexico (SNL/NM)
decommissioning with plug and abandonment of one
groundwater monitoring well, and installation of one replacement
groundwater monitoring well

Case No.: 98036.10.11.01

Project Leader/Department No.: Paul Freshour/6765

Scheduled Start Date: June 2007

Estimated Completion Date: August 2007

Operations/Technical Area: OU 1330, Groundwater Initiative

2 Regulatory Criteria

This Plug and Abandonment (P&A) Plan outlines the activities and procedures to decommission existing groundwater well TAV-MW1, and install replacement groundwater monitoring well TAV-MW10.

Regulatory guidance for well plug and abandonment can be found in New Mexico Environment Department, Hazardous Waste Bureau (NMED/HWB) requirements. Section VIII.C of the Compliance Order on Consent (the Order) discusses well abandonment (NMED April 2004):

"Wells shall be abandoned when they are no longer required in the monitoring network, no longer provide representative groundwater samples because of falling water levels or insufficient productivity, or become damaged beyond repair. The goal of well abandonment is to seal the well in such a manner that it cannot act as a conduit for the migration of contaminants from either the ground surface to the saturated zone or between saturated zones. Respondents shall prepare an abandonment plan for any and all wells that are to be plugged and abandoned, and shall submit the plan to the Department for approval. Respondents shall not abandon any groundwater monitoring well without prior written approval of the Department."

Further guidance for well P&A procedures can be found in the New Mexico Office of the State Engineer (OSE) "Rules and Regulations Governing Well Driller Licensing; Construction, Repair and Plugging of Wells" (NM OSE August 2005):

"To plug a well, the entire well shall be filled from the bottom upwards to land surface using a tremie pipe. The well shall be plugged with neat cement slurry, bentonite based plugging material, or other sealing material approved by the state engineer for use in the plugging of non-artesian wells"

The OSE guidance also states that:

"Wells encountering contaminated water or soil may require coordination between the office of the state engineer and the New Mexico environment department (or other authorized agency or department) prior to the plugging of the well."

And,

“A licensed well driller shall keep a record of each well plugged as the work progresses. The well driller shall file a complete plugging record with the state engineer and the permit holder no later than twenty (20) days after completion of the plugging. The plugging record shall be on a form prescribed by the state engineer . . .”

To meet these regulatory requirements, the following tasks will be completed at SNL/NM:

- Decommission well and TAV-MW1 because it no longer provides representative groundwater samples due to falling water levels and insufficient productivity.
- Submit this P&A Plan to the NMED/HWB and OSE for review and approval.
- Use a licensed well driller and approved materials to seal the well so that it cannot act as a conduit for the migration of potential contaminants from the ground surface to the saturated zone.
- Upon completion of the P&A activities, submit a plugging record to the OSE and submit a P&A Report describing the field activities to the NMED/HWB.

3 Existing Well Information


Groundwater monitoring well TAV-MW1 is proposed for decommissioning in this P&A Plan. The monitoring well completion diagram for TAV-MW1 is presented in Attachment 1, and the pertinent well completion information is summarized below.

TAV-MW1 is a compliance groundwater monitoring well located in the Technical Area V (TA-V) groundwater Area of Concern (AOC) (Figure 1). This well was installed in February 1995 and is completed in the regional aquifer with the following well completion details:

- Total depth of the well -- 509 ft bgs.
- Screened interval: -- 489 to 509 ft bgs.
- Construction materials -- PVC riser pipe, PVC screen, carbon steel protective surface casing and guard posts, and a concrete well pad.
- Current water level -- ~509 ft bgs.
- Water-bearing strata – Groundwater occurs in unconsolidated silts and sands (alluvial fan facies) of the upper Santa Fe Group that have relatively low hydraulic conductivities.
- Reason for decommissioning – The regional water table has dropped to the lowest portion of the screened interval. There is no evidence that suggests the annular seal is compromised.

4 Plugging and Abandonment


Based on the requirements established by the NMED/HWB and OSE, the groundwater monitoring well TAV-MW1 will be decommissioned. Applicable Field Operating Procedures (FOPs) and Administrative Operating Procedures (AOPs) are listed in Table 1; however, this site-specific P&A Plan should be used as the primary guidance in the field.

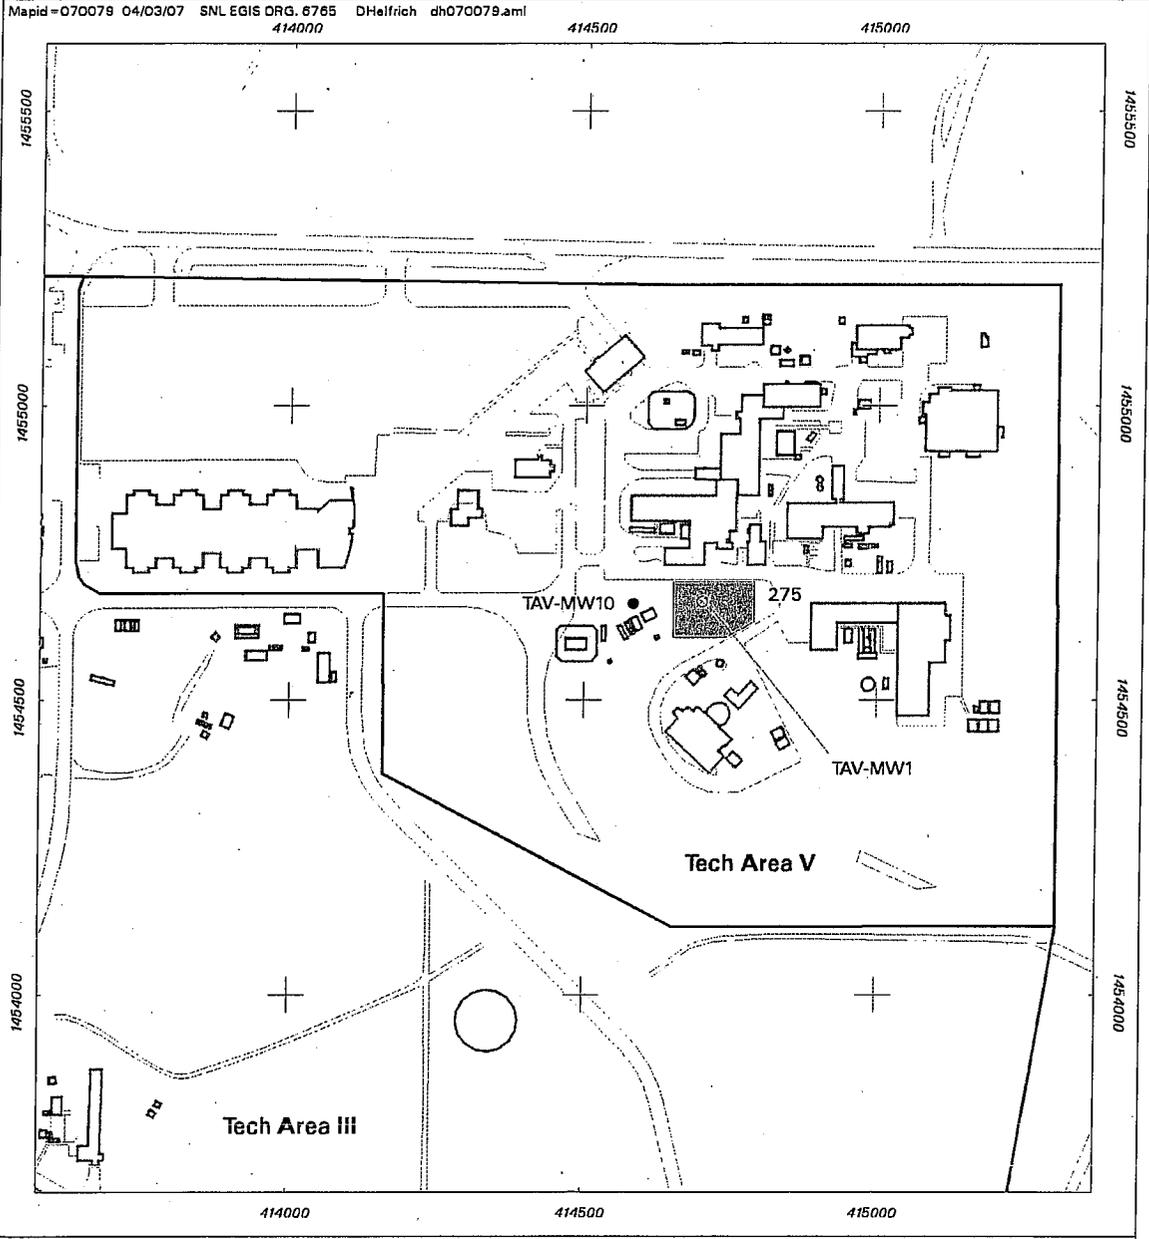

Legend

-  Existing Groundwater Monitoring Well
Proposed for Plug and Abandonment
-  Replacement Groundwater Monitoring Well
(location shown schematically)
-  Building / Structure
-  Paved and unpaved Road
-  SNL Technical Area Boundary
-  SWMU 275

Figure 1
Location of TAV-MW1 and
Proposed well TAV-MW10



Sandia National Laboratories, New Mexico
Environmental Geographic Information System

Table 1. Applicable Operating Procedures

Number of Procedure	Title of Procedure
FOP 94-01	Safety Meetings, Inspections, and Pre-Entry Briefings Rev. 1, 12/16/96
FOP 94-05	Borehole Lithologic Logging, Rev. 0, 2/10/94
FOP 94-25	Documentation of Field Activities, Rev. 0, 11/4/94
FOP 94-26	General Equipment Decontamination, Rev. 1, 2/20/97
FOP 94-28	Health and Safety Monitoring of Organic Vapors (FID and PID), Rev. 2, 4/27/97
FOP 94-38	Drilling Methods and Drill Site Management, Rev. 0, 4/14/94
FOP 94-41	Well Development, Rev. 0, 11/21/94
FOP 94-42	Integration of the design, Installation, Rehabilitation, and Decommissioning of Environmental Restoration Wells, Rev. 1, 5/31/94
FOP 94-43	Decommissioning Of Wells, Rev 0, 5/31/94
FOP 94-45	Designing and Installing Groundwater Monitoring Wells, Rev. 0, 5/31/94
FOP 94-57	Decontaminating Drilling and Other Field Equipment, Rev. 0, 5/31/94
FOP 94-68	Field Change Control, Rev. 2 (in revision)
FOP 94-69	Personnel Decontamination (Level D, C, and B Protection), Rev. 1, 1/23/98
AOP 94-24	System and Performance Audits, Rev. 0, 1/12/95
AOP 94-25	Deficiency Reporting, Rev. 0, 1/12/95
AOP 95-16	Administrative Operating Procedure for Sample Management and Custody, Rev. 1, 4/18/96

4.1 Goal

The goal for decommissioning monitoring well TAV-MW1 is to eliminate the potential of the well to act as a conduit for the migration of potential contamination to groundwater. The well materials and annular seals are not believed to pose a threat to groundwater, and therefore will be backfilled in place with proper sealing materials.

4.2 Objective

The objective is to seal this monitoring well in such a manner that there is reasonable certainty that the abandonment has adequately eliminated the potential for cross-communication between the land surface and the aquifer, and the potential for downward migration of potential contaminants through the borehole annulus to the aquifer. All grouting techniques and grout mixtures used during decommissioning will minimize grout intrusion into the native formation.

4.3 Implementation:

General activities for the implementation of the P&A include:

- 1) Remove all monitoring well surface completion features,
- 2) Backfill the casing with well-plugging materials, and
- 3) Construct a new surface pad/monument.

SNL/NM personnel and the selected drilling contractor will remove all surface completion features, such as guard posts, concrete well pads, and surface protective casing. Care will be taken to prevent materials from falling down the well casing and possibly causing a downhole obstruction. The well will be abandoned with casing left in place, and the well casing will be cut off at approximately 5 ft bgs.

The well screen and blank well casing will be sealed by lowering a tremie pipe to the base of the well casing (below the base of the screen) and injecting the plug material (bentonite grout) using a diaphragm or equivalent pump system. The plug material will be filled to within 5 ft of the ground surface and allowed to set overnight. If the level of the plug material in the well casing drops overnight, additional bentonite grout will be added to again reach within 5 ft of ground level.

Once the well has been properly plugged, the decommissioning process will be completed by placing concrete in the upper 5 ft of the well/borehole and installing a concrete slab on the surface. The concrete pad will be 4 inches thick with a 2 ft by 2 ft area, constructed in the ground so that the surface of the finished concrete slab will be 1 to 2 inches above the natural ground surface. A brass marker containing the well name, total depth, and date of decommissioning will be set in the concrete pad.

5 Monitoring Well Installation

A replacement monitoring well (TAV-MW10) will be installed after TAV-MW1 has been decommissioned.

5.1 Objective

Install a 5-inch (inside diameter) PVC casing replacement monitoring well to provide representative groundwater samples. The replacement monitoring well borehole will be drilled using Air-Rotary Casing-Hammer (ARCH) drilling methods at locations a minimum of 25 ft away from the existing well location, if possible. The proposed replacement well location on Figure 1 is shown schematically; the actual location will be selected with concurrence with NMED/HWB personnel and may vary due to utility clearance and land use issues.

5.2 Implementation

Applicable FOPs and AOPs are listed in Table 1; however, this site-specific plan should be used as the primary guidance in the field.

5.2.1 Borehole Drilling

The ARCH drilling method will use environmentally-friendly lubricants and will be able to penetrate highly variable lithologies such as cobbles, boulders, gravel, sand, clay, and caliche while maintaining an open, competent borehole. The total depth of the borehole will be determined by the SNL/NM field geologist, but the depth is anticipated to be 30 to 35 ft deeper than the original well. After reaching total depth, the cased borehole will be logged using natural gamma and neutron wire-line geophysical methods.

Minimal water (but no other foams/liquids) in the form of "mist" may be introduced into the borehole to aid in the removal of cuttings. Waste generation will be kept to a minimum.

Borehole cuttings will be contained within an area adjacent to the well. Water produced from the well during drilling or development will be contained in 55-gallon drums and placed on spill control pallets.

Monitoring well TAV-MW10 is anticipated to be drilled to approximately 544 ft bgs. The well screen completion interval is expected to be approximately 509 to 539 ft bgs with a 5-foot sump placed below the screen.

5.2.2 Well Construction

The monitoring well will be completed as specified in this plan. The water-table monitoring well will be installed through the temporary steel drive casing (nominal 10-inch diameter), and completed using 5-inch inner diameter, flush threaded, PVC Schedule-80 water well casing. No solvents, cleaners, or lubricants will be used for construction of the monitoring well. The casing will be delivered pre-cleaned and bagged, or steam-cleaned on site prior to installation. To preserve the integrity of the well materials, the well screen and riser pipe will be suspended in the borehole until the primary filter pack, bentonite pellet seal and annular seal are installed.

The regional aquifer in the study area is being over-pumped and the water table at TAV-MW1 is rapidly declining with a decline rate of 0.99 feet/year over the last several years (Figure 2). To accommodate the rapidly declining water table, a 30-ft length of screen with a 0.020-inch slot size will be used for the replacement well. A 5-ft sump will be placed at the base of the screen and sealed with a threaded end cap. PVC centralizers will be placed at the base and top of the well screen. The screen for the water-table well will be placed so that the top of the screen is approximately 5 feet above the static water level.

The annulus surrounding the well screen will be filled with a primary filter pack of clean 10-20 silica sand. The primary filter pack will extend from the bottom of the sump to at least 5 ft above the top of the screen. A 5-ft thick layer of clean 40-60 sand will be placed above the primary filter pack. Both sand packs will be tagged using a tag line to verify their depth. Preliminary well development using a surge block will be performed at this time to help settle the filter pack.

A 30-foot thick layer of 1/4-inch bentonite pellets or 3/8-inch bentonite chips will be placed above the filter pack prior to emplacement of the bentonite-grout annular seal. Each 5 ft thickness of bentonite pellets/chips added will be hydrated before adding the next 5-ft thickness of bentonite pellets/chips. The final lift of bentonite pellets/chips will be allowed to set for a time adequate for hydration (at least 1 hour). The remaining annular space to ground surface will then be filled with bentonite grout. To prevent overloading, the bentonite grout will be installed in at least 2 lifts (each lift filling approximately one-half of the borehole annulus above the bentonite pellets/chips). Each lift of bentonite grout will be allowed to set overnight. The bentonite grout will be topped off to within 6-inches to 1-ft bgs.

The well casing will extend approximately 30 inches above ground surface with a water-tight cap. The monitoring well will be completed with protective steel casing with a hinged locking cap. The protective casing will be primed and painted yellow. A 3-ft by 3-ft, sloped concrete

pad will be constructed around the casing. The pad will contain a 3-in brass cap stamped with the well identification. Three, 4-inch diameter concrete-filled, steel guard posts (also primed and painted yellow) will be placed around the pad, equidistant from the well.

5.2.3 Well Development

Well development will be completed at least 48 hours after grouting. The well will be developed for approximately 10 hours, and will consist of pumping, surge-block, swabbing, and/or bailing techniques. During development, the groundwater field parameters will be continuously monitored, and development will continue until parameters have stabilized. All development water will be contained in drums and will not be allowed to discharge to the ground surface.

6 Equipment Decontamination

The drilling rig and related equipment will be decontaminated at the decontamination pad in Technical Area III prior to the beginning of drilling operations. Decontamination of equipment will also be required after completing the well. Decontamination waste will be kept to a minimum and containerized in drums placed on spill control pallets at the decontamination pad.

7 Health and Safety

Level D personal protective equipment is required for all drilling operations. Health and Safety records associated with drilling and development personnel will be maintained on site and will be available at the commencement of drilling activities. All field personnel will operate under an SNL/NM Health and Safety Plan (HASP) and will have SNL/NM-required training including 40-Hr OSHA HAZWOPER and subsequent yearly refresher courses. An SNL/NM Subject Matter Expert will perform a safety inspection of the drill rig before drilling commences.

8 Pre-field activities

Pre-field activities that must be completed prior to drilling include:

- Preparation of the Statement of Work for drilling and monitoring well installation;
- SNL/NM digging permit request and approval;
- HASP preparation, review, and signatures;
- National Environmental Policy Act (NEPA) review and signatures;
- Sample bottle order for waste samples through Sample Management Office;
- Waste Management Plan preparation;
- Field checklist completion, review, and approval; and
- Readiness review meeting.

9 Mobilization and Site Setup

SNL/NM personnel will ensure that containers for cuttings have been obtained and are ready for drilling operations. Roll-off bins supplied by SNL/NM will be used to collect drill cuttings for waste management purposes.

10 Reporting

Based on the requirements established by the NMED/HWB, OSE and SNL/NM FOPs, the field activities associated with decommissioning and installation of the monitoring wells will be documented.

10.1 Decommissioning Records

All decommissioning field activities will be documented in a field log book per guidance in FOP 94-25. Upon completion of decommissioning of a well, the P&A Report will document all site activities and provide final as-built well decommissioning diagrams (Attachment 2). Attachment 3 will be used to assure that all records are completed, approved, and submitted for proper records management. The following list of documents and records that are generated as part of the decommissioning process will be provided to the SNL/NM Well File Coordinator who, in turn, will submit them to the SNL/NM Customer-Funded Records Center:

- Monitoring Well Plugging and Abandonment Request
- Well Plugging and Abandonment Form
- Site-Specific Well Plugging and Abandonment Work Plan
- Site-Specific Well Plugging and Abandonment Report
- Plugging and Abandonment Documentation and Approval Checklist
- Waste Management Plan
- Field Log Book
- Detailed as-built diagram (Attachment 2)

All decommissioning activities performed at SNL/NM will be accurately and concisely documented in a final P&A Report to be submitted to the NMED/HWB and the OSE. The P&A Report will contain a brief narrative describing actual work performed at the site and any variances to the site-specific P&A Plan. Information to be contained in the P&A Report include: (1) daily field activity notes, (2) all materials used, (3) a final "as-built" plugging and abandonment diagram, and (4) documentation of notification of SNL/NM GIS group and the appropriate regulatory agencies. The Well Plugging and Abandonment Form (Attachment 2) will be completed and included as part of the P&A Report.

Further P&A reporting elements are required by the OSE (OSE August 2005). SNL/NM personnel and the licensed well driller (contractor) will submit a plugging record with the state engineer no later than twenty (20) days after completion of the plugging. The record will include the following elements:

- Name and address of the well owner
- Well driller's name and license number
- Name of each drill rig supervisor that supervised the well plugging
- State engineer file number for the well (if available)
- Location of the well (reported in latitude and longitude)
- Dates when plugging began/concluded
- Plugging material(s) used
- Depth of the well
- Size and type of casing
- Location of perforations

- Location of the sanitary seal
- Completed well log with depth and thickness of all strata plugged, including whether each stratum was water bearing

10.2 Well Installation Records

All well installation field activities will be documented in a field log book per guidance in FOP 94-45. Upon completion of the well installation, the Field Report will document all site activities and provide final as-built well completion diagrams (Attachment 4). The Field Report will contain a brief narrative describing actual work performed at the site and any variances to the site-specific Well Installation Plan. Information to be contained in the Field Report include: (1) daily field activity notes, (2) all materials used, (3) a final "as-built" well completion diagram, and (4) documentation of notification of SNL/NM GIS group and the appropriate regulatory agencies. The documentation will also include the 37 information elements required in Section VIII.D of the Order (NMED April 2004). The following list of documents and records that are generated as part of the well installation process will be provided to the SNL/NM Well File Coordinator who, in turn, will submit them to the SNL/NM Customer-Funded Records Center:

- Well permit agreement
- Well file contents checklist
- Well data summary sheet
- Statement of work for drilling the well
- Drilling permit
- Lithologic (boring) log
- Well construction diagram and completion parameters
- Well development data and groundwater parameters
- Copies of field logbook (geologist, driller)
- Surveyed elevations and location in State Plane coordinates
- Location map
- Water level measurements
- Aquifer test data
- Analytical data
- Waste management documentation
- Photographs

11 References

NMED April 2004, "Compliance Order on Consent Pursuant to the New Mexico Hazardous Waste Act 74-4-10: Sandia National Laboratories Consent Order," New Mexico Environment Department, April 24, 2004.

OSE August 2005, "Rules and Regulations Governing Well Driller Licensing; Construction, Repair and Plugging of Wells" New Mexico Office of the State Engineer, August 2005.

Attachment 1

Monitoring Well Completion Diagram for TAV-MW1

WELL DATABASE SUMMARY SHEET

Project Name:	TA5 SEEPAGE PITS	Geo Location:	TA5 SEEPAGE PITS
ER ADS #:	1306	Well Completion Date:	28-FEB-1995
Well Name:	TAV-MW1	Completion Zone:	SILTY SAND
Owner Name:	SNL/NM	Formation of Completion:	SANTA FE GROUP
Date Drilling Started:	31-JAN-1995	Well Comment:	WELL DEVELOPED 4/10/95 - 4/14/95. INSIDE FENCE TA-V
Drilling Contractor:	STEWART BROTHERS		
Drilling Method:	AIR CASING HAMMER W/CENTER BI		
Borehole Depth:	520		
Casing Depth:	509.5		

Survey Data

Survey Date: 13-APR-1995
 Surveyed By: GREINER INC.

State Plane Coordinates.

(X) Easting: 414699.928
 (Y) Northing: 1454667.5

Surveyed Elevations (FAMSL)

Protective Casing: 5436.204
 Top of Inner Well Casing: 5435.136
 Concrete Pad: 5432.535
 Ground Surface: 5432.5



Calculated Depths and Elevations

Initial Water Elevation: 4935.34
 (FAMSL)
 Initial Depth To Water: 499.8
 (FBGS)

Last measured water level was measured on 24-OCT-2006 FASL

Date Updated: 14-MAR-00 Date Printed: 12-MAR-2007

Completion Data Measured Depths (FBGS)


Casing Stickup: 3.7

Interval	Start	Stop
BOREHOLE	0'	200'
		O.D. 11.75"
Interval	Start	Stop
GROUT/BACKFILL	0'	463'
VOLCLAY GROUT		
Interval	Start	Stop
CASING	0'	509.5'
PVC SCH 80	I.D. 5"	O.D. 5.2"
Interval	Start	Stop
BOREHOLE	200'	520'
		O.D. 10.5"
Interval	Start	Stop
SEAL	463'	474'
BENTONITE POWDER		
Interval	Start	Stop
SECONDARY PACK	474'	483.5'
0.100		
Interval	Start	Stop
PRIMARY PACK	483.5'	512.5'
10/20		
Interval	Start	Stop
SCREEN	489.5'	509.5'
PVC 80		
	Slot Size	.02"
Interval	Start	Stop
PLUG BACK	509.5'	520'
10/20 SAND		



Attachment 2

Groundwater Well Abandonment Diagram

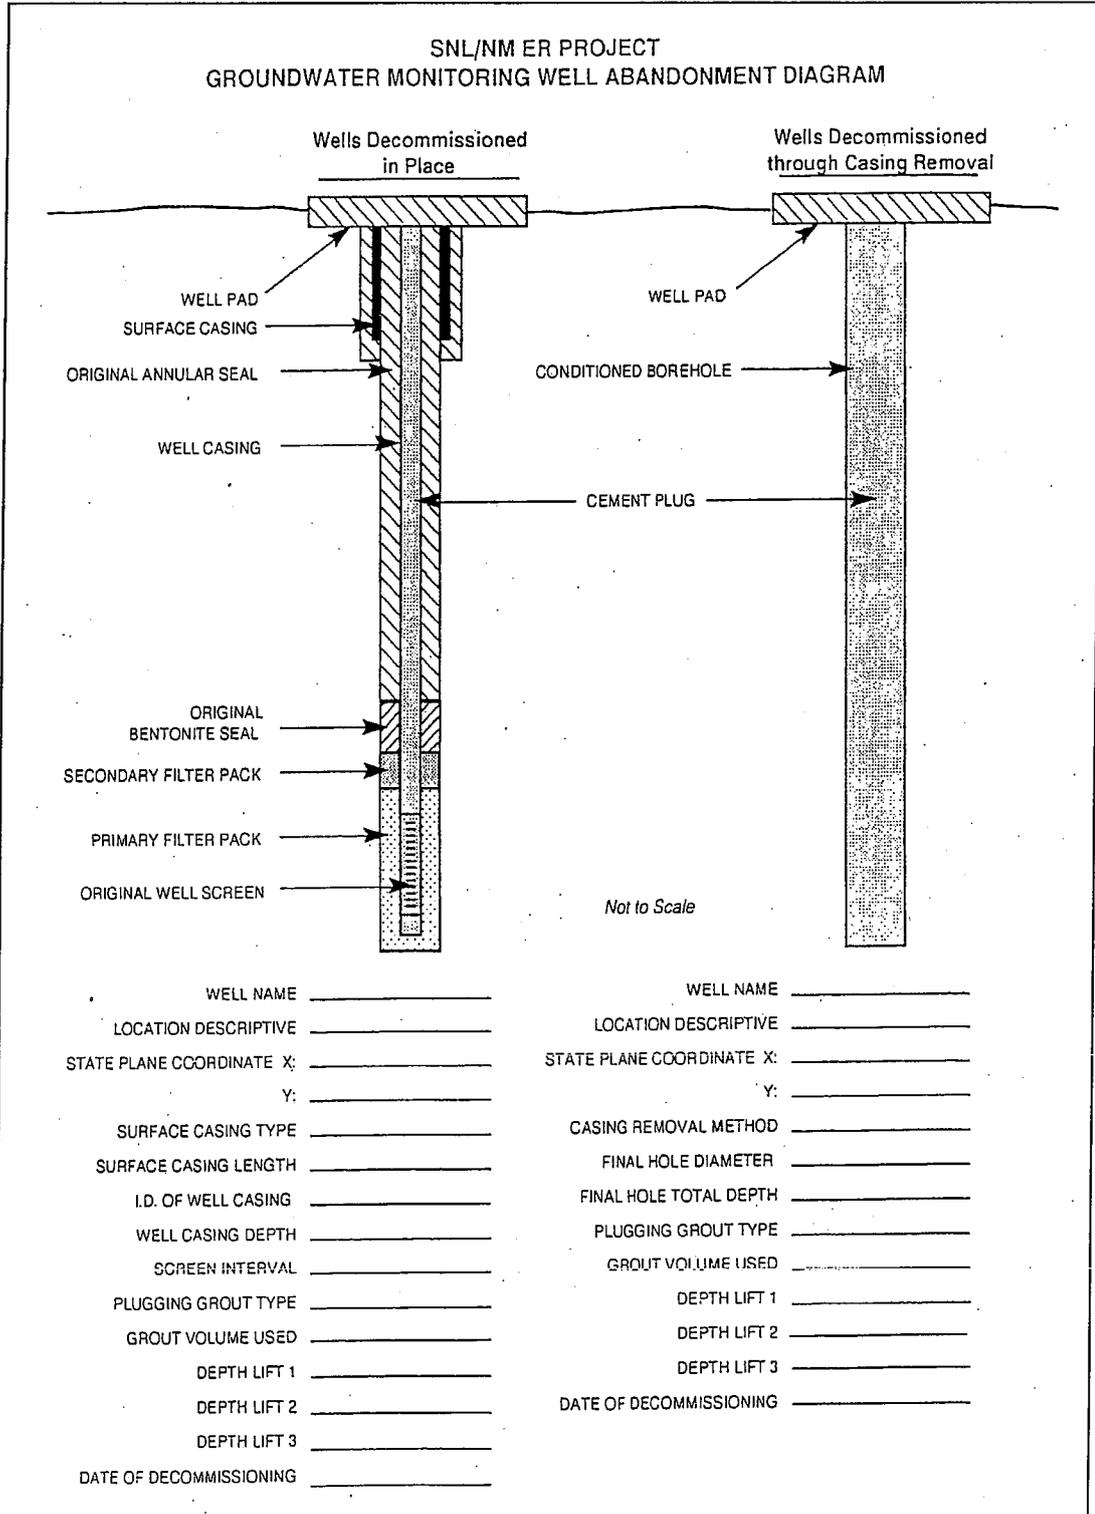

Attachment 3

Well Plug and Abandonment Form

SNL/NM ER PROJECT
WELL PLUGGING AND ABANDONMENT FORM

Page 1 of 1

1. Preabandonment Well Specifics:
- a. Well Identification _____
 - b. Location (geographic description and state plane coordinates) _____
 - c. Reported Well Depth (feet) _____
 - d. Field Well Depth (feet) _____
 - e. Screened Intervals(s) (feet) _____
 - f. Screen Diameter(s) (inches) _____
 - g. Screen Type(s) (SS or PVC, etc.) _____
 - h. Casing Diameter(s) (inches) _____
 - i. Casing Type (PVC, steel, etc.) _____
 - j. Artesian or Nonartesian Aquifer _____

2. Reason for Abandonment: _____

3. Abandonment Specifics:
- a. Date Abandonment Started _____
 - b. Date Abandonment Completed _____
 - c. ID Number of Field Log Book Used _____
 - d. Site Personnel _____
 - e. Drilling Method Used _____
 - f. Grout Used _____
 - g. Casing Removed (Y or N) _____
 - h. Concrete Pad Inscription _____

j. Briefly Describe Abandonment Method: _____

k. Disposition of Materials Removed From Well: _____

4. Comments or Problems Encountered: _____

Completed by: _____
Printed Name Signature Date

Subcontractor: _____

Drilling Contractor: _____ License No.: _____

Attachment 4

Groundwater Monitoring Well Data Sheet

SNL/NM Groundwater Monitoring Well Data Sheet	
PROJECT NAME _____	GEOGRAPHIC LOCATION: _____
ER ADS #: _____	WELL COMPLETION DATE: _____
WELL NAME: _____	COMPLETION ZONE: _____
OWNER: _____	FORMATION OF COMPLETION: _____
DATE DRILLING BEGAN: _____	REMARKS: _____
DRILLING CONTRACTOR: _____	_____
DRILLING METHOD: _____	_____
BOREHOLE DEPTH: _____	_____
BOREHOLE DIAMETERS: _____	_____



Survey Data		Completion Data
Survey Date: _____		Measured Depths (feet below ground surface)
Surveyed by: _____		Initial Water Level: _____
State Plane Coordinates		Casing Stackup: _____ (above ground level)
(X) Easting = _____		Casing OD (in.): _____
(Y) Northing = _____		Casing ID (in.): _____
Surveyed Elevations (feet above sea level)		1. Grout/Backfill Interval: _____ Material: _____
Protective Casing: _____ (Elev. D - FOP 94-71)		2. Seal Interval: _____ Material: _____
Top of inner Well Casing: _____ (Elev. C - FOP 94-71)		3. Secondary Pack Interval: _____ Secondary Pack Size: _____
Concrete Pad: _____ (Elev. B - FOP 94-71)		4. Primary Pack Interval: _____ Primary Pack Size: _____
Ground Surface: _____ (Elev. A - FOP 94-71)		Screen Interval: _____ Slot Size: _____ Material: _____
Calculated Elevations (feet above sea level)	Sump Length: _____	
Initial Water Level: _____	Casing Depth: _____ Material: _____	
Other: _____	5. Plug Back Interval (if used): _____ (Casing TD-Hole TD) _____ Plug Material (if used): _____	
Comments: _____		

Form Completed by: _____		
Verified by: _____		