


General




Environmental Programs
P.O. Box 1663, MS M991
Los Alamos, New Mexico 87545
(505) 606-2337/FAX (505) 665-1812

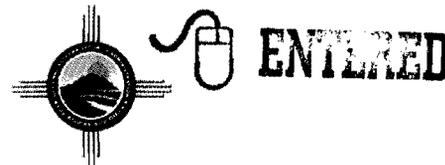

National Nuclear Security Administration
Los Alamos Site Office, MS A316
Environmental Restoration Program
Los Alamos, New Mexico 87544
(505) 667-4255/FAX (505) 606-2132

Date: DEC 04 2009
Refer To: EP2009-0641

James Bearzi, Bureau Chief
Hazardous Waste Bureau
New Mexico Environment Department
2905 Rodeo Park Drive East, Building 1
Santa Fe, NM 87505-6303



**Subject: Response to Request for Information on Wells and Boreholes,
Los Alamos National Laboratory and Surrounding Area**

Reference: Letter, Bearzi to Messrs. Gregory and McInroy, dated 10/7/09

Dear Mr. Bearzi:

Enclosed please find two hard copies with electronic files of the response to a request for information on wells and boreholes at Los Alamos National Laboratory and the surrounding area. This report is provided in response to the New Mexico Environment Department's request to provide information pertaining to abandoned or potentially abandoned wells and boreholes at and near Los Alamos National Laboratory (referenced above). The report presents the results of a literature search and discussions with subject matter experts on wells in their respective areas. The information provided is the best available and known information at this time. In places where information is not available, the report tables indicate this.

If you have any questions, please contact Ardyth Simmons at (505) 665-3935 (asimmons@lanl.gov) or Hai Shen at (505) 665-5046 (hshen@doeal.gov).

Sincerely,

Michael J. Graham, Associate Director
Environmental Programs
Los Alamos National Laboratory

Sincerely,

David R. Gregory, Project Director
Environmental Operations
Los Alamos Site Office



MG/DG/DM/AS:sm

Enclosures: Two hard copies with electronic files – Information on Wells and Boreholes,
Los Alamos National Laboratory and Surrounding Area (LA-UR-09-7521)

Cy: (w/enc.)

Neil Weber, San Ildefonso Pueblo
Hai Shen, DOE-LASO, MS A316
Ardyth Simmons, EP-LWSP, MS M992
RPF, MS M707 (with two CDs)
Public Reading Room, MS M992

Cy: (Letter and CD and/or DVD only)

Laurie King, EPA Region 6, Dallas, TX
Steve Yanicak, NMED-DOE-OB, MS M894
Mark Everett, EP-LWSP, MS M992
Ted Ball, PMF-SEC, MS 992
Kristine Smeltz, EP-WES, MS M992

Cy: (w/o enc.)

Tom Skibitski, NMED-OB, Santa Fe, NM
Annette Russell, DOE-LASO (date-stamped letter emailed)
Steve Paris, EP-PROJMGMT, MS M992
Victoria George, EP ENV-COMPLY, MS M991
Michael J. Graham, ADEP, MS M991
Dave McInroy, EP-CAP, MS M992
IRM-RMMSO, MS A150 (date-stamped letter emailed)

**INFORMATION ON WELLS AND BOREHOLES,
LOS ALAMOS NATIONAL LABORATORY AND SURROUNDING AREA**

INTRODUCTION

This report presents responses to a letter request for information from the New Mexico Environment Department (NMED 2009, 107559) pertaining to abandoned or potentially abandoned wells and boreholes at and near Los Alamos National Laboratory (the Laboratory).

LOCATIONS

Information was requested for the following wells or boreholes:

1. Beta Hole
2. Distillation holes at Technical Area 21 (TA-21) and TA-46
3. DT-5, DT-5P, and all other TA-49 wells/boreholes
4. H-19
5. Layne Western
6. Sigma Mesa EGH-LA-1
7. SHB-1
8. SHB-2
9. SHB-3
10. SHB-4
11. TH-5
12. TH-6
13. TH-7
14. USGS Test Hole east of Material Disposal Area (MDA) C

TYPES OF INFORMATION REQUESTED

The following types of information were requested:

1. Identifiers and construction details for the wells
2. Well logs for each well or borehole
3. Current condition of the wells
4. If abandoned, the methods used to plug and abandon the well
5. Water-bearing zone(s) intersected and/or screened by each well
6. Depth or vertical distance to nearest water-bearing zone and top of regional aquifer.

The requested information is presented in three tables with appendixes that document graphical details related to the wells or boreholes. Figure 1 is a base map showing the location of TAs referred to in this report. Information about wells or boreholes listed in location 2 and locations 4 through 14 above is presented in Table 1, which includes all locations other than those in TA-49. Information for locations 1 and 3, dealing with TA-49, is presented separately in Table 2 because of the number of wells and boreholes in TA-49. Table 3 is an overview of perched water and regional groundwater occurrences in the vicinity of each well or group of wells listed in the information request, as listed under "Types of Information" items 5 and 6. Tables 1 and 2 are color-coded to easily identify the sources of information for individual details related to the boreholes and wells. Appendixes A through I are keyed to the tables, with each appendix covering a specific location. Each appendix contains a location map and a geologic log.

The documentation presented in the tables is to the best of our knowledge. The information presented was obtained through an extensive literature search and discussions with subject matter experts for the different TAs. The tables and appendixes represent the most accurate and comprehensive information from available source documents. Where information was not available, the tables state "unknown."

REFERENCE

NMED (New Mexico Environment Department), October 7, 2009. "Request for Information, Abandoned Wells and Boreholes, Los Alamos National Laboratory and Surrounding Areas," New Mexico Environment Department letter to D. Gregory (DOE-LASO) and D. McInroy (LANL) from J.P. Bearzi (NMED-HWB), Santa Fe, New Mexico. (NMED 2009, 107559)

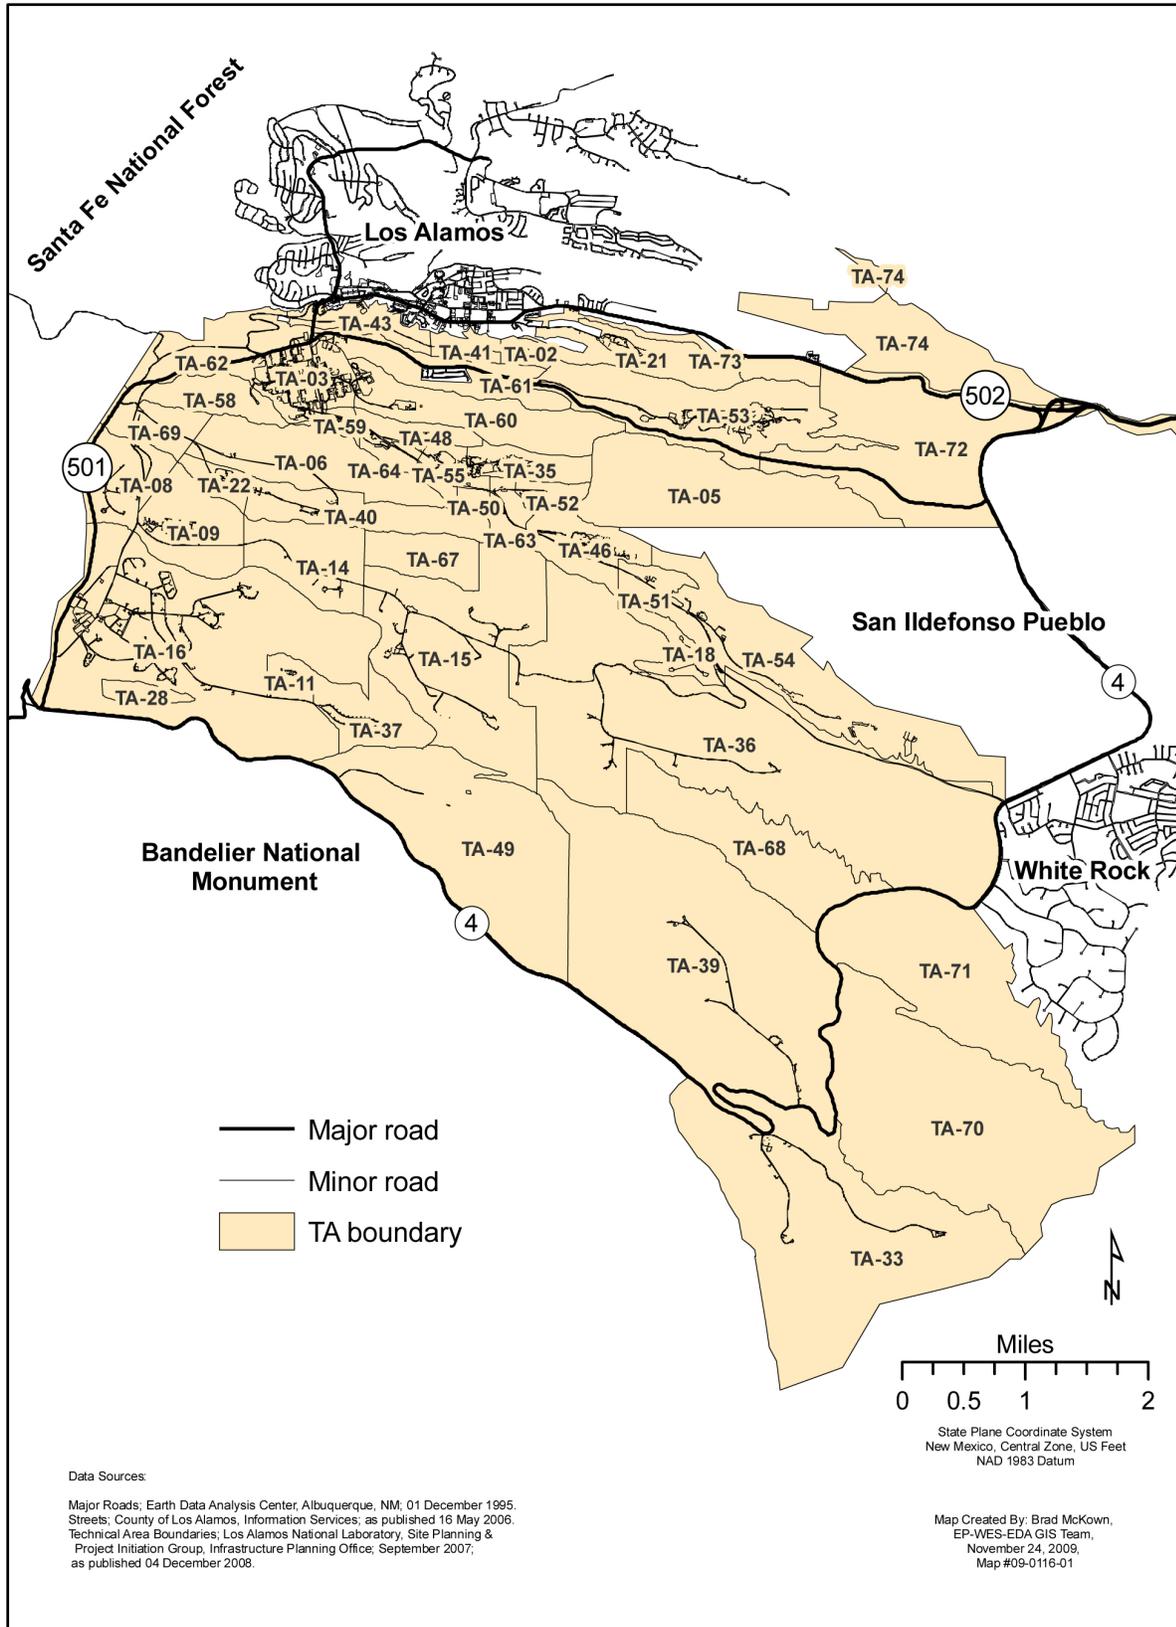


Figure 1 Map of Los Alamos National Laboratory showing technical areas

**Table 1
Status of Wells and Boreholes**

| Well Or Borehole | Location/ Elevation (ft) | Date Drilled (yr) | Total Depth Drilled (ft) | Borehole Diameter (in.) | Casing Information | Geology and Well Log | Screen and Filter Pack | Seal Placement | Status | Water-Bearing Zones | Notes |
|---|---|----------------------|-----------------------------------|---|--|---|--|----------------|--|--|---|
| 21-SM-3 TA-21 Distillation hole | TA-21-3 N 1,774,500 E 492,000 El 7150 | 1969 | 125 | 36 | 18-in. casing cemented to bottom of borehole and 15 ft above ground level | Tshirege Mbr of the Bandelier Tuff – no log See App. A | n/a | n/a | Bldg 3 has been removed; 21-SM-3 still exists w/15-ft casing sticking up out of ground. Lines observed inside of casing. Casing appears to be capped at grade. | Dry | n/a |
| 46-SM-88 TA-46 Distillation hole(s) | TA-46-88 N 1,765,500 E 499,500 El 7105 | 1971 | ~747 | 16 | 13 3/8-in. steel cemented to total depth | Bandelier Tuff, Puye Conglomerate See App. B | n/a | n/a | Bldg. TA-46-88 still in use; borehole(s) believed still in place. | Dry | Purtymun (1995, 045344) states "The holes...had a spacing of about 20 ft." |
| Pajarito Canyon TH-5 | N 1,756,515 E 503,312 El 6591.6 | 1950 | 263 | 24 | 24-in. casing 0–24 ft; open 24–263 ft | Alluvium, Bandelier Tuff, Basalt See App. C | n/a | n/a | Well present as of 1998; otherwise unknown. | Dry | n/a |
| Pajarito Canyon TH-6 | N 1,757,818 E 500,272 El 6642.1 | 1950 | 300 | 6 | 8-in. casing to 120 ft; open 120–300 ft | Alluvium, Bandelier Tuff, Puye Fm See App. C | n/a | n/a | Well present as of 1998; otherwise unknown. | Dry | n/a |
| Ancho Canyon TH-7 | N 1,740,400 E 600,500 El 6224 | 1950 | 55 | unknown | n/a | Alluvium, Bandelier Tuff, Basalt See App. C | n/a | n/a | Plugged and abandoned | Dry | n/a |
| H-19 | Los Alamos Canyon (Near Ice Skating Rink) N 1,775,462 E 1,618,444 El 7178 | 1949 | 2,000 | unknown | 12-in. casing to 10 ft; open 10–2000 ft | Bandelier Tuff, Tschicoma Fm (w/ Puye Formation and Totavi Lentil) See App. D | n/a | n/a | Well present as of 1998; hole reported to be caved in at 67 ft in 1992 | Perched and regional aquifer encountered. See Table 3. | Casing does not extend through alluvium and standing water has been observed in the casing, indicating that alluvial groundwater in LA Canyon has entered the borehole. |
| Layne Western | Guaje Canyon N 1,783,200 E 516,000 El 5971 | 1950 | 157 | 12–14-in. at surface; ~10 in. to total depth | 8-in. casing 0–147 ft, screen 127–147 ft | Alluvium, Puye Fm, Totavi Lentil, Santa Fe Gp. See App. E | Screened from 127–147 ft; however, the 8-in. screen from 147–157 ft was welded on the end of the casing. | n/a | Pump removed in 1950. Open as of 1998. | Set as water well. See Table 3. | Not hydraulically connected with water-bearing zone in regional aquifer at former supply well Guaje-1 (100 ft away). |
| Sigma Mesa EGH-LA-1 | Sigma Mesa N 1,771,800 E 484,100 El 7215 | 1979 | 2,292 | 36-in. 0–85 ft; 26-in. 85–2292 ft. | 30-in casing 0–85 ft; 20-in. 0–1,627 ft | Bandelier Tuff, Puye Fm, Basalt, Totavi Lentil, Santa Fe Gp. See App. F | n/a | n/a | Hole filled with cement from 2,292 ft to 1,425 ft extending up into 20-in. casing. Well abandoned in 1979. | Depth to water 1330 ft based on geophysical log. | n/a |

Table 1 (continued)

| Well Or Borehole | Location/ Elevation (ft) | Date Drilled (yr) | Total Depth Drilled (ft) | Borehole Diameter (in.) | Casing Information | Geology and Well Log | Screen and Filter Pack | Seal Placement | Status | Water-Bearing Zones | Notes |
|---|--|----------------------|-----------------------------------|-------------------------------|--|---|---|---|---|--|---|
| SHB-1 TA-55 | TA-55 Upper Pajarito Canyon EI 7314 <i>See App. G for map.</i> | 1991 | 700 | 6 | 2.8-in. PVC casing to total depth | Bandelier Tuff, Cerro Toledo Rhyolite, Cerros del Rio lava <i>See App. G</i> | n/a | n/a | <i>unknown</i> | Dry | <i>Well reported damaged in 2008; status unknown.</i> |
| SHB-2 TA-3 | <i>See App. G for map.</i> EI 7436 | 1991 | 200 | 6 | 2.8-in. PVC casing to total depth | Bandelier Tuff <i>See App. G</i> | n/a | n/a | Well reported to be plugged and abandoned before construction of building 3-2322 at TA-3 | Dry | <i>TA-3 building 2322 constructed near site of well; status unknown.</i> |
| SHB-3 TA-16 | <i>See App. G for map.</i> EI 7607 Upper Water Canyon | 1991 | 860 | 6 | 2.8-in. PVC casing to total depth | Bandelier Tuff, Cerro Toledo Rhyolite, Puye Fm <i>See App. G</i> | <i>Screen not installed but well perforated with high explosives to monitor groundwater</i> | n/a | <i>unknown</i> | Perched water encountered at ~663 ft to bottom of hole. <i>See Table 3.</i> | <i>Well originally capped at bottom and filled with water, later perforated.</i> |
| SHB-4 TA-18 | <i>See App. G for map.</i> Pajarito Canyon EI 6701 | 1991 | 200 | 6 | 2.8-in. PVC casing to total depth | Bandelier Tuff <i>See App. G</i> | n/a | n/a | Casing sticking up out of ground at TA-18 | Perched water encountered during drilling. <i>See Table 3.</i> | n/a |
| USGS Test Hole east of MDA C, TA-50 | N 1,768,500 E 486,500 | 1983 | 210 | 4.5 | Installed as a vadose monitoring well. Six screened intervals for vadose zone monitoring <i>See App. H</i> | Bandelier Tuff. <i>See App. H</i> | <i>See App. H for screened intervals in vadose zone.</i> | 0–22 ft sealed with cement; intervals between screens filled with cement/ cuttings. | Not cited in MDA C Phase II Investigation Report; apparently not in use. | Dry | Corehole drilled to test core recovery with wireline-rotary air coring technique in the Bandelier Tuff. Completed as a vadose zone monitoring hole. |

Notes:

Colors in cells correspond to references listed below.

n/a = Not applicable.

Grayed rows indicate plugged and abandoned boreholes.

Geophysical logs noted in Purtymun (1995, 045344) were not located.

Italics indicate notes for this report.

Northings and eastings are based on the 1983 North American Datum.

REFERENCES:

- Criswell, B., December 2, 2009. RE: is[otope] column writeup. E-mail message to C. Nicola (LANL) from B. Criswell (LANL), Los Alamos, New Mexico. (Criswell 2009, 107566)
- Gardner, J.N., T. Kolbe, and S. Chang, January 1993. "Geology, Drilling, and Some Hydrologic Aspects of Seismic Hazards Program Core Holes, Los Alamos National Laboratory, New Mexico," Los Alamos National Laboratory report LA-12460-MS, Los Alamos, New Mexico. (Gardner et al. 1993, 012582)
- Gardner, J.N., A. Lavine, G. WoldeGabriel, D. Krier, J., D.T. Vaniman, F.A. Caporuscio, C.J. Lewis, M.R. Reneau, E.C. Kluk, and M.J. Snow, March 1999. "Structural Geology of the Northwestern Portion of Los Alamos National Laboratory, Rio Grande Rift, New Mexico: Implications for Seismic Surface Rupture Potential from TA-3 to TA-55," Los Alamos National Laboratory report LA-13589-MS, Los Alamos, New Mexico. (Gardner et al. 1999, 063492)
- Koch, R. (Los Alamos National Laboratory), November 24, 2009. "Peer Review Comment/Resolution Form for Information on Wells and Boreholes," Los Alamos National Laboratory, Los Alamos, New Mexico. (Koch 2009, 107565)
- LANL (Los Alamos National Laboratory), May 2009. "Phase II Investigation Report for Material Disposal Area C, Solid Waste Management Unit 50-009, at Technical Area 50," Los Alamos National Laboratory document LA-UR-09-2842, Los Alamos, New Mexico. (LANL 2009, 106047)
- Purtymun, W.D. (Comp.), March 1, 1994. "Source Document Compilation: Los Alamos Investigations Related to the Environment, Engineering, Geology, and Hydrology, 1961-1990," Los Alamos National Laboratory report LA-12733-MS, Los Alamos, New Mexico. (Purtymun 1994, 058233)
- Purtymun, W.D., January 1995. "Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area," Los Alamos National Laboratory report LA-12883-MS, Los Alamos, New Mexico. (Purtymun 1995, 045344)
- Purtymun, W.D., and A.K. Stoker, November 1987. "Environmental Status of Technical Area 49, Los Alamos, New Mexico," Los Alamos National Laboratory report LA-11135-MS, Los Alamos, New Mexico. (Purtymun and Stoker 1987, 006688)
- Purtymun, W.D., and A.S. Swanton, February 5, 1998. "Engineering, Geology, and Construction Data of Twenty-Five Test Holes and Test Wells on and Adjacent to the Pajarito Plateau," draft, Los Alamos National Laboratory, Los Alamos, New Mexico. (Purtymun and Swanton 1998, 099096)
- Robinson, B.A., D.E. Broxton, and D.T. Vaniman, 2005. "Observations and Modeling of Deep Perched Water beneath the Pajarito Plateau," *Vadose Zone Journal*, Vol. 4, pp. 637–652. (Robinson et al. 2005, 091682)
- Teasdale, W.E., and R.R. Pemberton, 1984. "Wireline-Rotary Air Coring of the Bandelier Tuff, Los Alamos, New Mexico," U.S. Geological Survey Water-Resources Investigations Report 84-4176, Denver, Colorado. (Teasdale and Pemberton 1984, 073680)

**Table 2
Status of Wells and Boreholes at Technical Area-49**

| Well or Borehole at TA-49 (>10 ft deep) | Location | Date Drilled (yr) | Total Depth Drilled (ft) | Borehole Diameter | Casing Information | Geology and Well Log | Screen and Filter Pack Dimensions | Annular Seal | Status | Water-Bearing Zones | Notes |
|---|--------------------------------|-------------------|--------------------------|-------------------|----------------------|--|-----------------------------------|--------------|-----------------|---------------------|---|
| 1M-1 | Area 1 N1755531 E1624583 | 1960 | 49 | 2-in. | 2-in. plastic tubing | 4.5 ft soil, 44.5 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 1M-2 | Area 1 N1755642 E1624363 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 1 ft soil, 18 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 1M-3 | Area 1 N1755381 E1624508 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 4 ft soil, 15 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 1M-3A | Area 1 N1755381 E1624530 | 1960 | 49 | 2-in. | 2-in. plastic tubing | 3 ft soil, 46 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 2M-1 | Area 2 N1755442 E1625960 | 1960 | 49 | 2-in. | 2-in. plastic tubing | 1 ft soil, 48 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 2M-2 | Area 2 N1755207 E1626012 | 1960 | 10 | 2-in. | 2-in. plastic tubing | 5 ft soil, 5 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 2M-3 | Area 2 N1755258 E1625610 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 5 ft soil, 14 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 3M-1 | Area 3 N1754501 E1624241 | 1960 | 50 | 2-in. | 2-in. plastic tubing | 1ft soil, 49 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 3M-2 | Area 3 N1754501 E1624241 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 2.5 ft soil, 16.5 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 3M-3 | Area 3 N1754538 E1623989 | 1960 | 20 | 2-in. | 2-in. plastic tubing | 7 ft soil, 13 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 4M-1 | Area 4 N1753799 E1625609 | 1960 | 49 | 2-in. | 2-in. plastic tubing | 2 ft soil, 47 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 4M-2 | Area 4 N1753878 E1625438 | 1960 | 20 | 2-in. | 2-in. plastic tubing | 1.5 ft soil, 18.5 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 4M-3 | Area 4 N1753646 E1625632 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 3 ft soil, 16 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 4M-4 | Area 4 N1754058 E1625450 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 3 ft soil, 16 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |
| 5M-1 | Area 5 N1754804 E1625442 | 1960 | 39 | 2-in. | 2-in. plastic tubing | 2.5 ft soil, 36.5 ft Bandelier Tuff | n/a | n/a | <i>inactive</i> | Dry | <i>Coordinates from LANL ER GIS database.</i> |

Table 2 (continued)

| Well or Borehole at TA-49 (>10 ft deep) | Location | Date Drilled (yr) | Total Depth Drilled (ft) | Borehole Diameter | Casing Information | Geology and Well Log | Screen and Filter Pack Dimensions | Annular Seal | Status | Water-Bearing Zones | Notes |
|---|---------------------------------|-------------------|--------------------------|-------------------|-----------------------------|--|-----------------------------------|--------------|--|---------------------|--|
| 5M-2 | Area 5 N1754836 E1625228 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 3 ft soil, 16 ft Bandelier Tuff | n/a | n/a | inactive | Dry | Coordinates from LANL ER GIS database. |
| 6M-1 | Area 6 N1755828 E1622914 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 9ft soil, 10 ft Bandelier Tuff | n/a | n/a | inactive | Dry | Coordinates from LANL ER GIS database. |
| 9M-1 | Area 9 N1754291 E1624810 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 6 ft soil, 13 ft Bandelier Tuff | n/a | n/a | inactive | Dry | Coordinates from LANL ER GIS database. |
| 9M-2 | Area 9 N1754576 E16275794 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 6.5 ft soil, 12.5 ft Bandelier Tuff | n/a | n/a | inactive | Dry | Coordinates from LANL ER GIS database. |
| 9M-3 | Area 9 N1754186 E1626420 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 4 ft soil, 15 ft Bandelier Tuff | n/a | n/a | inactive | Dry | Coordinates from LANL ER GIS database. |
| 9M-4 | Area 9 N1754513 E1626017 | 1960 | 19 | 2-in. | 2-in. plastic tubing | 12.5 ft soil, 6.5 ft Bandelier Tuff | n/a | n/a | inactive | Dry | Coordinates from LANL ER GIS database. |
| 10M-1 | Area 10 N1755374 E1627061 | 1960 | 29 | 2-in. | 2-in. plastic tubing | 2 ft soil, 27 ft Bandelier Tuff | n/a | n/a | inactive | Dry | Coordinates from LANL ER GIS database. |
| 10M-2 | Area 10 N1755423 E1626901 | 1960 | 20 | 2-in. | 2-in. plastic tubing | 4 ft soil, 16 ft Bandelier Tuff | n/a | n/a | inactive | Dry | Coordinates from LANL ER GIS database. |
| Area 1- 22 shafts | Area 1 See App. I | 1959-1960 | 31-80 | 3-6 ft | n/a | Bandelier Tuff | n/a | n/a | Shafts backfilled with crushed tuff/sand | Dry | Shafts installed for high explosives and radioactive (hydronuclear) experiments. |
| Area 2 23 shafts | MDA AB Area 2 See App. I | 1959-1960 | 30-78 | 3-6 ft | n/a | Bandelier Tuff | n/a | n/a | Shafts backfilled with crushed tuff/sand | Dry | Shafts installed for high explosives and radioactive (hydronuclear) experiments. |
| Area 2A 6 shafts | MDA AB Area 2A See App. I | 1959-1960 | 57-58 | 3-6 ft | n/a | Bandelier Tuff | n/a | n/a | Shafts backfilled with crushed tuff/sand | Dry | Shafts installed for high explosives and radioactive (hydronuclear) experiments. |
| Area 2B 11 shafts | MDA AB Area 2B See App. I | 1959-1960 | 57-78 | 3-6 ft | n/a | Bandelier Tuff | n/a | n/a | Shafts backfilled with crushed tuff/sand | Dry | Shafts installed for high explosives and radioactive (hydronuclear) experiments. |
| Area 3 12 shafts | Area 3 See App. I | 1959-1960 | 57-142 | 3-6 ft | n/a | Bandelier Tuff | n/a | n/a | Shafts backfilled with crushed tuff/sand | Dry | Shafts installed for high explosives and radioactive (hydronuclear) experiments. |
| Area 4 18 shafts | Area 4 See App. I | 1959-1960 | 58-108 | 3-6 ft | n/a | Bandelier Tuff | n/a | n/a | Shafts backfilled with crushed tuff/sand | Dry | Shafts installed for high explosives and radioactive (hydronuclear) experiments. |
| Area 11 13 shafts | Area 11 See App. I | 1959 | 12 | unknown | Steel casing to total depth | Bandelier Tuff | n/a | n/a | Shafts backfilled with crushed tuff/sand | Dry | First hydronuclear experiments at TA-49 were conducted in these shafts. |

Table 2 (continued)

| Well or Borehole at TA-49 (>10 ft deep) | Location | Date Drilled (yr) | Total Depth Drilled (ft) | Borehole Diameter | Casing Information | Geology and Well Log | Screen and Filter Pack Dimensions | Annular Seal | Status | Water-Bearing Zones | Notes |
|---|---|-------------------|--------------------------|-------------------|---|----------------------|-----------------------------------|--------------|---------------------------------------|---------------------|---|
| Bottle House shaft | Area 12 See App. I | 1959 | 30 | 6 ft 10 ft | unknown | Bandelier Tuff | n/a | n/a | Shaft filled with sand in late 1960s. | Dry | Shaft housed a 17.5-ft tall by 5.4-ft diameter steel "bottle" that was used to conduct confinement experiments. Shaft was inside the Bottle House (TA-49-23). |
| Alpha Hole | East of MDA AB N1754807 E1625769 | 1960 | 189 | 24-in. | 24-in. diam. corrugated metal pipe set from 0–7 ft; open hole 7–189 ft. | See App. I for Log | n/a | n/a | Grouted and abandoned | Dry | n/a |
| Beta Hole | Floor of Water Canyon N1757577 E1625322 | 1960 | 180 | 24-in. | 24-in. diam. corrugated metal pipe set from 0–13 ft; open hole 13–189 ft. | See App. I for Log | n/a | n/a | Open as of 1998 | Dry | n/a |
| Gamma Hole | Floor of Ancho Canyon N1752630 E1626278 | 1960 | 54 | 4-in. | Cased 0–8 ft; open 8–54 ft | See App. I for Log | n/a | n/a | Grouted and abandoned | Dry | n/a |
| DT-5 | N1754842 E1625310 EI 7143 | 1959 | 962 927 | 8-in. | 8-in.-diam. steel casing set 0–180 ft; open hole 180–962 ft | See App. I for Log | n/a | n/a | Plugged and abandoned ~1998 | Dry | Geophysical logs are available. |
| DT-5P | N1625442 E1754804 EI 7144 | 1959 | 692 | unknown | n/a | See App. I for Log | n/a | n/a | Plugged and abandoned 1959 | Dry | n/a |
| DT-5A | N 1754789 E 1625310 EI 7144 | 1960 | 1821 | 12-in. | See App. I | See App. I for Log | See App. I | See App. I | Active monitoring well | wl 1186 ft (04/08) | Geophysical logs are available. |
| DT-9 | N 1751431 E 488,750 EI 6935 | 1960 | 1501 | 8-in. | See App. I | See App. I for Log | See App. I | See App. I | Active monitoring well | wl 1020 ft (10/08) | Geophysical logs are available. |
| DT-10 | N 1754448 E 1628994 EI 7020 | 1960 | 1409 | 8-in. | See App. I | See App. I for Log | See App. I | See App. I | Active monitoring well | wl 1102 ft (0/09) | Geophysical logs are available. |
| CH-1 | Area 1 N1755478 E1624469 | 1959 | 501 | 4.5-in. | 2-in. galvanized pipe to 500 ft | See App. I for Log | unknown | unknown | Open | Dry | n/a |
| CH-2 | Area 2 N1755344 E1625826 | 1959 | 507 | 4.5-in. | 2-in. pipe to bottom of hole; bottom 20 ft is slotted | See App. I for Log | unknown | unknown | Plugged and abandoned 1998 | Dry | n/a |
| CH-3 | Area 3 N1754493 E1624196 | 1960 | 300 | 4.5-in. | 2-in. galvanized pipe to 300 ft | See App. I for Log | unknown | unknown | Open | Dry | n/a |
| CH-4 | Area 4 N1753898 E1625537 | 1960 | 303 | 4.5-in. | 2-in. galvanized pipe to 303 ft | See App. I for Log | unknown | unknown | Open | Dry | n/a |

Table 2 (continued)

| Well or Borehole at TA-49 (>10 ft deep) | Location | Date Drilled (yr) | Total Depth Drilled (ft) | Borehole Diameter | Casing Information | Geology and Well Log | Screen and Filter Pack Dimensions | Annular Seal | Status | Water-Bearing Zones | Notes |
|---|--|-------------------|--------------------------|-------------------|--|--|-----------------------------------|--------------|--|---------------------|---|
| TH-1 | Area 2 N1755200 E485700 | 1980 | 123 | 5-in. | Surface casing only | See App. I for Log and neutron log. | n/a | n/a | Open | Dry | Drilled in 1980 to aid in determining the source of water that was noted in CH-2 in 1975. Borehole was used for neutron logging that was discontinued in 2006. |
| TH-2 | Area 2 N1755500 E485600 | 1980 | 123 | 5-in. | Surface casing only | See App. I for Log and neutron log. | n/a | n/a | Open | Dry | Drilled in 1980 to aid in determining the source of water that was noted in CH-2 in 1975. Borehole was used for neutron logging that was discontinued in 2006. |
| TH-3 | Area 2 N1755300 E485400 | 1980 | 123 | 5-in. | Surface casing only | See App. I for Log and neutron log. | n/a | n/a | Open | Dry | Drilled in 1980 to aid in determining the source of water that was noted in CH-2 in 1975. Well was used for neutron logging that was discontinued on 2006. |
| TH-4 | Area 2 N1755100 E485400 | 1980 | 123 | 5-in. | Surface casing only | See App. I for Log and neutron log. | n/a | n/a | Open | Dry | Drilled in 1980 to aid in determining the source of water that was noted in CH-2 in 1975. Borehole was used for neutron logging that was discontinued in 2006. |
| TH-5 | Area 2 N1755200 E485500 | 1980 | 123 | 5-in. | Surface casing only | See App. I for Log and neutron log. | n/a | n/a | Open | Dry | Drilled in 1980 to aid in determining the source of water that was noted in CH-2 in 1975. Borehole was used for neutron logging that was discontinued in 2006. |
| 2A-O | Area 2 - in Shaft 2A-O N1755360 E1625730 | 1980 | 74 | 2-in. | Cased to 56-ft; slough below | 59 ft of sand; 15 ft of Bandelier Tuff | n/a | n/a | Open | Dry | Moisture monitoring hole drilled in unused shaft that had been backfilled with crushed tuff or sand. Borehole was used for neutron logging that was discontinued in 2006. |
| 2A-Y | Area 2 - in Shaft 2A-Y N1755312 E1625727 | 1980 | 80 | 2-in. | Cased to 29 ft; slough below | 58 ft of sand; 22 ft of Bandelier Tuff | n/a | n/a | Open | Dry | Moisture monitoring hole drilled in unused shaft that had been backfilled with crushed tuff or sand. Borehole was used for neutron logging that was discontinued in 2006. |
| 2B-Y | Area 2 - in Shaft 2B-Y N1755134 E1625839 | 1980 | 80 | 2-in. | Cased to 30 ft; slough below | 58 ft of sand; 22 ft of Bandelier Tuff | n/a | n/a | Open | Dry | Moisture monitoring hole drilled in unused shaft that had been backfilled with crushed tuff or sand. Borehole was used for neutron logging that was discontinued in 2006. |
| TBM-1 | Area 10 N 1754534 E 488302 | 1993 | 139 | 7.25-in. | See App. I | Bandelier Tuff See App. I for Log | n/a | n/a | 6-in. thick, 8-ft square concrete well pad was installed above the corehole. | Dry | Installed to measure the effects of barometric changes on the tuff. |
| TBM-2 | Area 10 N 1754534 E 488302 | 1993 | 64 | 7.25-in. | 4-in. plastic pipe set in sand to 40 ft; capped on bottom. See App. I | Bandelier Tuff See App. I for Log | n/a | n/a | 6-in. thick, 8-ft square concrete well pad was installed above the corehole. | Dry | Installed to measure deformation of the tuff by seismic events. |
| 49-02901 | Area 12 (100 ft east of Area 2) N1755209 E1625985 | 1994 | 700 | 8-in. | 0-40 ft surface casing; open hole below | Bandelier Tuff See App. I | n/a | n/a | Open | Dry | n/a |

Table 2 (continued)

| Well or Borehole at TA-49 (>10 ft deep) | Location | Date Drilled (yr) | Total Depth Drilled (ft) | Borehole Diameter | Casing Information | Geology and Well Log | Screen and Filter Pack Dimensions | Annular Seal | Status | Water-Bearing Zones | Notes |
|---|--------------------------------|-------------------|--------------------------|-------------------|--------------------|----------------------|-----------------------------------|--------------|--------------------------------------|---------------------|---|
| 49-02906 | Area 2 N1755319 E1625814 | 1994 | 150 | 8-in. | n/a | Bandelier Tuff | n/a | n/a | Casing removed and hole grouted 1998 | Dry | n/a |
| 49-02907 | Area 2 N1755369 E1625790 | 1994 | 150 | 8-in. | n/a | Bandelier Tuff | n/a | n/a | Casing removed and hole grouted 1998 | Dry | n/a |
| 49-10046 | Area 2 N1755327 E1625813 | 2000 | 15 | 2-in. | Casing to 15 ft | Bandelier Tuff | n/a | n/a | Open | Dry | <i>Borehole was used for neutron logging that was discontinued in 2006.</i> |
| 49-10047 | Area 2 N1755368 E1625803 | 2000 | 15 | 2-in. | Casing to 15 ft | Bandelier Tuff | n/a | n/a | Open | Dry | <i>Borehole was used for neutron logging that was discontinued in 2006.</i> |
| 49-10048 | Area 2 N1755355 E1625883 | 2000 | 15 | 2-in. | Casing to 15 ft | Bandelier Tuff | n/a | n/a | Open | Dry | <i>Borehole was used for neutron logging that was discontinued in 2006.</i> |

Notes:

Colors in cells correspond to references listed below.

n/a = Not applicable; wl = water level.

Grayed rows indicate plugged and abandoned boreholes/wells; details regarding abandonment procedures were not located.

unknown = Information could not be located.

Italics indicate notes made for this report.

Northings and eastings are based on the 1983 North American Datum.

REFERENCES:

- Farley, P.D., December 2, 2009. TA-49 - Corehole 2 and Borehole DT-5 - Plug and Abandon. E-mail message to A.M. Simmons (LANL) from P.D. Farley (LANL), Los Alamos, New Mexico. (Farley 2009, 107564)
- LANL (Los Alamos National Laboratory), May 1992. "RFI Work Plan for Operable Unit 1144," Los Alamos National Laboratory document LA-UR-92-900, Los Alamos, New Mexico. (LANL 1992, 007670)
- LANL (Los Alamos National Laboratory), December 2005. "2005 Annual Moisture Monitoring Report for Material Disposal Area AB at Technical Area 49," Los Alamos National Laboratory document LA-UR-05-8256, Los Alamos, New Mexico. (LANL 2005, 092389)
- LANL (Los Alamos National Laboratory), October 2007. "Historical Investigation Report for Sites at Technical Area 49 Inside the Nuclear Environmental Site Boundary," Los Alamos National Laboratory document LA-UR-07-6078, Los Alamos, New Mexico. (LANL 2007, 098492)
- LANL (Los Alamos National Laboratory), January 2008. "Investigation Work Plan for Sites at Technical Area 49 Outside the Nuclear Environmental Site Boundary, Revision 1," Los Alamos National Laboratory document LA-UR-08-0449, Los Alamos, New Mexico. (LANL 2008, 102215)
- Levitt, D.G., M.J. Hartmann, K.C. Kisiel, C.W. Criswell, P.D. Farley, and C. Christensen, 2005. "Comparison of the Water Balance of an Asphalt Cover and an Evapotranspiration Cover at Technical Area 49 at the Los Alamos National Laboratory," *Vadose Zone Journal*, Vol. 4, pp. 789–797. (Levitt et al. 2005, 107562)
- Levitt, D.G., K.C. Kisiel, D.L. Newell, J.K. Hopkins, C.W. Criswell, and L.A. Woodworth, February 23–27, 2003. "Site Characterization and Monitoring of Technical Area 49 at the Los Alamos National Laboratory," Waste Management Conference 2003, February 23–27, 2003, Tucson, Arizona. (Levitt et al. 2003, 107563)
- Loomis, E., E.D. McGehee, and K.L.M. Garcia, April 22, 2005. "Hydronuclear Experiments at TA-49: The Decommissioning of the Bottle House (TA-49-23) and the Cable Test Facility (TA-49-21)," Historic Building Survey Report No. 243, Los Alamos National Laboratory document LA-UR-05-3031, Los Alamos, New Mexico. (Loomis et al. 2005, 107561)
- Purtymun, W.D. (Comp.), March 1, 1994. "Source Document Compilation: Los Alamos Investigations Related to the Environment, Engineering, Geology, and Hydrology, 1961-1990," Los Alamos National Laboratory report LA-12733-MS, Los Alamos, New Mexico. (Purtymun 1994, 058233)
- Purtymun, W.D., January 1995. "Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area," Los Alamos National Laboratory report LA-12883-MS, Los Alamos, New Mexico. (Purtymun 1995, 045344)
- Purtymun, W.D., and A.K. Stoker, November 1987. "Environmental Status of Technical Area 49, Los Alamos, New Mexico," Los Alamos National Laboratory report LA-11135-MS, Los Alamos, New Mexico. (Purtymun and Stoker 1987, 006688)
- Purtymun, W.D., and A.S. Swanton, February 5, 1998. "Engineering, Geology, and Construction Data of Twenty-Five Test Holes and Test Wells on and Adjacent to the Pajarito Plateau," draft, Los Alamos National Laboratory, Los Alamos, New Mexico. (Purtymun and Swanton 1998, 099096)
- Stimac, J.A., D.E. Broxton, E.C. Kluk, S.J. Chipera, and J.R. Budahn, July 2002. "Stratigraphy of the Tuffs from Borehole 49-2-700-1 at Technical Area 49, Los Alamos National Laboratory, New Mexico," Los Alamos National Laboratory report LA-13969, Los Alamos, New Mexico. (Stimac et al. 2002, 073391)

Table 3
Perched Water and Groundwater Occurrence at Subject Sites

| Location | Depth of Borehole/Well (ft bgs); Elevation (ft) | Perched Water | Regional Aquifer |
|-----------------------------------|---|---|---|
| TA-21, Distillation hole 21-SM-3 | 125 EI 7150 | <p>An east-west trending perched water body is present beneath Los Alamos Canyon, south of TA-21, in the Guaje Pumice Bed (Robinson et al. 2005, 091682). Perched water is also encountered in the underlying Puye Formation at R-6i, east of TA-21, and R-7, south of TA-21. However, "Little is known about the extent of perched groundwater beneath the adjacent mesas, but paired (<i>Los Alamos</i>) canyon-(DP) mesa boreholes (R-7/21-2523, Fig. 2) suggest that saturation does not extend beneath the mesa north of Los Alamos Canyon" (Robinson et al. 2005, 091682).</p> <p>Two wells drilled to the north of TA-21 did not encounter perched groundwater. LADP-4 was drilled north of TA-21 in DP Canyon to investigate the presence of perched water; no perched water was encountered even though the borehole penetrated 227 ft below ground surface (bgs) into the Puye Formation (Broxton and Eller 1995, 058207). Borehole LADP-5, located between R-6i and LADP-4, was designed to intersect perched groundwater encountered at R-6i; however, it was dry even though it was drilled to a depth of 720 ft in the DP Canyon channel.</p> | Depth to the regional aquifer from the top of DP Mesa is approximately 1273 ft bgs (Koch and Schmeer 2009, 105181); therefore, the regional aquifer would be encountered at approximately 1148 ft below the bottom of 21-3. |
| TA-46, Distillation hole 46-SM-88 | 747 EI 7105 | No water was encountered during drilling (Purtymun 1995, 045344). | The depth to the regional aquifer at TA-46 is approximately 1230 ft (LANL 2009, 106047). Therefore, the bottom of hole 46-SM-88 is approximately 48 ft above the regional aquifer. |
| H-19, Upper Los Alamos Canyon | 2000 EI 7178 | Perched water was encountered from 450–472 ft in the Guaje Pumice Bed; yield was insufficient for water well (Purtymun 1995, 045344). | Regional aquifer was encountered in H-19 in Tschicomma Fm at approximately 970 ft. A well was not installed because of low-permeability formation (Purtymun 1995, 045344). |

Table 3 (continued)

| Location | Depth of Borehole/Well (ft bgs); Elevation (ft) | Perched Water | Regional Aquifer |
|---------------------------------|---|--|---|
| Layne Western, Guaje Canyon | 157 El 5971 | Depth to water after well installation (screen from 127–147 ft bgs) was 104.88 ft in 1950. Water was apparently produced from a perched zone in the upper part of the Santa Fe Gp above the top of the regional aquifer (Purtymun and Swanton 1998, 099096). | The elevation of the top of the regional aquifer in nearby water-supply well G-1A is approximately 5710 ft; however, this is the level recorded between pumping intervals. The true surface of the regional aquifer might be higher if the well were allowed to recover after pumping. But based on this elevation, the depth to the regional aquifer in the vicinity of the Layne Western well would be approximately 280 ft or 123 ft below the bottom of the well. |
| Sigma Mesa EGH-LA-1, Sigma Mesa | 2292 El 7215 | No perched water zones were noted (Purtymun 1995, 045344). | The regional aquifer was encountered in the borehole at 1330 ft based on a geophysical log (Purtymun 1995, 045344), near the contact of the Totavi Lentil with the underlying Santa Fe Gp. |
| SHB-1, TA-55 | 700 El 7314 | No perched water was encountered during drilling of SHB-1 and no perched water was encountered at boreholes drilled nearby to characterize MDA C at TA-50, southeast of TA-55 (LANL 2009, 106047). | Depth to regional groundwater should be about 1330 ft based on groundwater information presented in a LANL report (LANL 2009, 106047); this depth is about 630 ft below the bottom of SHB-1. Well was reported damaged in 2008; its status is unknown. |
| SHB-2, TA-3 | 200 El 7436 | SHB-2 did not encounter perched groundwater. H-19, approximately 0.6 mi north northeast of SHB-3, did encounter perched water, but it is located in Los Alamos Canyon. Robinson et al. (2005, 091682), indicate that perched zones tend to be present under wet canyon areas and absent beneath mesas. | The depth to the regional aquifer near SHB-2 is approximately 940 ft (LANL 2009, 106047), indicating that it would be approximately 740 ft below the bottom of SHB-2. |
| SHB-3, TA-16 Upper Water Canyon | 860 El 7607 | Perched water was encountered at ~663 ft in the lower Bandelier Tuff and the underlying Puye Fm; confining layer was not reached in the borehole (Robinson et al. 2005, 091682). | Depth to regional aquifer in R-26 (surface elevation 7642 ft), approximately 0.6 mi to the northeast, along strike of the Pajarito fault zone, is approximately 1100 ft (Koch and Schmeer 2009, 105181) or 240 ft below the bottom of SHB-3. |

Table 3 (continued)

| Location | Depth of Borehole/Well (ft bgs); Elevation (ft) | Perched Water | Regional Aquifer |
|-------------------------------------|---|--|---|
| SHB-4, TA-18 Pajarito Canyon | 200 El 6701 | Perched water may have been encountered from 125–145 ft in the Tsankawi pumice unit at the base of the Tshirege Mbr of the Bandelier Tuff (Gardner et al. 1993, 012582). | The depth to the regional aquifer is approximately 880 ft below TA-18 ground surface (Koch and Schmeer 2009, 105181); this depth is approximately 680 ft below the bottom of SHB-4. |
| TH-5, Pajarito Canyon | 263 El 6591.6 | No water was encountered during drilling of TH-5. Perched water was encountered in nearby R-23 (to the southeast in lower Pajarito Canyon) in the Cerros del Rio basalt at a depth of approximately 450 ft. However, perched water was not encountered at nearby wells R-22, R-39, R-41, and R-49, indicating that perched zones in this area, if present, are likely of limited extent. | Depth to regional aquifer is approximately 870 ft bgs, or 600 ft below the bottom of TH-5 (LANL 2009, 106047). |
| TH-6, Pajarito Canyon | 300 El 6642.1 | No water was encountered during drilling of TH-6. Perched water was encountered in nearby R-23 (to the southeast in lower Pajarito Canyon) in the Cerros del Rio basalt at a depth of approximately 450 ft. However, perched water was not encountered at nearby wells R-22, R-39, R-41, and R-49, indicating that perched zones in this area, if present, are likely of limited extent. | Depth to regional aquifer is approximately 890 ft or 590 ft below the bottom of TH-6 (LANL 2009, 106047). |
| TH-7, Ancho Canyon | 55 El 6224 | No water was encountered during drilling of TH-7. The only well drilled in the vicinity of TH-7 is regional well R-31, approximately 1 mi to the northwest, also in Ancho Canyon. A thin perched zone was encountered in the Cerros del Rio basalt during drilling, but it did not sustain water production once the well was installed. | Depth to regional aquifer is approximately 525 ft or 470 ft below the bottom of TH-7 (LANL 2009, 106047). |
| USGS Test Hole east of MDA C, TA-50 | 210 El 7229 | Perched water has not been identified in any of the boreholes drilled at MDA C to a depth of 653 ft (LANL 2009, 106047). Additionally, perched water was not encountered in regional aquifer well R-46, approximately 0.25 mi east of MDA C. | The regional aquifer is located approximately 1330 ft bgs at MDA C (LANL 2009, 106047), or approximately 1120 ft below the bottom of the USGS Test Hole. |

Table 3 (continued)

| Location | Depth of Borehole/Well (ft bgs); Elevation (ft) | Perched Water | Regional Aquifer |
|----------------------------|---|--|--|
| TA-49 Various boreholes | 15–507 | <p>According to the 2008 outside nuclear environmental site investigation work plan (LANL 2008, 102215), perched water was not encountered during the drilling of three deep test wells that reached the regional aquifer and moisture monitoring has not detected the presence of perched water zones at TA-49.</p> <p>Water encountered periodically between 1975 and 1991 in CH-2 was apparently the result of surface water that infiltrated and remained beneath a cracked asphalt pad installed in 1961 (Levitt et al. 2003, 107563). Perched water was not present during the drilling of CH-2 or in the period from 1960 when it was installed to 1975. Since the removal of the asphalt pad in 1998 and the installation of an evapotranspiration cover over the area, free water has not been detected by moisture monitoring in the area.</p> | Based on the depth to groundwater measured at the three deep test wells at TA-49 (Koch and Schmeer 2009, 105181), the regional aquifer is present approximately 1200 ft beneath the top of Frijoles Mesa and the TA-49 site. |

REFERENCES

Broxton, D.E., and P.G. Eller (Eds.), June 1995. "Earth Science Investigations for Environmental Restoration—Los Alamos National Laboratory, Technical Area 21," Los Alamos National Laboratory report LA-12934-MS, Los Alamos, New Mexico. (Broxton and Eller 1995, 058207)

Gardner, J.N., T. Kolbe, and S. Chang, January 1993. "Geology, Drilling, and Some Hydrologic Aspects of Seismic Hazards Program Core Holes, Los Alamos National Laboratory, New Mexico," Los Alamos National Laboratory report LA-12460-MS, Los Alamos, New Mexico. (Gardner et al. 1993, 012582)

Koch, R.J., and S. Schmeer, March 2009. "Groundwater Level Status Report for 2008, Los Alamos National Laboratory," Los Alamos National Laboratory report LA-14397-PR, Los Alamos, New Mexico. (Koch and Schmeer 2009, 105181)

LANL (Los Alamos National Laboratory), January 2008. "Investigation Work Plan for Sites at Technical Area 49 Outside the Nuclear Environmental Site Boundary, Revision 1," Los Alamos National Laboratory document LA-UR-08-0449, Los Alamos, New Mexico. (LANL 2008, 102215)

- LANL (Los Alamos National Laboratory), May 2009. "Phase II Investigation Report for Material Disposal Area C, Solid Waste Management Unit 50-009, at Technical Area 50," Los Alamos National Laboratory document LA-UR-09-2842, Los Alamos, New Mexico. (LANL 2009, 106047)
- Levitt, D.G., K.C. Kisiel, D.L. Newell, J.K. Hopkins, C.W. Criswell, and L.A. Woodworth, February 23–27, 2003. "Site Characterization and Monitoring of Technical Area 49 at the Los Alamos National Laboratory," Waste Management Conference 2003, February 23–27, 2003, Tucson, Arizona. (Levitt et al. 2003, 107563)
- Purtymun, W.D., January 1995. "Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area," Los Alamos National Laboratory report LA-12883-MS, Los Alamos, New Mexico. (Purtymun 1995, 045344)
- Purtymun, W.D., and A.S. Swanton, February 5, 1998. "Engineering, Geology, and Construction Data of Twenty-Five Test Holes and Test Wells on and Adjacent to the Pajarito Plateau," draft, Los Alamos National Laboratory, Los Alamos, New Mexico. (Purtymun and Swanton 1998, 099096)
- Robinson, B.A., D.E. Broxton, and D.T. Vaniman, 2005. "Observations and Modeling of Deep Perched Water beneath the Pajarito Plateau," *Vadose Zone Journal*, Vol. 4, pp. 637–652. (Robinson et al. 2005, 091682)

APPENDIX A

TA-21 Distillation Borehole

References for Appendix A Information

| Borehole | MAP | GEOLOGIC LOG | CONSTRUCTION DIAGRAM | OTHER |
|-----------------------------|-----|--|----------------------|-------|
| TA-21 Distillation borehole | 1 | not found – see general geologic cross section - 2 | not found | na |

1. Purtymun, W.D., 1995, Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area, Los Alamos National Laboratory Report LA-12883-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, January 1995.

2. Broxton, D.E. and Eller, P.G., 1995, Earth Science Investigations for Environmental Restoration – Los Alamos National Laboratory Technical Area 21, Los Alamos National Laboratory report LA-12934-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, June 1995.

XVI. CARBON ISOTOPE PRODUCTION HOLES AT TA-21 AND TA-46

Carbon isotope production holes were drilled at TA-21 and TA-46 (Fig. XVI-A). The holes were used as part of a carbon 13 production plant using carbon monoxide distillation (Armstrong et al. 1970).

The preliminary testing and production of carbon 13 occurred at TA-21 building SM-3. In 1969 a hole to hold the distillation column was drilled in the northwest stairwell. The 36-in.-diam hole was augered to a depth of 125 ft. An 18-in.-diam casing was cemented in the hole. The casing extended about 15 ft above the floor level. The hole was completed in the Tshirege Member of the Bandelier Tuff. The hole was dry.

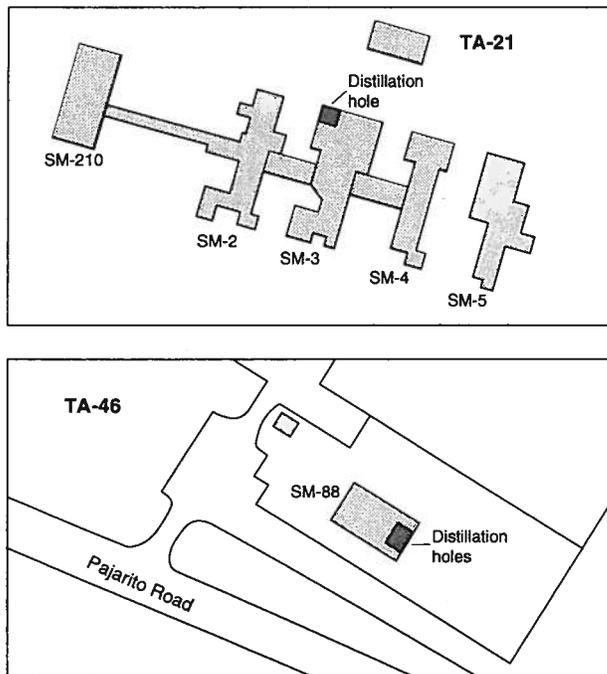


Fig. XVI-A. Distillation holes at TA-21 and TA-46.

A production plant was built at TA-46 in building SM-88 in 1971. The eastern end of the building contained a large bay about 38 ft in height. The holes were drilled in the bay with a spacing of about 20 ft. The holes were reamed out to a 16-in. diameter to a depth of about 747 ft using a mud rotary. A 13 3/8-in.-diam casing was cemented in the holes.

The holes at TA-46 penetrated the total thickness of the Bandelier Tuff and were completed into the top of the Puye Conglomerate. The holes were dry (Purymun 1994).

Geologic Log of TA-46 Holes

Elevation 7105 ft

| | Thickness (ft) | Depth |
|----------------------------|-------------------|-------|
| Bandelier Tuff | | |
| Tshirege Member | 360 | 360 |
| Otowi Member | 335 | 695 |
| Guaje Member | 32 | 727 |
| Puye Conglomerate | | |
| Sand, gravel, and boulders | 20 | 747 |

REFERENCES

D. E. Armstrong, A. C. Briesmeister, B. B. McInteer, and R. M. Potter, "A Carbon 13 Production Plant Using Carbon Monoxide Distillation," Los Alamos Scientific Laboratory report LA-4391 (1970).

W. D. Purymun, "Source Document Compilation: Los Alamos Investigations Related to the Environment, Engineering, Geology, and Hydrology, 1961-1990," Los Alamos National Laboratory report LA-12733-MS (1994), chapters 21 and 76.

TABLE XVI-A. Locations and Elevations (NAD 1927)

| | | | |
|-------|-------------|-----------|---------|
| TA-21 | N 1,774,500 | E 492,000 | 7150 ft |
| TA-46 | N 1,765,500 | E 499,500 | 7105 ft |

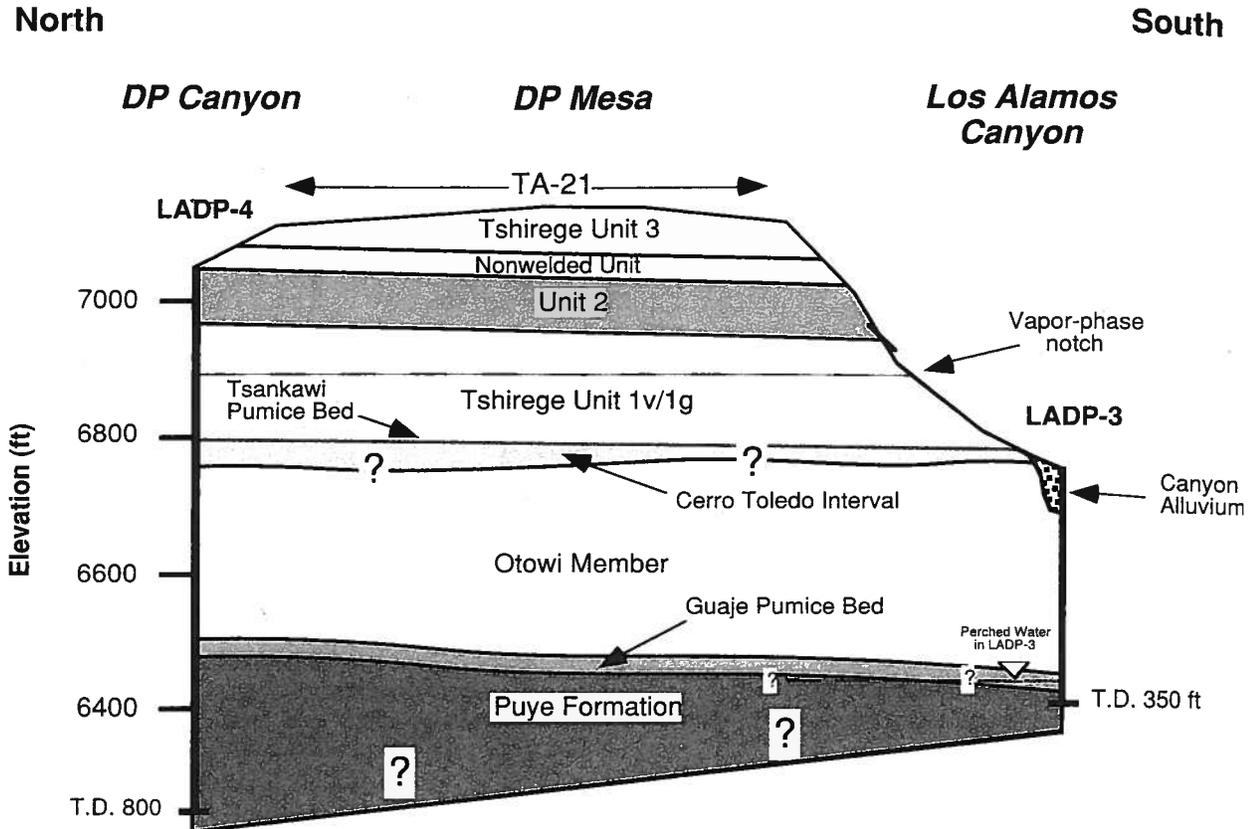


Fig. 12. N-S geologic cross section of TA-21 showing the distribution of principal stratigraphic units. Perched groundwater occurs in the Guaje Pumice Bed under Los Alamos Canyon, but its extent northward under the industrialized areas of DP Mesa is not known.

Pumice Bed at LADP-3 may flow downgradient into the Puye Formation in other parts of Los Alamos Canyon. In the geologic log for well Otowi-4, Stoker *et al.* (1992) observed, "Some perched water was visible in a video log of the 48-in. hole at about 253 ft where the water cascaded in from large gravel." The perched groundwater in Otowi-4 occurs in the Puye Formation 0.75 miles downcanyon and 64 ft lower in elevation than the Guaje Pumice Bed groundwater in LADP-3 (Fig. 13). Although these occurrences of perched groundwater may be related, this hypothesis cannot be demonstrated with certainty using the data currently available.

At this point in the investigation, the source of tritium in the Guaje Pumice Bed groundwater in Los Alamos Canyon has not been

determined. The Laboratory's TA-2 and TA-41 are located on the floor of Los Alamos Canyon upgradient of the tritium contamination detected at LADP-3. TA-2 is a possible contamination source because it was the source of tritium releases in the past. In January 1992, it was determined that tritium-laden primary coolant water from the Omega West Reactor at TA-2 was leaking into the alluvial groundwater. Surface water and alluvial groundwater from the canyon bottom are possible sources of recharge to the Guaje Pumice Bed groundwater. TA-21 is a less likely source for the tritiated groundwater because thick, unsaturated tuffs, lack of available surface and groundwater, and low recharge rates could serve as effective barriers to contaminant transport from the mesa top.

APPENDIX B

TA-46 Distillation Boreholes

References for Appendix B Information

| Borehole | MAP | GEOLOGIC LOG | CONSTRUCTION DIAGRAM |
|------------------------------|------|--------------|----------------------|
| TA-46 Distillation boreholes | 1, 2 | 1, 3 | not found |

1. Purtymun, W.D., 1995, Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area, Los Alamos National Laboratory Report LA-12883-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, January 1995.

2. Los Alamos National Laboratory Engineering Drawing Number C-39824-003-C-0, 1971, Expanded Carbon 13 Facility Floor Plan, Building WA-88, TA-46, Los Alamos National Laboratory, Los Alamos, New Mexico, October 1971.


3. Los Alamos National Laboratory, 1993, LANL, RCRA Facility Investigation Work Plan for Operable Unit 1140, Environmental Restoration Program, Los Alamos National Laboratory report LA-UR-93-1940, Los Alamos National Laboratory, Los Alamos, New Mexico, August 1993.

TA-46 DISTILLATION BOREHOLES

Purtymun (1994, 1995) indicates that there were several boreholes drilled inside the east high bay of building SM-88 at TA-46 (now called TA-46-88), but he did not state explicitly the number of boreholes drilled and cased for the carbon monoxide distillation process.

Engineering drawing C-39824-003 from October 1971 (on following page) shows six 8-in. diameter boreholes, 747 ft deep. A drawing note (#1) states that the boreholes were to be reamed out to larger 16-in. diameter holes and fitted with 14-in. casing to total depth in order to conduct carbon monoxide distillation . The boreholes are spaced at 10-ft intervals in the southern end of the high bay.

According to Purtymun's 1994 writeup, any fluids that might be released from a failure in the distillation system would be contained in the cased holes.

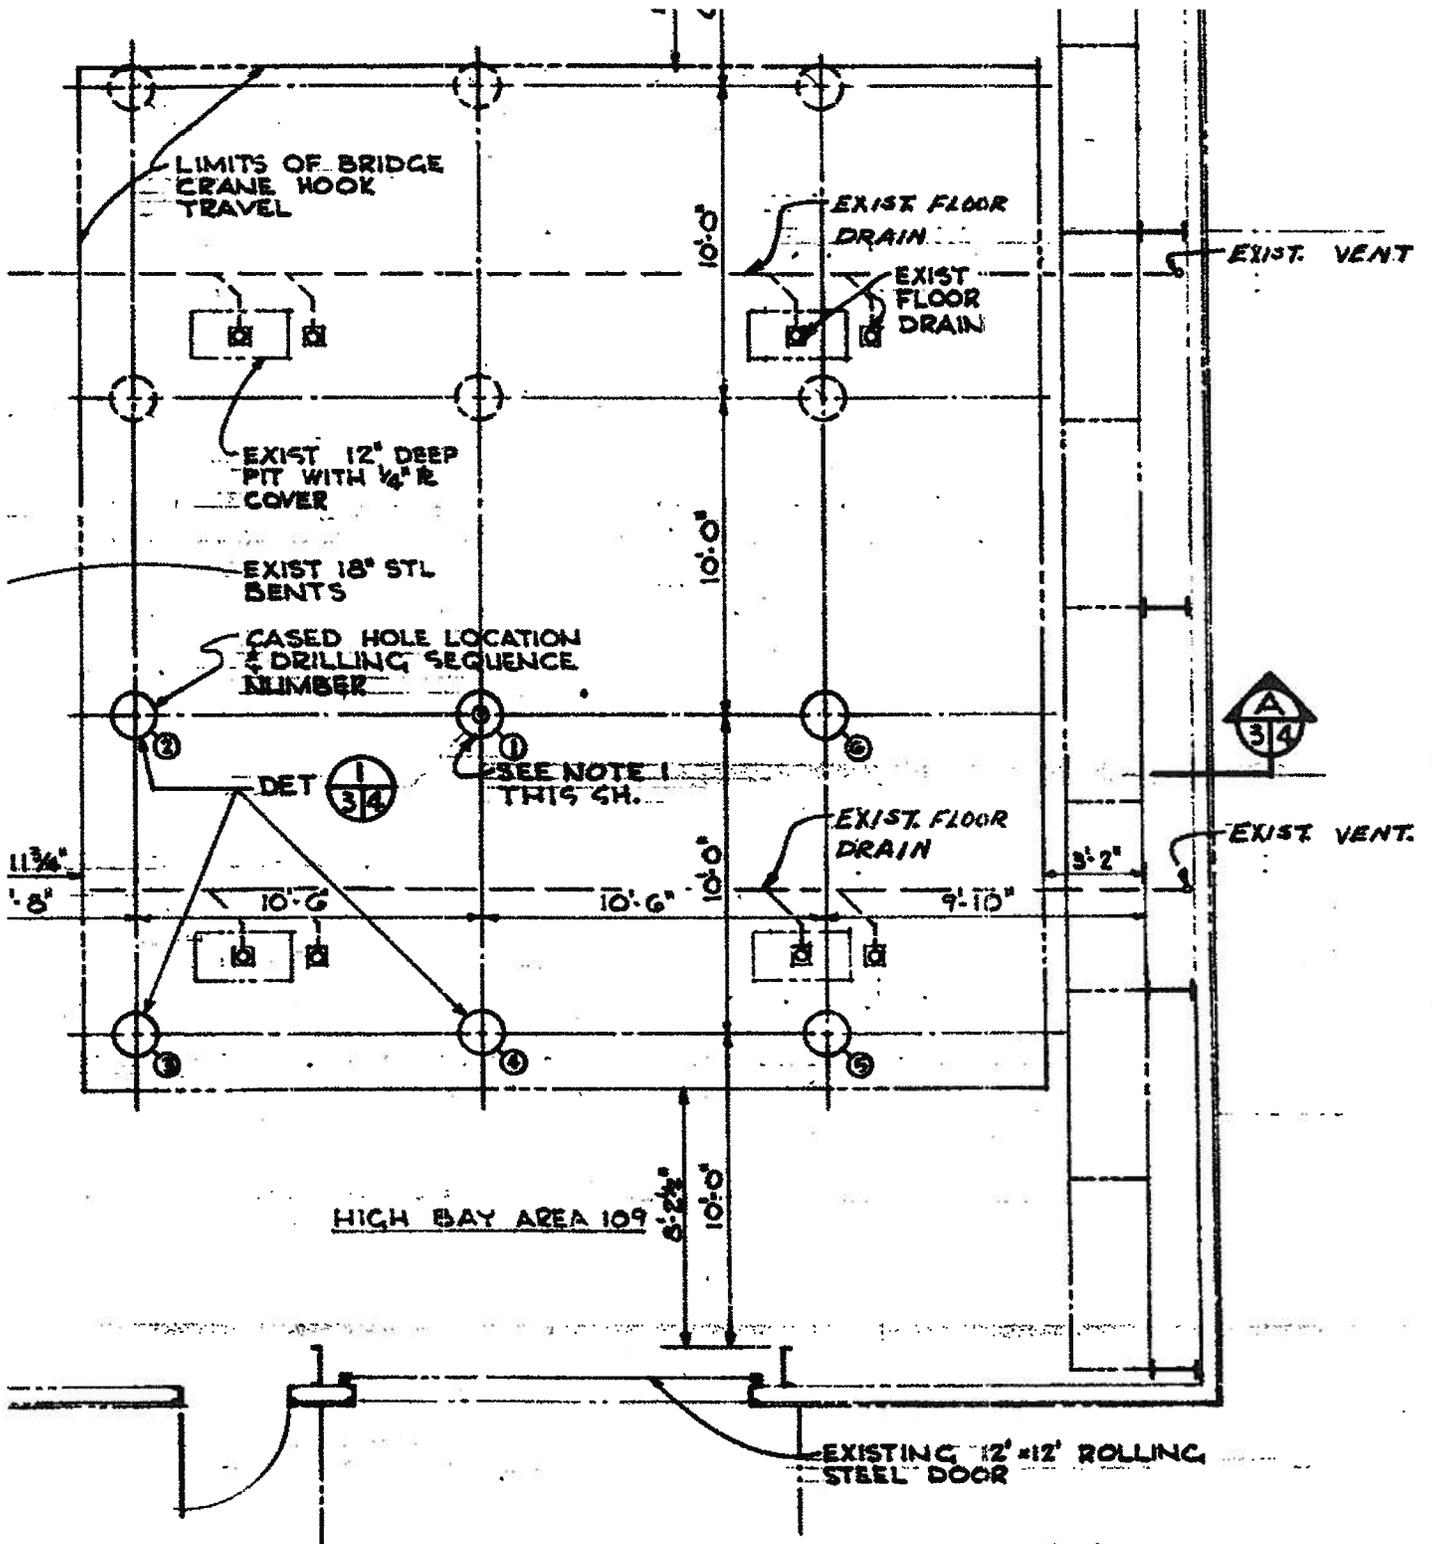

NOTE: 1. EXISTING 8" ϕ HOLE 747' DEEP TO BE REAMED OUT TO 18" ϕ AND 12" ϕ CASING INSTALLED TO T. D. GROUT BETWEEN EXIST CMP & CASING AND BACKFILL BETWEEN CMP & SOIL.

2. THE BLDG. 5 TON CAPACITY BRIDGE CRANE IS AVAILABLE FOR USE BY THE CONTRACTOR. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE TO THE CRANE.
3. PROTECT FLOOR DRAINS & PITS FROM DRILLING MUD.

DWG C-39824-003

GRAPHIC SCALE

XVI. CARBON ISOTOPE PRODUCTION HOLES AT TA-21 AND TA-46

Carbon isotope production holes were drilled at TA-21 and TA-46 (Fig. XVI-A). The holes were used as part of a carbon 13 production plant using carbon monoxide distillation (Armstrong et al. 1970).

The preliminary testing and production of carbon 13 occurred at TA-21 building SM-3. In 1969 a hole to hold the distillation column was drilled in the northwest stairwell. The 36-in.-diam hole was augered to a depth of 125 ft. An 18-in.-diam casing was cemented in the hole. The casing extended about 15 ft above the floor level. The hole was completed in the Tshirege Member of the Bandelier Tuff. The hole was dry.

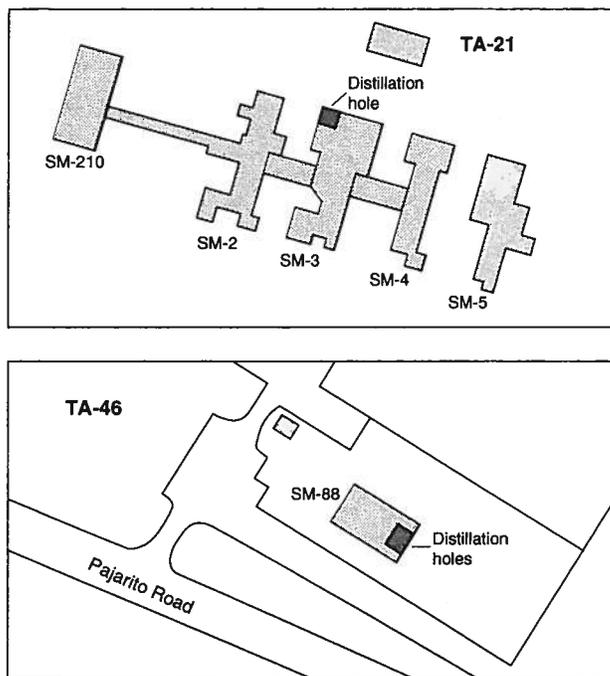


Fig. XVI-A. Distillation holes at TA-21 and TA-46.

A production plant was built at TA-46 in building SM-88 in 1971. The eastern end of the building contained a large bay about 38 ft in height. The holes were drilled in the bay with a spacing of about 20 ft. The holes were reamed out to a 16-in. diameter to a depth of about 747 ft using a mud rotary. A 13 3/8-in.-diam casing was cemented in the holes.

The holes at TA-46 penetrated the total thickness of the Bandelier Tuff and were completed into the top of the Puye Conglomerate. The holes were dry (Purtymun 1994).

Geologic Log of TA-46 Holes

| | Thickness (ft) | Depth |
|----------------------------|-------------------|-------|
| Elevation 7105 ft | | |
| Bandelier Tuff | | |
| Tshirege Member | 360 | 360 |
| Otowi Member | 335 | 695 |
| Guaje Member | 32 | 727 |
| Puye Conglomerate | | |
| Sand, gravel, and boulders | 20 | 747 |

REFERENCES

D. E. Armstrong, A. C. Briesmeister, B. B. McInteer, and R. M. Potter, "A Carbon 13 Production Plant Using Carbon Monoxide Distillation," Los Alamos Scientific Laboratory report LA-4391 (1970).

W. D. Purtymun, "Source Document Compilation: Los Alamos Investigations Related to the Environment, Engineering, Geology, and Hydrology, 1961-1990," Los Alamos National Laboratory report LA-12733-MS (1994), chapters 21 and 76.

TABLE XVI-A. Locations and Elevations (NAD 1927)

| | | | |
|-------|-------------|-----------|---------|
| TA-21 | N 1,774,500 | E 492,000 | 7150 ft |
| TA-46 | N 1,765,500 | E 499,500 | 7105 ft |

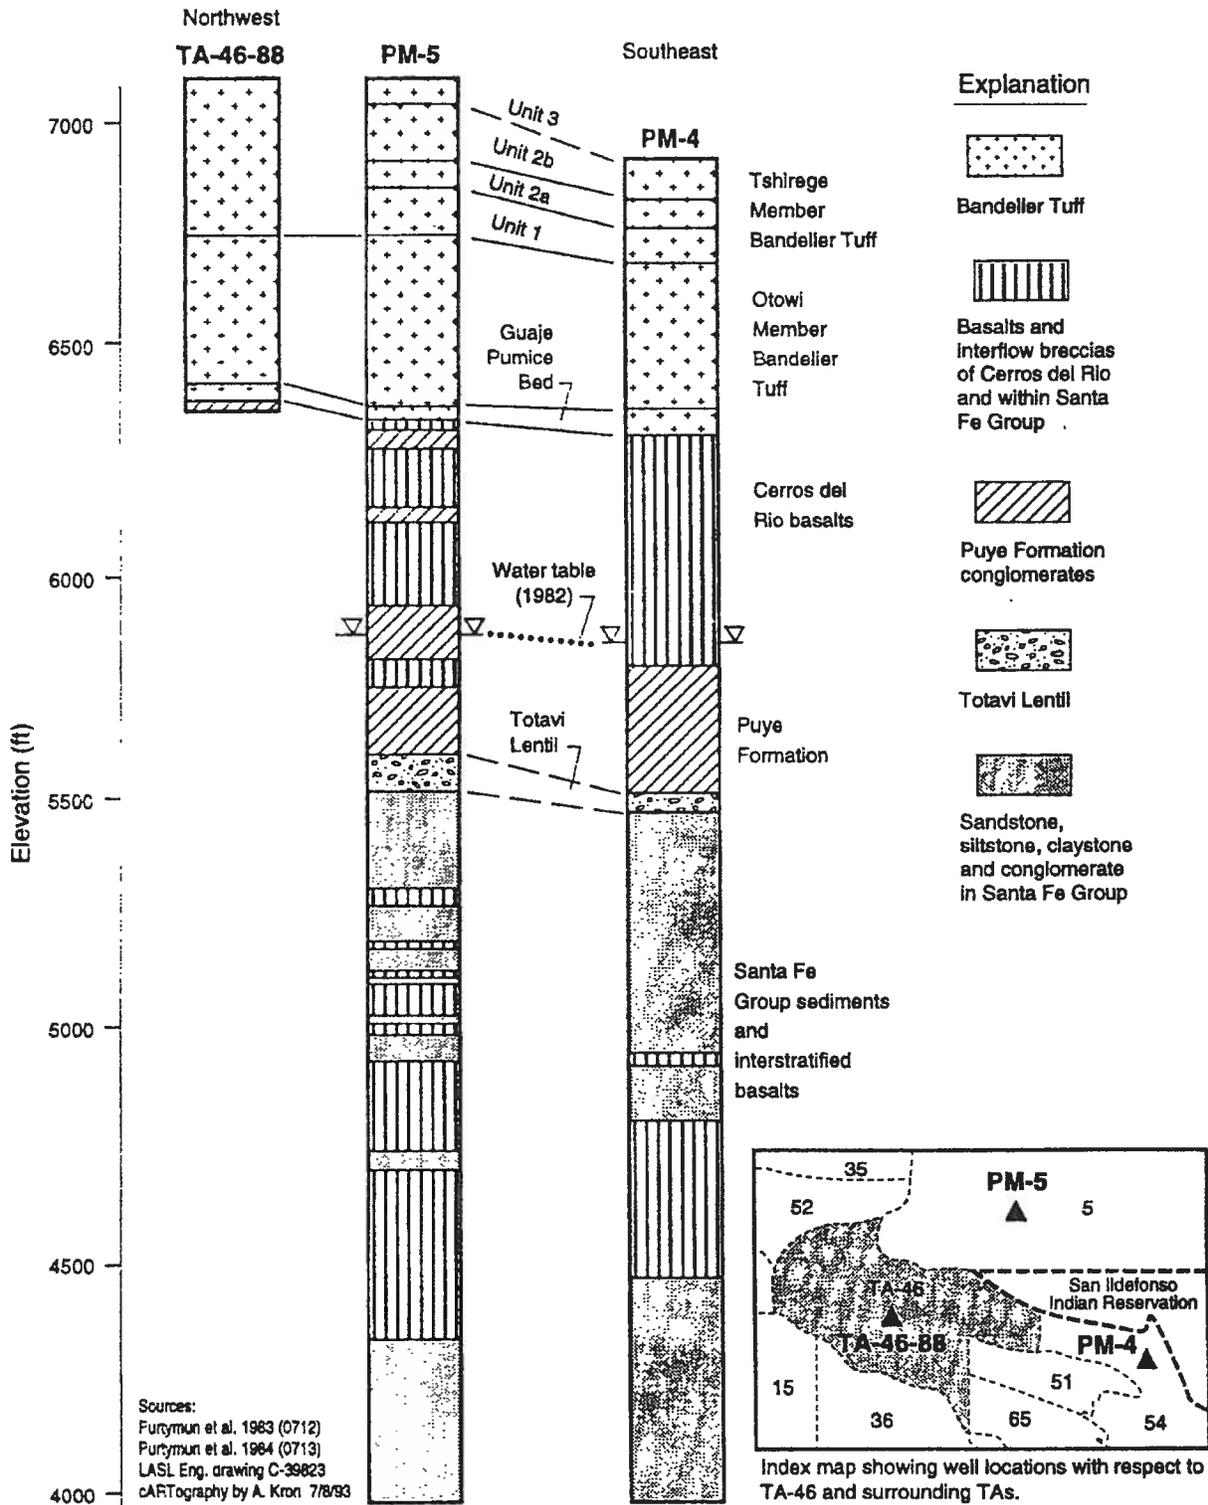


Fig. 3-4. Lithologic logs for borings near TA-46.

APPENDIX C

Boreholes TH-5, TH-6 AND TH-7

References for Appendix C Information

| Boreholes | MAP | GEOLOGIC LOG | CONSTRUCTION DIAGRAM |
|-------------------------|------------|-------------------------|-----------------------------|
| TH-5, TH-6, TH-7 | 1 | 1 | not found |

1. Purtymun, W.D., 1995, Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area, Los Alamos National Laboratory Report LA-12883-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, January 1995.

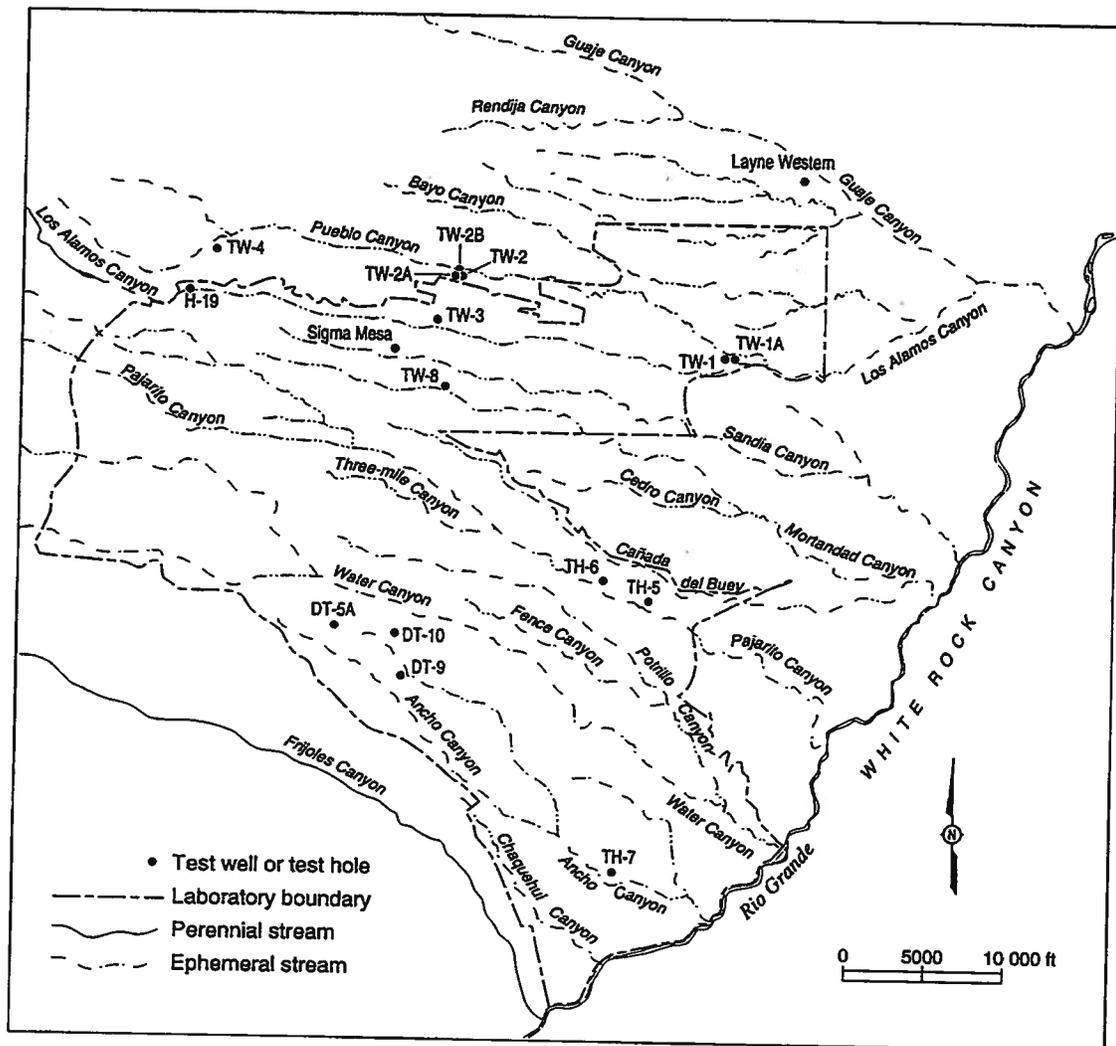


Fig. XVII-A. Test wells and test holes on the Pajarito Plateau.

REFERENCES

E. H. Baltz, J. H. Abrahams, and W. D. Purtymun, "Preliminary Report on the Geology and Hydrology of Mortandad Canyon, Los Alamos, New Mexico, with Special Reference to Disposal of Liquid Low-Level Radioactive Wastes," U.S. Geological Survey Open-File Report (1963).

Black and Veatch (Consulting Engineers), "Ground-Water Observation Wells, Los Alamos, New Mexico," Administrative Report prepared for the U.S. Atomic Energy Commission (1950).

R. L. Griggs, "Geology and Ground-Water Resources of the Los Alamos Area, New Mexico," U.S. Geol. Survey Admin. Report to the U.S. Atomic Energy Commission (1955).

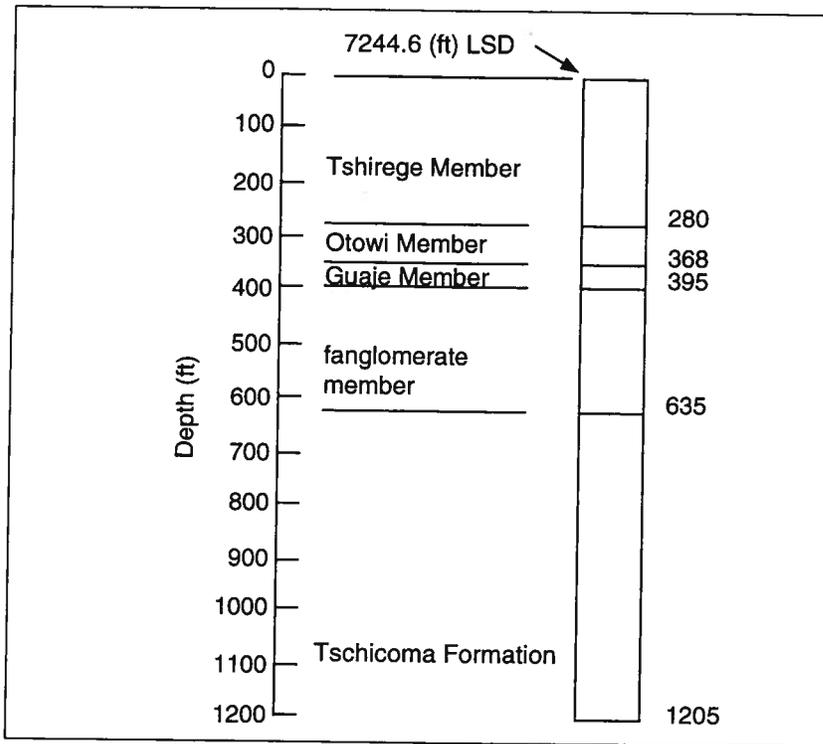


Fig. XVII-E. Geologic log of test well TW-4, completed March 1950, water level 1171 ft (Griggs 1955).

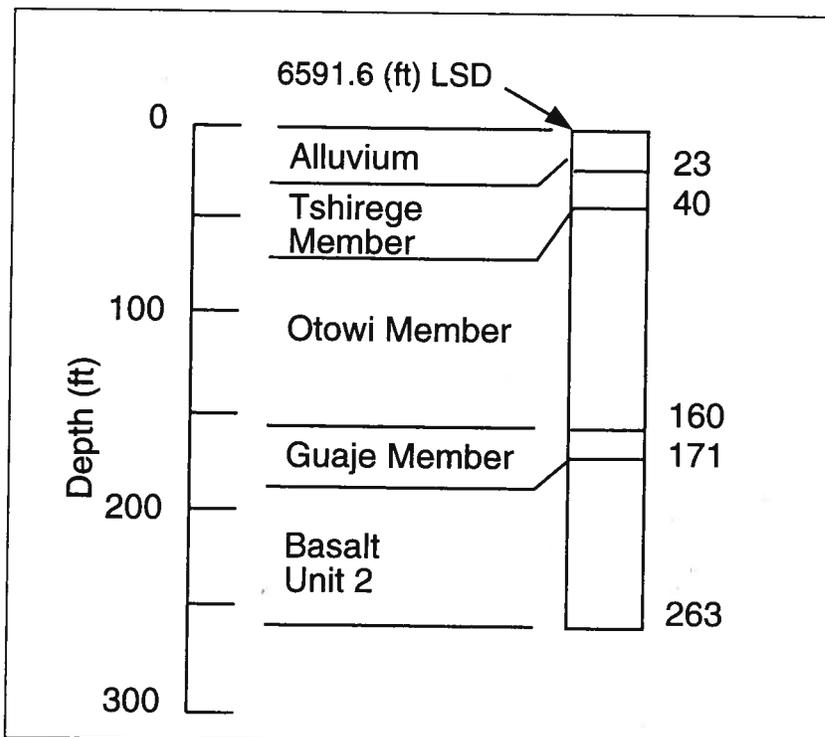


Fig. XVII-F. Geologic log of test hole TH-5, completed March 1950, dry (Griggs 1955).

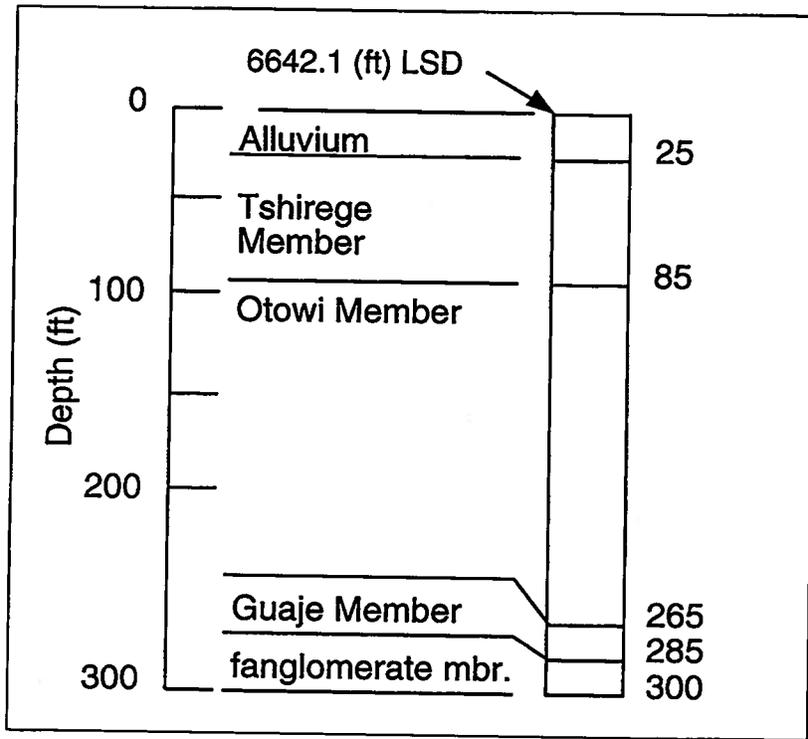


Fig. XVII-G. Geologic log of test hole TH-6, completed March 1950, dry (Griggs 1955).

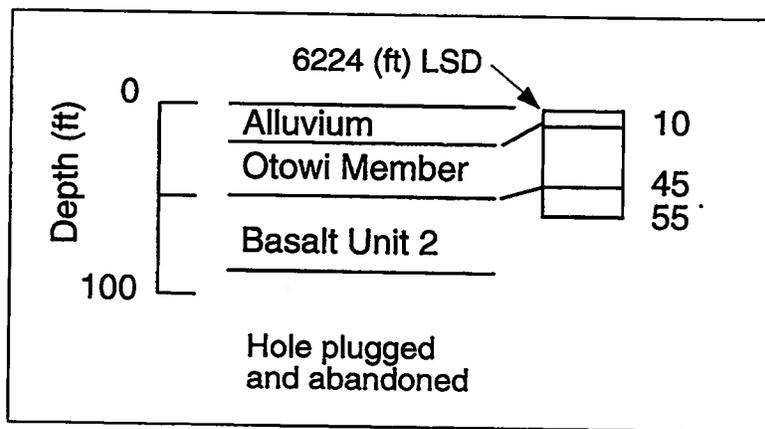


Fig. XVII-H. Geologic log of test hole TH-7, completed April 1950, dry (Griggs 1955).

**TABLE XVII-B. Geologic Logs and Construction Data for Test Wells and Test Holes on the Pajarito Plateau
(15 Test Wells and Test Holes) (Continued)**

7. Test Well TW-4 (Continued)

| <u>Casing Schedule</u> | |
|-------------------------|-------------------|
| <u>Inner Diam (in.)</u> | <u>Depth (ft)</u> |
| 16 | 0-109 |
| 12 | 0-288 |
| 10 | 0-633 |
| 6 | 0-1195 |

10 ft of 6-in.-diam screen run from the bottom of the 6-in. casing, from 1195 to 1205 ft.

Geophysical Log

Gamma-ray (5-7-60), Files ESH-18.

Note: Water level 1168.9 ft (5-7-60); water level 1172 ft (7-20-92).

8. Test Hole TH-5

Elevation (LSD): 6591.6 ft

| <u>Water Level: Dry (1950)</u> | |
|--------------------------------|--------------|
| <u>Thickness</u> | <u>Depth</u> |
| <u>(ft)</u> | <u>(ft)</u> |
| Alluvium | 23 |
| Bandelier Tuff | |
| Tshirege Member | 17 |
| Otowi Member | 120 |
| Guaje Member | 11 |
| Basaltic Rocks of Chino Mesa | |
| Unit 2 | 92 |
| | 263 |

Geologic Log

Alluvium
Bandelier Tuff
 Tshirege Member
 Otowi Member
 Guaje Member
Basaltic Rocks of Chino Mesa
 Unit 2

Casing Schedule

| <u>Outer Diam (in.)</u> | <u>Depth (ft)</u> |
|-------------------------|-------------------|
| 24 | 0-24 |
| Open Hole | 24-163 |

Note: Water in alluvium cased out of hole.

9. Test Hole TH-6

Elevation (LSD): 6642.1 ft

| <u>Water Level: Dry (1950)</u> | |
|--------------------------------|--------------|
| <u>Thickness</u> | <u>Depth</u> |
| <u>(ft)</u> | <u>(ft)</u> |
| Alluvium | 25 |
| Bandelier Tuff | |
| Tshirege Member | 60 |
| Otowi Member | 180 |
| Guaje Member | 20 |
| Puye Conglomerate | |
| Fanglomerate member | 15 |
| | 300 |

Geologic Log

Alluvium
Bandelier Tuff
 Tshirege Member
 Otowi Member
 Guaje Member
Puye Conglomerate
 Fanglomerate member

Casing Schedule

| <u>Outer Diam (in.)</u> | <u>Depth (ft)</u> |
|-------------------------|-------------------|
| 8 | 0-120 |
| Open Hole | 120-300 |

Note: Water in alluvium cased out of hole.

TABLE XVII-B. Geologic Logs and Construction Data for Test Wells and Test Holes on the Pajarito Plateau
(15 Test Wells and Test Holes) (Continued)

10. Test Hole TH-7

| | | |
|------------------------------|-------------------------|-------------|
| Elevation (LSD): 6224 ft | Water Level: Dry (1950) | |
| | Thickness | Depth |
| <u>Geologic Log</u> | <u>(ft)</u> | <u>(ft)</u> |
| Alluvium | 10 | 10 |
| Bandelier Tuff | | |
| Otowi Member | 35 | 45 |
| Basaltic Rocks of Chino Mesa | | |
| Unit 2 | 10 | 55 |

Hole plugged and abandoned.

11. Test Well TW-8

| | | |
|-----------------------------|----------------------------|-------------|
| Elevation (LSD): 6877.62 ft | Water Level: 968 ft (1960) | |
| | Thickness | Depth |
| <u>Geologic Log</u> | <u>(ft)</u> | <u>(ft)</u> |
| Alluvium | 40 | 40 |
| Bandelier Tuff | | |
| Tshirege Member | 20 | 60 |
| Otowi Member | 385 | 445 |
| Guaje Member | 45 | 490 |
| Puye Conglomerate | | |
| Fanglomerate member | 90 | 580 |
| Basalt Unit 2 | 145 | 725 |
| Fanglomerate member | 340 | 1065 |

Casing Schedule

44 ft of 20-in. corrugated metal pipe from 0 to 44 ft; 64 ft of 14-in.-outside-diam steel casing 0 to 64 ft cemented in; 1065 ft of 8-in.-inside-diam steel casing from 0 to 1065 ft with the lower 112 ft slotted.

Geophysical Log

Gamma-ray (11-29-61), files available from the ESH-18 Geohydrology section.

12. Test Hole H-19

| | | |
|--------------------------|----------------------------|-------------|
| Elevation (LSD): 7178 ft | Water Level: 950 ft (1950) | |
| | Thickness | Depth |
| <u>Geologic Log</u> | <u>(ft)</u> | <u>(ft)</u> |
| Alluvium | 27 | 27 |
| Bandelier Tuff | | |
| Tshirege Member | 173 | 200 |
| Otowi Member | 215 | 415 |
| Guaje Member | 57 | 472 |
| Tschicoma Formation | 347 | 819 |
| Puye Conglomerate | | |
| Fanglomerate member | 391 | 1210 |
| Tschicoma Formation | 270 | 1480 |
| Puye Conglomerate | | |
| Totavi Lentil | 10 | 1490 |
| Tschicoma Formation | 510 | 2000 |

APPENDIX D

Borehole H-19

References for Appendix D Information

| Borehole | MAP | GEOLOGIC LOG | CONSTRUCTION DIAGRAM |
|---------------|-----|--------------|----------------------|
| H-19 Borehole | 1 | 1 | not found |

1. Purtymun, W.D., 1995, Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area, Los Alamos National Laboratory Report LA-12883-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, January 1995.

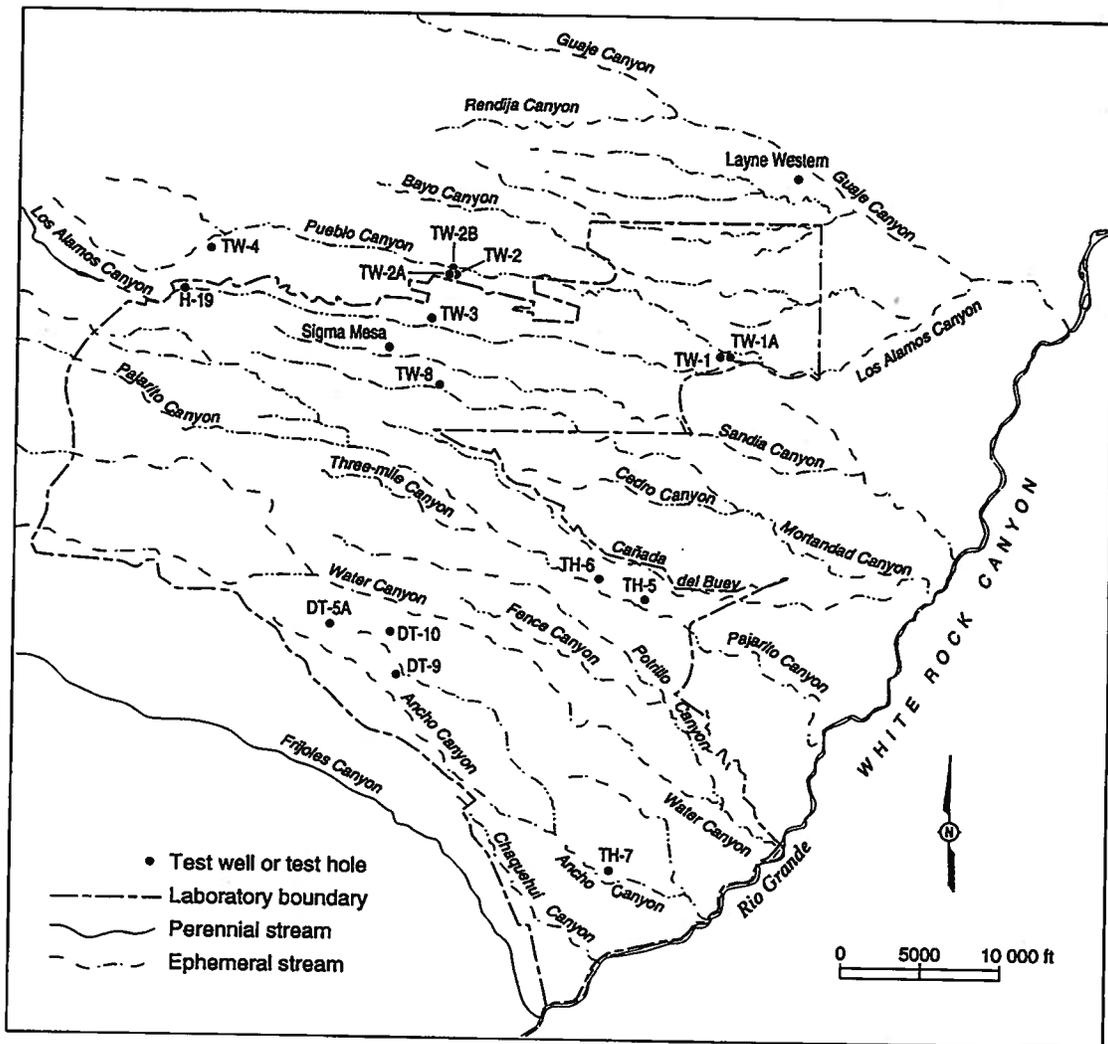


Fig. XVII-A. Test wells and test holes on the Pajarito Plateau.

REFERENCES

E. H. Baltz, J. H. Abrahams, and W. D. Purtymun, "Preliminary Report on the Geology and Hydrology of Mortandad Canyon, Los Alamos, New Mexico, with Special Reference to Disposal of Liquid Low-Level Radioactive Wastes," U.S. Geological Survey Open-File Report (1963).

Black and Veatch (Consulting Engineers), "Ground-Water Observation Wells, Los Alamos, New Mexico," Administrative Report prepared for the U.S. Atomic Energy Commission (1950).

R. L. Griggs, "Geology and Ground-Water Resources of the Los Alamos Area, New Mexico," U.S. Geol. Survey Admin. Report to the U.S. Atomic Energy Commission (1955).

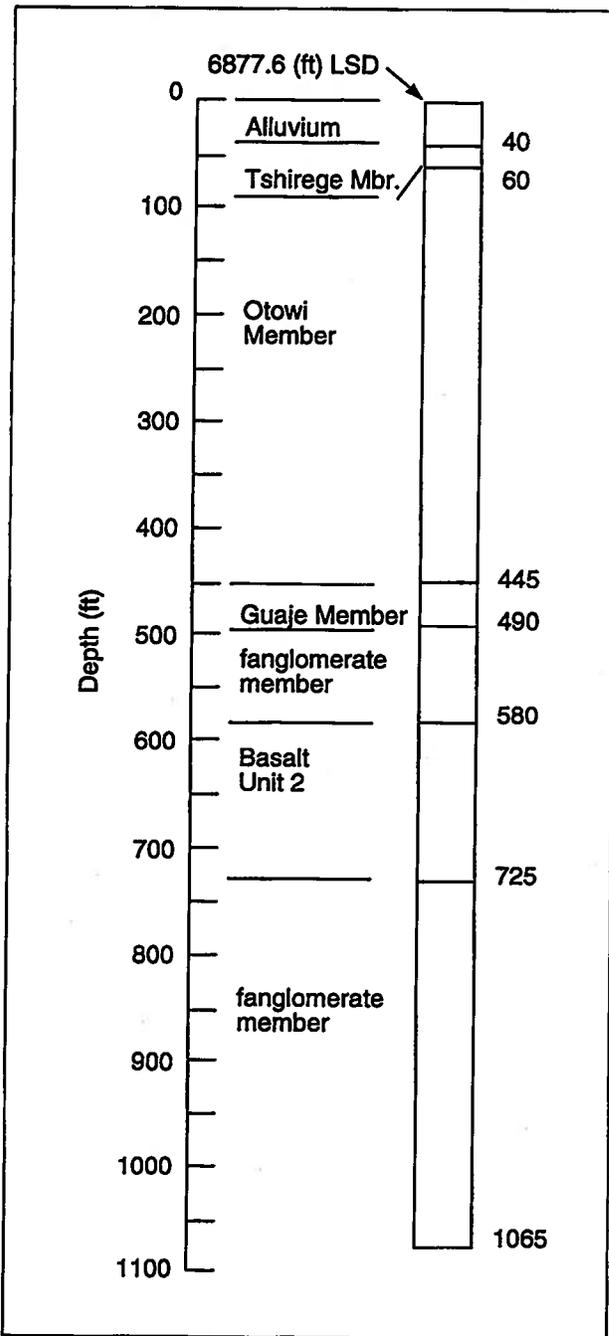


Fig. XVII-I. Geologic log of test well TW-8, completed December 1960, water level 968 ft (Baltz et al. 1963).

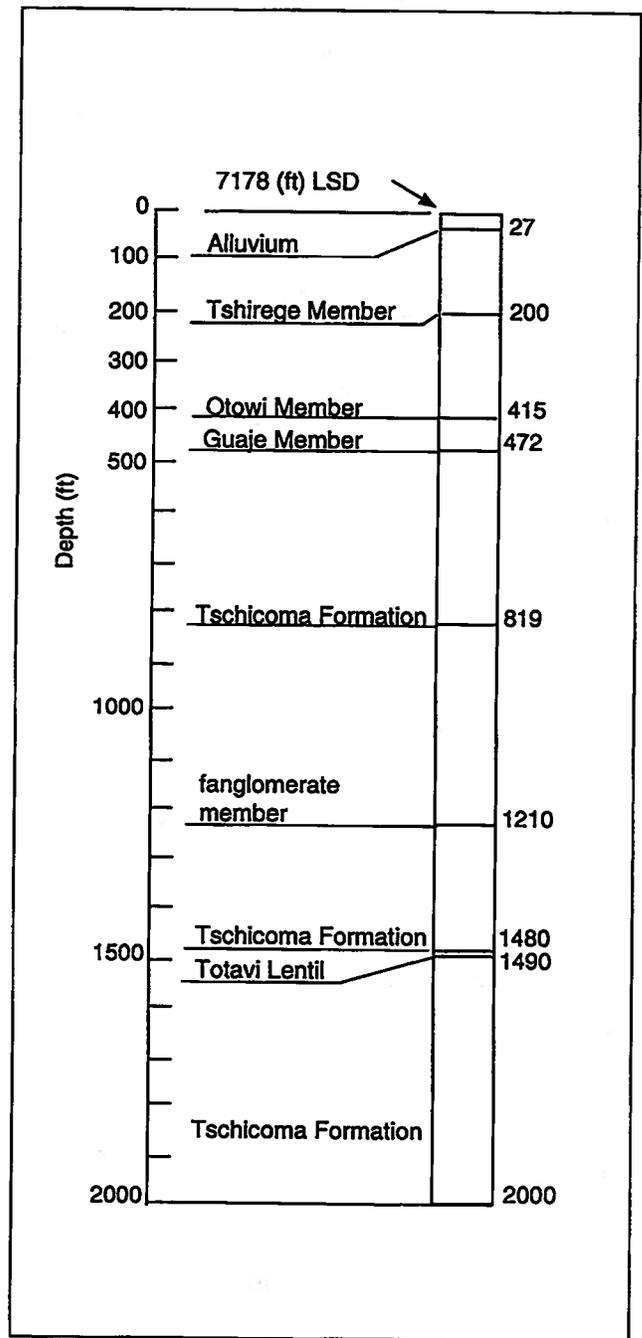


Fig. XVII-J. Geologic log of test hole H-19, completed September 1949, water level 950 ft (Griggs 1955).

TABLE XVII-B. Geologic Logs and Construction Data for Test Wells and Test Holes on the Pajarito Plateau
(15 Test Wells and Test Holes) (Continued)

10. Test Hole TH-7

| | | |
|------------------------------|-------------------------|-------------|
| Elevation (LSD): 6224 ft | Water Level: Dry (1950) | |
| | Thickness | Depth |
| <u>Geologic Log</u> | <u>(ft)</u> | <u>(ft)</u> |
| Alluvium | 10 | 10 |
| Bandelier Tuff | | |
| Otowi Member | 35 | 45 |
| Basaltic Rocks of Chino Mesa | | |
| Unit 2 | 10 | 55 |

Hole plugged and abandoned.

11. Test Well TW-8

| | | |
|-----------------------------|----------------------------|-------------|
| Elevation (LSD): 6877.62 ft | Water Level: 968 ft (1960) | |
| | Thickness | Depth |
| <u>Geologic Log</u> | <u>(ft)</u> | <u>(ft)</u> |
| Alluvium | 40 | 40 |
| Bandelier Tuff | | |
| Tshirege Member | 20 | 60 |
| Otowi Member | 385 | 445 |
| Guaje Member | 45 | 490 |
| Puye Conglomerate | | |
| Fanglomerate member | 90 | 580 |
| Basalt Unit 2 | 145 | 725 |
| Fanglomerate member | 340 | 1065 |

Casing Schedule

44 ft of 20-in. corrugated metal pipe from 0 to 44 ft; 64 ft of 14-in.-outside-diam steel casing 0 to 64 ft cemented in; 1065 ft of 8-in.-inside-diam steel casing from 0 to 1065 ft with the lower 112 ft slotted.

Geophysical Log

Gamma-ray (11-29-61), files available from the ESH-18 Geohydrology section.

12. Test Hole H-19

| | | |
|--------------------------|----------------------------|-------------|
| Elevation (LSD): 7178 ft | Water Level: 950 ft (1950) | |
| | Thickness | Depth |
| <u>Geologic Log</u> | <u>(ft)</u> | <u>(ft)</u> |
| Alluvium | 27 | 27 |
| Bandelier Tuff | | |
| Tshirege Member | 173 | 200 |
| Otowi Member | 215 | 415 |
| Guaje Member | 57 | 472 |
| Tschicoma Formation | 347 | 819 |
| Puye Conglomerate | | |
| Fanglomerate member | 391 | 1210 |
| Tschicoma Formation | 270 | 1480 |
| Puye Conglomerate | | |
| Totavi Lentil | 10 | 1490 |
| Tschicoma Formation | 510 | 2000 |

TABLE XVII-B. Geologic Logs and Construction Data for Test Wells and Test Holes on the Pajarito Plateau
(15 Test Wells and Test Holes) (Continued)

12. Test Hole H-19 (Continued)

Casing Schedule

10 ft of 12-in.-diam surface casing set 0 to 10 ft. Exploratory hole drilled by cable tool, casing pulled at end of tests in 1949. Hole open to 265 ft (5-7-60); to 69 ft (7-20-92).

Geophysical Log

Gamma-ray (5-7-60), files available from the ESH-18 Geohydrology section.

13A. Test Hole Sigma Mesa EGH-LA-1 (1979)

Elevation (LSD): 7215 ft LSD

| <u>Geologic Log</u> ^a | Thickness (ft) | Depth (ft) |
|---|-------------------|---------------|
| Tshirege Member Bandelier Tuff | 270 | 270 |
| Ash flow of Otowi Member | | |
| Bandelier Tuff | 430 | 700 |
| Guaje Pumice Bed | 35 | 735 |
| Puye Conglomerate with interbedded basalt | 110 | 845 |
| Aphyric Tschicoma Flow | 80 | 925 |
| Hornblende-bearing Tschicoma Flow | 45 | 970 |
| Fanglomerate member of Puye Conglomerate | 365 | 1335 |
| Totavi Lentil of the Puye Formation | 65 | 1400 |
| Chamita Formation of the Santa Fe Group | 500 | 1900 |
| Tschicoma Flow | 35 | 1935 |
| Chamita Formation of the Santa Fe Group | 60 | 1995 |
| Tschicoma Flow | 297 | 2292 |

13B. Test Hole Sigma Mesa EGH-LA-1 (1992)

Elevation (LSD): 7215 ft LSD

Water Level: 1330 ft (1979, geophysical log)

| <u>Geologic Log</u> ^b | Thickness (ft) | Depth (ft) |
|----------------------------------|-------------------|---------------|
| Bandelier Tuff | | |
| Tshirege Member | 345 | 345 |
| Otowi Member | 350 | 695 |
| Guaje Member | 30 | 725 |
| Puye Conglomerate | | |
| Fanglomerate member | 185 | 910 |
| Basalt Unit 2 | 140 | 1050 |
| Fanglomerate member | 255 | 1305 |
| Totavi Lentil | 25 | 1330 |
| Santa Fe Group | | |
| Chaquehui Formation | 250 | 1580 |
| Basalt and basalt breccias | 135 | 1715 |
| Chaquehui Formation | 180 | 1895 |
| Basalt and basalt breccias | 397 | 2292 |

^a Logged by Carolyn Potzich.

^b Revised log by W. D. Purtymun from geophysical logs, comparison with logs of nearby supply and test wells, and R. F. Smith Corp. Geothermal Data Log.

APPENDIX E

Layne Western Well

References for Appendix E Information

| Well | MAP | GEOLOGIC LOG | CONSTRUCTION DIAGRAM |
|--------------------|-----|--------------|----------------------|
| Layne Western Well | 1 | 1 | not found |

1. Purtymun, W.D., 1995, Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area, Los Alamos National Laboratory Report LA-12883-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, January 1995.

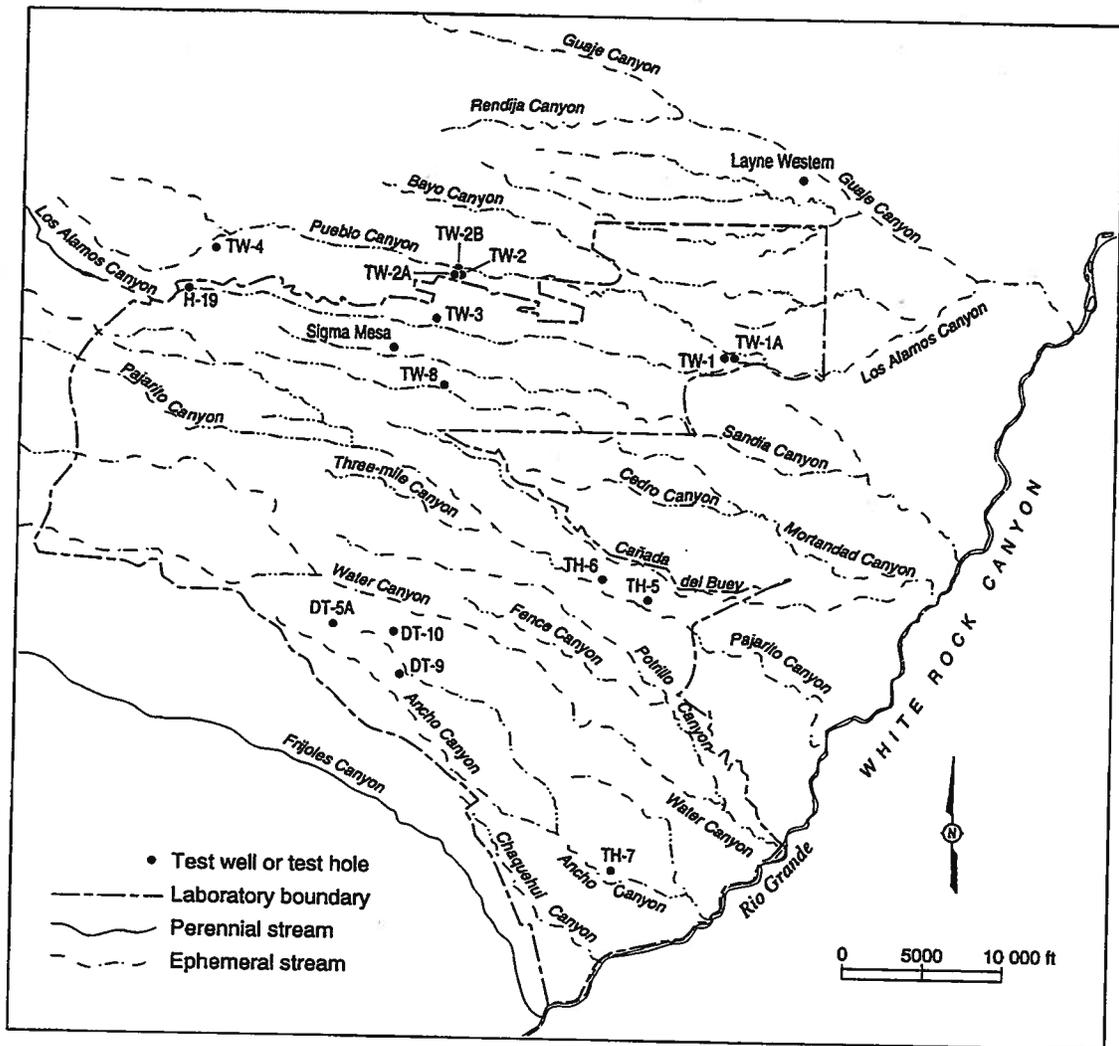


Fig. XVII-A. Test wells and test holes on the Pajarito Plateau.

REFERENCES

E. H. Baltz, J. H. Abrahams, and W. D. Purtymun, "Preliminary Report on the Geology and Hydrology of Mortandad Canyon, Los Alamos, New Mexico, with Special Reference to Disposal of Liquid Low-Level Radioactive Wastes," U.S. Geological Survey Open-File Report (1963).

Black and Veatch (Consulting Engineers), "Ground-Water Observation Wells, Los Alamos, New Mexico," Administrative Report prepared for the U.S. Atomic Energy Commission (1950).

R. L. Griggs, "Geology and Ground-Water Resources of the Los Alamos Area, New Mexico," U.S. Geol. Survey Admin. Report to the U.S. Atomic Energy Commission (1955).

TABLE XVII-B. Geologic Logs and Construction Data for Test Wells and Test Holes on the Pajarito Plateau
(15 Test Wells and Test Holes) (Continued)

13B. Test Hole Sigma Mesa EGH-LA-1 (1992) (Continued)

Casing Schedule

Hole size: 36-in. diam to 85 ft, 26-in. diam to 2292 ft; casing size 30-in. diam to 85 ft, 20-in. diam to 1627 ft. Hole plugged with cement at about 1425 ft; unknown length of drill stem, drill collars, and bit lost in the bottom of the hole. The hole had a bad history of lost circulation throughout the entire depth drilled; large volumes of water, drilling mud, lost circulation materials, and cement were pumped into the hole. The hole was abandoned in December 1979.

Geophysical Logs

Temperature, compensated neutron-formation density; dual induction-SFL with linear correlation log; and R.F. Smith Corp. Geothermal Data Log (files available from the ESH-18 Geohydrology section).

14. Layne Western

Elevation (LSD): 5971 ft

Water Level: 100 ft (1950)

| <u>Geologic Log</u> | <u>Thickness (ft)</u> | <u>Depth (ft)</u> |
|-------------------------|---------------------------|-----------------------|
| Alluvium | 12 | 12 |
| Puye Conglomerate | | |
| Fanglomerate member | 13 | 25 |
| Totavi Lentil | 50 | 75 |
| Tesuque Formation | | |
| Siltstone and sandstone | 82 | 157 |

Casing Schedule

147 ft of 8-in.-diam casing set from 0 to 147 ft, screen from 127 to 147 ft.

15. Ski Basin Well

Elevation (LSD): 9310 ft

Water Level: 245 ft (June 1985)

| <u>Geologic Log</u> | <u>Thickness (ft)</u> | <u>Depth (ft)</u> |
|---|---------------------------|-----------------------|
| Tough sandstone (probably Tshirege Member Bandelier Tuff, welded unit) | 35 | 35 |
| Lost circulation: same formation throughout, probably Tschicoma Formation latite and rhyolite flow, water perched on interflow breccia of pebbly cobbles in a matrix of silt and clay | 365 | 400 |

Casing Schedule

392 ft of 4 1/2-in. plastic casing with perforations from 332 to 352 ft and 372 to 392 ft. Data from drillers' log.

APPENDIX F

Sigma Mesa Well EGH-LA-1

References for Appendix F Information

| Well | MAP | GEOLOGIC LOG | CONSTRUCTION DIAGRAM |
|--------------------------|-----|--------------|----------------------|
| Sigma Mesa Well EGH-LA-1 | 1 | 1 | not found |

1. Purtymun, W.D., 1995, Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area, Los Alamos National Laboratory Report LA-12883-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, January 1995.

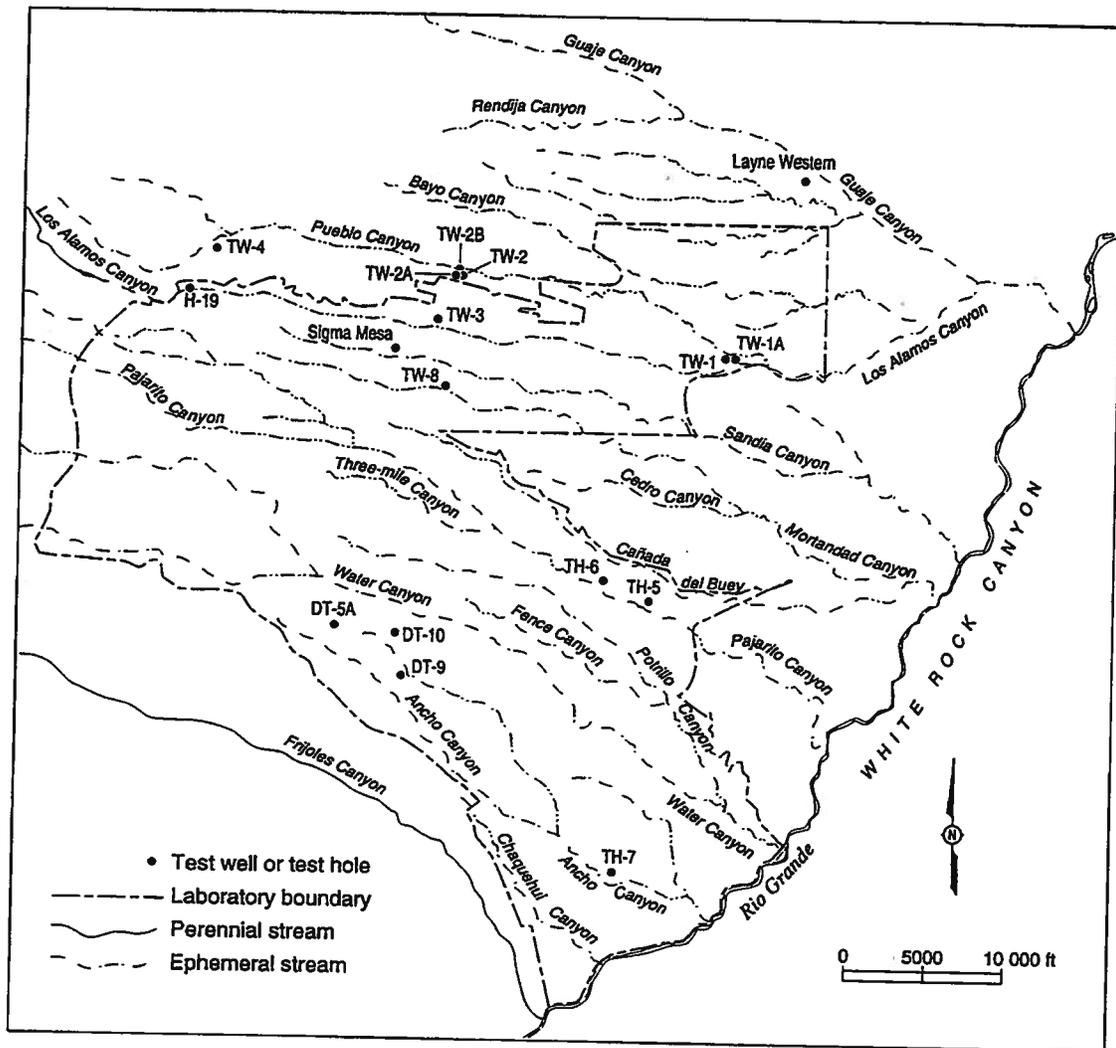


Fig. XVII-A. Test wells and test holes on the Pajarito Plateau.

REFERENCES

E. H. Baltz, J. H. Abrahams, and W. D. Purtymun, "Preliminary Report on the Geology and Hydrology of Mortandad Canyon, Los Alamos, New Mexico, with Special Reference to Disposal of Liquid Low-Level Radioactive Wastes," U.S. Geological Survey Open-File Report (1963).

Black and Veatch (Consulting Engineers), "Ground-Water Observation Wells, Los Alamos, New Mexico," Administrative Report prepared for the U.S. Atomic Energy Commission (1950).

R. L. Griggs, "Geology and Ground-Water Resources of the Los Alamos Area, New Mexico," U.S. Geol. Survey Admin. Report to the U.S. Atomic Energy Commission (1955).

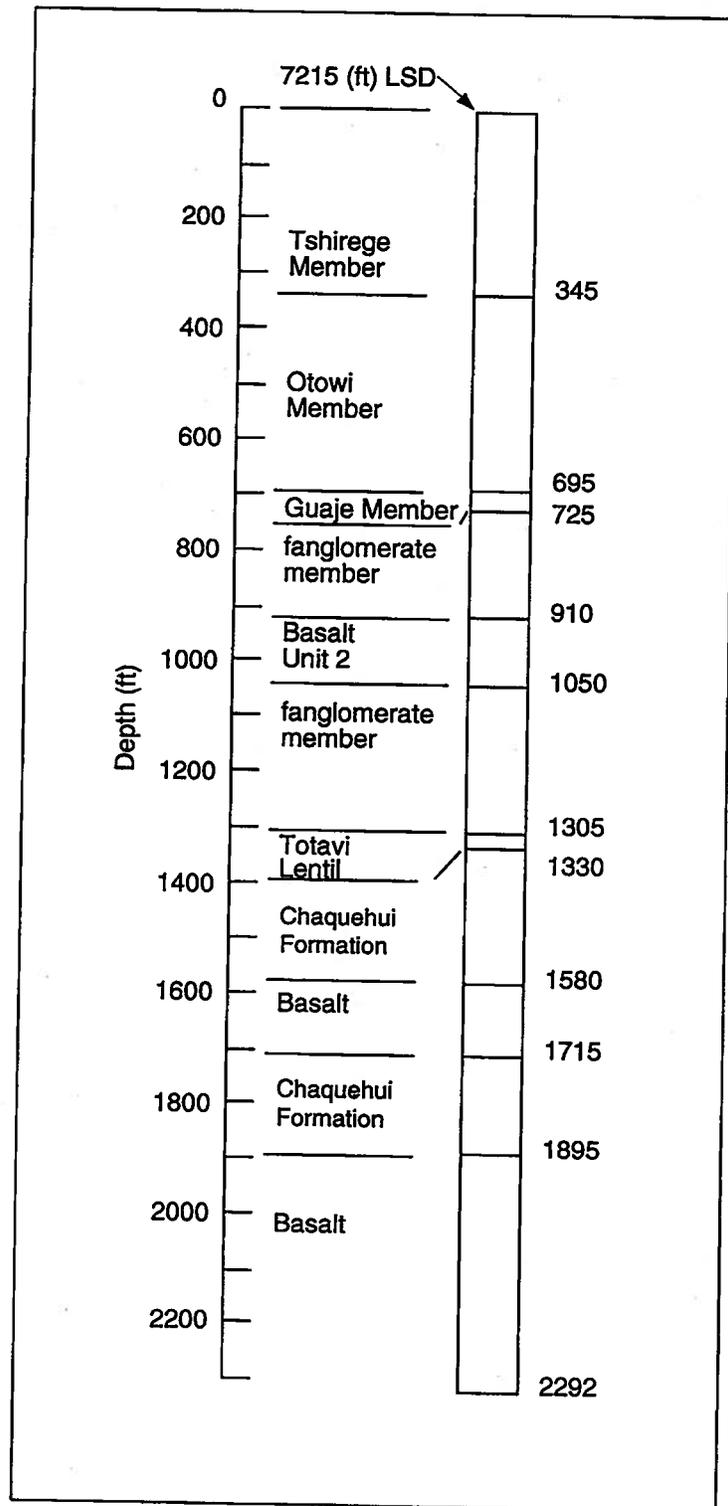


Fig. XVII-K. Geologic log of test hole Sigma Mesa, drilled July–November 1979, water level about 1330 ft (data from unpublished log by Carolyn Potzich modified by Purtymun; see text and Table XVII-B).

TABLE XVII-B. Geologic Logs and Construction Data for Test Wells and Test Holes on the Pajarito Plateau
(15 Test Wells and Test Holes) (Continued)

12. Test Hole H-19 (Continued)

Casing Schedule

10 ft of 12-in.-diam surface casing set 0 to 10 ft. Exploratory hole drilled by cable tool, casing pulled at end of tests in 1949. Hole open to 265 ft (5-7-60); to 69 ft (7-20-92).

Geophysical Log

Gamma-ray (5-7-60), files available from the ESH-18 Geohydrology section.

13A. Test Hole Sigma Mesa EGH-LA-1 (1979)

Elevation (LSD): 7215 ft LSD

| <u>Geologic Log</u> ^a | Thickness (ft) | Depth (ft) |
|--|-------------------|---------------|
| Tshirege Member Bandelier Tuff | 270 | 270 |
| Ash flow of Otowi Member | | |
| Bandelier Tuff | 430 | 700 |
| Guaje Pumice Bed | 35 | 735 |
| Puye Conglomerate with interbedded basalt | 110 | 845 |
| Aphyric Tschicoma Flow | 80 | 925 |
| Hornblende-bearing Tschicoma Flow | 45 | 970 |
| Fanglomerate member of Puye Conglomerate | 365 | 1335 |
| Totavi Lentil of the Puye Formation | 65 | 1400 |
| Chamita Formation of the Santa Fe Group | 500 | 1900 |
| Tschicoma Flow | 35 | 1935 |
| Chamita Formation of the Santa Fe Group | 60 | 1995 |
| Tschicoma Flow | 297 | 2292 |

13B. Test Hole Sigma Mesa EGH-LA-1 (1992)

Elevation (LSD): 7215 ft LSD

Water Level: 1330 ft (1979, geophysical log)

| <u>Geologic Log</u> ^b | Thickness (ft) | Depth (ft) |
|----------------------------------|-------------------|---------------|
| Bandelier Tuff | | |
| Tshirege Member | 345 | 345 |
| Otowi Member | 350 | 695 |
| Guaje Member | 30 | 725 |
| Puye Conglomerate | | |
| Fanglomerate member | 185 | 910 |
| Basalt Unit 2 | 140 | 1050 |
| Fanglomerate member | 255 | 1305 |
| Totavi Lentil | 25 | 1330 |
| Santa Fe Group | | |
| Chaquehui Formation | 250 | 1580 |
| Basalt and basalt breccias | 135 | 1715 |
| Chaquehui Formation | 180 | 1895 |
| Basalt and basalt breccias | 397 | 2292 |

^a Logged by Carolyn Potzich.

^b Revised log by W. D. Purtymun from geophysical logs, comparison with logs of nearby supply and test wells, and R. F. Smith Corp. Geothermal Data Log.

TABLE XVII-B. Geologic Logs and Construction Data for Test Wells and Test Holes on the Pajarito Plateau
(15 Test Wells and Test Holes) (Continued)

13B. Test Hole Sigma Mesa EGH-LA-1 (1992) (Continued)

Casing Schedule

Hole size: 36-in. diam to 85 ft, 26-in. diam to 2292 ft; casing size 30-in. diam to 85 ft, 20-in. diam to 1627 ft. Hole plugged with cement at about 1425 ft; unknown length of drill stem, drill collars, and bit lost in the bottom of the hole. The hole had a bad history of lost circulation throughout the entire depth drilled; large volumes of water, drilling mud, lost circulation materials, and cement were pumped into the hole. The hole was abandoned in December 1979.

Geophysical Logs

Temperature, compensated neutron-formation density; dual induction-SFL with linear correlation log; and R.F. Smith Corp. Geothermal Data Log (files available from the ESH-18 Geohydrology section).

14. Layne Western

Elevation (LSD): 5971 ft

Water Level: 100 ft (1950)

Geologic Log

| | Thickness (ft) | Depth (ft) |
|-------------------------|-------------------|---------------|
| Alluvium | 12 | 12 |
| Puye Conglomerate | | |
| Fanglomerate member | 13 | 25 |
| Totavi Lentil | 50 | 75 |
| Tesuque Formation | | |
| Siltstone and sandstone | 82 | 157 |

Casing Schedule

147 ft of 8-in.-diam casing set from 0 to 147 ft, screen from 127 to 147 ft.

15. Ski Basin Well

Elevation (LSD): 9310 ft

Water Level: 245 ft (June 1985)

Geologic Log

| | Thickness (ft) | Depth (ft) |
|---|-------------------|---------------|
| Tough sandstone (probably Tshirege Member Bandelier Tuff, welded unit) | 35 | 35 |
| Lost circulation: same formation throughout, probably Tschicoma Formation latite and rhyolite flow, water perched on interflow breccia of pebbly cobbles in a matrix of silt and clay | 365 | 400 |

Casing Schedule

392 ft of 4 1/2-in. plastic casing with perforations from 332 to 352 ft and 372 to 392 ft. Data from drillers' log.

APPENDIX G

Boreholes SHB-1, SHB-2, SHB-3 AND SHB-4

References for Appendix G Information

| Boreholes | MAP | GEOLOGIC LOG | CONSTRUCTION DIAGRAM |
|----------------------------|------|--------------|----------------------|
| SHB-1, SHB-2, SHB-3, SHB-4 | 1, 2 | 2 | not found |

1. Purtymun, W.D., 1995, Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area, Los Alamos National Laboratory Report LA-12883-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, January 1995.
2. Gardner, J.N., Kolbe, T., and Chang, S., 1993, Geology, Drilling, and Some Hydrologic Aspects of Seismic Hazard Program Boreholes, Los Alamos National Laboratory report LA-12460-MS, Los Alamos National Laboratory, New Mexico.

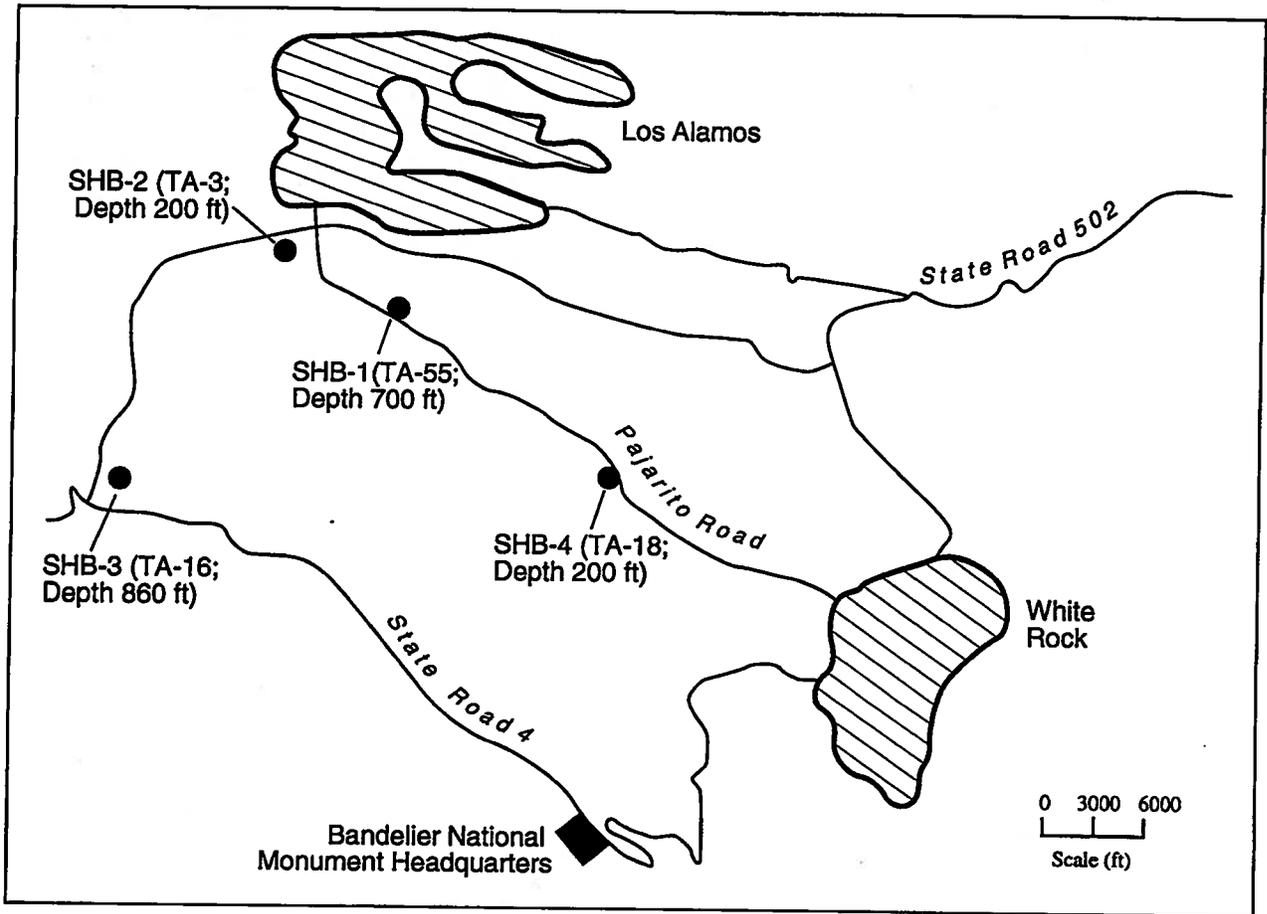


Fig. XXIII-B. Locations of test holes for seismic investigation.

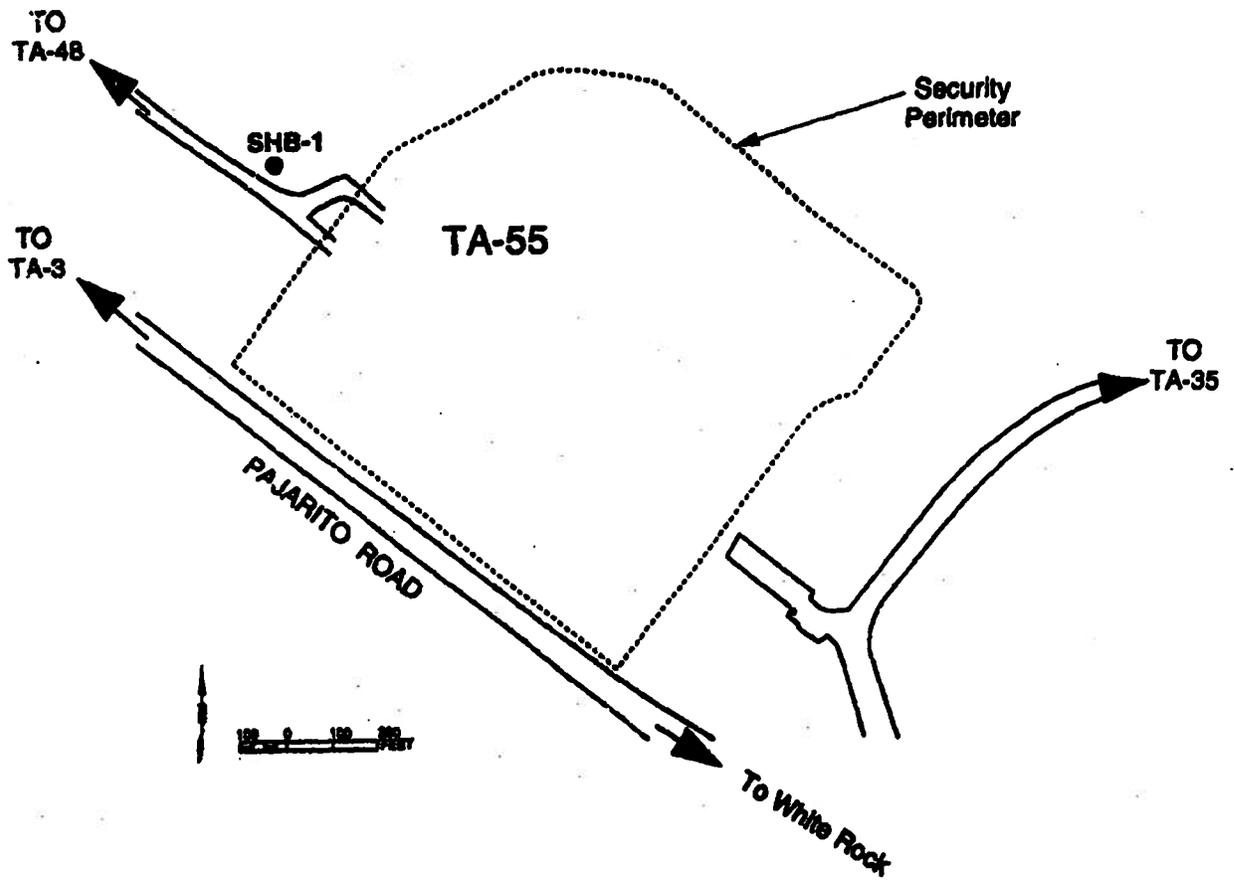


Figure 2: Map of the TA-55 area showing main roads, security perimeter, and location of core hole SHB-1.

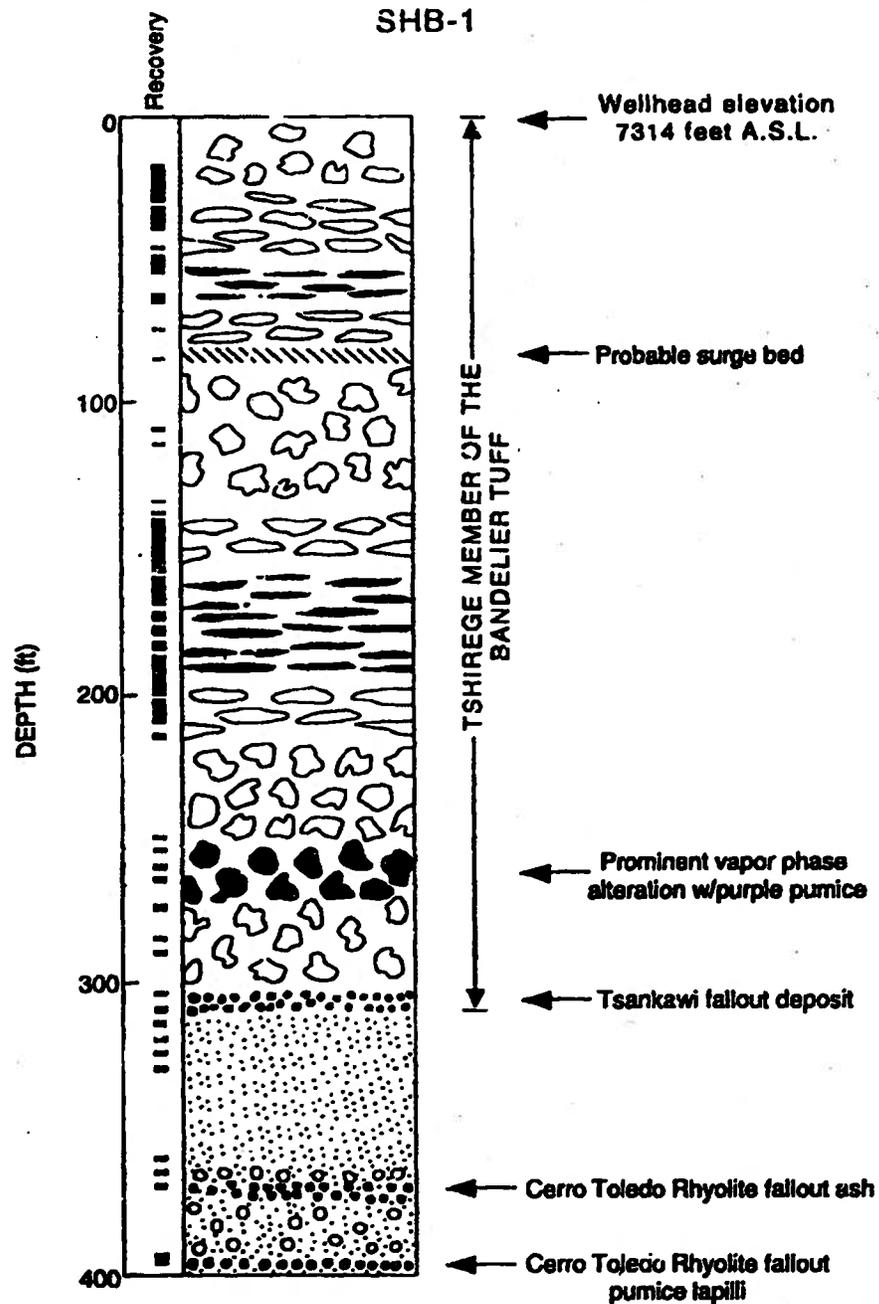


Figure 6a: Graphic lithology log for core hole SHB-1. Log is continued on next page. Black marks in recovery column indicate where core was recovered. See Table II for explanation of symbols.

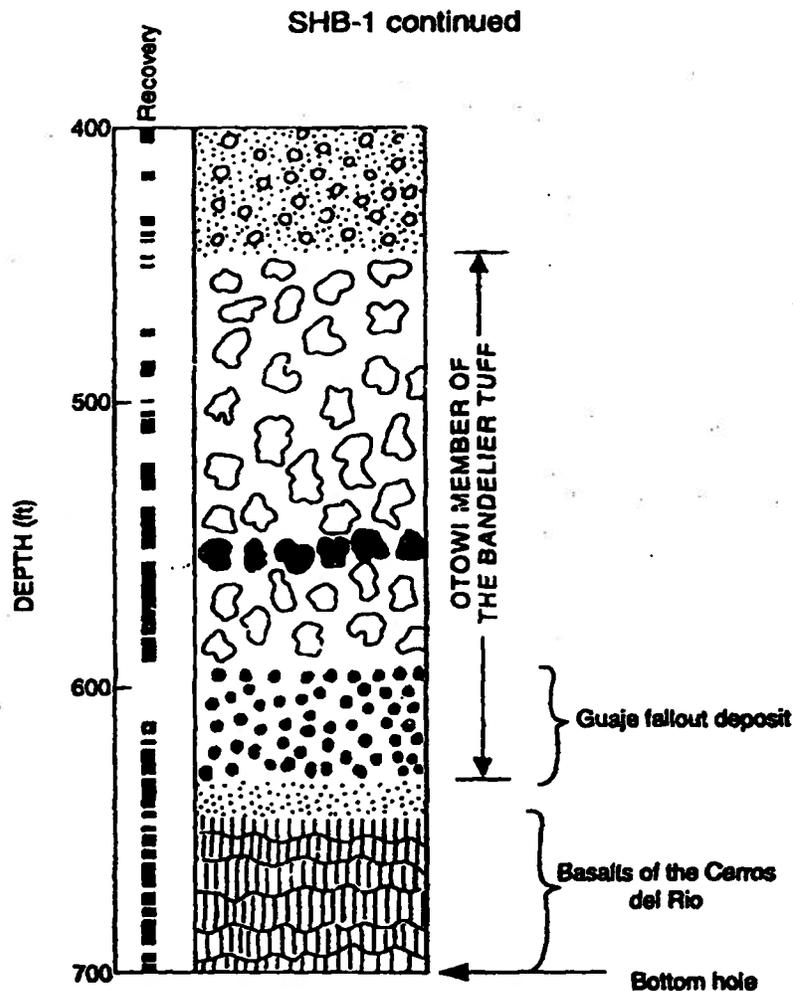


Figure 6b: Graphic lithology log for core hole SHB-1. Black marks in recovery column indicate where core was recovered. See Table II for explanation of symbols.

VI. SHB-3 (TA-16)

SHB-3 was drilled west of the new tritium facility in TA-16 (S-site) (see Figures 1 and 4) with a total drilled depth of 848 feet and an accessible depth of 860 feet (the depth discrepancy is explained below). In spite of the fact that about 70% of the section penetrated consisted of nonwelded tuff and unconsolidated sediments (Figure 8), core recovery from SHB-3 was nearly 70%, indicating both the advantages of drilling with mud and the results of lessons learned during the drilling of SHB-1.

After the hole was cored to 848 feet, the reaming operation proceeded to 790 feet with the use of a down-hole air hammer. At this point there was a breakdown on the rig and the hammer was pulled up about 40 feet to 750 feet while repairs were made. After about 45 hours from last air injection, air was resupplied to the reaming hammer to resume operations. Within a minute of the resupplying of air to the

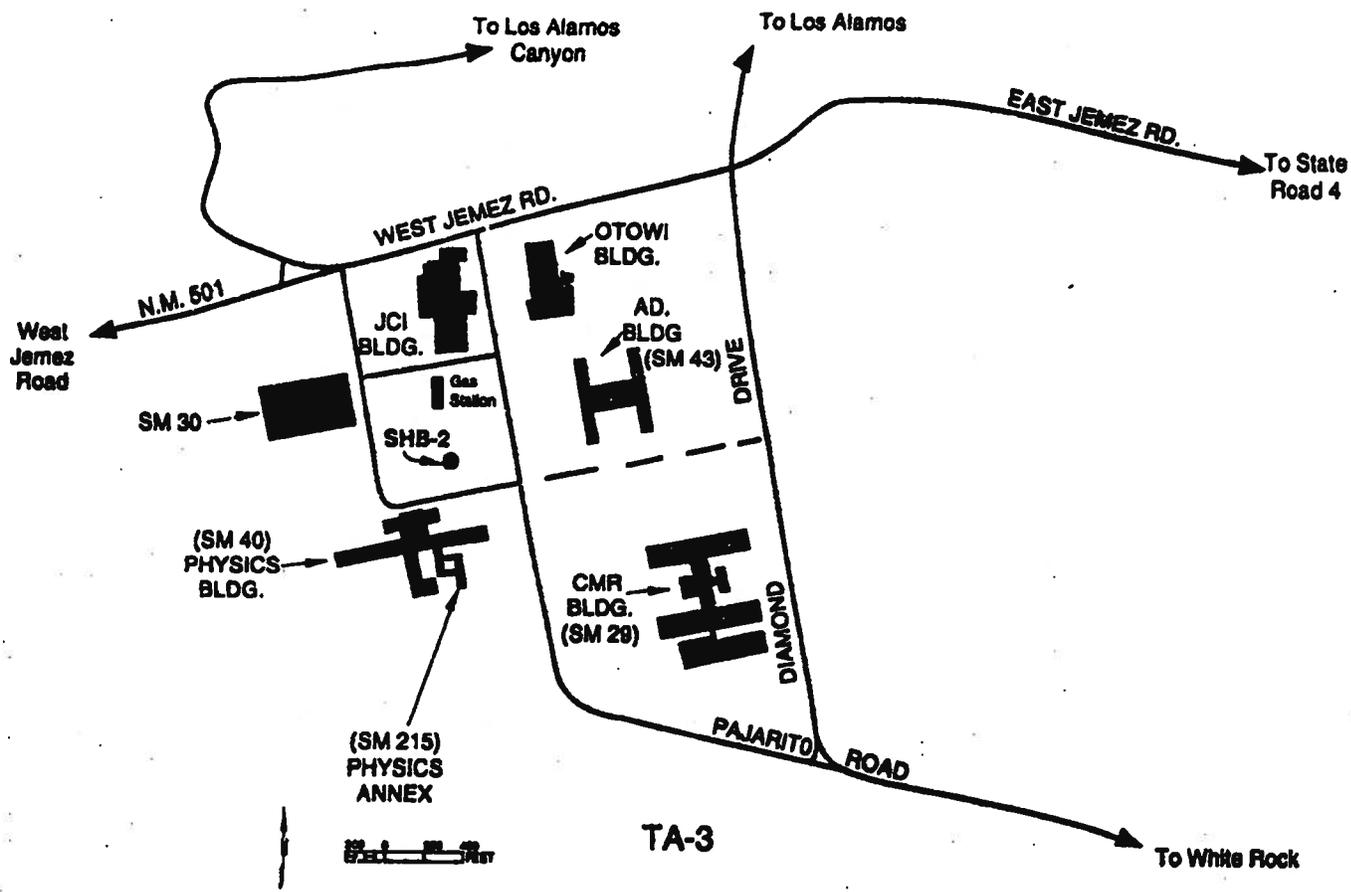


Figure 3: Map of the TA-3 area showing main roads, selected buildings, and location of core hole SHB-2.

hammer, SHB-3 erupted a spout of water at least 40 feet into the air (40 feet is the height of the derrick on the drill rig). The spout lasted for less than 10 seconds, and, while air was supplied to the down-hole hammer for the remainder of the reaming operation, SHB-3 continued to make water at a rate of about 10 to 15 gallons per minute. Reaming proceeded without further incident to 852 feet where air was supplied for about 10 more minutes after reaming to remove sand and other loose material from the hole. By this time, the discharging water was clear; furthermore, the discharge water never appeared to contain bentonite or other drilling mud additives. When the PVC casing was inserted into the core hole, it dropped to 860 feet. Apparently, the loose bottom hole material (see below) was extensively eroded during the flowing of the hole.

From the surface to about 335 feet, SHB-3 penetrates the Tshirege Member of the Bandelier Tuff. The Tshirege at this locality, closer to the caldera source, is over 95% welded tuff, most of which is densely welded (Figure 8). Cooling breaks are few, with one in the top 60 feet of the hole and another around 230 feet. From about 320 to about 335 feet core recovery was poor, but this interval apparently includes the nonwelded base of the ignimbrite and an unknown thickness of Tsankawi fallout pumice.

From roughly 335 to 424 feet is a sequence of unconsolidated sands and sandy gravels very similar to the sequence between the Tshirege and Otowi members encountered in SHB-1. Lithologically identical to the older Puye Formation, these epiclastic sediments represent alluvium shed off of the Sierra de los Valles dacite highlands to the west. Interbedded with this epiclastic sequence at about 385 to 388 feet is a coarse sand-sized pumice fall deposit. Some of the pumice contain obsidian fragments. It is likely that this pyroclastic interbed is related to the Rabbit Mountain tuff of the Cerro Toledo Rhyolite (Goff et al., 1990).

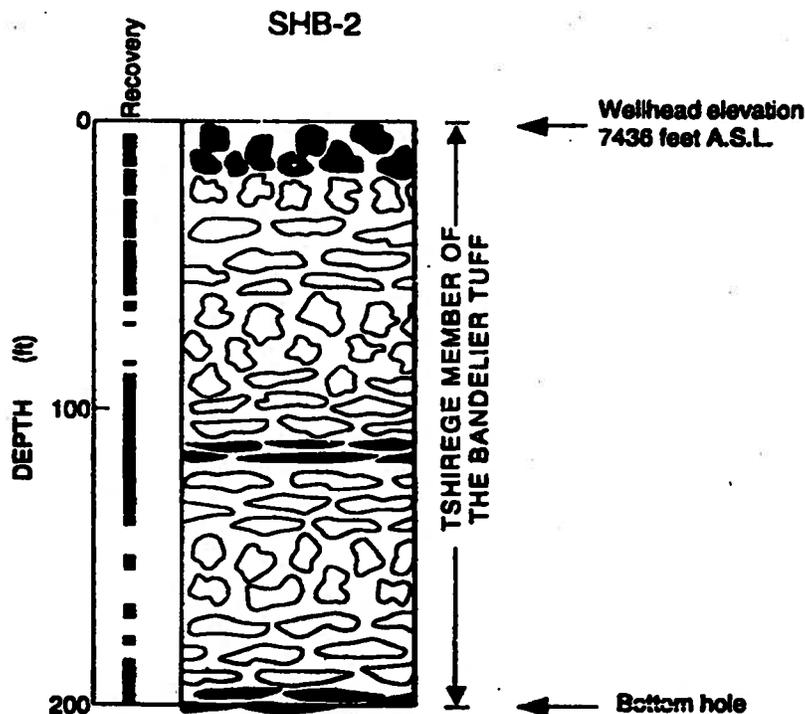


Figure 7: Graphic lithology log for core hole SHB-2. see Table II and Figure 6 for explanation of symbols.

TA-16

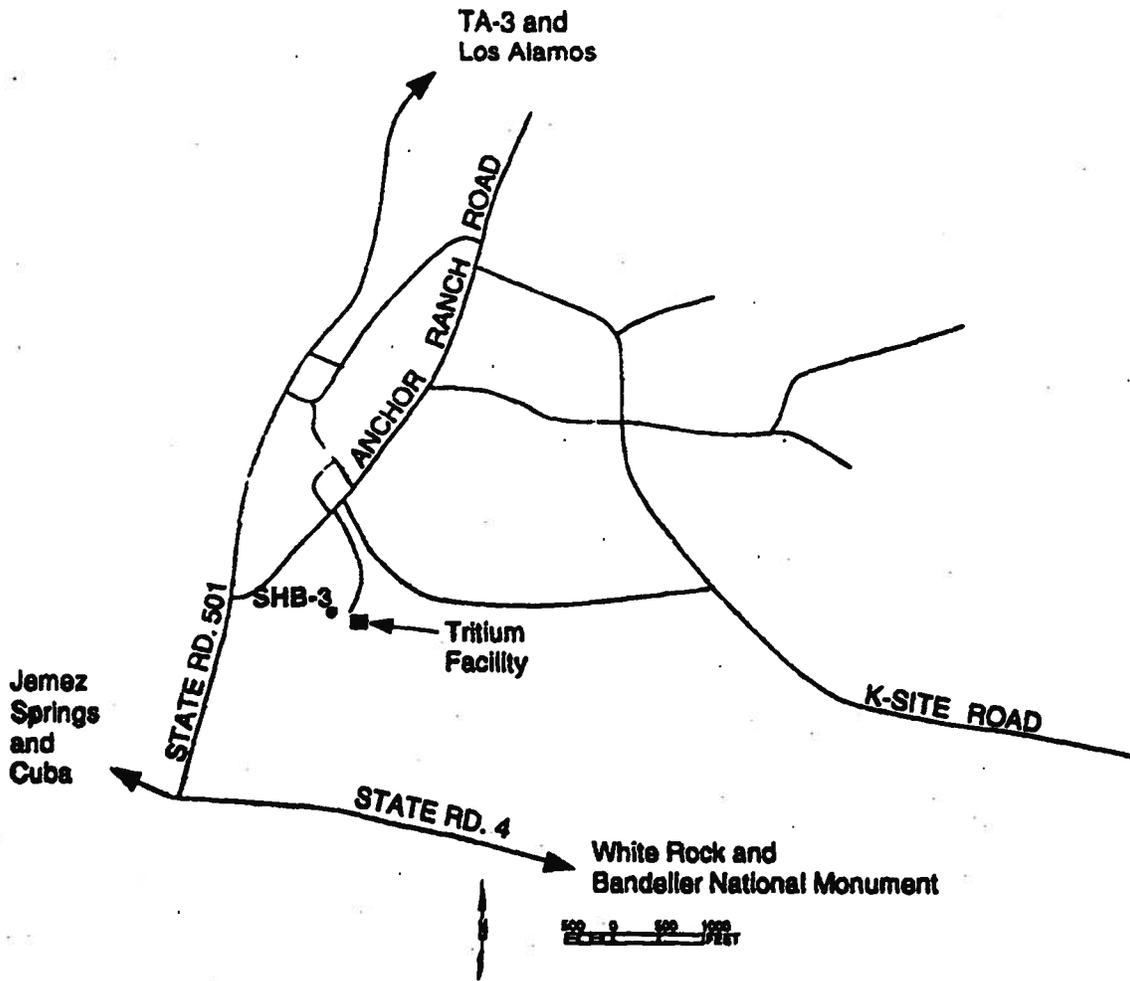


Figure 4: Map of the TA-16 area showing main roads, the Tritium Facility, and location of core hole SHB-3.

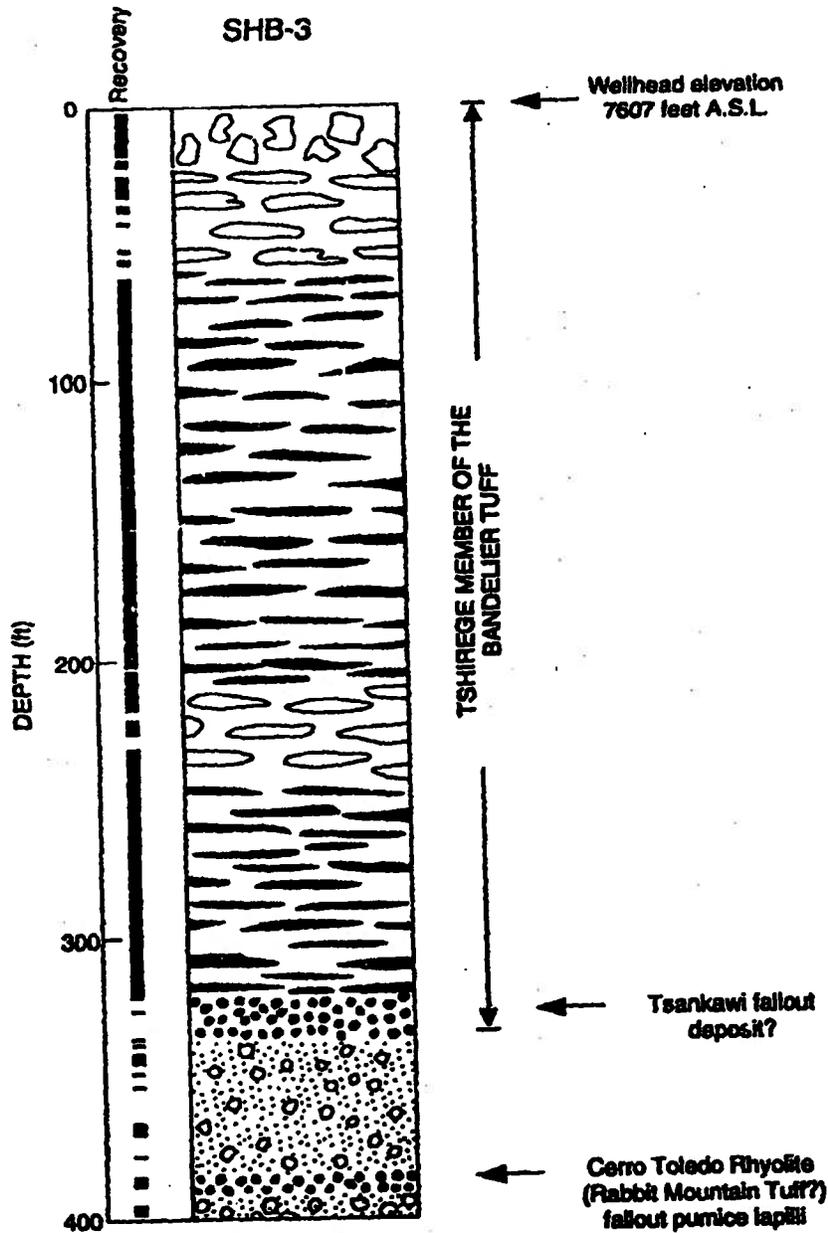


Figure 8a: Graphic lithology log for core hole SHB-3. Log is continued on next page. See Table II and Figure 6 for explanation of symbols.

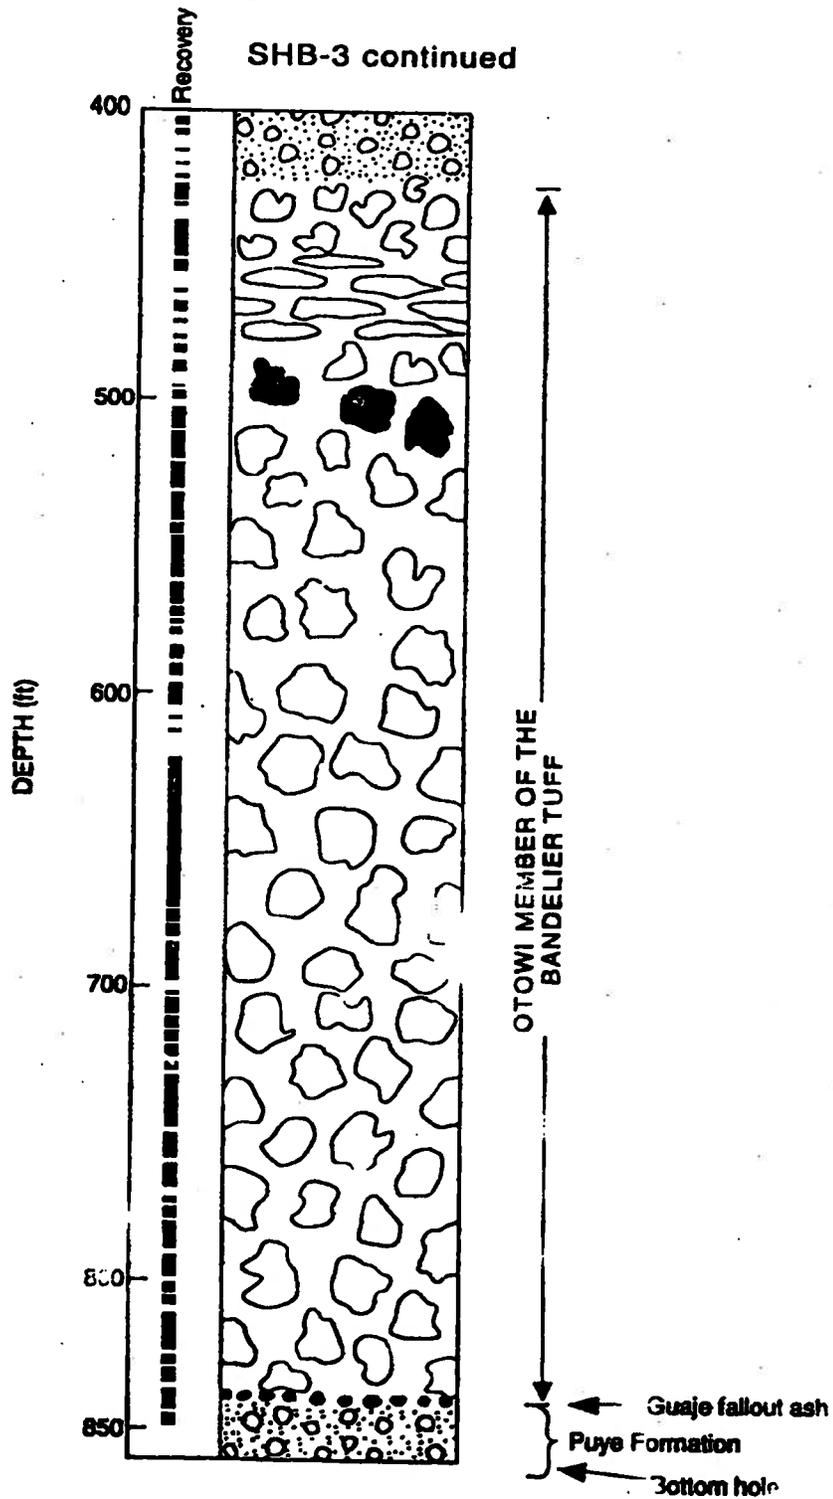


Figure 8b: Graphic lithology log for core hole SHB-3. See Table II and Figure 6 for explanation of symbols.

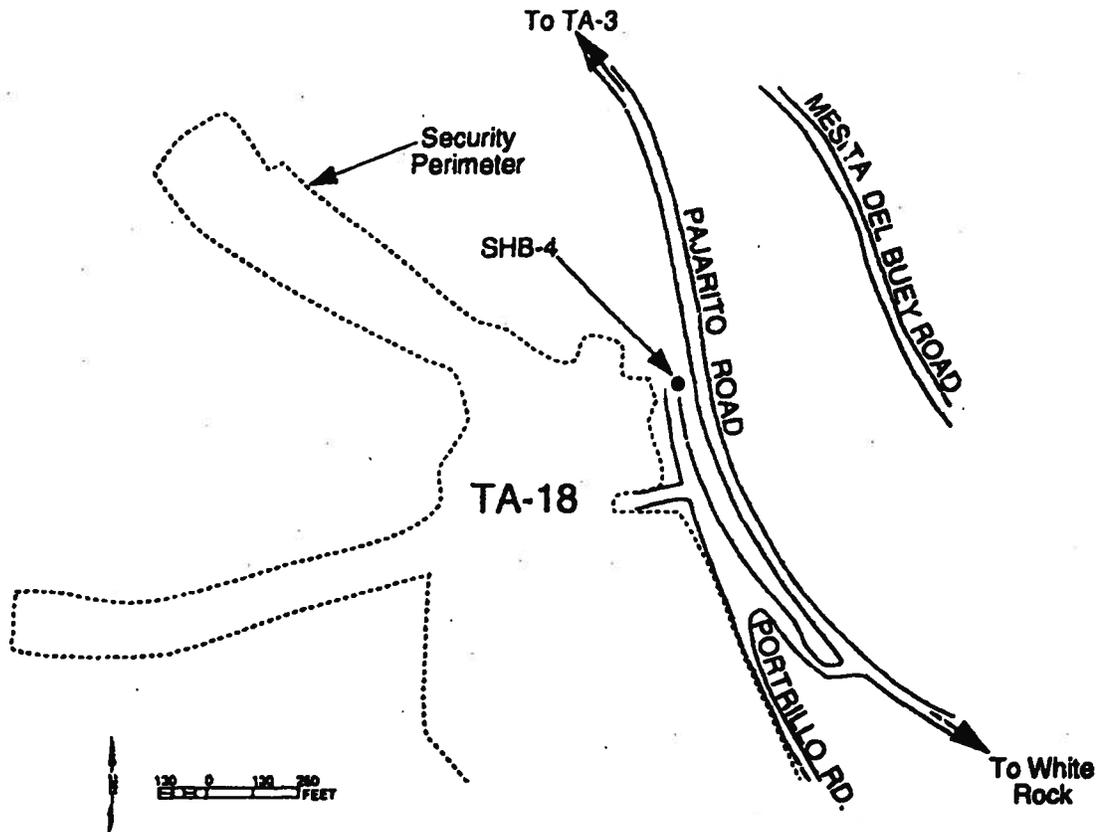


Figure 5: Map of the TA-18 area showing main roads, security perimeter, and location of core hole SHB-4.

core holes (SHB-1) penetrates basalts and related sediments of the Cerros del Rio, and another (SHB-3) penetrates sands and gravels that must, because of their lithology and stratigraphic position, be considered part of the Puye Formation.

We have avoided, in this report, use of the subdivisions of the Tshirege Member of previous workers (for example, Wier and Purtymun, 1962; Baltz et al., 1963; Crowe et al., 1978; Vaniman and Wohletz, 1990). We have done this for two main reasons: first, the units used in the aforementioned works are inconsistent; and, second, we note that the sub-units are useful only within localized areas, and without geologic mapping between these areas correlations are dubious at best. Thus, we make only the most general stratigraphic correlations, and emphasize descriptions of the rocks and deposits. Another difference in our nomenclature from that of some previous workers at the Laboratory is in our use of the term surge. Surges are a kind of pyroclastic flow that leave deposits of sorted pyroclasts which commonly exhibit bedforms typical of high energy flow regimes, such as plane beds or low-angle cross-beds. Previous workers (for example, Wier and Purtymun, 1962; Purtymun and Stoker, 1987) have called the surges of the Pajarito Plateau fluvial sandstones. However, in that the surges of the Bandelier Tuff are rather famous in the earth science community (for example, Fisher, 1979; Fisher and Schmincke, 1984), their description as sandstones should be discontinued.

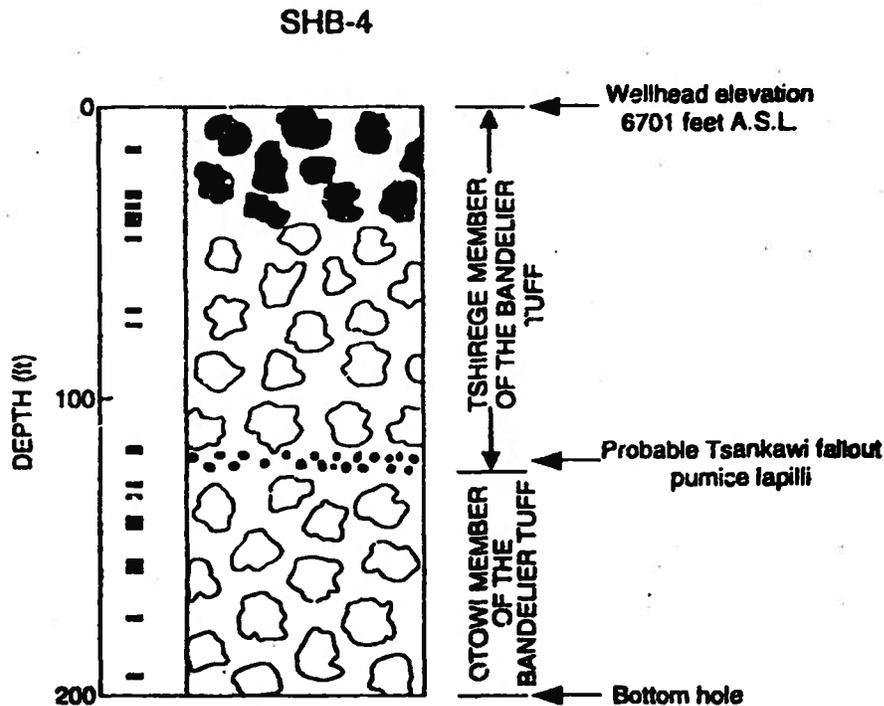


Figure 9: Graphic lithology log for core hole SHB-4. See Table II and Figure 6 for explanation of symbols.

The Otowi Member of the Bandelier Tuff extends from about 424 to 839 feet in SHB-3. It is almost entirely nonwelded tuff with a zone of slightly flattened pumices from about 450 to 480 feet.

Beneath the Otowi in SHB-3 is a sequence of sands and boulder-rich gravels that must be correlative to the Puye Formation (see Discussion, below). The cobbles and clasts of these epiclastic, alluvial deposits are dominantly dacite lithologies that can be found exposed in the Tschicoma Formation in the Sierra de los Valles immediately west of the drill site. As with the similar epiclastic deposits encountered between the Otowi and Tshirege members higher in SHB-3 and in SHB-1, the alternating unconsolidated sands and hard dacite boulders caused very difficult drilling conditions.

VII. SHB-4 (TA-18)

SHB-4 was drilled exclusively with air, north and east of entrance road to TA-18 in Pajarito canyon (see Figures 1 and 5), to a total depth of 200 feet. Core recovery was only about 12.5%, so our interpretations of stratigraphy must be considered to be constrained speculation (see Figure 9).

The top 40 feet of SHB-4 appears to penetrate nonwelded, vapor phase altered ignimbrite of the Tshirege Member. Spotty recovery from 40 to about 117 feet suggests this interval consists of nonwelded ignimbrite. At about 117 feet, the samples recovered were discrete pebble-sized pumices, which may represent a fallout deposit equivalent to the Tsankawi pumice. From about 120 to 200 feet, the remainder of SHB-4 appears to have penetrated nonwelded ignimbrite of the Otowi Member.

Cuttings and core samples from 32 to at least 125 feet came out of SHB-4 damp and moist. The core tube and rock samples from about 125 feet and 145 feet came out of the hole wet. From about 55 feet to total depth SHB-4 would steadily discharge air while drilling was stopped.

APPENDIX H

USGS Test Hole near MDA C

References for Appendix H Information

| Borehole | MAP | GEOLOGIC LOG | CONSTRUCTION DIAGRAM |
|---------------------------|-----|--------------|----------------------|
| USGS Test Hole near MDA-C | 1 | 1 | not found |

1. Purtymun, W.D., 1995, Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area, Los Alamos National Laboratory Report LA-12883-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, January 1995.

XV. U.S. GEOLOGICAL SURVEY TEST HOLE NEAR TA-52

The U.S. Geological Survey cored an experimental hole to test the use of wireline-rotary air-coring techniques in the Bandelier Tuff. A modified standard wireline core-barrel system was used. The hole was located just east of Waste Disposal Area C (Fig. XV-A). The modified equipment was used to collect uncontaminated cores of unconsolidated ash and

indurated tuff to a depth of 210 ft. Core recovery was 92%. The hole was completed to study the characteristics of the vadose zone (Table XV-A).

REFERENCE

W. E. Teasdale and R. E. Pemberton, "Wireline-Rotary Air Coring of the Bandelier Tuff, Los Alamos, New Mexico," U.S. Geol. Survey Water Resources Investigation Report 84-4176 (1984).

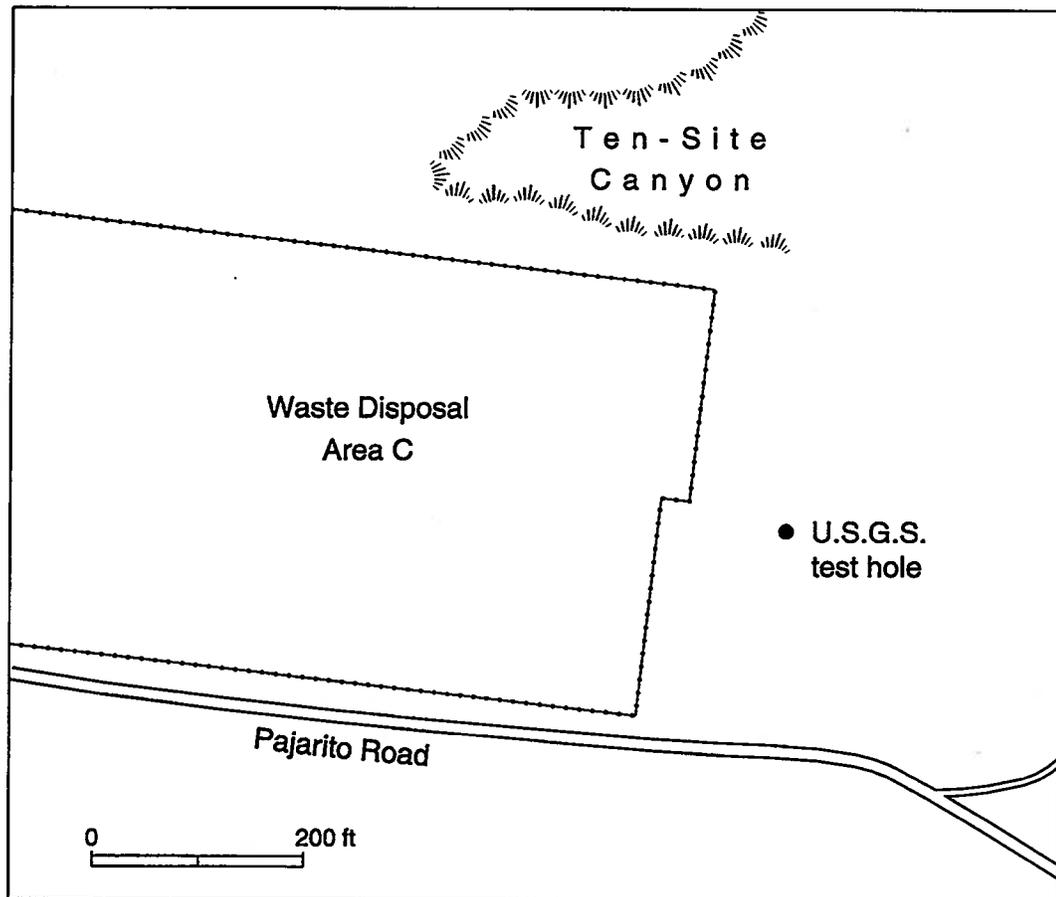


Fig. XV-A. Location of U.S. Geological Survey test hole east of Waste Disposal Area C.

**TABLE XV-A. Geologic Log and Construction Data for U.S. Geological Survey Test Hole
near Waste Disposal Area C**

Elevation (LSD) 7220 ft

Drilled: September 1983

Water Level: Dry

| <u>Geologic Log</u> | <u>Thickness (ft)</u> | <u>Depth (ft)</u> |
|--|---------------------------|-----------------------|
| Bandelier Tuff | | |
| Tshirege Member | | |
| Unit 3, light gray moderately welded tuff | 110 | 110 |
| Unit 2, dark gray welded tuff | 100 | 210 |

Construction

Completed as a vadose monitoring test hole.

Screen 1 190 to 195 ft

Screen 2 140 to 145 ft

Screen 3 105 to 110 ft

Screen 4 78 to 83 ft

Screen 5 50 to 55 ft.

Screen 6 25 to 30 ft

Instruments were set in screen sections, each section of screen sealed off with a mixture of grout (cement) and dry cuttings. Surface to 22 ft sealed with cement. Heat dissipation probe set in cuttings 118 to 122 ft. Electrical leads extend from instruments in screen section to land surface.

Geophysical Logs

Bulk density, neutron, gamma-ray, and caliper. Files available from the ESH-18 Geohydrology section.

TABLE XV-B. Locations and Elevations (NAD 1927)

| | | | |
|------------|-------------|-----------|---------|
| U.S.G.S.TH | N 1,768,500 | E 486,500 | 7220 ft |
|------------|-------------|-----------|---------|

APPENDIX I

Wells and Boreholes at TA-49

References for Appendix I Information

| Well Or Borehole at TA-49 (>10 ft deep) | MAP | GEOLOGIC LOG | CONSTRUCTION DIAGRAM | OTHER |
|---|-----|---|----------------------|---|
| Moisture Access Holes | 5 | not found | not found | na |
| Shafts-Areas 1, 2, 2A, 2B, 3, 4 | 2 | See logs for coreholes drilled in each area (CHs 1-4) | not found | na |
| Area 11 - 13 shafts | 2 | not found | not found | na |
| Bottle House shaft | 7 | not found | not found | na |
| Alpha Hole | 5 | 3 | P&A'd | Borehole abandonment description - 1 |
| Beta Hole | 5 | 3 | not found | na |
| Gamma Hole | 5 | 3 | P&A'd | Borehole abandonment description - 1 |
| DT-5 | 5 | 5 | P&A'd | na |
| DT-5P | 5 | 3 | P&A'd | na |
| DT-5A | 5 | 3 | 3 | na |
| DT-9 | 5 | 3 | 3 | na |
| DT-10 | 5 | 3 | 3 | na |
| CH-1, CH-2, CH-3, CH-4 | 5 | 3 | not found | na |
| TH-1, TH-2, TH-3, TH-5 | 5 | 5 | not found | Neutron logs for THs 1-5 – 4; Moisture logs for all Test Holes - 4 |
| 2A-O, 2A-Y, 2B-Y | 2 | See CH-2 log | not found | na |
| TBM-1, TBM-2 | 5 | 5 | 5 | Construction diagrams - 5 |
| 49-02901 | 7 | 6 | not found | na |
| 49-02906 | 2 | not found | P&A'd | na |
| 49-02907 | 2 | not found | P&A'd | na |
| 49-10046 | 3 | not found | not found | na |
| 49-10047 | 3 | not found | not found | na |
| 49-10048 | 3 | not found | not found | na |

1. Los Alamos National Laboratory, 2005, Annual Moisture Monitoring Report for Material Disposal Area AB at Technical Area 49, Los Alamos National Laboratory report LA-UR-05-8256, Los Alamos National Laboratory, Los Alamos, New Mexico, 2005.

2. Los Alamos National Laboratory, 2007, Historical Investigation Report for Sites at Technical Area 49 Inside the Nuclear Environmental Site Boundary, Los Alamos National Laboratory report LA-UR-07-6078, Los Alamos National Laboratory, Los Alamos, New Mexico, October 2007.

3. Los Alamos National Laboratory, 2008, Investigation Work Plan for Sites at Technical Area 49 Outside the Nuclear Environmental Site Boundary, Revision 1, Los Alamos National Laboratory report LA-UR-08-0449, Los Alamos National Laboratory, Los Alamos, New Mexico, January 2008.

4. Purtymun, W.D., 1994, Source Document Compilation: Los Alamos Investigations Related to the Environment, Engineering, Geology, and Hydrology, 1961- - 1990. Los Alamos National Laboratory Report LA-12733-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, January 1994.

5. Purtymun, W.D., 1995, Geologic and Hydrologic Records of Observation Wells, Test Holes, Test Wells, Supply Wells, Springs, and Surface Water Stations in the Los Alamos Area, Los Alamos National Laboratory Report LA-12883-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, January 1995.

6. Stimac, J.A., D.E. Broxton, E.C. Kluk, and S.J. Chipera, 2002, Stratigraphy of the tuffs from Borehole 49-2-700-1 at Technical Area 49, Los Alamos National Laboratory, New Mexico, Los Alamos National Laboratory report LA-13969-MS, Los Alamos National Laboratory, Los Alamos, New Mexico, July 2002.

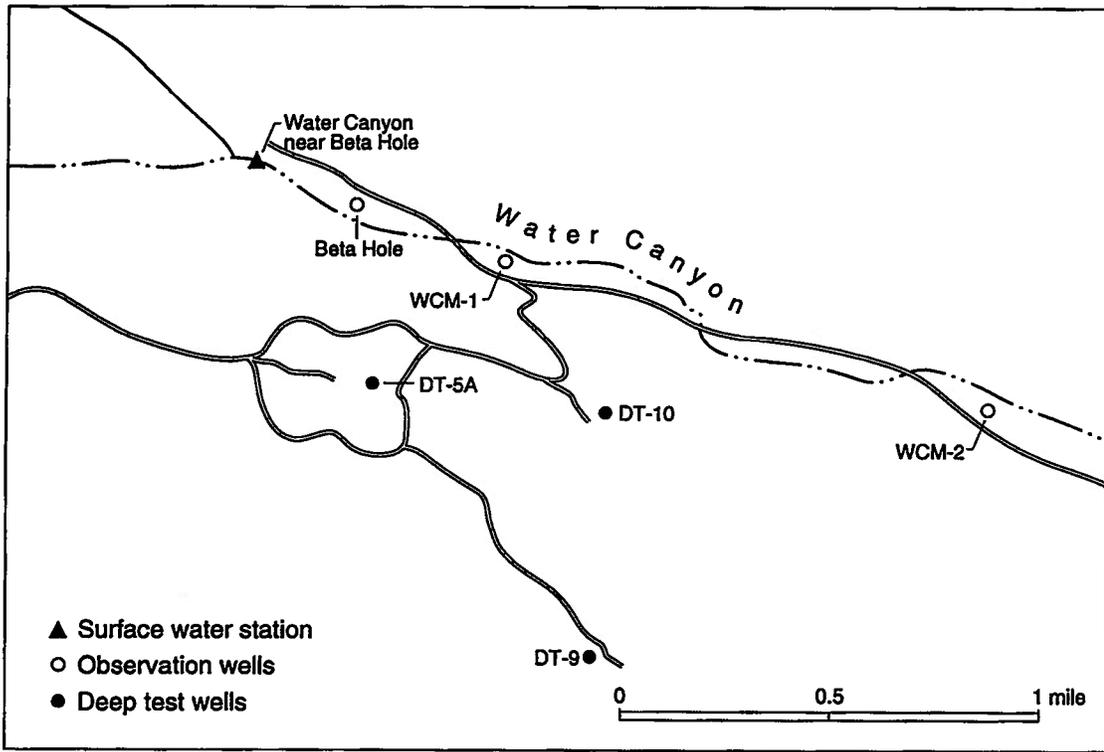


Fig. IX-U. Locations of wells, holes, and a surface water sampling station in Water Canyon north of TA-49.

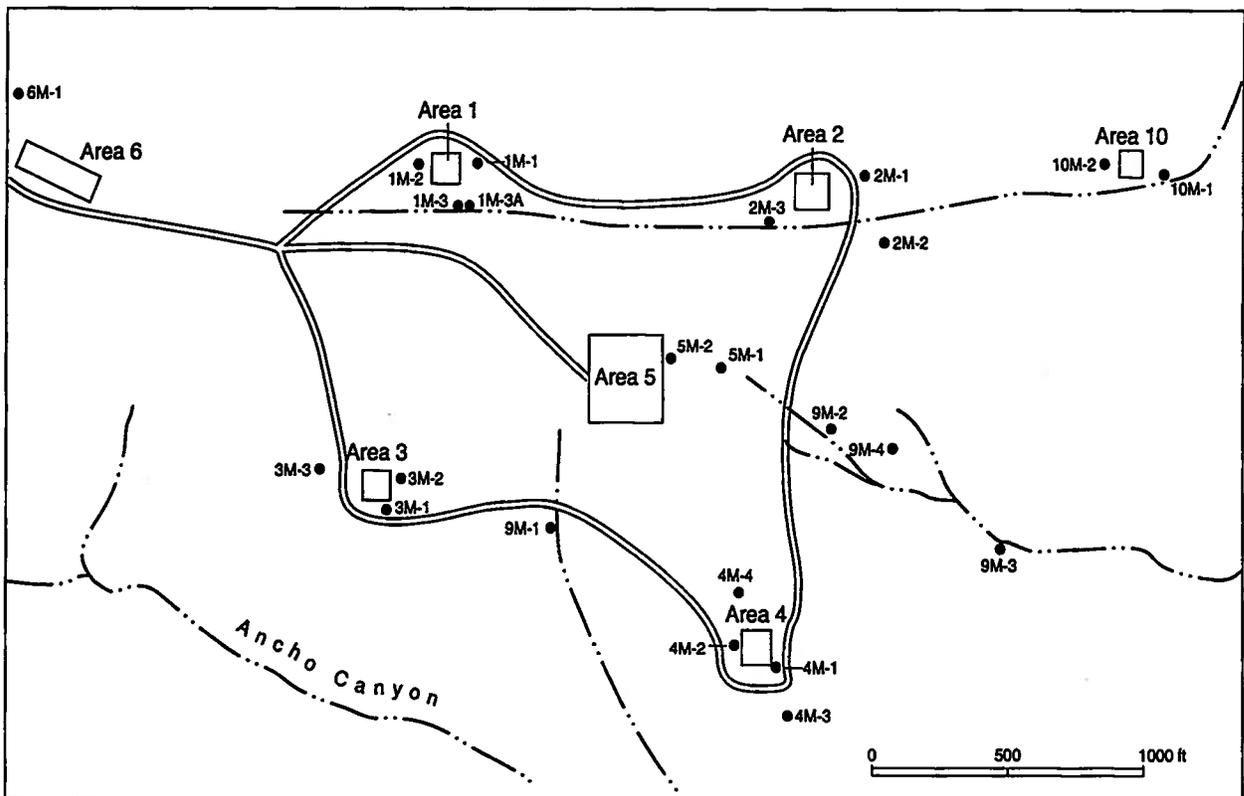


Fig. IX-V. Locations of moisture-access holes at TA-49.

| | | | |
|------------------------------------|--|--|--|
| TA-49 Weir and Purtymun 1962 | | Mortandad Canyon Baltz et al. 1963 | |
| Unit 6 | | Unit 3 | |
| Unit 5 | | Unit 2B | |
| Unit 4 | | Unit 2A | |
| Unit 3 | | Unit 1B | |
| Unit 2 | | Unit 1A | |
| Unit 1B | | | |
| Unit 1A | | | |
| Otowi Member | | Otowi Member | |

Fig. IX-B. Correlation of the units of the Tshirege Member of the Bandelier Tuff at TA-49 with the type section in Mortandad Canyon.

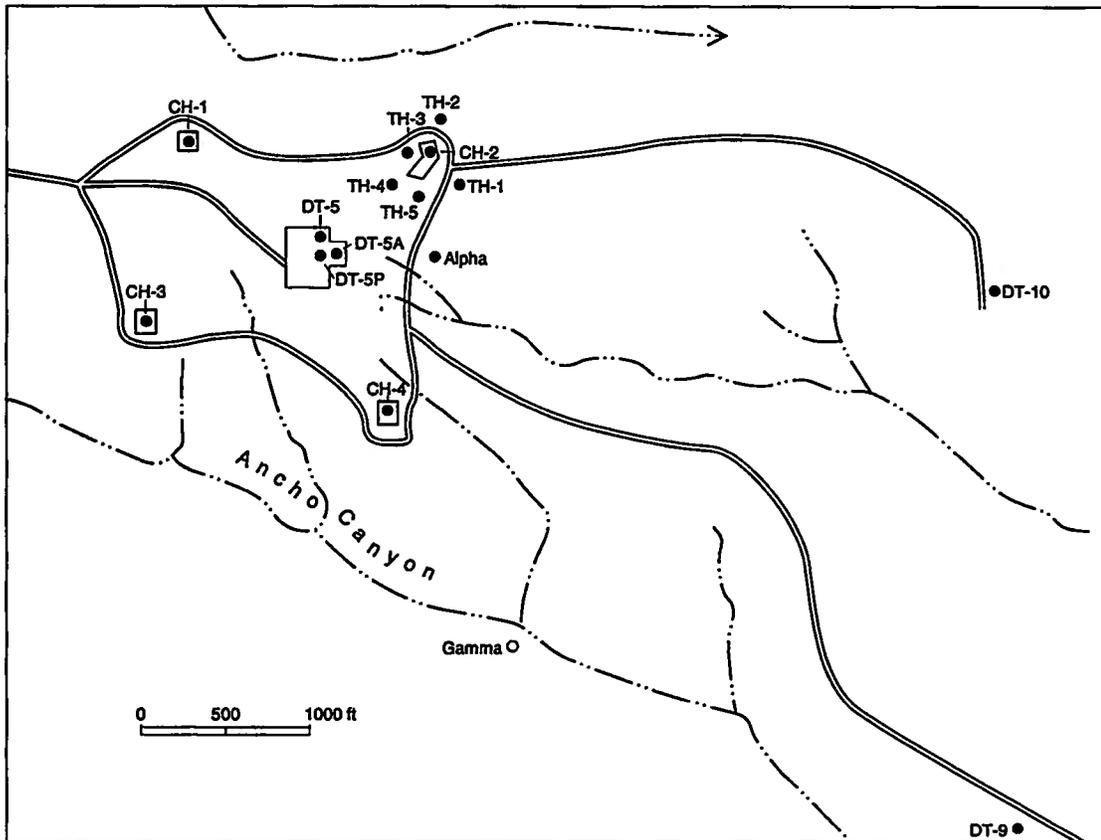


Fig. IX-C. Location of deep test wells (DT-series), core holes (CH-series), and test holes (TH-series) (Purtymun 1994).


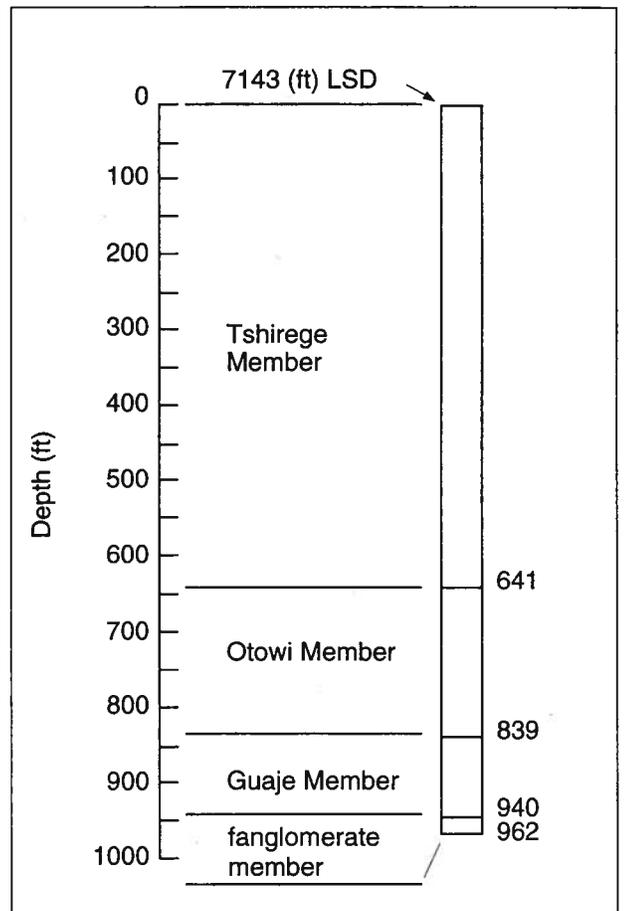



Fig. IX-E. Geologic log of test hole DT-5, completed November 1959, dry (Weir and Purtymun 1962).

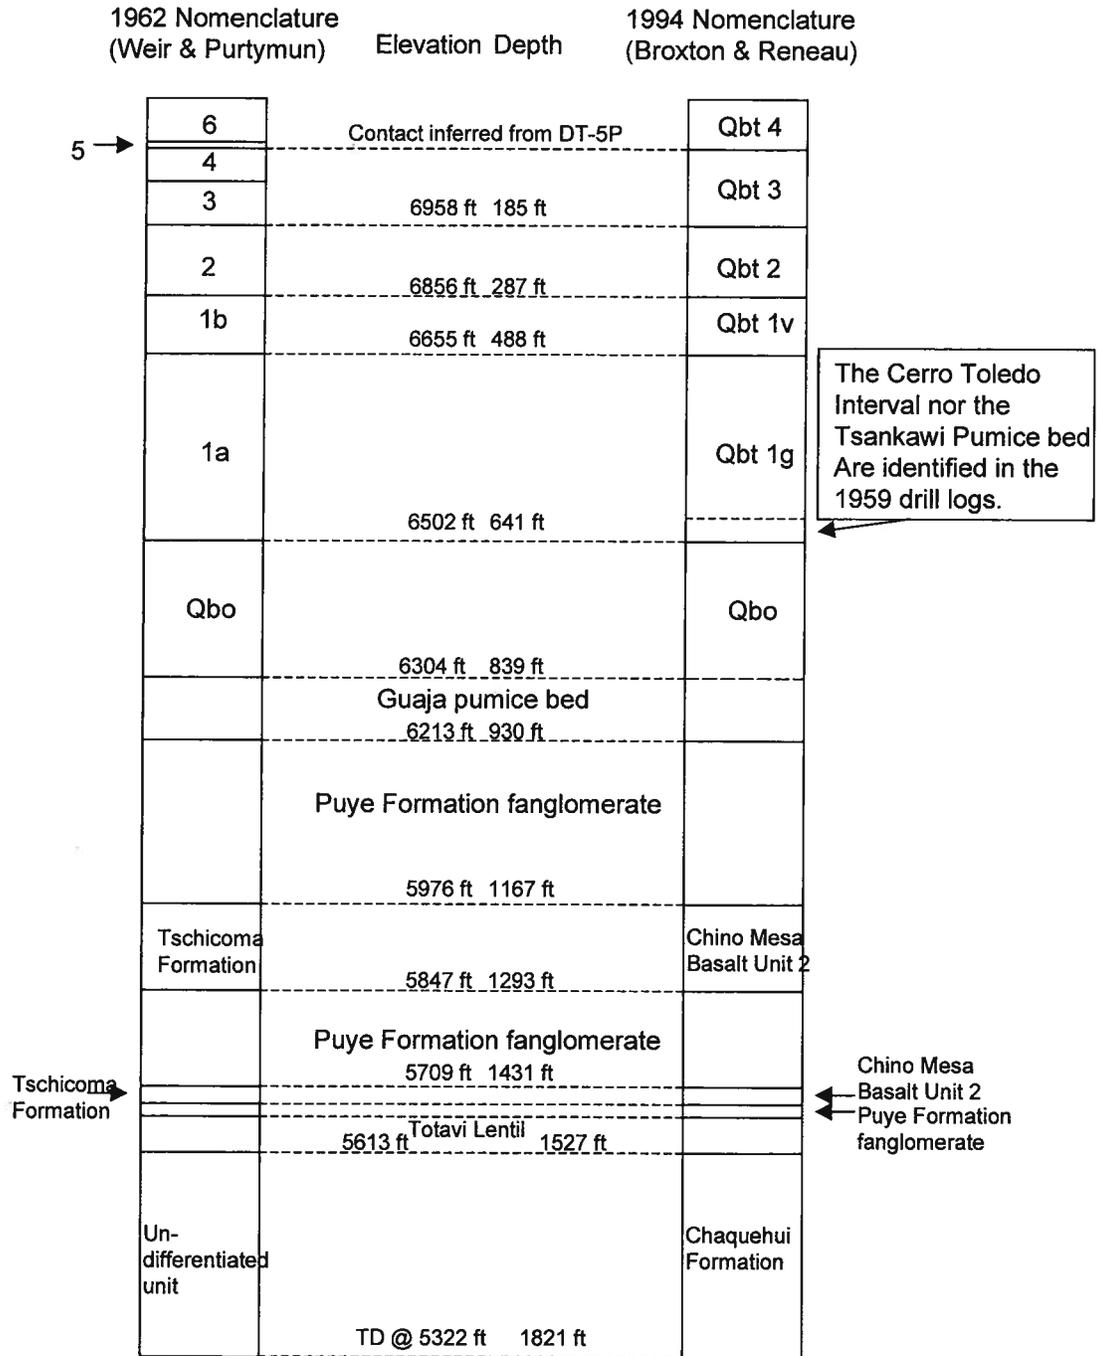

DT-5A

Adapted from Weir and Purtymun (1962, 011890) and Broxton and Reneau (1995, 049726)

Figure 3.2-2 Stratigraphic units of DT-5A

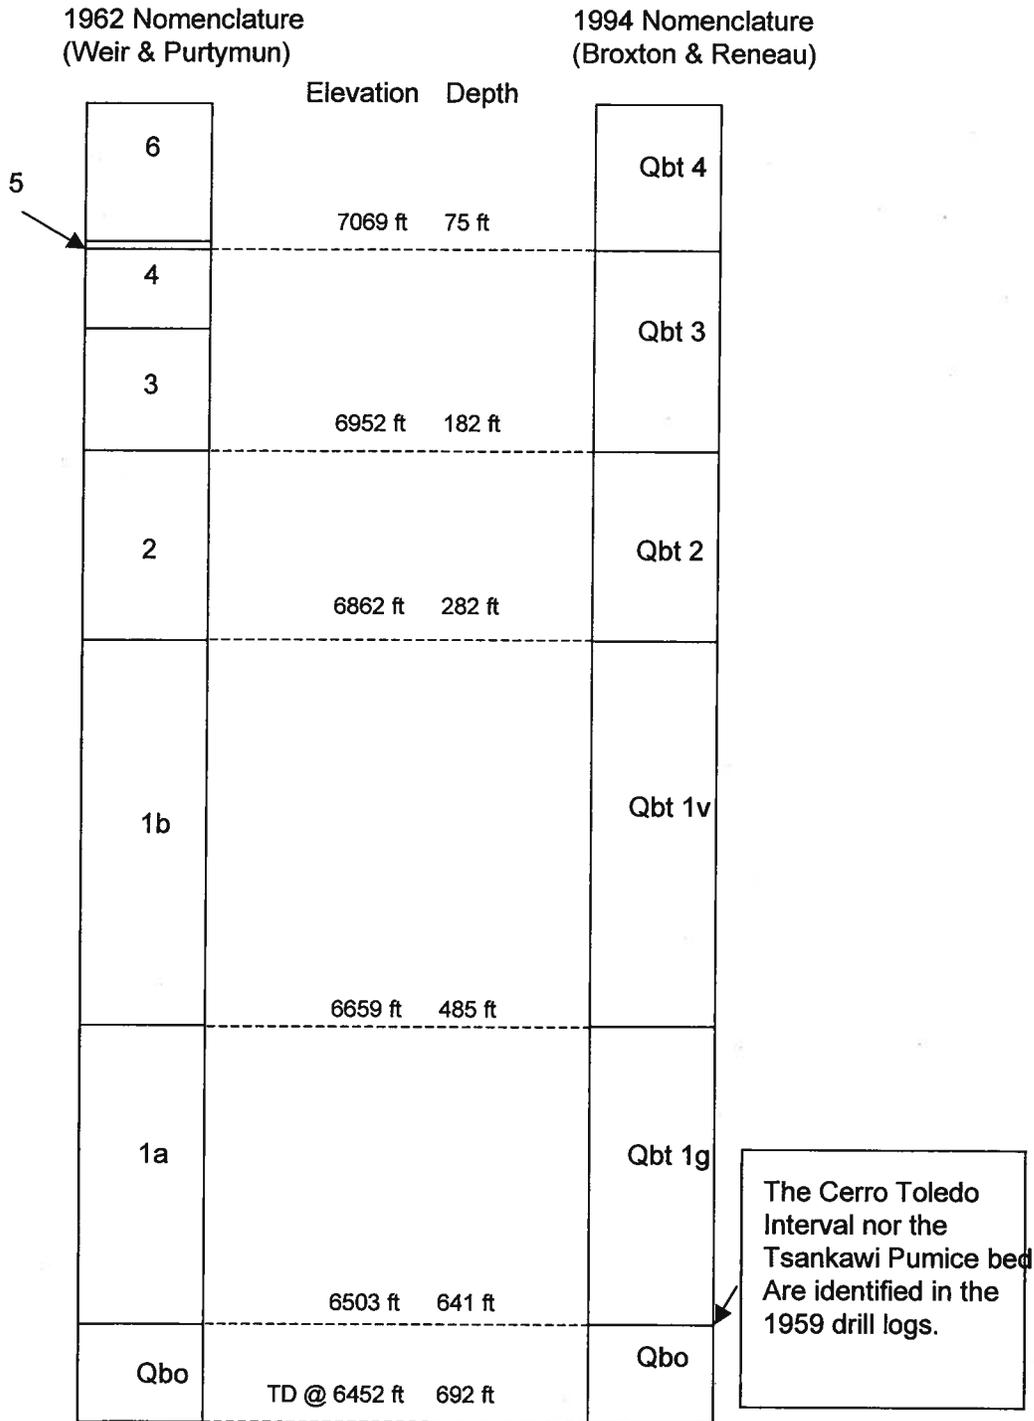

DT-5P

Adapted from Weir and Purtymun (1962, 011890) and Broxton and Reneau (1995, 049726)

Figure 3.2-3 Stratigraphic units of DT-5P

1962 Nomenclature (Weir & Purtymun) Elevation Depth 1994 Nomenclature (Broxton & Reneau)

| | | |
|------------------------|-----------------------------|--------------------------|
| 4 | | Qbt 3 |
| 3 | 6821 ft - 114 ft | |
| 2 | 6723 ft - 212 ft | Qbt 2 |
| 1b | | Qbt 1v |
| | 6475 ft - 460 ft | |
| 1a | | Qbt 1g |
| | 6261 ft - 676 ft | |
| Qbo | | Qbo |
| | 6135 ft - 802 ft | |
| | Guaja pumice bed | |
| | Puye Formation fanglomerate | |
| | 6013 ft - 924 ft | |
| Tschicoma Formation | | Chino Mesa Basalt Unit 2 |
| | 5775 ft - 1162 ft | |
| | Puye Formation fanglomerate | |
| | 5618 ft - 1319 ft | |
| | Totavi Lentil | |
| Un-differentiated unit | | Chaquehui Formation |
| | TD @ 5436 ft - 1501 ft | |

The Cerro Toledo Interval nor the Tsankawi Pumice bed Are identified in the 1960 drill logs.



DT-9

Adapted from Weir and Purtymun (1962, 011890) and Broxton and Reneau (1995, 049726)

Figure 3.2-4 Stratigraphic units of DT-9

1962 Nomenclature (Weir & Purtymun) Elevation Depth 1994 Nomenclature (Broxton & Reneau)


| 1962 Nomenclature (Weir & Purtymun) | Elevation | Depth | 1994 Nomenclature (Broxton & Reneau) |
|-------------------------------------|-----------------------------|---------|--------------------------------------|
| 6 | 6990 ft | 30 ft | Qbt 4 |
| 4 | | | Qbt 3 |
| 3 | 6868 ft | 152 ft | Qbt 2 |
| 2 | 6791 ft | 236 ft | Qbt 1v |
| 1b | | | Qbt 1g |
| | 6543 ft | 477 ft | |
| 1a | | | Qbo |
| | 6347 ft | 673 ft | |
| Qbo | | | Qbo |
| | 6190 ft | 829 ft | |
| | Guaja pumice bed | | |
| | Puye Formation fanglomerate | | |
| | 6047 ft | 927 ft | |
| Tschicoma Formation | | | |
| Chino Mesa Basalts | | | Chino Mesa Basalt Unit 2 |
| | 5738 ft | 1291 ft | |
| | Puye Formation fanglomerate | | |
| | 5663 ft | 1356 ft | |
| | Totavi Lentil | | |
| | 5610 ft | 1409 ft | |

The Cerro Toledo Interval nor the Tsankawi Pumice bed Are identified in the 1960 drill logs.

DT-10


Adapted from Weir and Purtymun (1962, 011890) and Broxton and Reneau (1995, 049726)

Figure 3.2-5 Stratigraphic units of DT-10

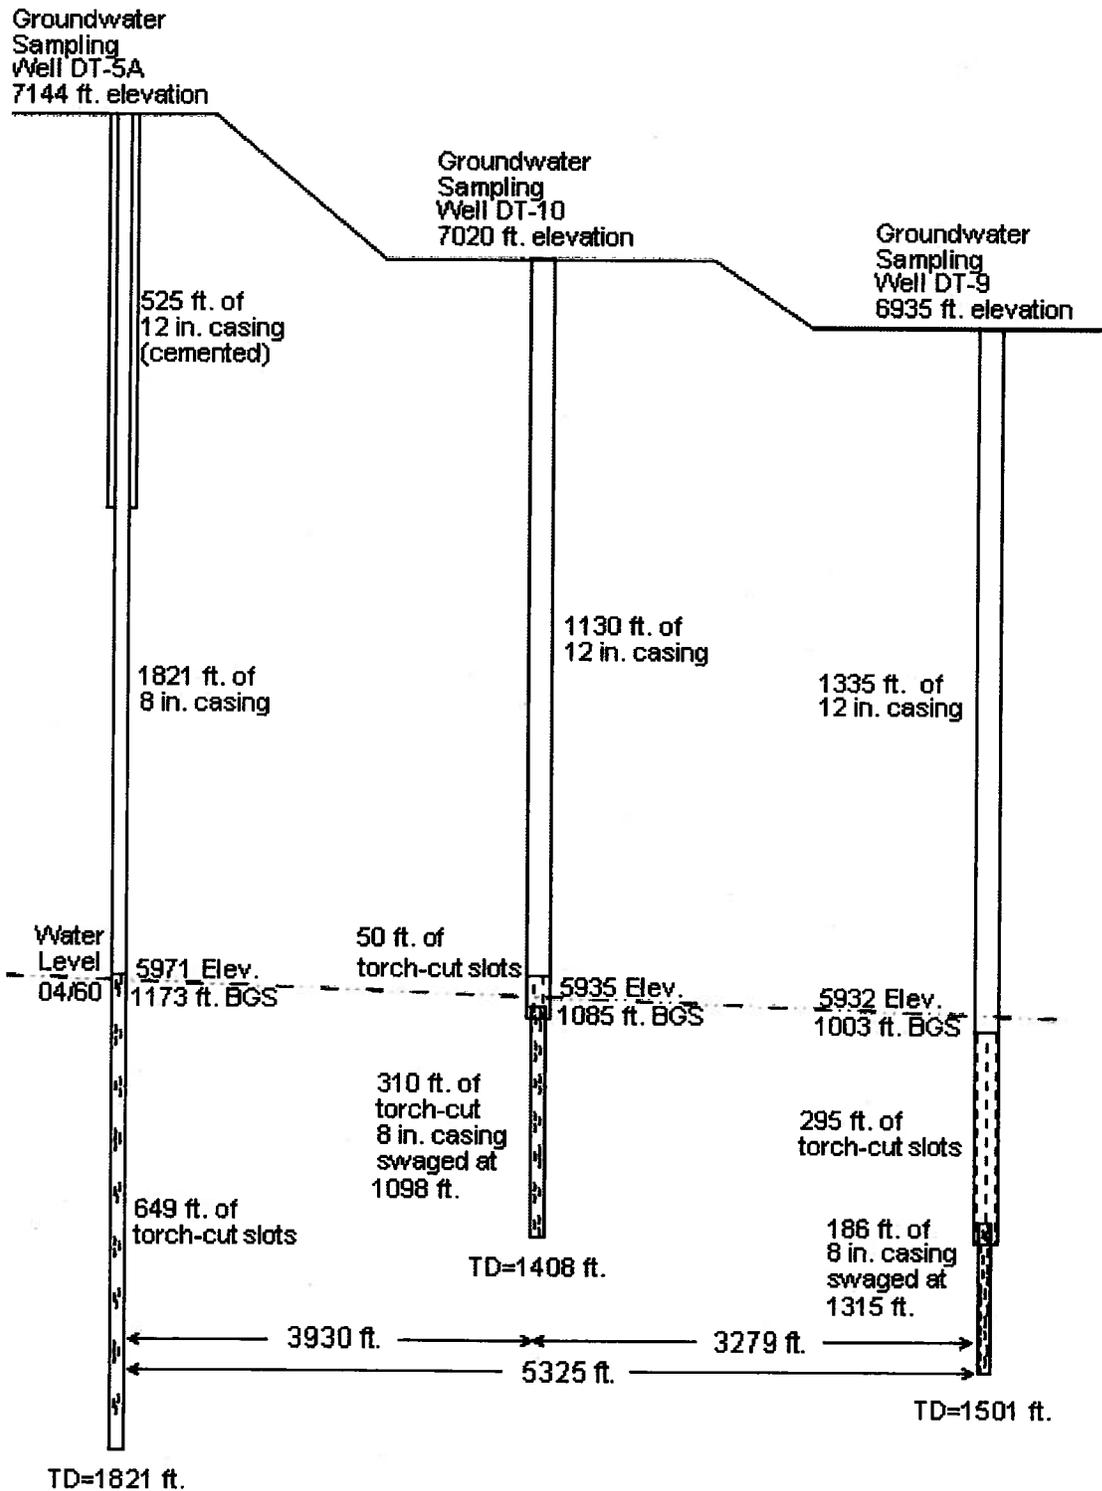

Adapted from Weir and Purtymun (1962, 011890)


Figure 3.3-3 Construction details for groundwater wells DT-5A, DT-10, and DT-9

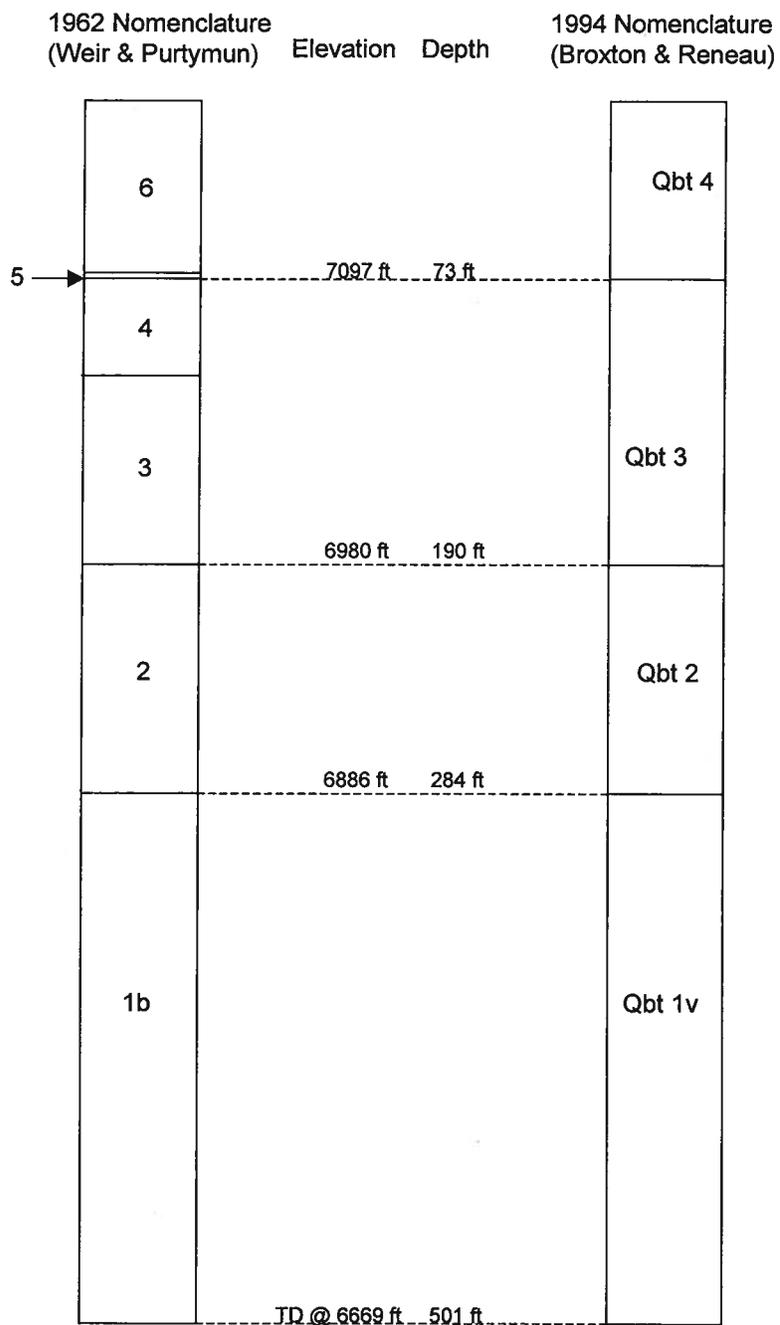

Core hole -1

Adapted from Weir and Purtymun (1962, 011890) and Broxton and Reneau (1995, 049726)


Figure 3.2-6 Stratigraphic units of CH-1

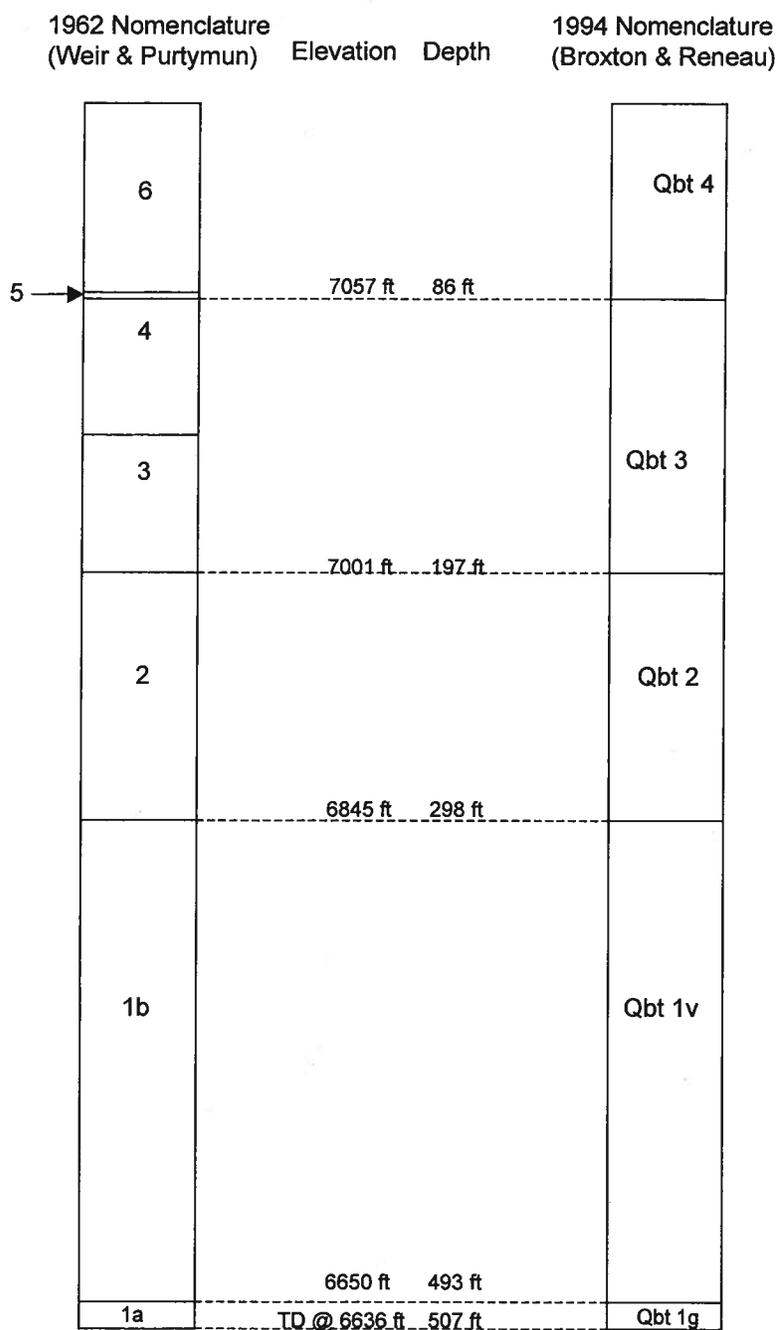

Core hole -2

Adapted from Weir and Purtymun (1962, 011890) and Broxton and Reneau (1995, 049726)


Figure 3.2-7 Stratigraphic units of CH-2

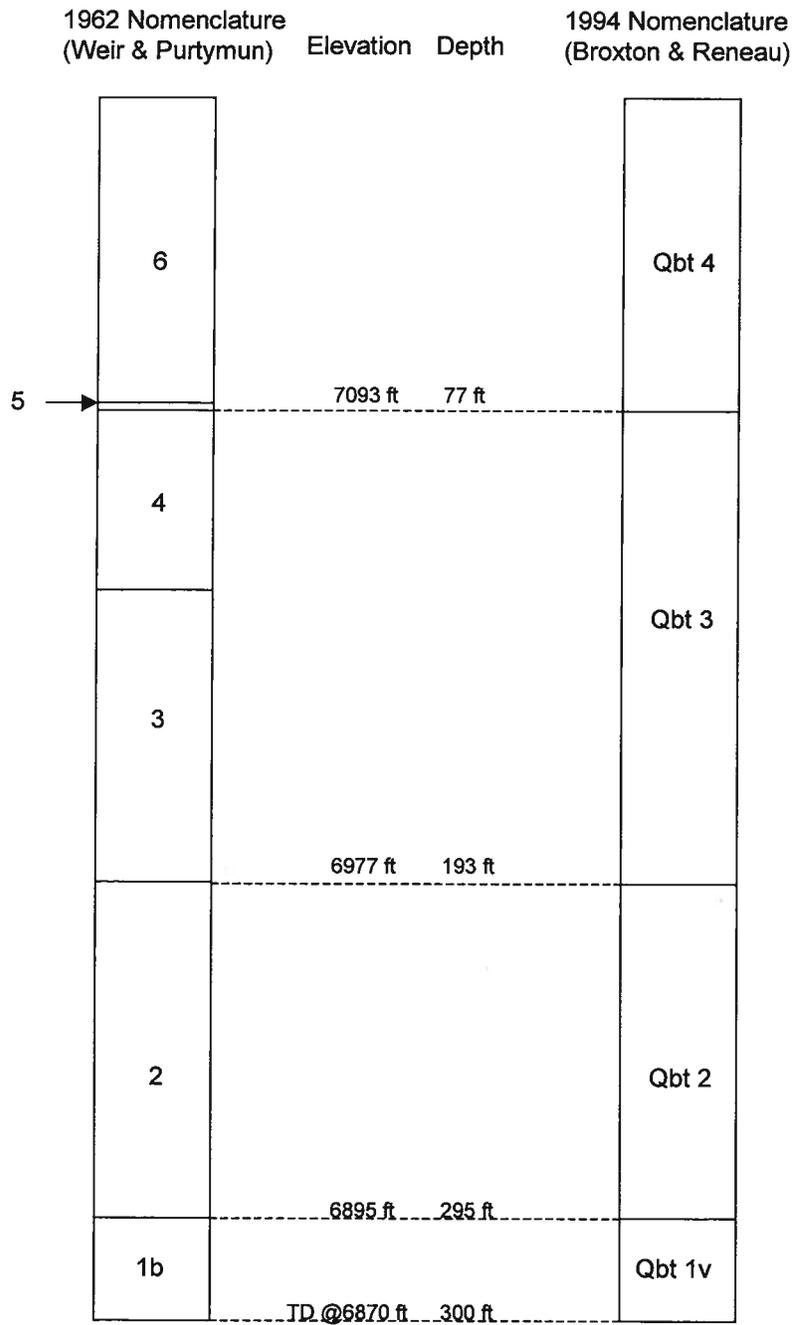

Core hole -3

Adapted from Weir and Purtymun (1962, 011890) and Broxton and Reneau (1995, 049726)


Figure 3.2-8 Stratigraphic units of CH-3

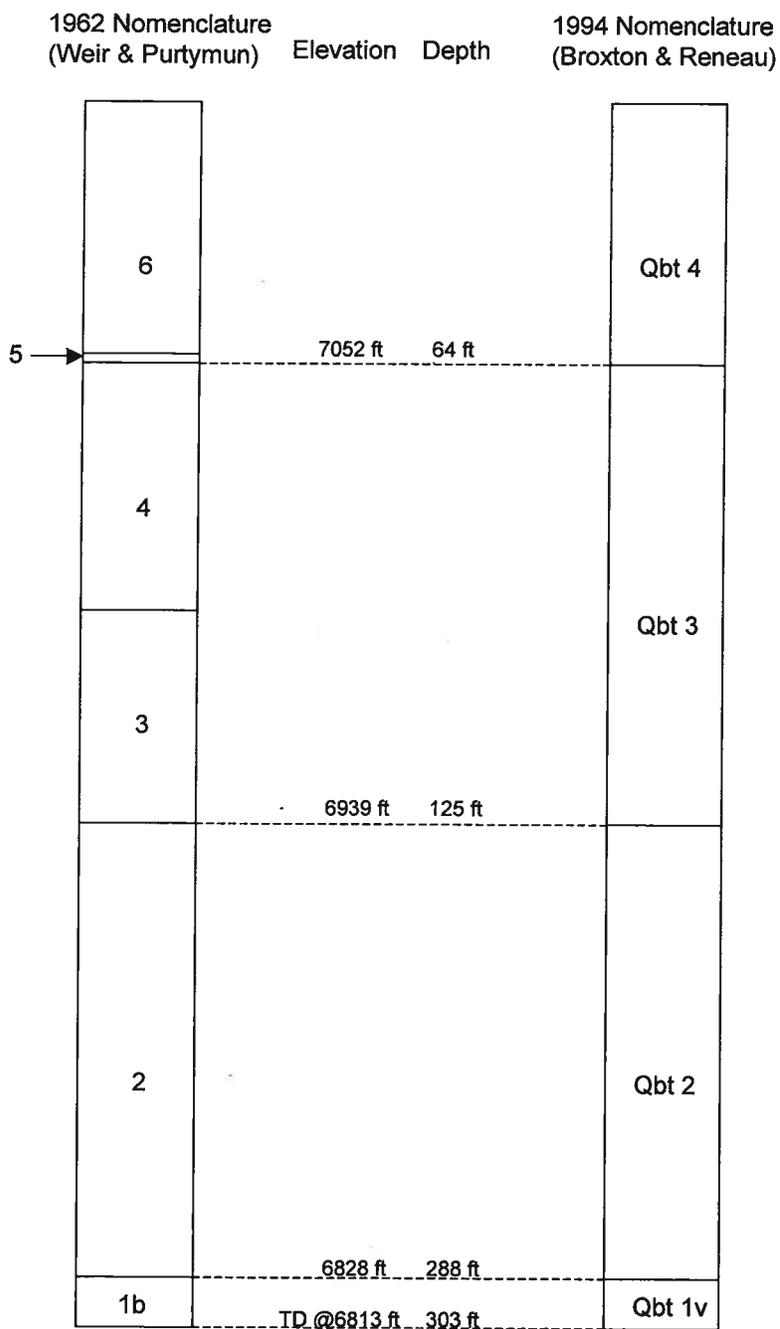

Core hole -4

Adapted from Weir and Purtymun (1962, 011890) and Broxton and Reneau (1995, 049726)

Figure 3.2-9 Stratigraphic units of CH-4

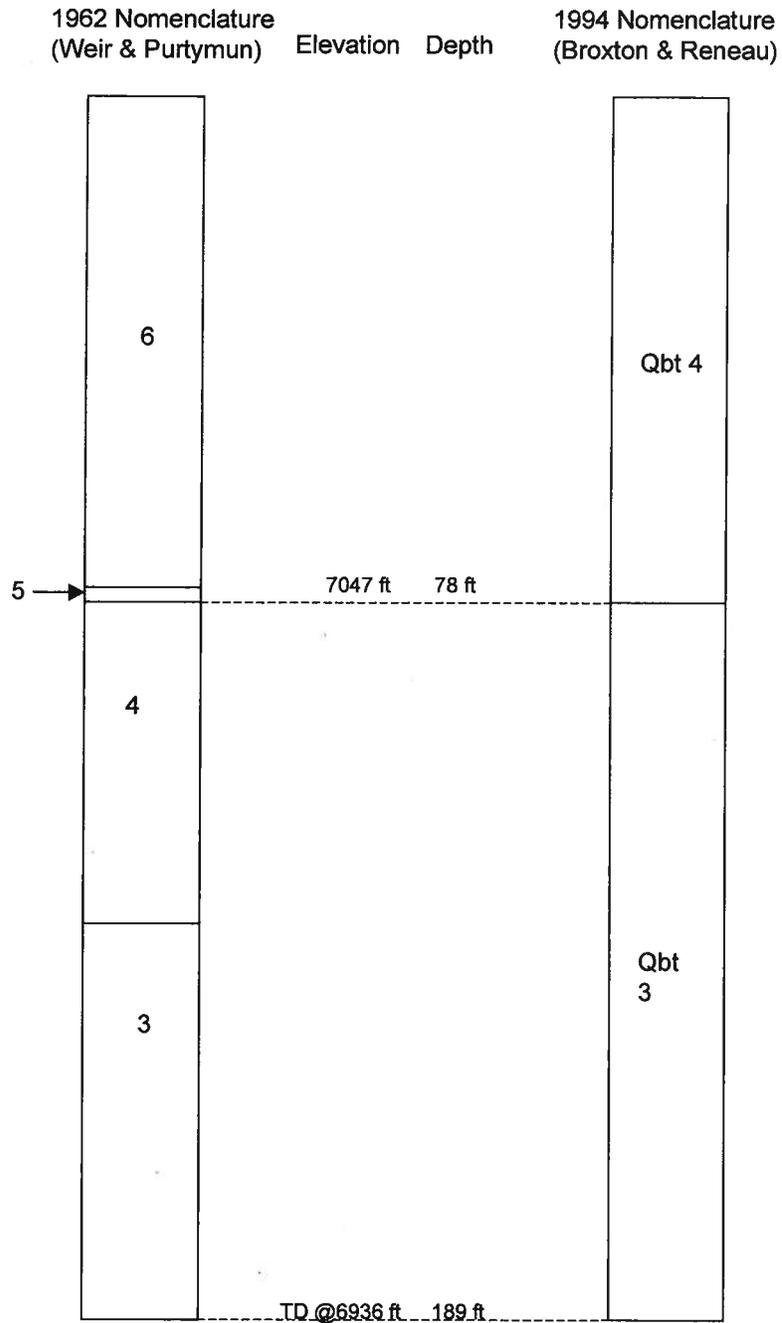


Alpha hole

Adapted from Weir and Purtymun (1962, 011890) and Broxton and Reneau (1995, 049726)

Figure 3.2-10 Stratigraphic units of Alpha hole

| | | | |
|--|-----------|-------|---|
| 1962 Nomenclature (Weir & Purtymun) | Elevation | Depth | 1994 Nomenclature (Broxton & Reneau) |
|--|-----------|-------|---|

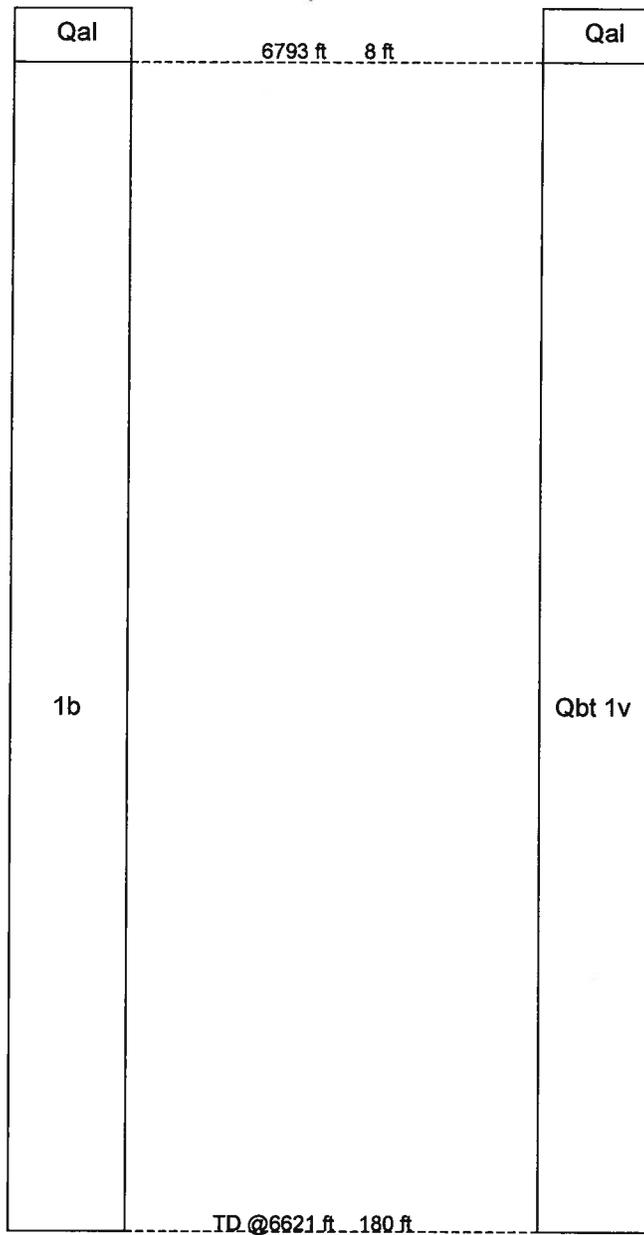


Beta hole

Adapted from Weir and Purtymun (1962, 011890) and Broxton and Reneau (1995, 049726)

Figure 3.2-11 Stratigraphic units of Beta hole

| 1962 Nomenclature (Weir & Purtymun) | Elevation | Depth | 1994 Nomenclature (Broxton & Reneau) |
|--|-----------|-------|---|
|--|-----------|-------|---|

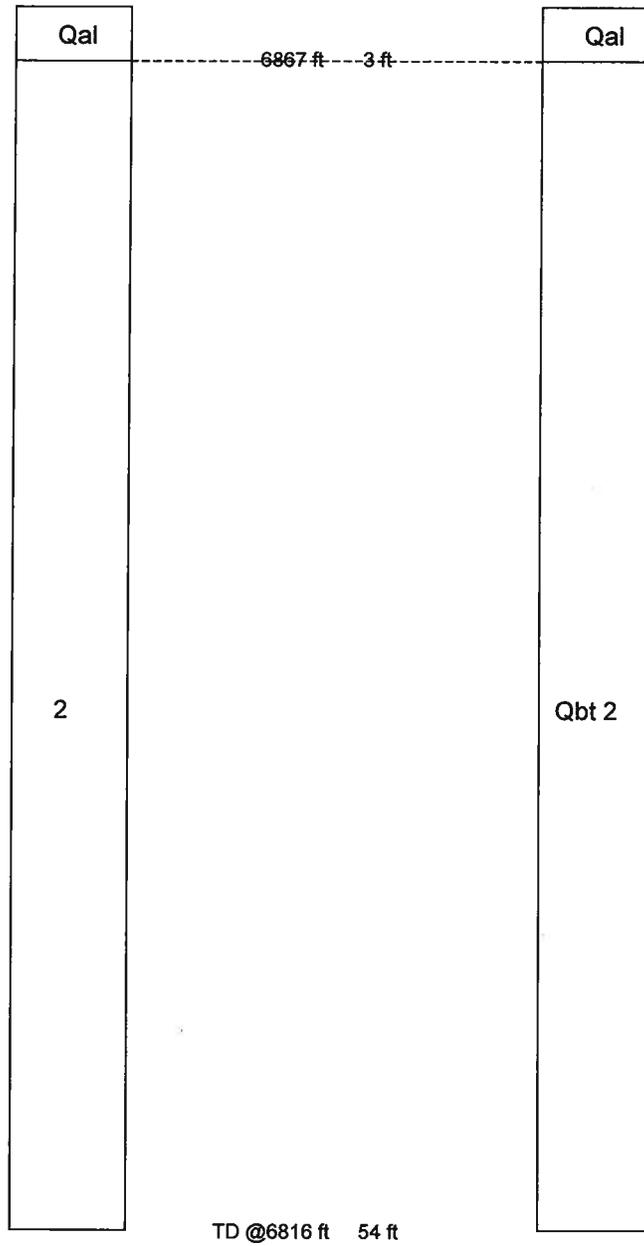

Gamma hole

Adapted from Weir and Purtymun (1962, 011890) and Broxton and Reneau (1995, 049726)

Figure 3.2-12 Stratigraphy of Gamma hole

Table 5.1-1
Summary of Analytical Results for Water Sample from Neutron Access Hole 2A-Y

| Analyte | Media | Number of Analyses | Number of Detects | Concentration Range (pCi/L) | Frequency of Detects above Background Value |
|---------------|--|--------------------|-------------------|-----------------------------|---|
| Americium-241 | Groundwater, intermediate depth, perched | 1 | 0 | [5.813707 to 5.813707] | 0/1 |
| Cesium-134 | Groundwater, intermediate depth, perched | 1 | 0 | [-3.288532 to -3.288532] | 0/1 |
| Cesium-137 | Groundwater, intermediate depth, perched | 1 | 0 | [-3.160709 to -3.160709] | 0/1 |
| Cobalt-60 | Groundwater, intermediate depth, perched | 1 | 0 | [1.48568 to 1.48568] | 0/1 |
| Europium-152 | Groundwater, intermediate depth, perched | 1 | 0 | [-4.195175 to -4.195175] | 0/1 |
| Sodium-22 | Groundwater, intermediate depth, perched | 1 | 0 | [8.693627 to 8.693627] | 0/1 |
| Uranium-235 | Groundwater, intermediate depth, perched | 1 | 0 | [0.7775123 to 0.7775123] | 0/1 |
| Gross alpha | Groundwater, intermediate depth, perched | 1 | 0 | [5.98 to 5.98] | 0/1 |
| Gross beta | Groundwater, intermediate depth, perched | 1 | 1 | 37.01 to 37.01 | 1/1 |

5.2 Biobarrier Repair

On September 28, 2004, it was discovered that a gopher had penetrated the biobarrier adjacent to the concrete pad surrounding neutron access hole 49-10046. An inadequate number of clips between biobarrier sheets had allowed the gopher to slip through and dig into the ET cover. Following this discovery, the gopher's spoil pile was screened by a Health, Safety, and Radiation Protection Group radiation control technician and deemed to be at or below instrument background for the surface of the site. The soil was then spread across the cover and the biobarrier repaired. No further signs of gopher intrusion have been observed since the barrier was repaired.

5.3 Borehole Abandonment

Boreholes Alpha and Gamma A were abandoned during the fourth quarter of FY2005. These boreholes were advanced in 1960 as hydrogeological test holes. Alpha was located west of Areas 2 and 4, with a diameter of 2 ft and a depth of 189 ft. Gamma A was located in Ancho Canyon to the south of Area 4, with a diameter of 4 in. and a depth of 56 ft. The borehole locations are shown in Figure 3.2-1. These boreholes were not used for periodic testing or monitoring; nor were there any foreseeable future uses for these boreholes. The exploratory boreholes were abandoned for the following reasons:

- The exploratory boreholes provided a potential rapid conduit for moisture or other unwanted constituents into the subsurface.
- No construction diagrams or records exist.

- Large diameter boreholes cannot be utilized for vadose zone monitoring.
- Gamma A was located in a canyon-bottom flood plain.
- Neither borehole encountered saturated intervals at time of drilling, nor did any contain water at the time of abandonment.
- These boreholes are not required for future remediation projects.

Borehole abandonment activities began on September 26, 2005, and were completed on October 3, 2005. Boreholes Alpha and Gamma A, drilled for a hydrogeologic investigation in 1960, were abandoned per SOP-5.03, Rev. 3, "Monitor Well and RFI Borehole Abandonment." The constructions are described below.

Alpha

The corrugated steel casing was cut flush at ground surface, with 7.5 ft left in the borehole. This borehole was sealed in three stages.

- *Stage 1:* A cement/sand slurry was placed from total depth to a level of 10.5 ft bgs. The slurry consisted of water, cement, and sand at a ratio of approximately 1:2:8 by weight that had been prepared and delivered by Los Alamos Transit Mix.
- *Stage 2:* A soft bentonite grout was placed on top of the cement/sand slurry over the interval of 10.5 ft bgs to 2 ft bgs. The soft bentonite grout consisted of water, cement, and bentonite at a ratio of 10:3:1 by weight. Type I/II Portland cement and Baroid Aquagel Gold Seal (200 mesh bentonite powder) were used.
- *Stage 3:* A concrete cap constructed of standard 4000 pounds per square inch concrete was placed over the soft bentonite grout and domed over the former borehole. A brass cap was placed in the center of this dome for future identification and geographic reference.

Gamma A

The 4-in.-diameter steel casing was removed, and the borehole was sealed in two stages.

- *Stage 1:* Bentonite pellets (1/4 in.) were placed from total depth to 1 ft bgs and hydrated in 5-ft lifts.
- *Stage 2:* A cement seal consisting of Type I/II Portland cement was placed from 1 ft bgs to the surface.


Appendix C, "2005 Borehole Abandonment Constructions," presents diagrams of the construction described above.

6.0 CONCLUSIONS

Analysis of the moisture monitoring data collected over the past year leads to the following conclusions:

- The neutron log and TDR data indicate that subsurface moisture levels fluctuate in the near surface (<10 ft) and remain constant at greater depth, as expected in a moisture-limited, semiarid climate.

TA-49 Borehole Abandonment Constructions*
Sept. - Oct. 2005

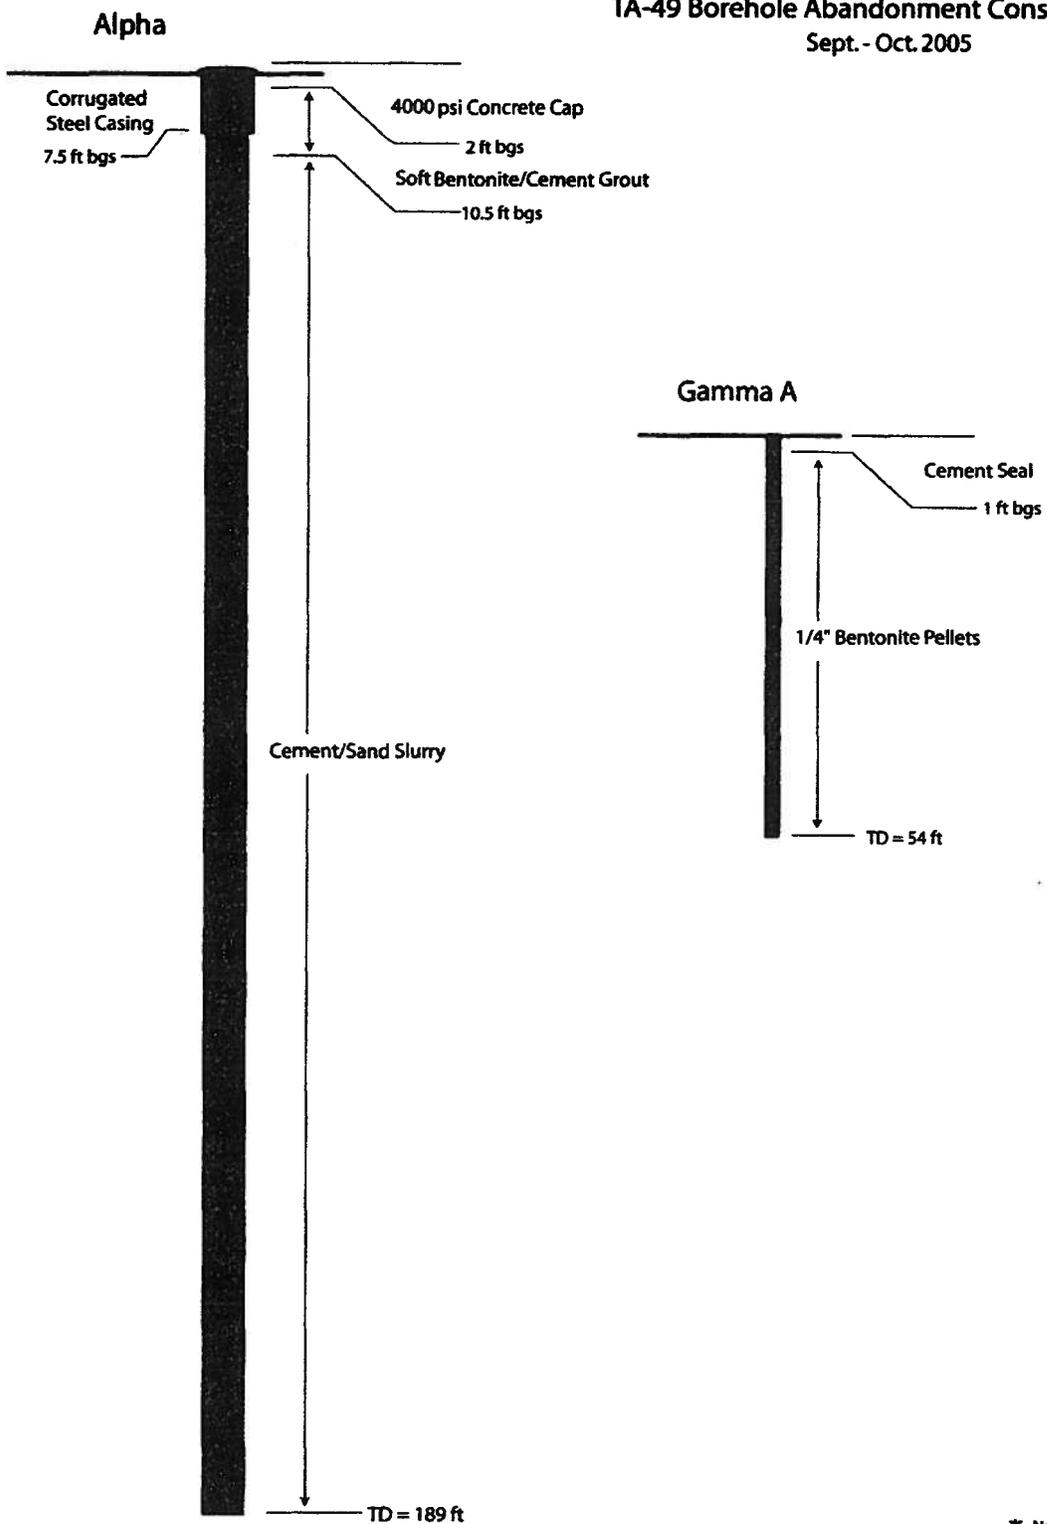

* Not to Scale

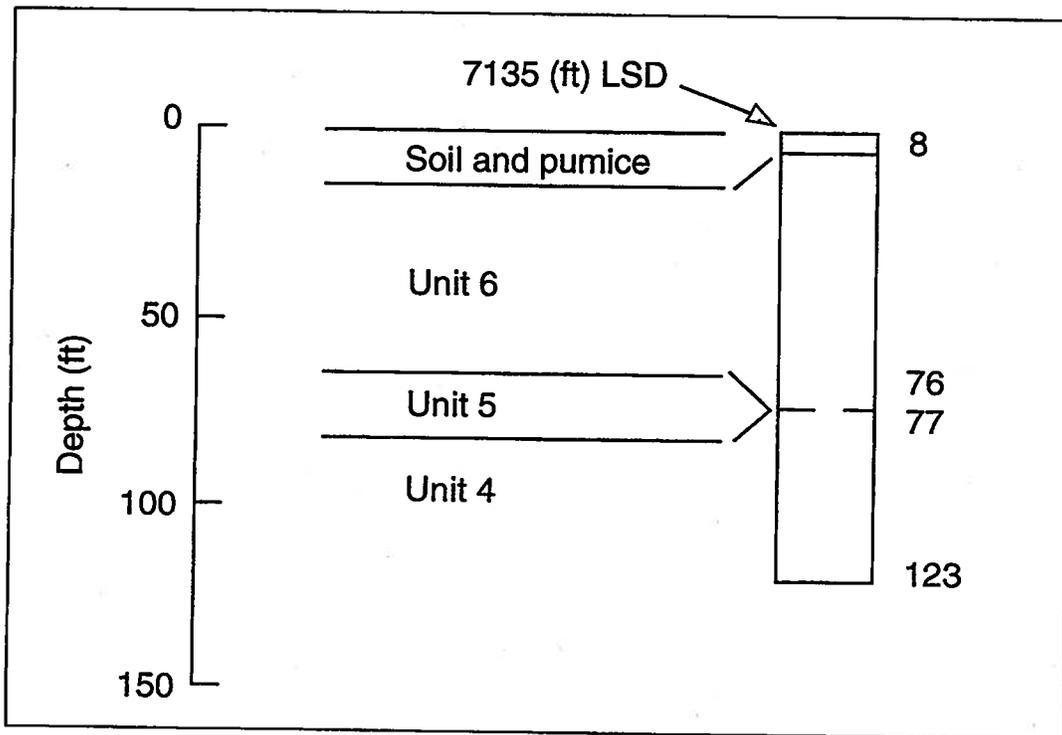


Fig. IX-P. Geologic log of Area 2 Test Hole 1, completed May 1980, dry (Purymun 1994).

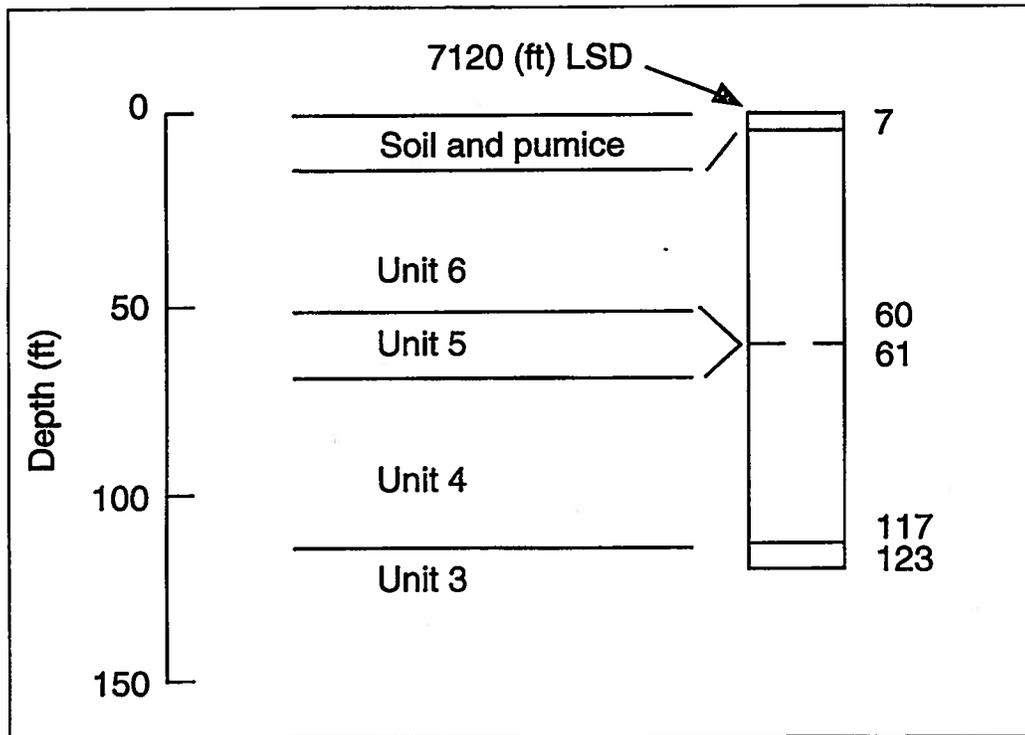


Fig. IX-Q. Geologic log of Area 2 Test Hole 2, completed May 1980, dry (Purtymun 1994).

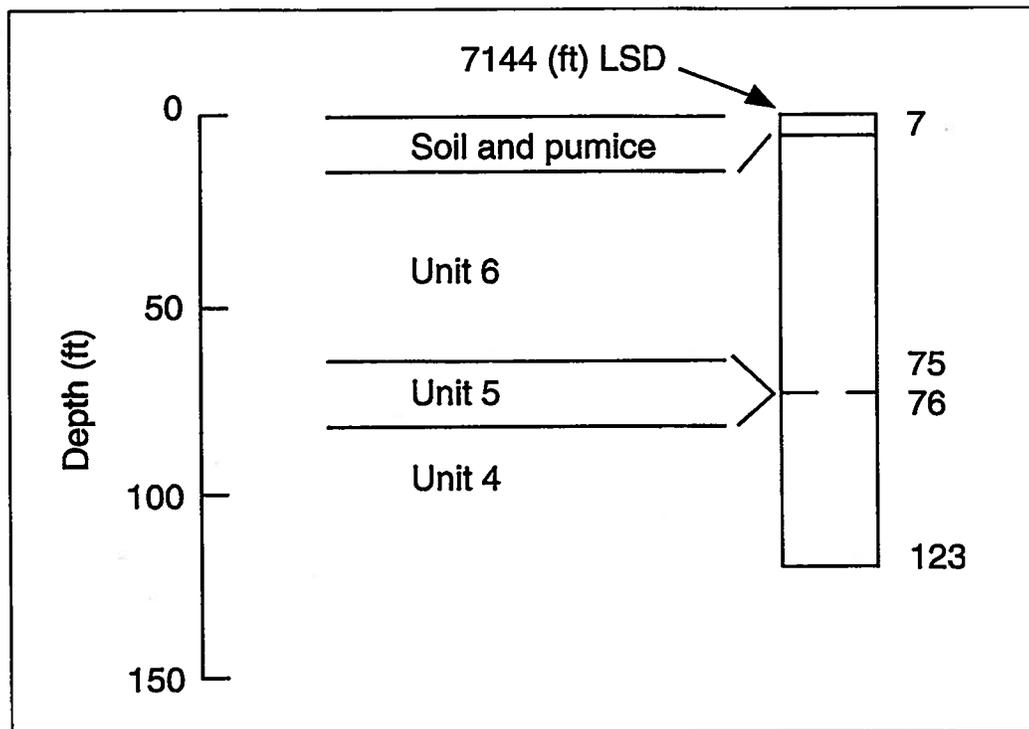


Fig. IX-R. Geologic log of Area 2 Test Hole 3, completed May 1980, dry (Purtymun 1994).

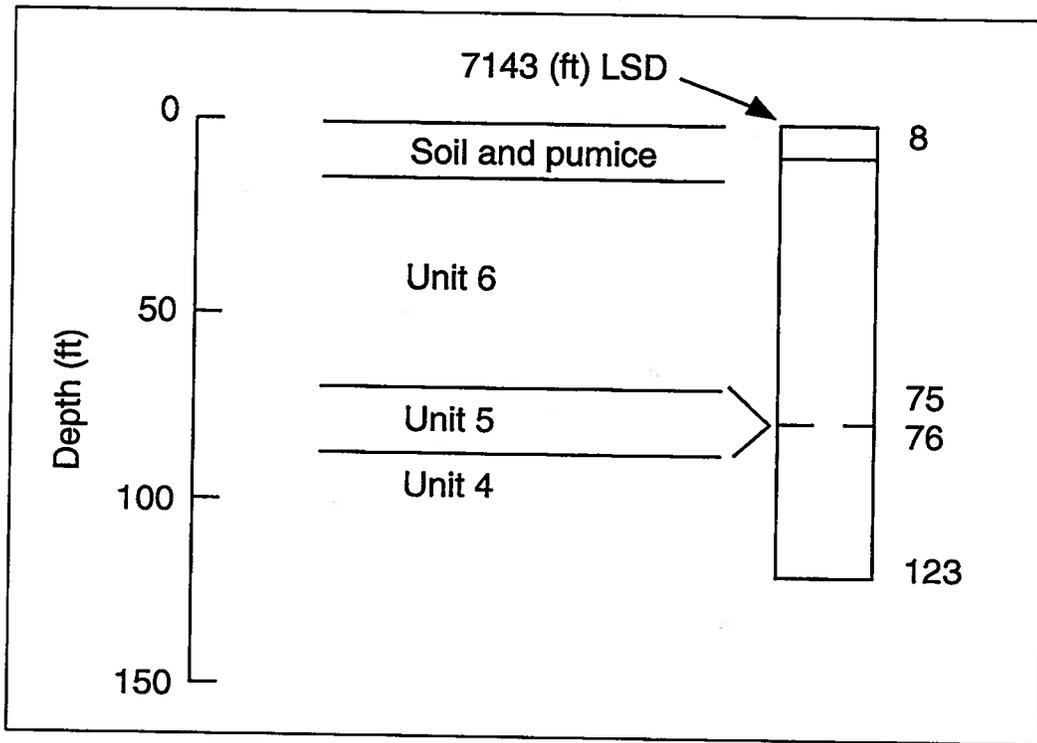


Fig. IX-S. Geologic log of Area 2 Test Hole 4, completed May 1980, dry (Purtymun 1994).

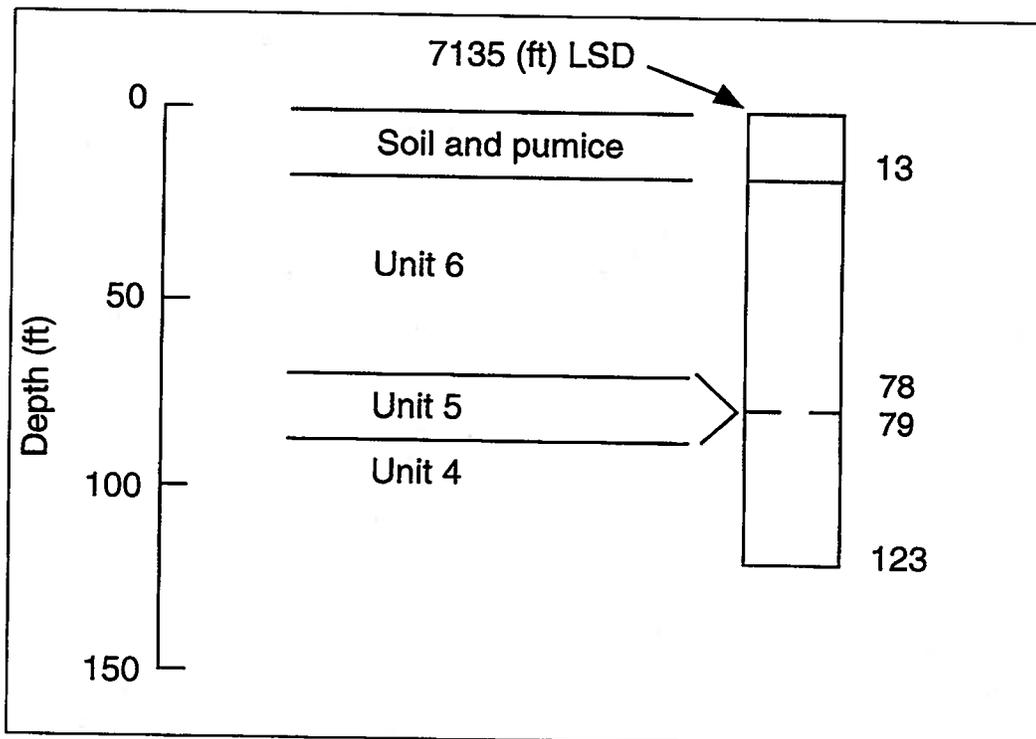


Fig. IX-T. Geologic log of Area 2 Test Hole 5, completed May 1980, dry (Purtymun 1994).

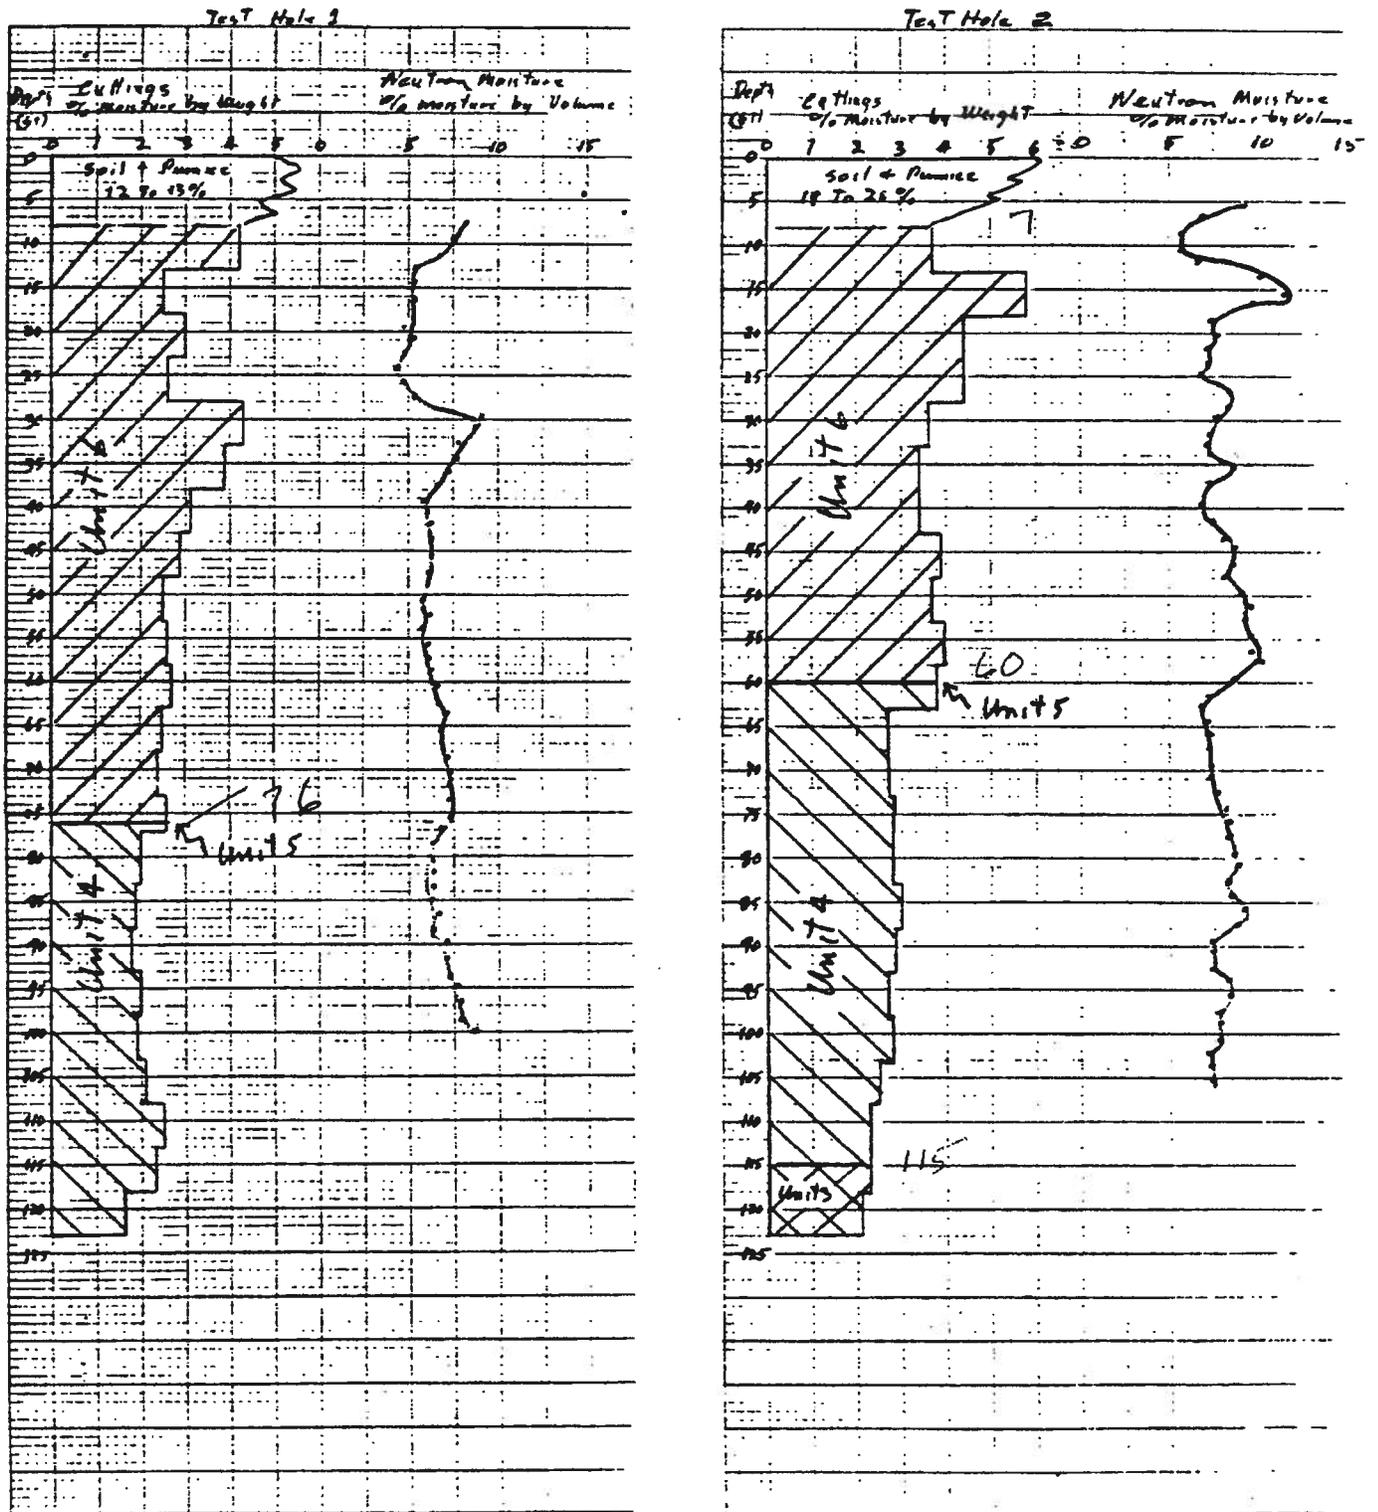


Fig. 2. Geologic and neutron logs of Test Holes TH-1 and TH-2.

UNCLASSIFIED

92-10



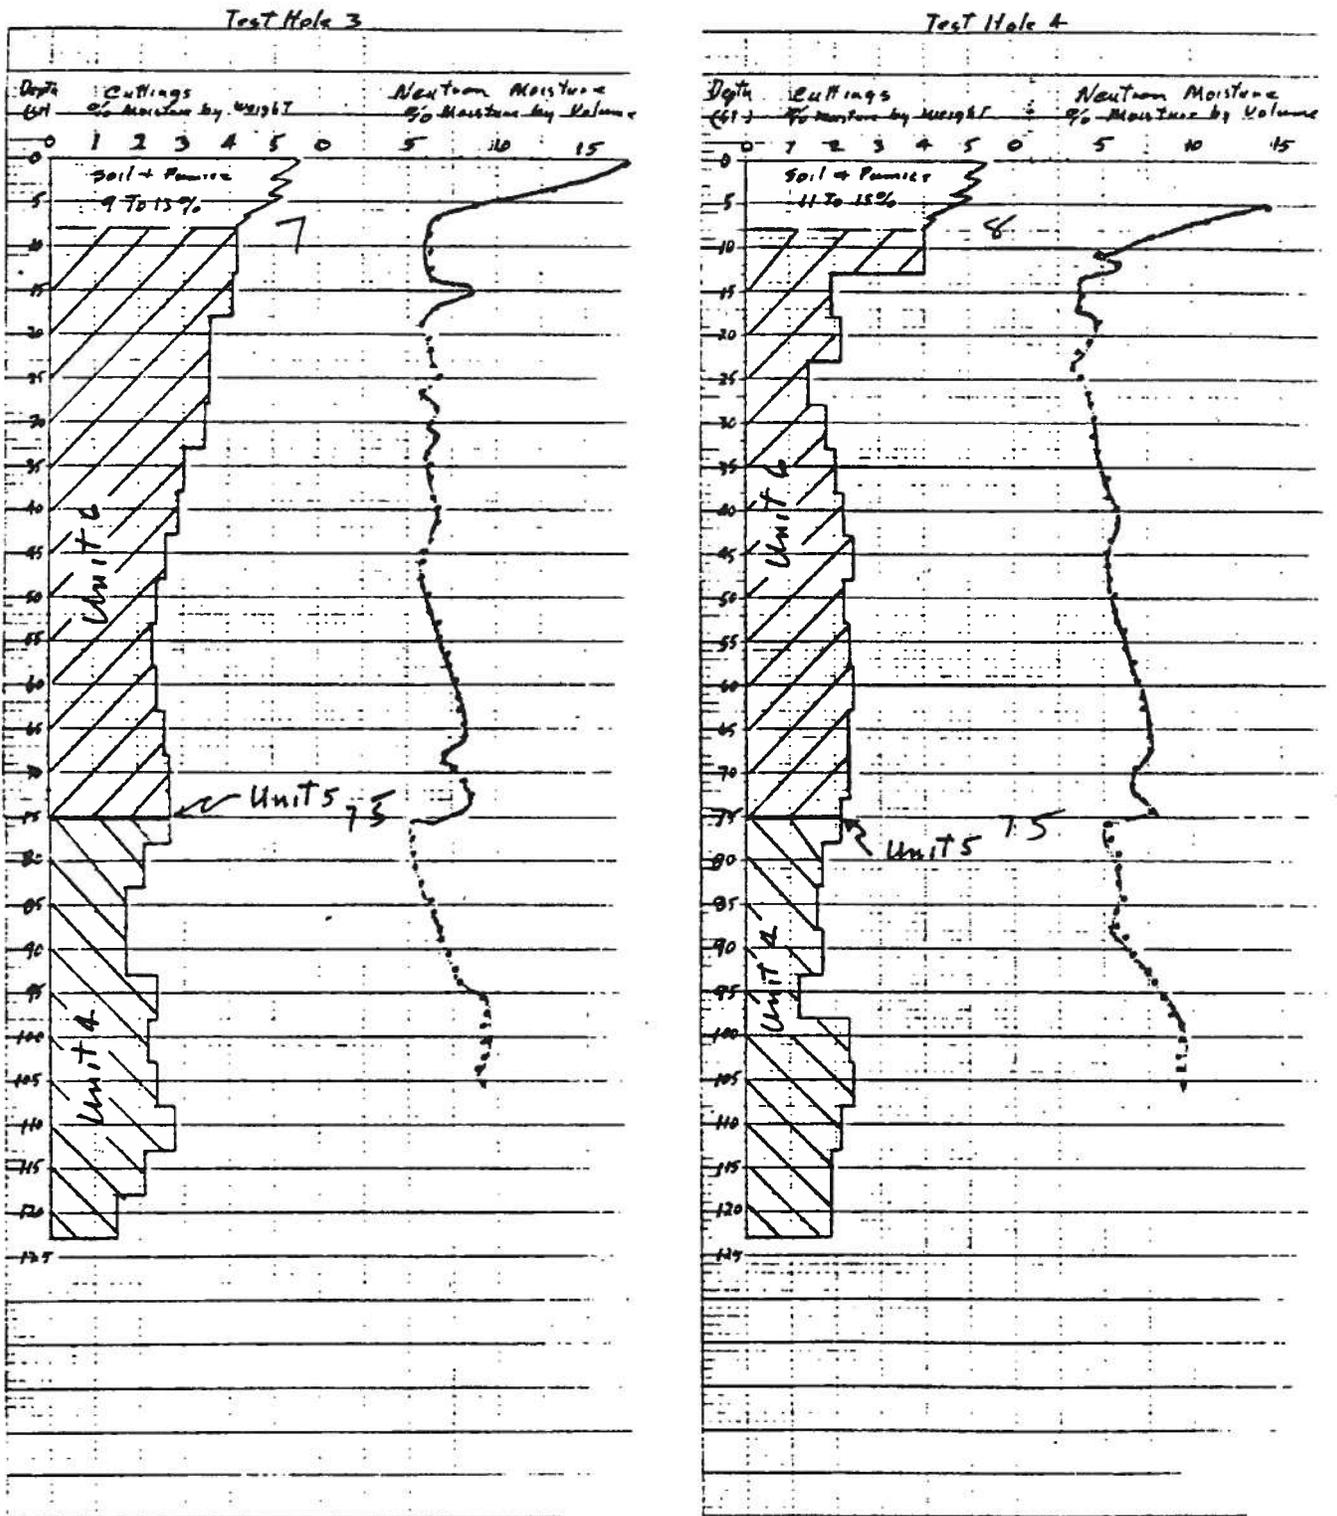


Fig. 3. Geologic and neutron logs of Test Holes TH-3 and TH-4.

UNCLASSIFIED



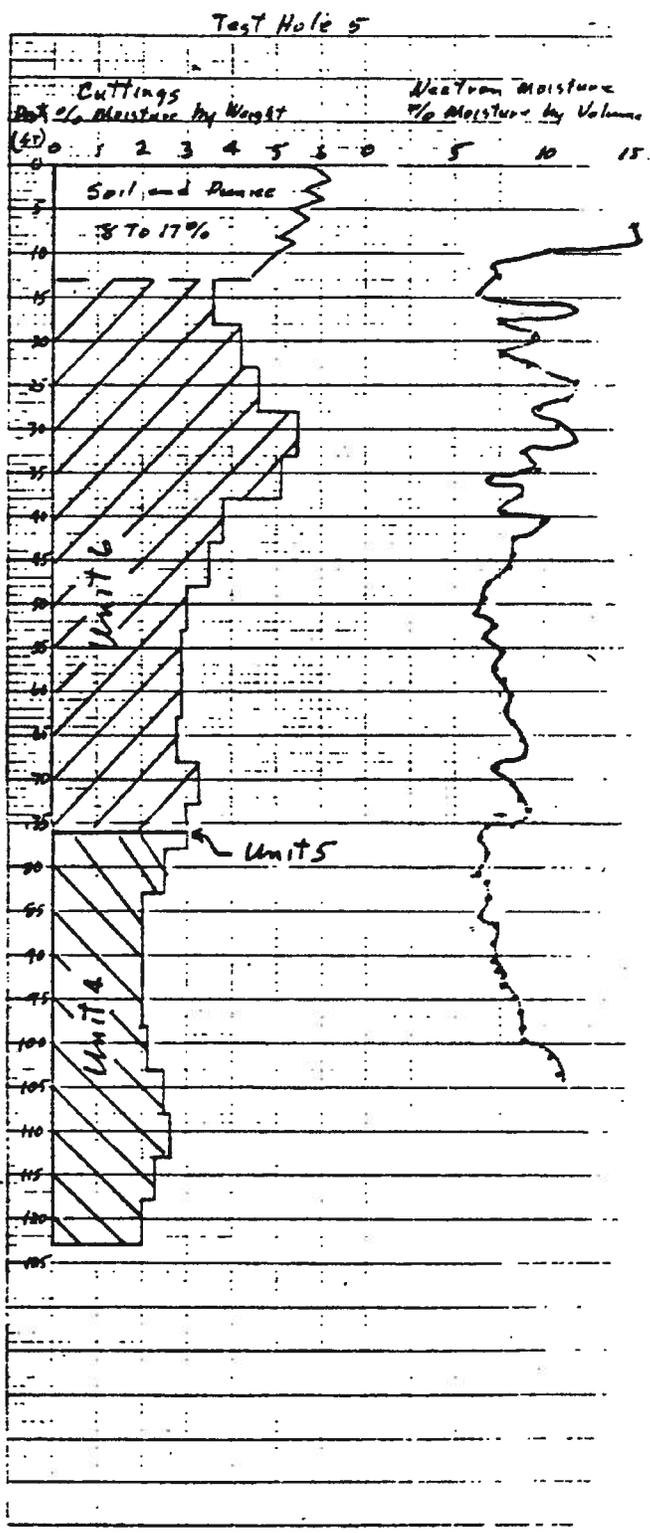


Fig. 4. Geologic and neutron logs of Test Hole TH-5.

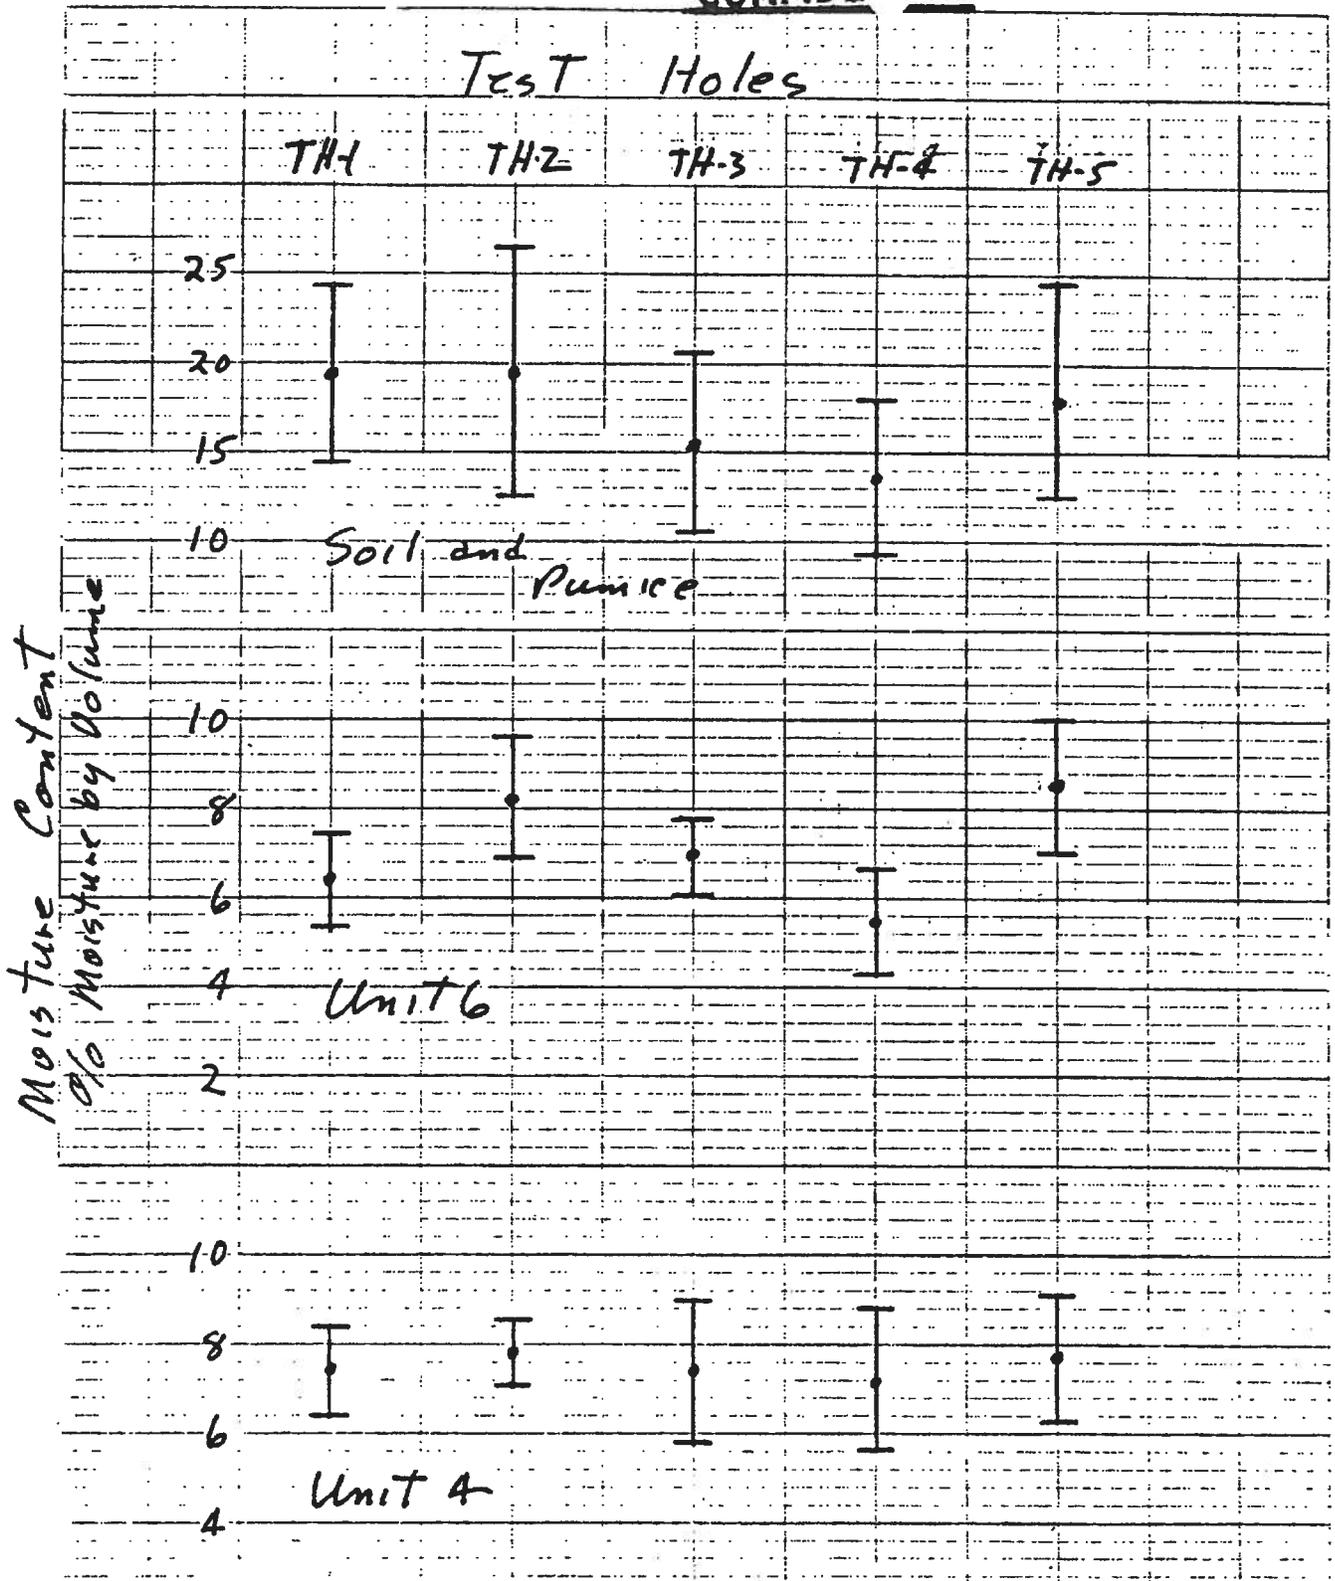


Fig. 5. Average moisture content of pumice and soil and tuff of Unit 4 and 6 in test holes.

Shaft 2A-0

~~CONFIDENTIAL~~

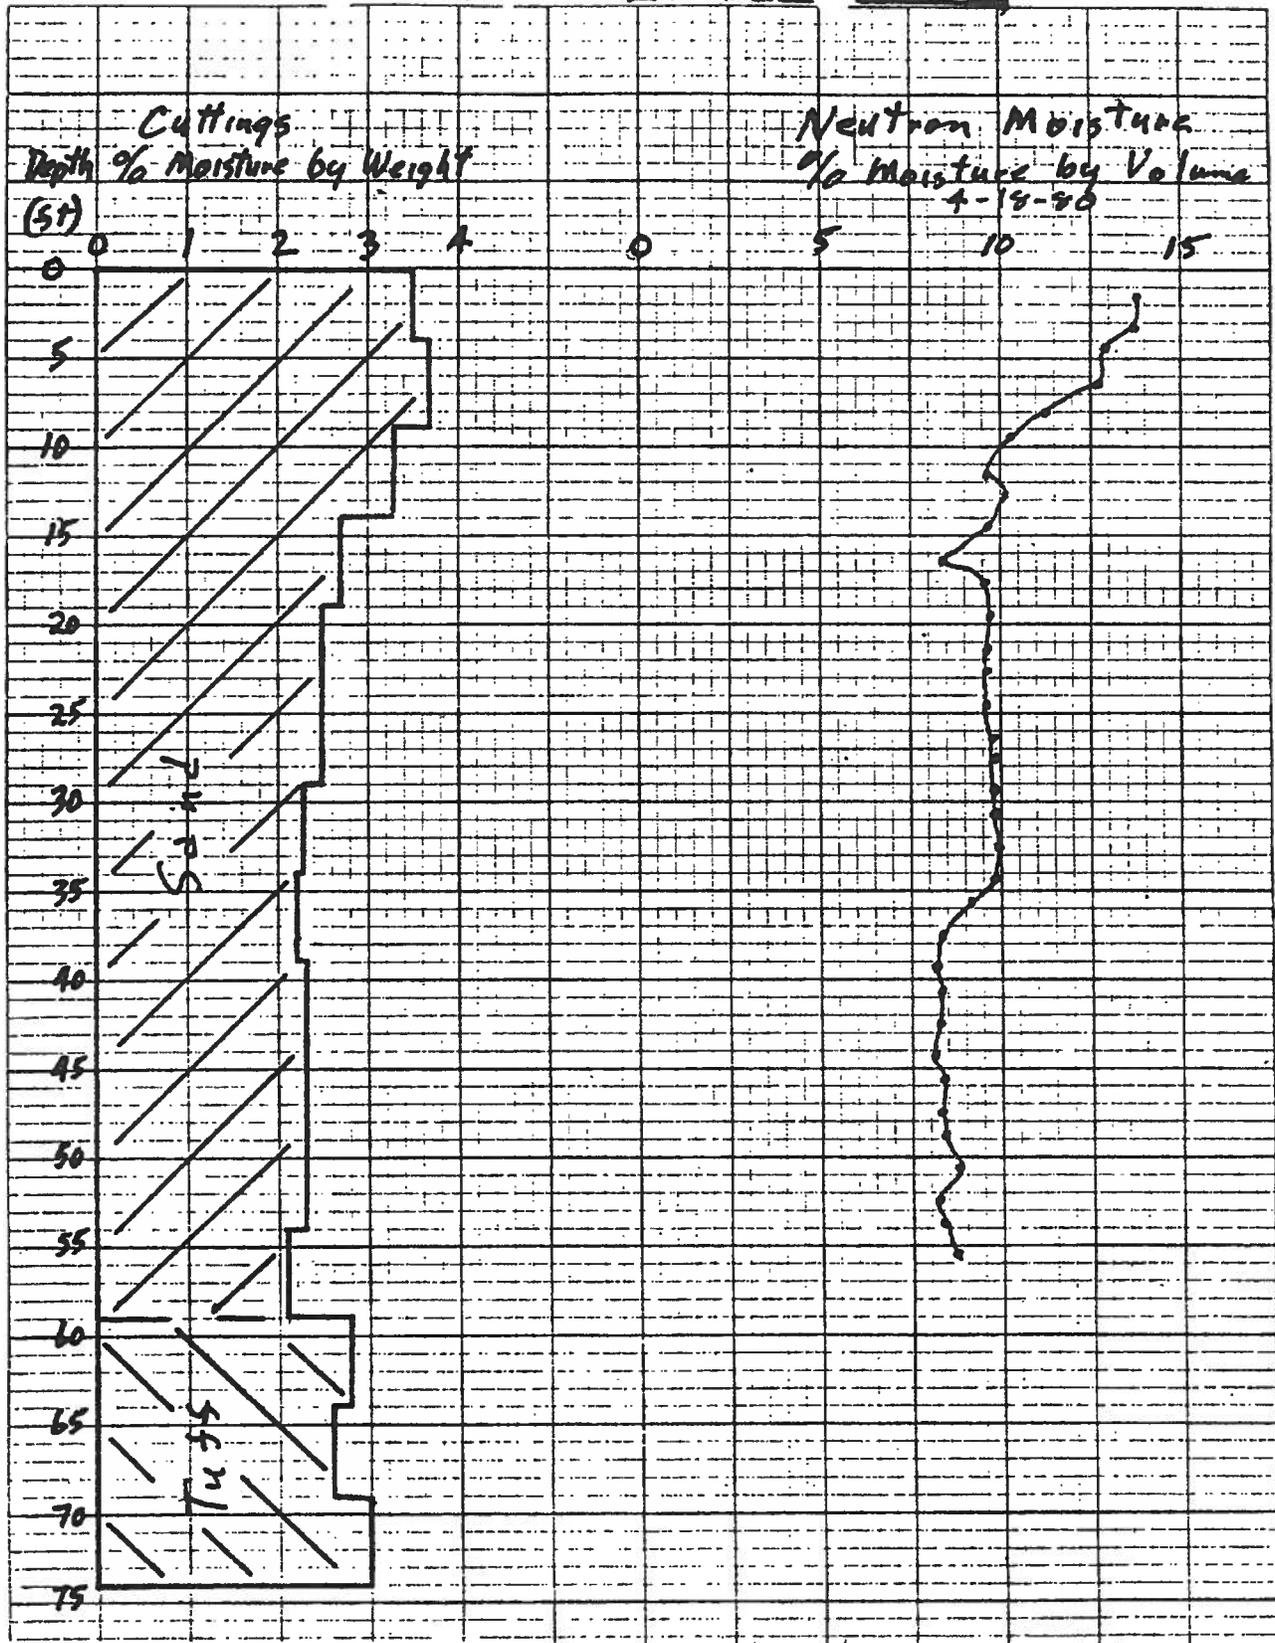


Fig. 6. Geologic and neutron logs of Shaft 2A-0.

UNCLASSIFIED

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~

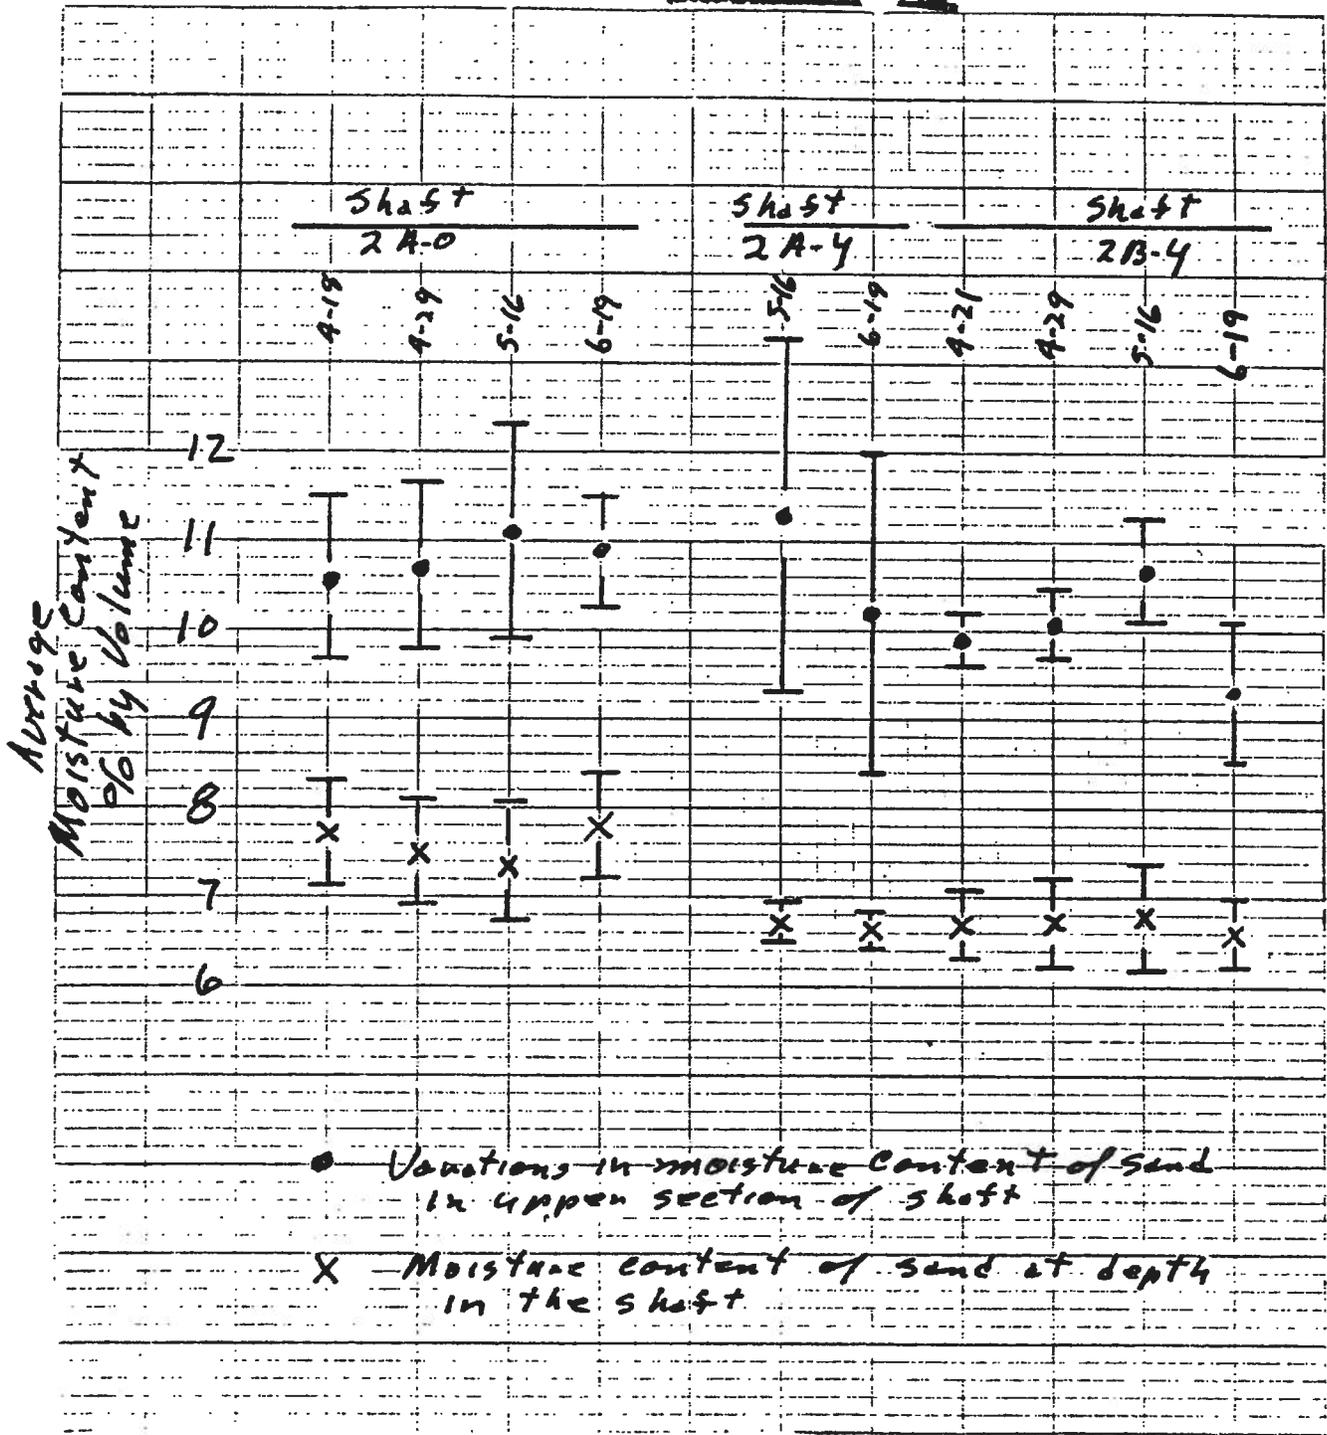


Fig. 7. Average moisture content of sand in Shafts 2A-0, 2A-Y, and 2B-Y.

UNCLASSIFIED

~~CONFIDENTIAL~~

Shaft 2A-Y


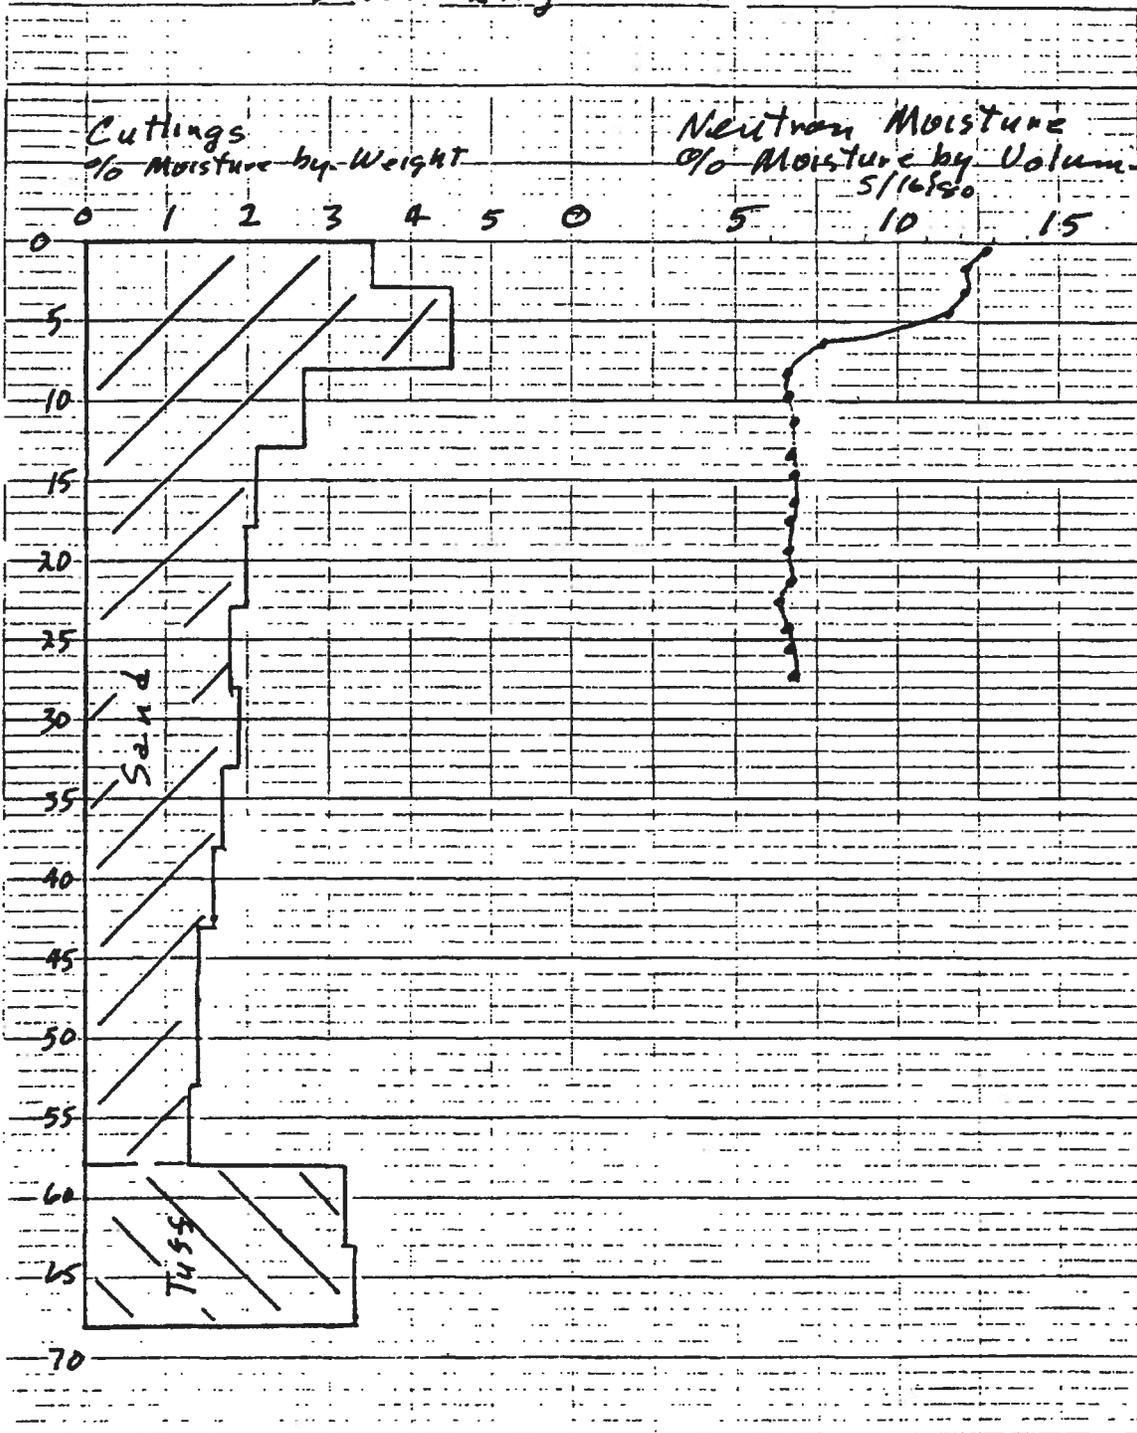


Fig. 8. Geologic and neutron logs of Shaft 2A-Y.

Shaft 2BY

~~CONFIDENTIAL~~

SQUARE 5 X 5 TO THE HALF INCH 15-0011-60

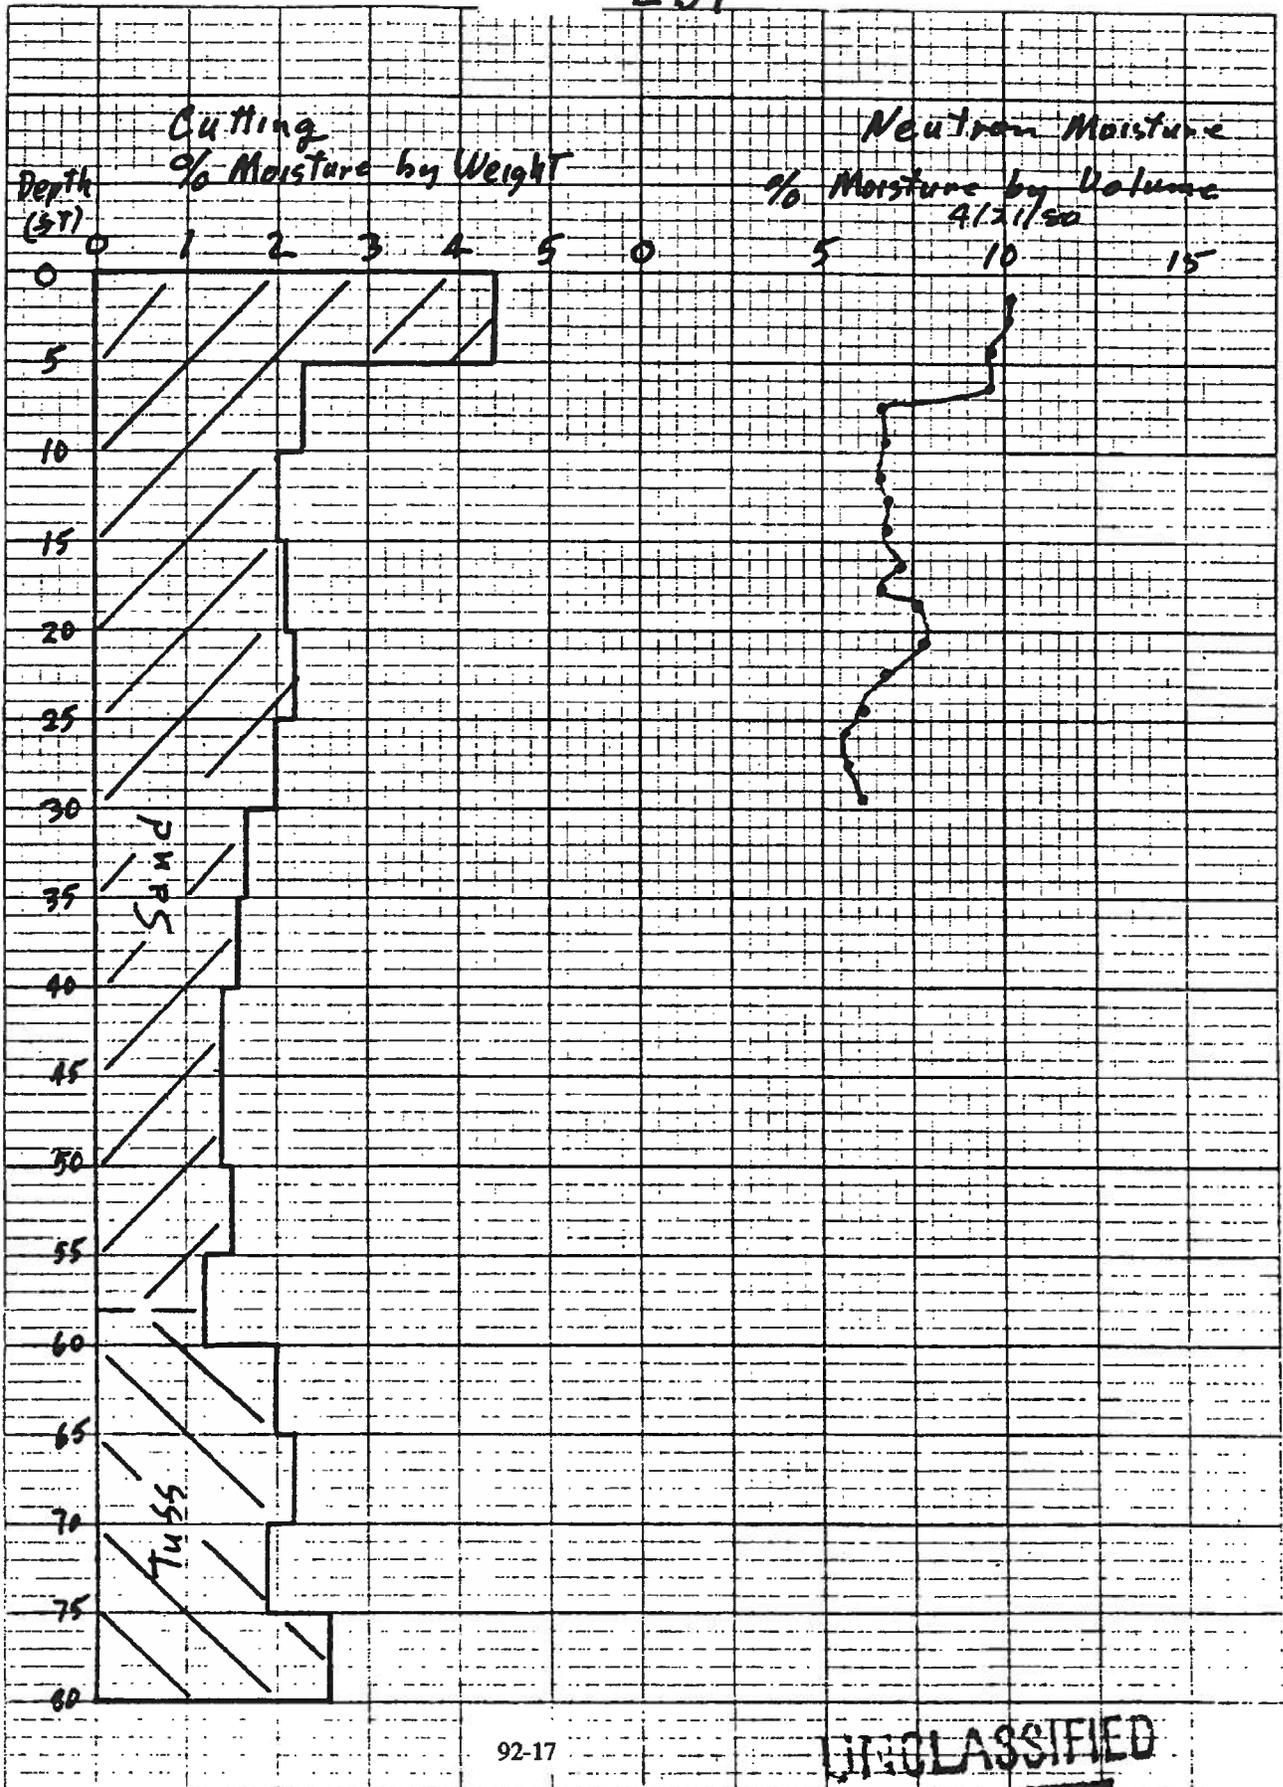

~~CONFIDENTIAL~~

Fig. 9. Geologic and neutron logs of Shaft 2B-Y.

XXXII. SPECIAL TEST HOLES AT TA-49 TO MEASURE BAROMETRIC EFFECTS AND DEFORMATION OF THE TUFF

Two test holes were cored (7 1/4-in. diam) near the eastern edge of TA-49 near well DT-10 (Fig. XXXII-A). The holes were completed in the upper units of the Tshirege Member of the Bandelier Tuff (Fig. XXXII-B). Geologic units are those described by Weir and Purtymun (1962).

Test hole TBM-1 was constructed to measure the barometric effect in the tuff caused by atmospheric pressure changes (Fig. XXXII-C). Test hole TBM-2 was equipped with a Geodetic Biaxial Tiltmeter to determine the deformation of the tuff caused by seismic events. The wellheads for both holes have an 8-ft-sq concrete slab about 6 in. thick. Location is N 1,754,534 E 488,302 (NAD 1927) at an elevation of 7038 ft.

REFERENCES

W. D. Purtymun, Los Alamos National Laboratory, unpublished data (EM-8 field notes), 1993.

J. E. Weir and W. D. Purtymun, "Geology and Hydrology of Technical Area 49, Frijoles Mesa, Los Alamos County, New Mexico," U.S. Geol. Survey Admin. Report (1962).

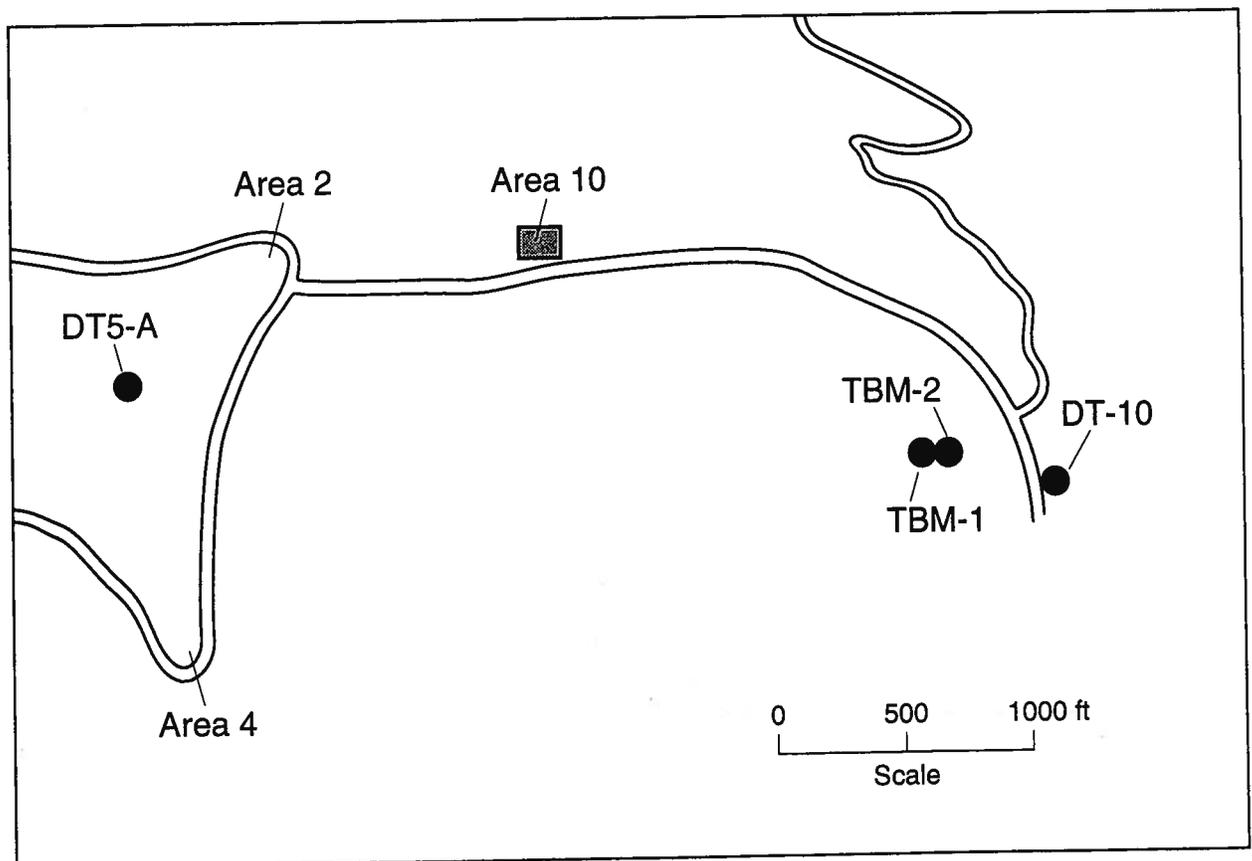


Fig. XXXII-A. Locations of test holes TBM-1 and TBM-2 at TA-49 (Purtymun 1993).

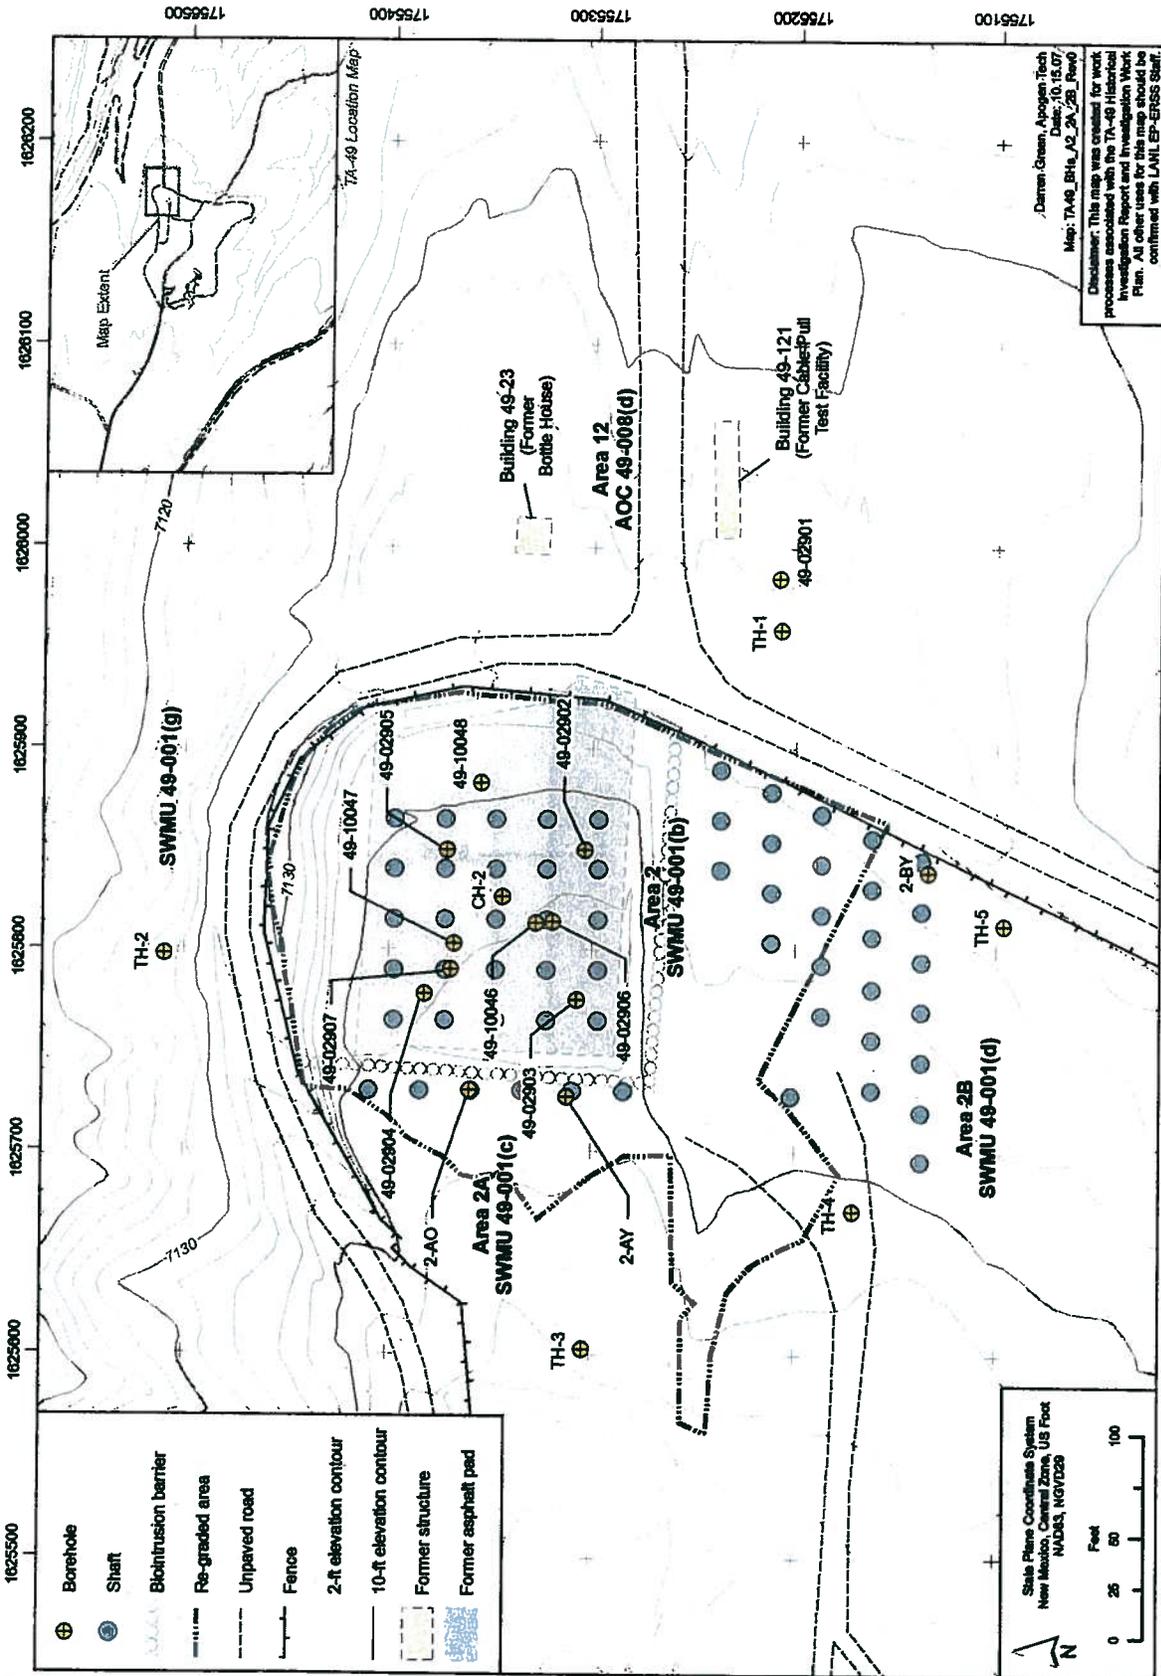


Figure 2.3-3 Areas 2, 2A, 2B, and 12 borehole locations

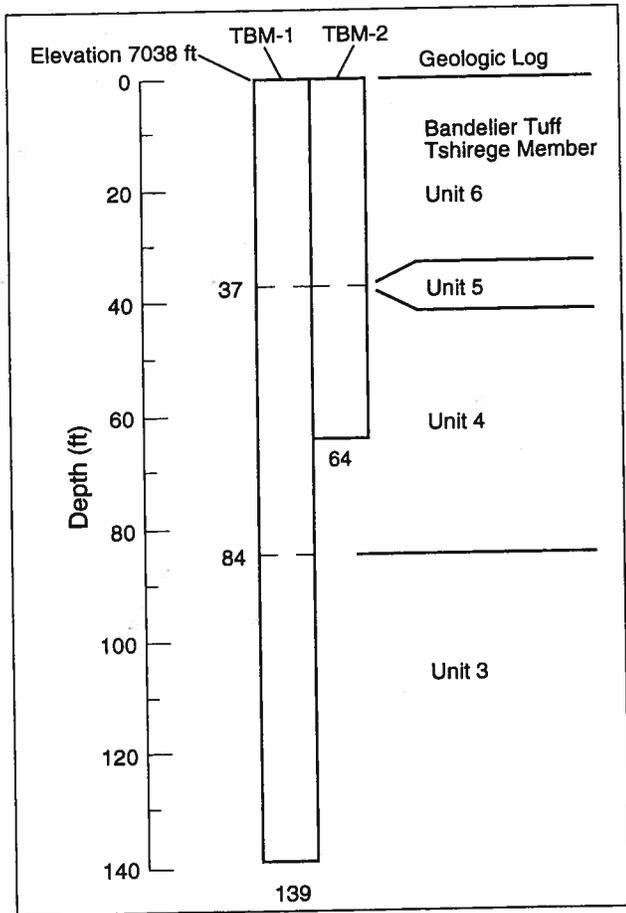


Fig. XXXII-B. Geologic logs of test holes TBM-1 and TBM-2 at TA-49 (Purtymun 1993).

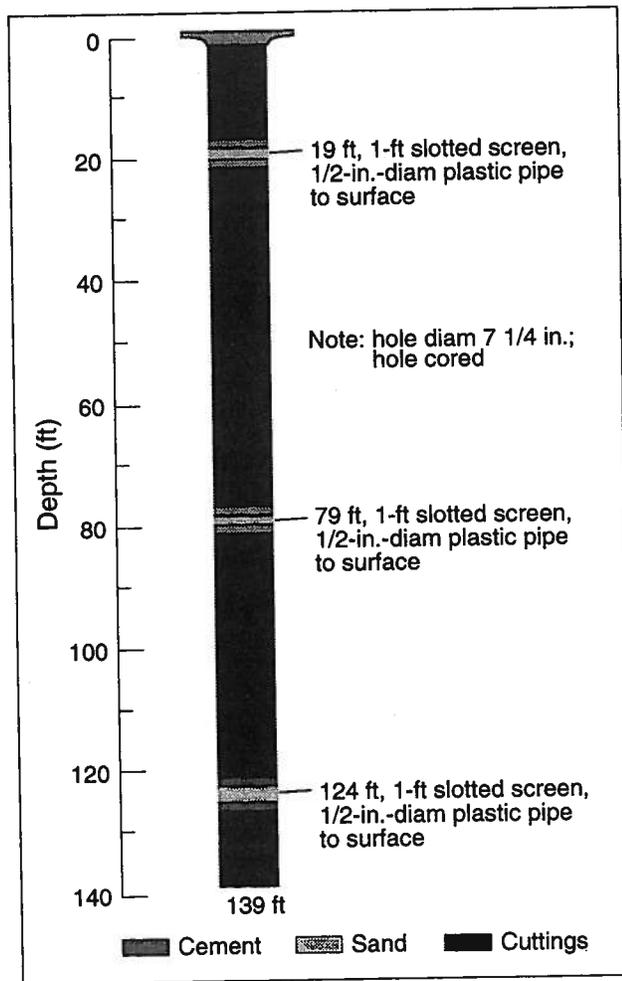


Fig. XXXII-C. Test hole TBM-1 constructed with three zones to measure barometric pressures in the tuff at depths of 19, 79, and 124 ft.

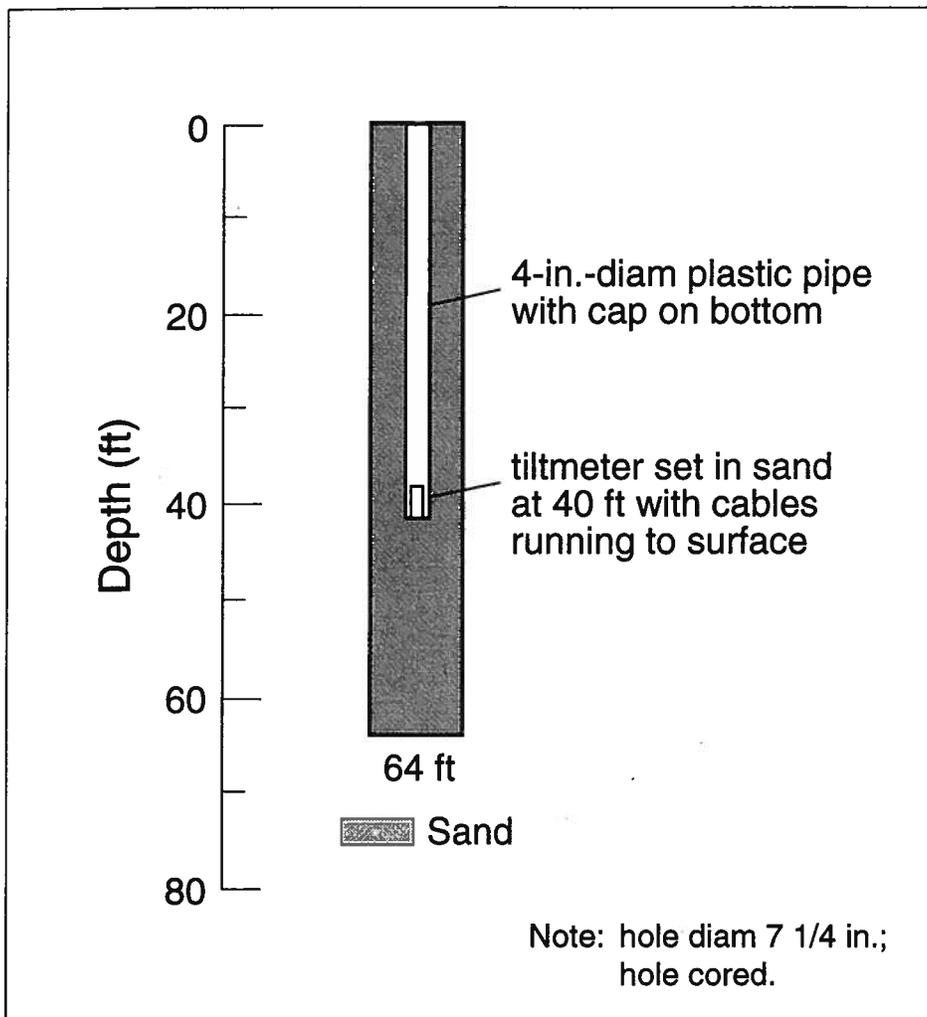


Fig. XXXII-D. Test hole TBM-2 equipped with a biaxial tiltmeter to measure deformation of the tuff at 40 ft.


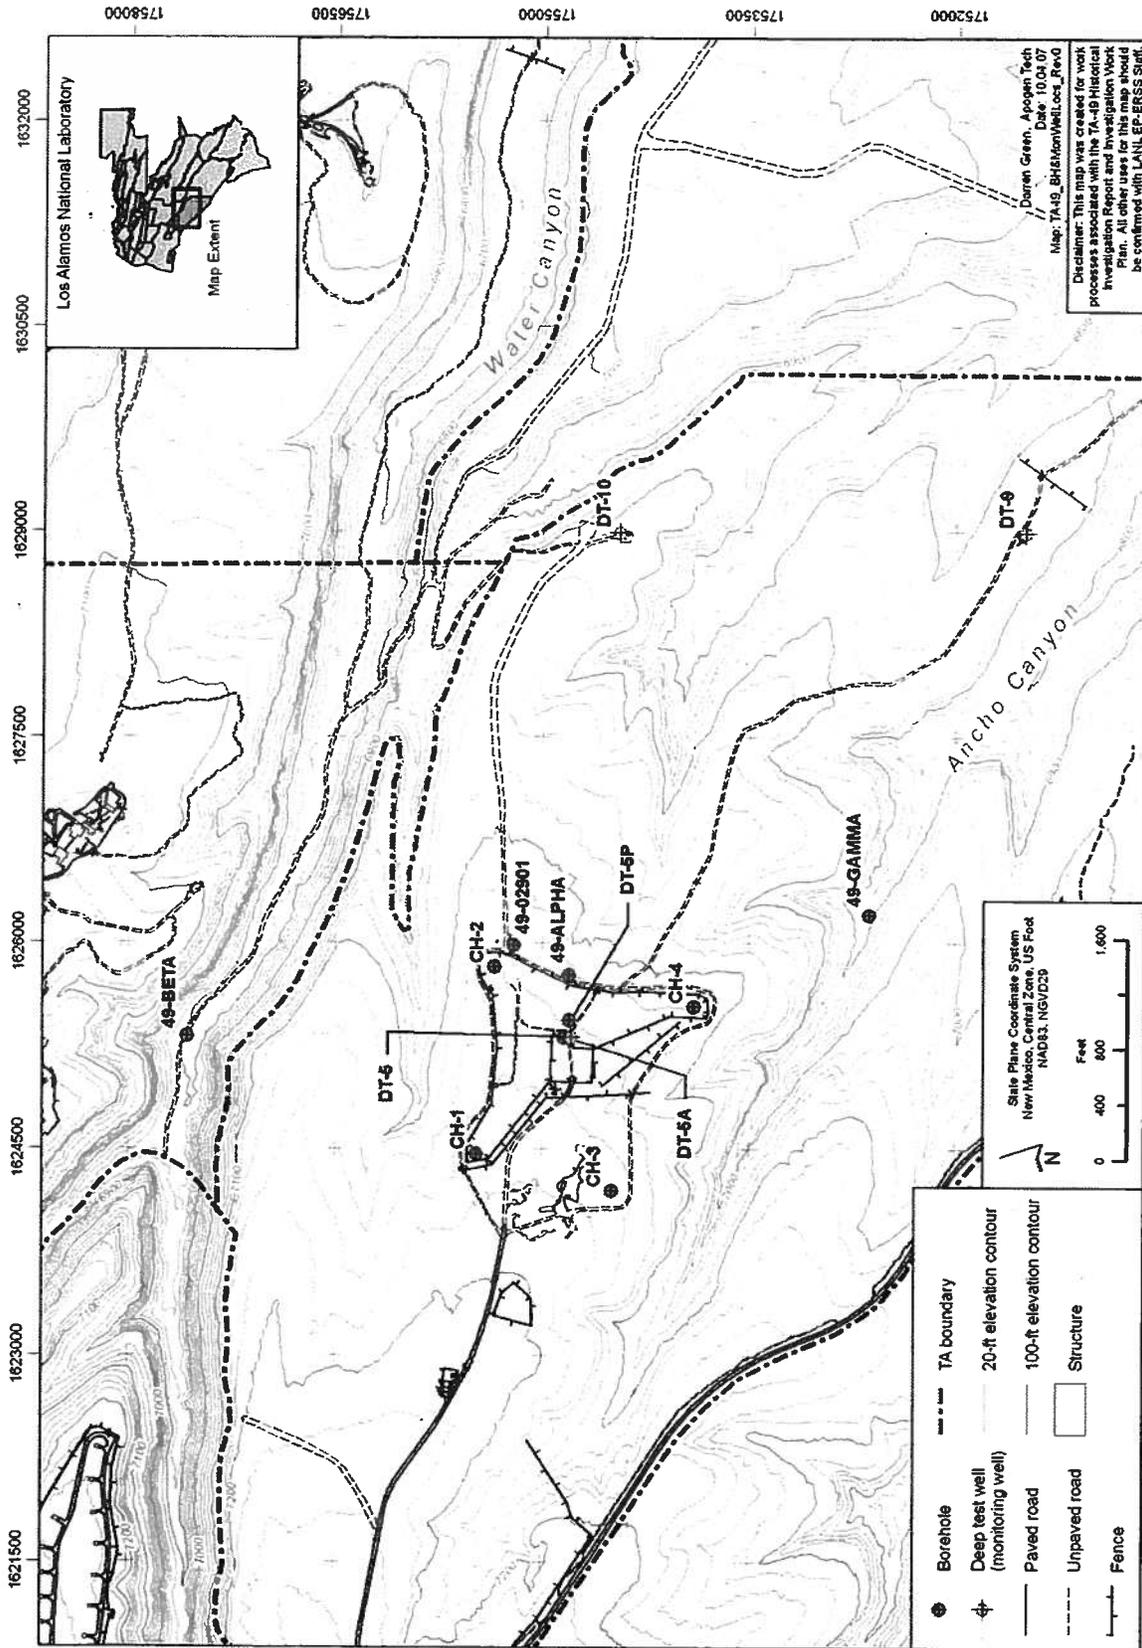


Figure 3.3-1 Locations of deep test wells and select boreholes at TA-49

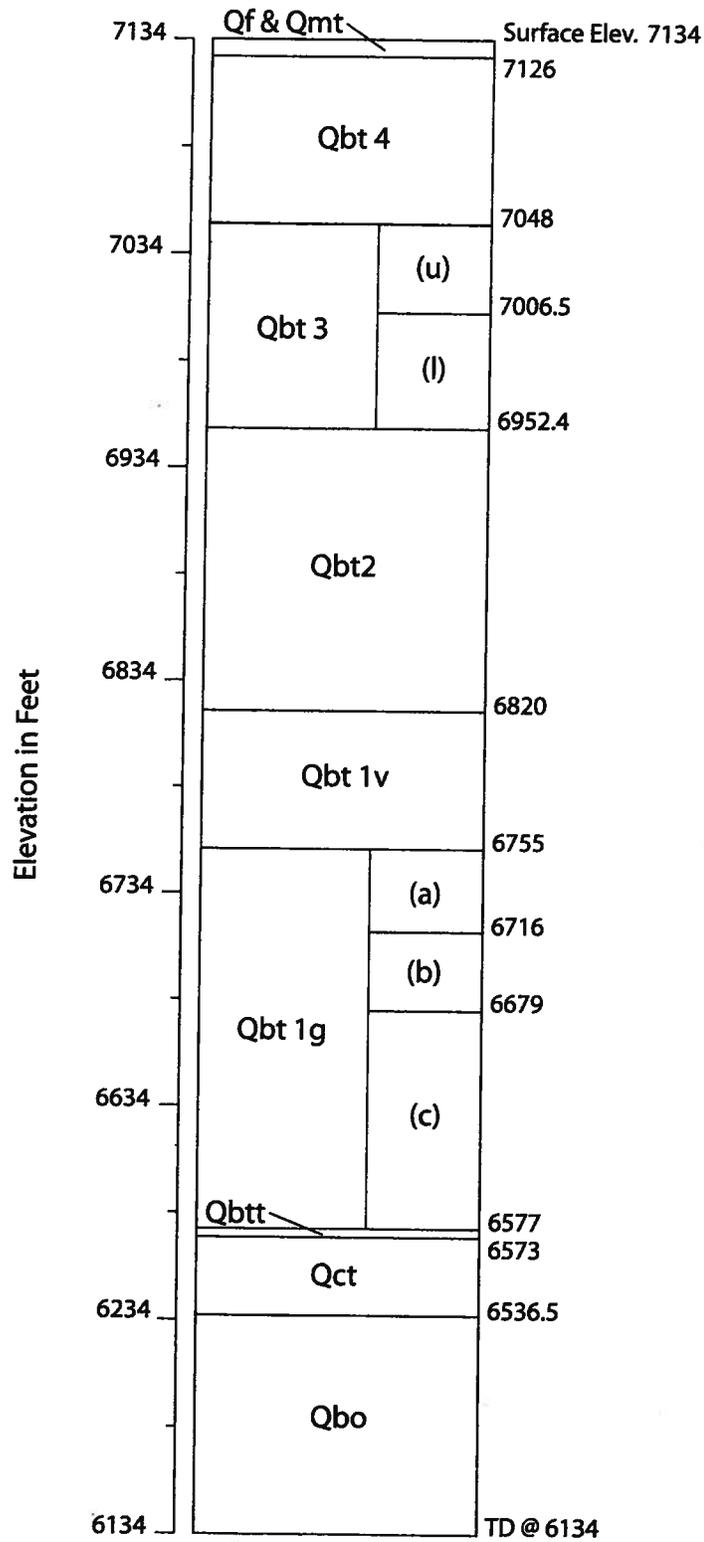

Borehole Location 49-02901

(Adapted From Stimac et al. 2002)

Source: Adapted from Stimac et al. 2002, 073391.

Figure 2.5-3 Stratigraphy of borehole location 49-02901

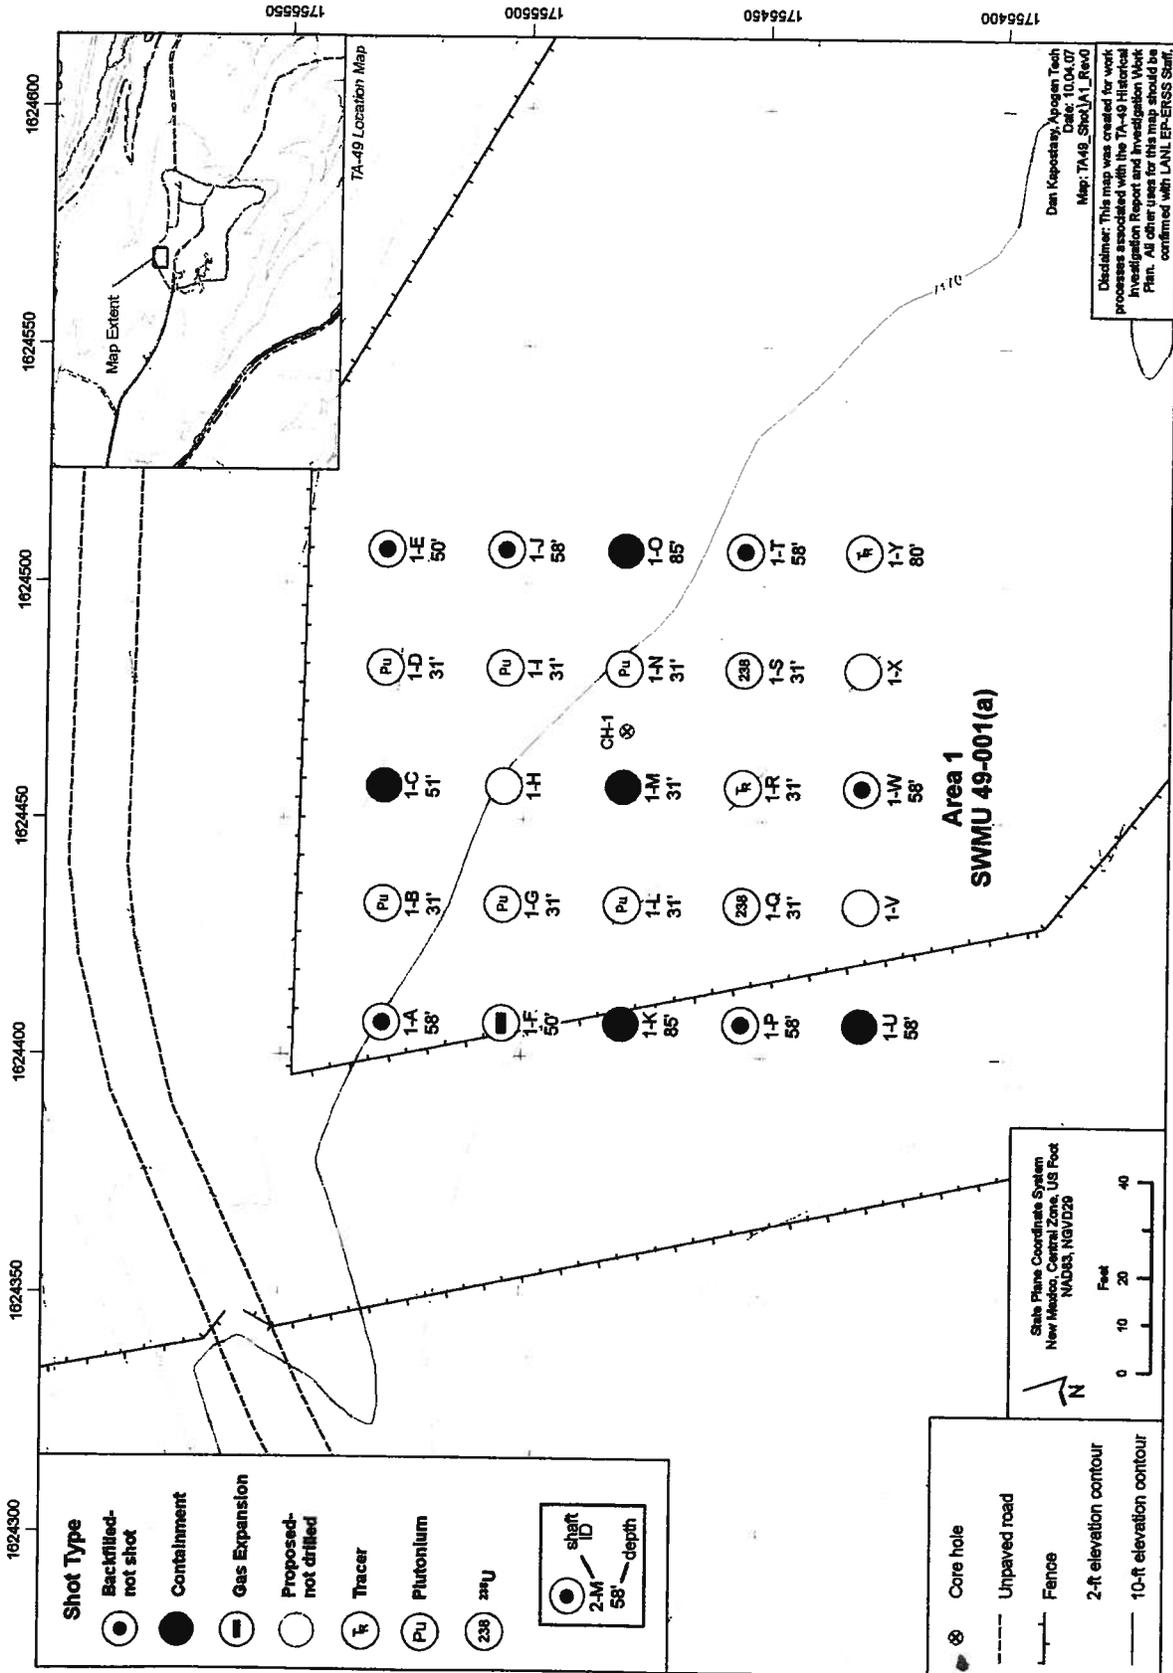


Figure 1.0-3 Area 1 experimental shaft details

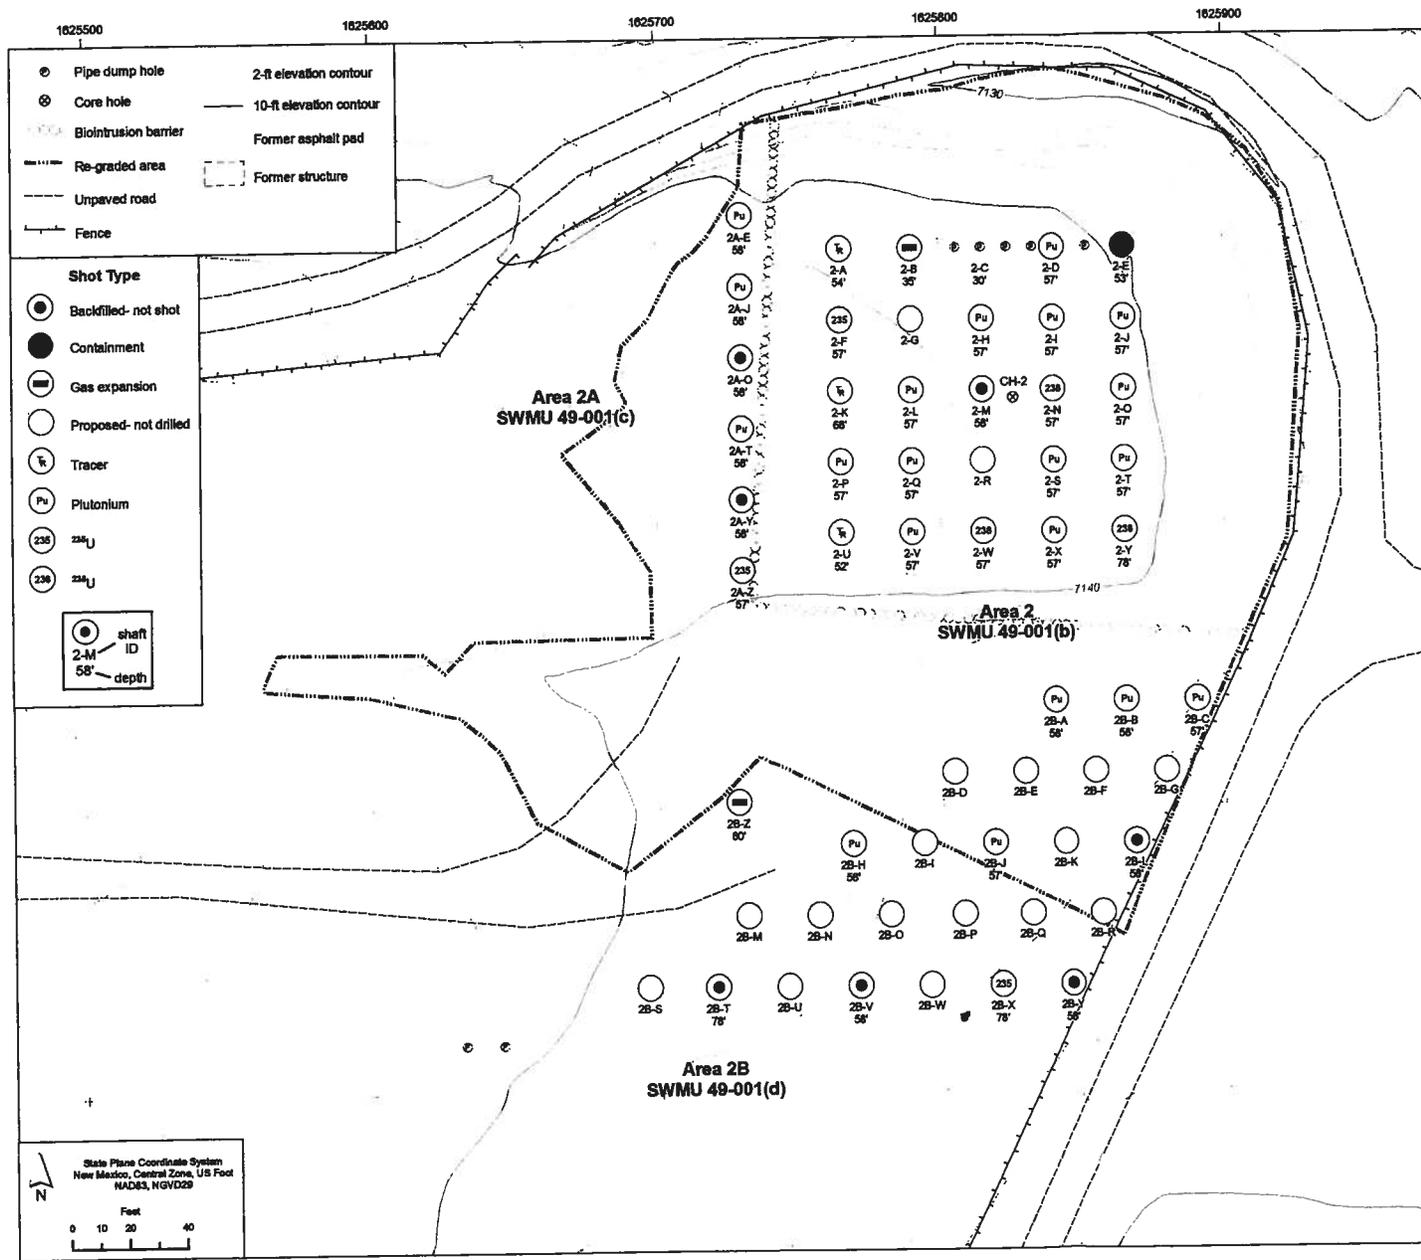


Figure 1.0-4 Area 2, Area 2A, and Area 2B experimental shaft details

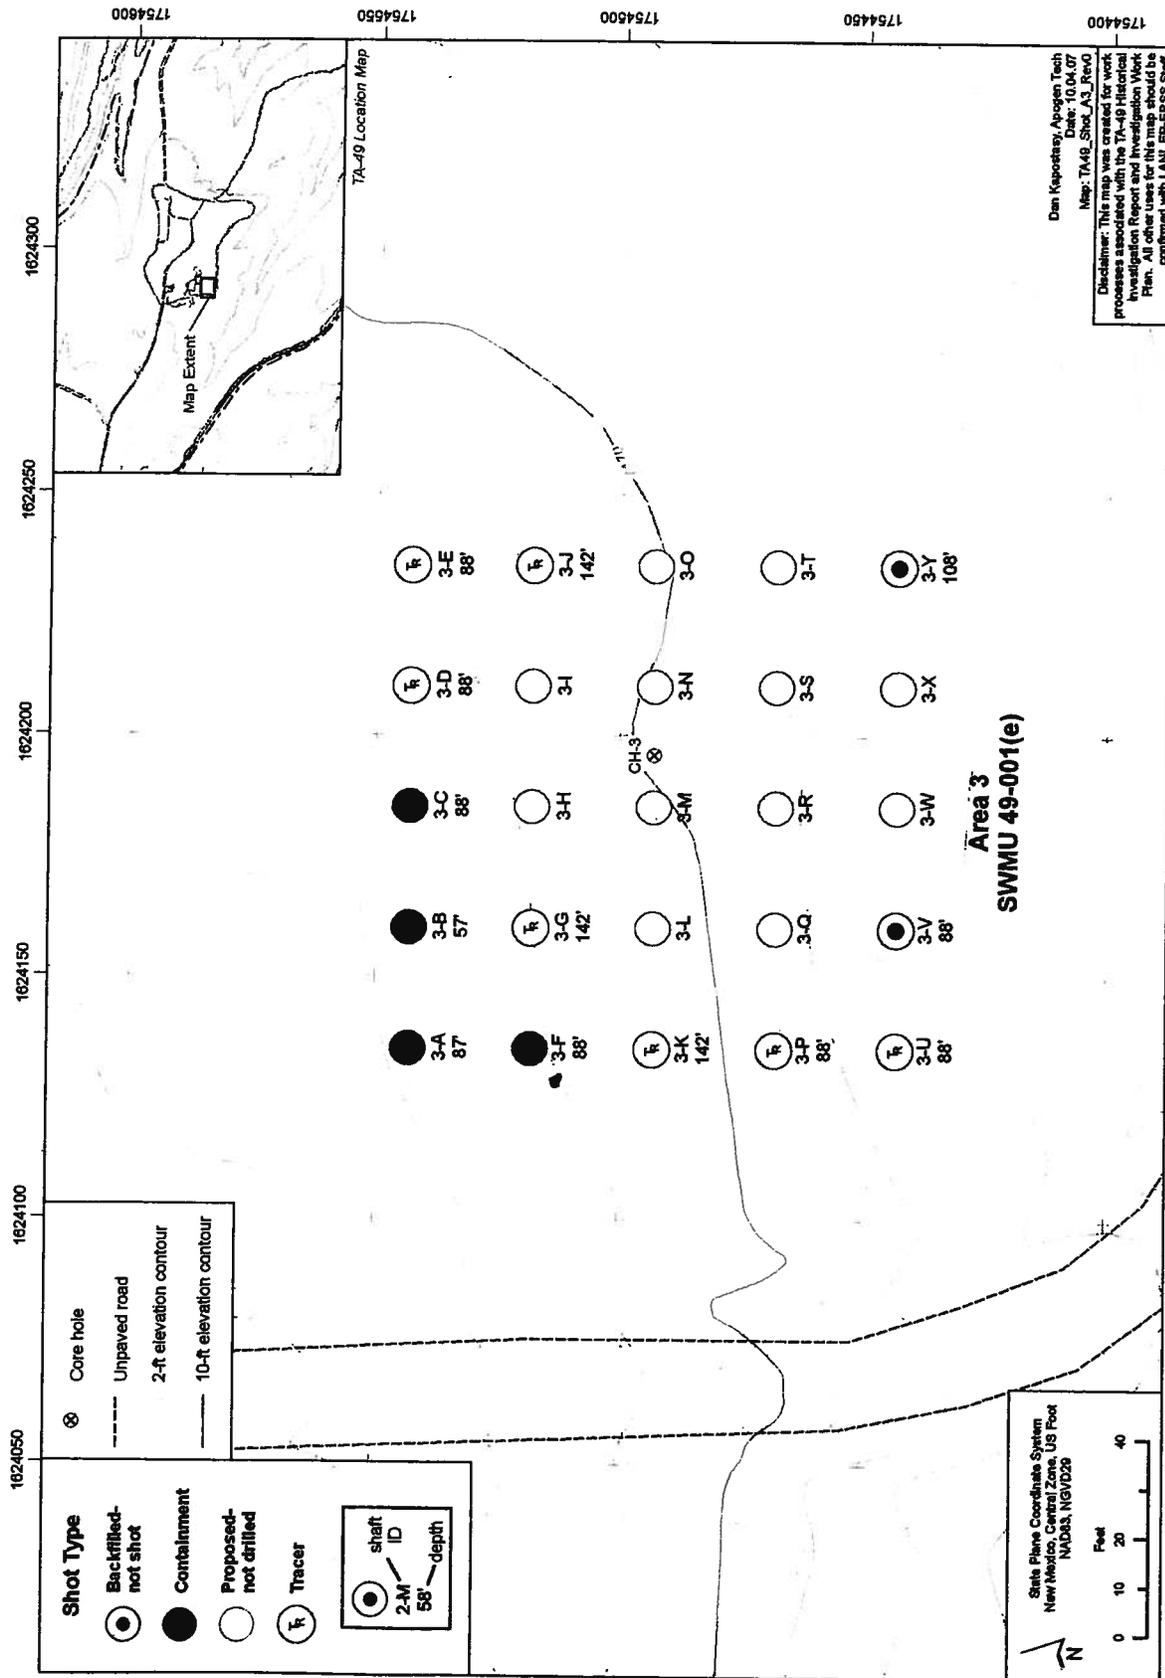


Figure 1.0-5 Area 3 experimental shaft details

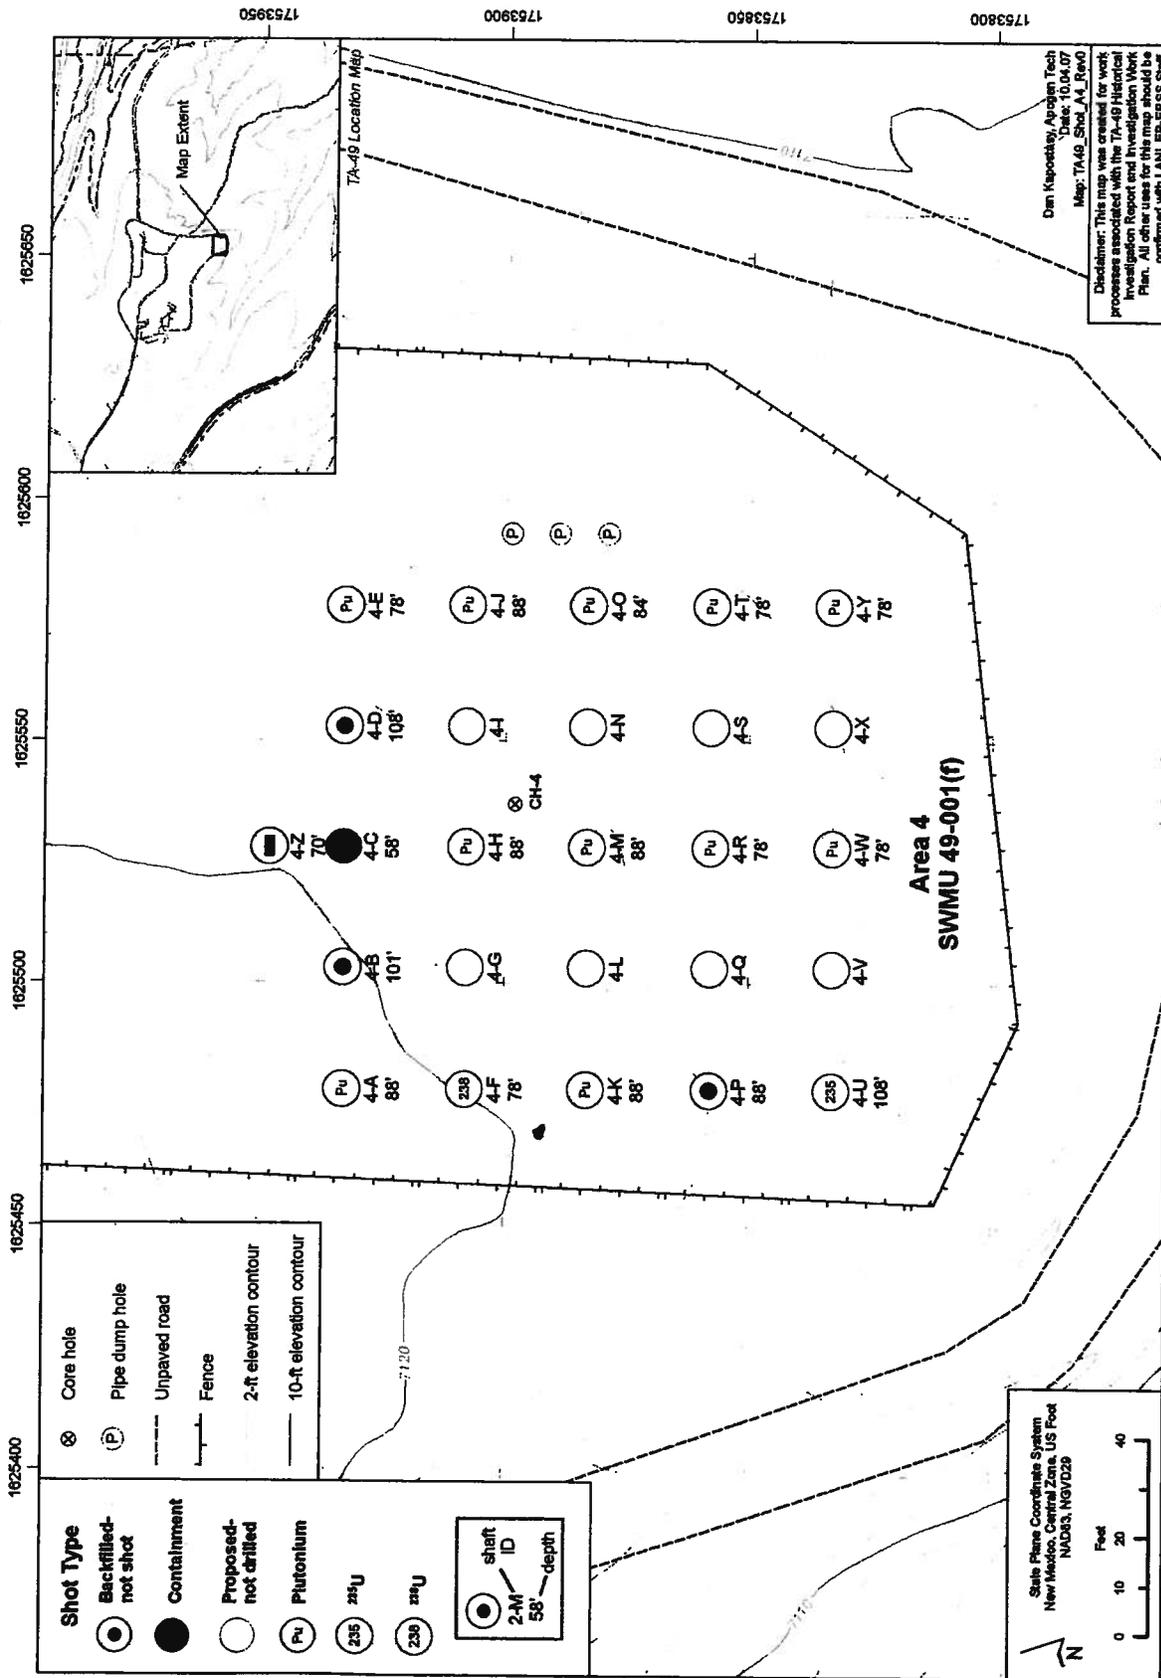


Figure 1.0-6 Area 4 experimental shaft details

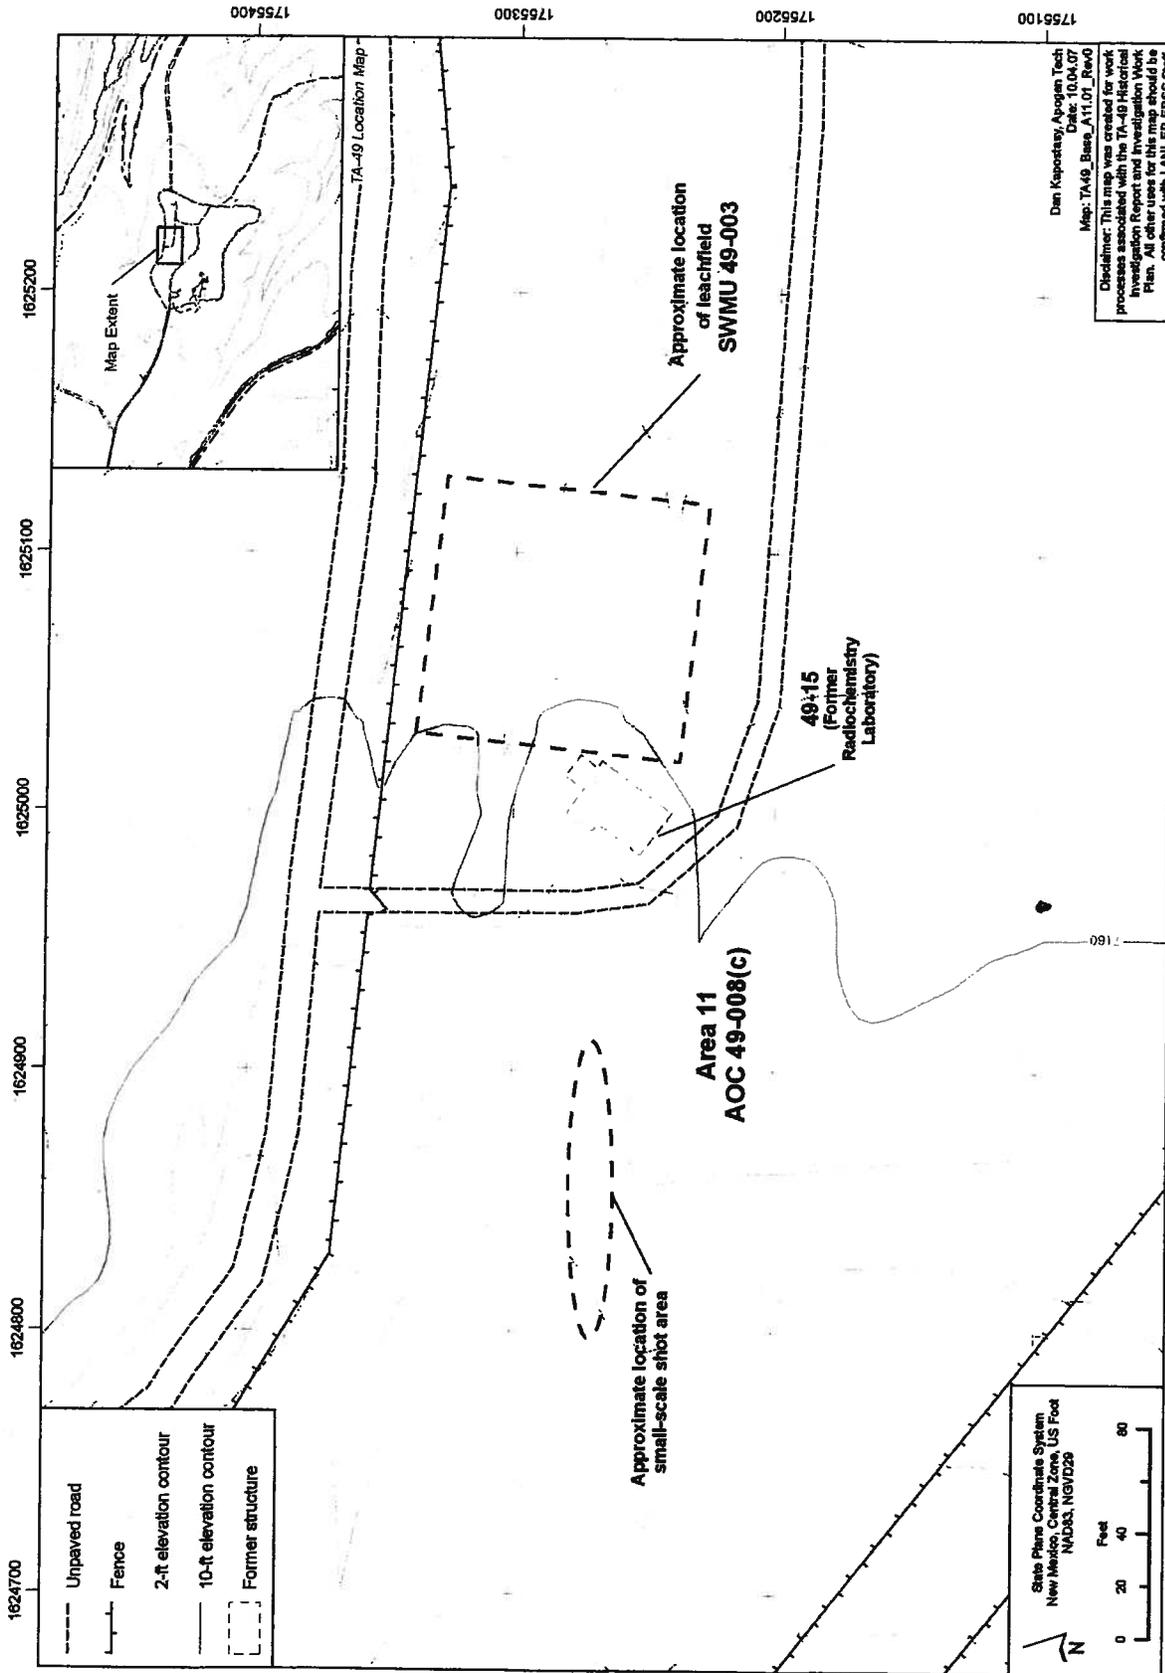


Figure 2.4-2 General site layout of Area 11

