04/09/91 Alb Gordon
S. F. Rec 1991

State of New Mexico
ENVIRONMENT DEPARTMENT
Harold Runnels Building
1190 St. Francis Drive
Santa Fe, New Mexico 87503

JUDITH M. ESPINOSA
SECRETARY

RON CURRY
DEPUTY SECRETARY

BRUCE KING
GOVERNOR

III

CERTIFIED MAIL
RETURN RECEIPT REQUESTED

April 4, 1991

Scott E. Fore
Vice President, Environment, Health and Safety
Safety-Kleen Corp.
777 Big Timber Road
Elgin, IL 60123

RE: OPERATING PERMIT
NMD980698849-1

Dear Mr. Fore:

Enclosed is the operating permit required by the Resource Conservation and Recovery Act (RCRA), as amended (42 U.S.C. 6901, et seq. and the New Mexico Hazardous Waste Act (Sections 74-4-1 et seq. NMSA 1978) for the management of hazardous waste in the container and tank storage facility at the Safety-Kleen Farmington Service Center. This operating permit will become effective 30 days after receipt in accordance with the New Mexico Hazardous Waste Regulations (HWMR-6), Part IX, Section 902.A.10. The U.S. Environmental Protection Agency (EPA), Region 6 will issue the permit for the Hazardous and Solid Waste Amendments of 1984.

The New Mexico Environment Department (NMED) received numerous comments from Safety-Kleen, EPA, Occupational Health and Safety Bureau (OSHA), and the Hazardous and Radioactive Waste Bureau during the comment period on the draft permit. A copy of the NMED responses to comments is enclosed for your information.

You have the right to appeal this decision in accordance with the New Mexico Hazardous Waste Act, Section 74-4-4.2.G. which reads as follows: "Any person adversely affected by a decision of the Secretary concerning the issuance, modification, suspension or revocation of a permit may appeal the decision by filing a notice of appeal with the court of appeals within thirty days after the date the decision is made. The appeal shall be on the record made at the hearing. The appellant shall certify in his notice of appeal that arrangements have been made with the Department for a sufficient number of transcripts of the record of the hearing on which the appeal (sic.) depends to support his appeal

Operating permit in magazine file

to the court, at the expense of the appellant, including one copy which he shall furnish to the department."

If you have any questions on the technical content of the permit, please contact Dr. A. Elizabeth Gordon on the Hazardous and Radioactive Waste Bureau staff at 827-2862.

Yours truly,

Judith M. Espinosa
Secretary,
New Mexico Environment Department

Enclosures (2)

cc: Mr. Bill Honker, EPA 6H-P. w/ encls.
Mr. Garth Graves, NMED District I, w/out encls.

JE/DE/de

Hazardous Waste Facility Permit

PERMITTEE: Safety-Kleen Farmington Service Center

ID NO: NMD980698849

PERMIT NO: NMD980698849-1

LOCATION: 4200A Hawkins Road, Farmington, NM 87401

Pursuant to the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act (RCRA), as amended 42 U.S.C. 6901, et seq. NMSA 1978), a permit is issued to the Safety-Kleen Farmington Service Center (hereafter called the Permittee) to operate a hazardous waste container and tank storage facility at the location stated above.

The Permittee must comply with all the terms and conditions of this permit. This permit consists of the conditions contained herein including the attachments. Applicable provisions of regulations cited are those which are in effect on the effective date of this permit, New Mexico Hazardous Waste Management Regulations (HWMR-6). This permit shall become effective upon the date of issuance in accordance with the New Mexico Hazardous Waste Act, Section 74-4-4.2 and shall run for a period of ten years.

This permit is also based on the assumption that all information contained in the permit application is accurate and that the facility will be operated as specified in the application. The permit application consists of information submitted in the original Part B permit application, dated September 14, 1987, and subsequent submissions received June 11, 1990, September 26, 1990 and in numerous exchanges of technical documents.

Any inaccuracies found in the information may be grounds for the termination or modification of this permit and potential enforcement action.

Signed this 7th day of April, 1991

by Judith M. Espinosa

Judith M. Espinosa, Secretary,
New Mexico Environment Department

New Mexico
Health and Environment Department
Environmental Improvement Division

CONTENTS

Module I	General Permit Conditions	I-1 to I-9
Module II	General Facility Conditions	II-1 to II-6
Module III	Container Storage	III-1 to III-5
Module IV	Tank Storage	IV-1 to IV-6
Module V	HSWA Conditions	V-1 to V-8
Attachment A	Waste Analysis Plan	A-1 to A-12
Attachment B	Security Measures	B-1
Attachment C	Inspection Procedures	C-1 to C-2
Attachment D	Personnel Training	D-1 to D-7
Attachment E	Waste Handling, Preparedness, and Prevention Procedures	E-1 to E-11
Attachment F	Contingency Plan	F-1 to F-14
Attachment G	Closure Plan	G-1 to G-12
Attachment H	Permit Application Part A	H-1 to H-10
Attachment I	New Mexico Hazardous Waste Management Regulations (HWMR-6)	I-1 to I-12 40 CFR 260-271

MODULE I - GENERAL PERMIT CONDITIONS

I.A. EFFECT OF PERMIT

The Permittee is allowed to store hazardous waste in accordance with the conditions of this Permit. Any storage of hazardous waste requiring a permit under the New Mexico Hazardous Waste Management Regulations (HWMR-6), Part V and not specifically authorized in this Permit is prohibited. Subject to HWMR-6, Pt. IX, 40 CFR section 270.4, compliance with this Permit during its term constitutes compliance, for purposes of enforcement, with the New Mexico Hazardous Waste Act (Sections 74-4-1 et seq. NMSA 1978) and HWMR-6, Pts. V, VII, and IX, only for those management practices specifically authorized by this Permit. The Permittee is also required to comply with HWMR-6, Pts. I, II III and IV to the extent the requirements of those Parts are applicable. The Permittee must also comply with all applicable self-implementing provisions imposed by the Resource Conservation and Recovery Act (RCRA) or HWMR-6, Pt. VIII. A complete (RCRA) permit consists of this Permit and a US EPA Permit issued under the provisions of the Hazardous and Solid Waste Amendments of 1984 (HSWA) which addresses the portion of the RCRA program for which the State is not authorized. Issuance of this Permit does not convey any property rights of any sort or any exclusive privilege; nor does it authorize any injury to persons or property, any invasion of other private rights, or any infringement of state or local law or regulations. Compliance with the terms of this Permit does not constitute a defense to any order issued or any action brought under Sections 3008(a), 3008(h), 3013, or 7003 of RCRA; Sections 106(a), 104 or 107 of the Comprehensive Environmental Response, Compensation, and Liability Act of 1980 (42 U.S.C. 9601 et seq., commonly known as CERCLA), or any other law providing for protection of public health or the environment. (HWMR-6, Pt. IX, § 270.4, 270.30(g))

I.B. PERMIT ACTIONS

I.B.1. Permit Modification, Revocation and Reissuance, and Termination

This Permit may be modified, revoked and reissued, or terminated for cause, as specified in HWMR-6, Pt. IX, § 270.41, 270.42, and 270.43. The filing of a request for a permit modification, revocation and reissuance, or termination, or the notification of planned changes or anticipated noncompliance on the part of the Permittee, does not stay the applicability or enforceability of any permit condition. (HWMR-6, Pt. IX, § 270.4(a) and 270.30(f))

I.B.2. Permit Renewal

This Permit may be renewed as specified in HWMR-6, Pt. IX, § 270.30(b) and Permit Condition I.E.2. Review of any application for a Permit renewal shall consider improvements in the state of control and measurement technology, as well as changes in applicable regulations. (HWMR-6, Pt. IX, § 270.30(b))

I.C. SEVERABILITY

The provisions of this Permit are severable, and if any provision of this Permit, or the application of any provision of this Permit to any circumstance, is held invalid, the application of such provision to other circumstances and the remainder of this Permit shall not be affected thereby. (HWMR-6, Pt. X, Section 1003)

I.D. DEFINITIONS

For purposes of this Permit, terms used herein shall have the same meaning as those in HWMR-6, Pts. I, V, VII, VIII, and IX, unless this Permit specifically provides otherwise. Where terms are not defined in the regulations or the Permit, the meaning associated with such terms shall be defined by a standard dictionary reference or the generally accepted scientific or industrial meaning of the term. "Secretary" means the Secretary of the New Mexico New Mexico Environment Department (NMED), or his designee or authorized representative. "Regional Administrator" means the Regional Administrator of EPA Region VI, or his designee or authorized representative.

I.E. DUTIES AND REQUIREMENTS

I.E.1. Duty to Comply

The Permittee shall comply with all conditions of this Permit, except to the extent and for the duration such noncompliance is authorized by an emergency Permit. Any Permit noncompliance, other than noncompliance authorized by an emergency Permit, constitutes a violation of RCRA and is grounds for enforcement action; for Permit termination, revocation and reissuance, or modification; or for denial of a Permit renewal application. (HWMR-6, Pt. IX, § 270.30(a))

I.E.2. Duty to Reapply

If the Permittee wishes to continue an activity allowed by this Permit after the expiration date of this Permit, the Permittee shall submit a complete application for a new Permit at least 180 days prior to Permit expiration. (HWMR-6, Pt. IX, §§ 270.10(h), 270.30(b))

I.E.3. Permit Expiration

Pursuant to HWMR-6, Pt. IX, § 270.50, this Permit shall be effective for a fixed term of ten years from its effective date. As long as ED is the Permit-issuing authority, this Permit and all conditions herein will remain in effect beyond the Permit's expiration date, if the Permittee has submitted a timely, complete application (see HWMR-6, Pt. IX, § 270.10, 270.13 through 270.29) and, through no fault of the Permittee, the Secretary has not issued a new Permit, as set forth in HWMR-6, Pt. IX, § 270.51.

I.E.4. Need to Halt or Reduce Activity Not a Defense

It shall not be a defense for the Permittee in an enforcement action, that it would have been necessary to halt or reduce the Permitted activity in order to maintain compliance with the conditions of this Permit. (HWMR-6, Pt. IX, § 270.30(c))

I.E.5. Duty to Mitigate

In the event of noncompliance with this Permit, the Permittee shall take all reasonable steps to minimize releases to the environment and shall carry out such measures as are reasonable to prevent significant adverse impacts to human health or the environment. (HWMR-6, Pt. IX, § 270.30(d))

I.E.6. Proper Operation and Maintenance

The Permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the Permittee to achieve compliance with the conditions of this Permit. Proper operation and maintenance includes effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory and process controls, including appropriate quality assurance/quality control procedures. This

provision requires the operation of back-up or auxiliary facilities or similar systems only when necessary to achieve compliance with the conditions of this Permit. (HWMR-6, Pt. IX, § 270.30(e))

I.E.7. Duty to Provide Information

The Permittee shall furnish to the Secretary, within a reasonable time, any relevant information which the Secretary may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this Permit, or to determine compliance with this Permit. The Permittee shall also furnish to the Secretary, upon request, copies of records required to be kept by this Permit. (HWMR-6, Pt. V, § 264.74(a); Pt. IX, § 270.30(h))

I.E.8. Inspection and Entry

Pursuant to HWMR-6, Pt. IX, § 270.30(i), the Permittee shall allow the Secretary, or an authorized representative, upon the presentation of credentials and other documents as may be required by law, to:

I.E.8.a. Enter at reasonable times upon the Permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this Permit;

I.E.8.b. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this Permit;

I.E.8.c. Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this Permit; and

I.E.8.d. Sample or monitor, at reasonable times, for the purposes of assuring Permit compliance or as otherwise authorized by RCRA, any substances or parameters at any location.

I.E.9. Monitoring and Records

I.E.9.a. Samples and measurements taken for the purpose of monitoring shall be representative of the monitored substance or activity. The method used to obtain a representative sample must be described in Permit Attachment A (the waste analysis plan), or be approved by the

Secretary. Analytical methods must be those specified in Test Methods for Evaluating Solid Waste: Physical/Chemical Methods (EPA publication SW-846); Standard Methods of Wastewater Analysis; or an equivalent method as specified in Permit Attachment A or approved by the Secretary. (HWMR-6, Pt. IX, § 270.30 (j)(1)).

I.E.9.b. The Permittee shall retain records of all monitoring, sampling, and analytical information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports and records required by this Permit, the certification (concerning waste minimization) required by HWMR-6, Pt. V, § 264.73(b)(9), and records of all data used to complete the application for this Permit for a period of at least 3 years from the date of the sample, measurement, report, record, certification, or application. These periods may be extended by request of the Secretary at any time and are automatically extended during the course of any unresolved enforcement action regarding this facility. (HWMR-6, Pt. IX, § 264.74(b); Pt. IX, § 270.30(j)(2))

I.E.9.c. Pursuant to HWMR-6, Pt. IX, § 270.30(j)(3), records of monitoring, sampling, and analytical information shall specify:

i. The dates, exact place, and times of sampling or measurements;

ii. The individuals who performed the sampling or measurements;

iii. The dates analyses were performed;

iv. The individuals who performed the analyses;

v. The analytical techniques or methods used; and

vi. The results of such analyses.

I.E.10. Reporting Planned Changes

The Permittee shall give notice to the Secretary, as soon as possible, of any planned physical alterations

or additions to the Permitted facility. (HWMR-6, Pt. IX, § 270.30(l)(1))

I.E.11. Reporting Anticipated Noncompliance

The Permittee shall give advance notice to the Secretary of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements. (HWMR-6, Pt. IX, § 270.30(l)(2))

I.E.12. Transfer of Permits

This Permit is not transferable to any person, except after notice to the Secretary. The Secretary may require modification or revocation and reissuance of the Permit pursuant to HWMR-6, Pt. IX, § 270.40. Before transferring ownership or operation of the facility during its operating life, the Permittee shall notify the new owner or operator in writing of the requirements of HWMR-6, Pts. V and IX, and this Permit. (HWMR-6, Pt. IX, § 270.30(1)(3); Pt. V, § 264.12(c))

I.E.13. Twenty-four hour and subsequent reporting

I.E.13.a The Permittee shall report to the Secretary any spill, release, fire, explosion, or other occurrence which involves a quantity of hazardous waste greater than one pound which escapes the secondary containment system, or which might otherwise endanger human health or the environment. This report must be made orally within twenty-four hours of the time the Permittee first becomes aware of the situation. It must be made even if the facility's contingency plan is not implemented. The report must include:

i. Name, address, and telephone number of the owner or operator;

ii. Name, address, and telephone number of the facility;

iii. Date, time, and type of incident;

iv. Name and quantity of materials involved;

v. The extent of injuries, if any;

vi. An assessment of actual or potential hazards to the environment and human health outside the facility, including particularly any

possible threat to public or private drinking water supplies, where this is applicable; and

vii. Estimated quantity and disposition of recovered material that resulted from the incident.

I.E.13.b A written submission shall also be provided within five days of the time the Permittee becomes aware of the circumstances. The written submission shall contain a description of the occurrence and its cause; the period(s) of the occurrence (including exact dates and times); whether the situation has been corrected; and, if not, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent recurrence of the situation. The Secretary may waive the five-day written notice requirement in favor of a written report within 15 days. (HWMR-6, Pt. IX, § 270.30(l)(6))

I.E.13.c If the Contingency Plan is implemented, the Permittee must comply with the reporting requirements listed in Permit Attachment F, pages F - 4 and F - 5.

I.E.13.d If a spill or release from the tank system occurs, the Permittee must comply with the reporting requirements listed in Module IV, Permit Condition IV.G.

I.E.14. Other Noncompliance

The Permittee shall report all other instances of noncompliance, not otherwise required to be reported by Permit Conditions I.E.1. and I.E.13., as soon as the Permittee becomes aware of them. The reports shall contain the information listed in Permit Condition I.E.13.b (HWMR-6, Pt. IX, § 270.30(l)(10))

I.E.15. Other Information

Whenever the Permittee becomes aware that it failed to submit any relevant facts in the Permit application, or submitted incorrect information in a Permit application or in any report to the Secretary, the Permittee shall promptly submit such facts or information. (HWMR-6, Pt. IX, § 270.30(l)(11))

I.F. SIGNATORY REQUIREMENT

All applications, reports, or information submitted to or requested

by the Secretary, his designee, or authorized representative, shall be signed and certified in accordance with HWMR-6, Pt. IX, § 270.11 and 270.30(k).

I.G. REPORTS, NOTIFICATIONS, AND SUBMISSIONS TO THE SECRETARY

All reports, notifications, or other submissions which are required by this Permit to be sent or given to the Secretary should be sent by certified mail or given to:

Secretary
Environment Department
Harold Runnels Bldg. N2300
1190 St. Francis Dr.
P.O. Box 26110
Santa Fe, New Mexico 87502

I.H. CONFIDENTIAL INFORMATION

In accordance with HWMR-6, Pt. IX, § 270.12, the Permittee may claim as confidential any information required to be submitted by this Permit.

I.I. DOCUMENTS TO BE MAINTAINED AT THE FACILITY

The Permittee shall maintain at the facility, until closure is completed and certified by an independent, registered professional engineer, the following documents and all amendments, revisions and modifications to these documents:

I.I.1. Waste Analysis Plan, as required by HWMR-6, Pt. V, § 264.13 and this Permit.

I.I.2. Inspection schedules, as required by HWMR-6, Pt. V, § 264.15(b)(2) and this Permit.

I.I.3. Personnel training documents and records, as required by HWMR-6, Pt. V, § 264.16(d) and this Permit.

I.I.4. Contingency Plan, as required by HWMR-6, Pt. V, § 264.53(a) and this Permit.

I.I.5. Operating record, as required by HWMR-6, Pt. V, § 264.73 and this Permit.

I.I.6. Closure Plan, as required by HWMR-6, Pt. V, § 264.112(a) and this Permit.

I.I.7. Annually-adjusted cost estimate for facility closure as required by HWMR-6, Pt. V, § 264.142(d) and this Permit.

I.I.8. All other documents required by Module I, Permit Condition I.E.9; Module II, Permit Condition II.H.6.;

and Module III, including Permit Condition III.B.3.a.ii.

I.J. PERMIT CONSTRUCTION

I.J.1. Citations

Whenever paragraphs of this Permit or of the Hazardous Waste Management Regulations are cited, such citations include all subordinate sections of the cited paragraph. When subordinate sections are cited, such citations includes all subsections of the cited subparagraphs. All such citations shall be considered an inclusion by reference to this Permit in accordance with HWMR-6, Pt. IX.

I.J.2. Gender

Whenever the pronoun "he" used in reference to the Secretary of the New Mexico Environment Department or the Permittee, it is to be read as "she" in any instance where the object of the reference is female.

MODULE II - GENERAL FACILITY CONDITIONS

II.A. DESIGN AND OPERATION OF FACILITY

The Permittee shall construct, maintain and operate the facility to minimize the possibility of a fire, explosion, or any unplanned sudden or nonsudden release of hazardous waste constituents to air, soil, or surface water which could threaten human health or the environment, as required by HWMR-6, Pt. V, § 264.31. The Permittee shall maintain the structures and equipment and follow the procedures described in Permit Attachments A throught G.

II.B. REQUIRED NOTICES

II.B.1. Hazardous Waste Imports

This Permit does not allow the Permittee to accept wastes from a foreign source. If the Permittee is to receive hazardous waste from a foreign source, he shall apply for and receive a permit modification in accordance with HWMR-6, Pt. IX, § 270.41 or 270.42 prior to accepting such waste.

II.B.2. Hazardous Waste from Off-Site Sources

When the Permittee is to receive hazardous waste from an off-site source (except where the Permittee is also the generator), he must inform the generator in writing that he has the appropriate Permits and will accept the waste the generator is shipping. The Permittee must keep a copy of this written notice as part of the operating record. (HWMR-6, Pt. V, § 264.12(b))

II.C. GENERAL WASTE ANALYSIS

The Permittee shall follow the waste analysis procedures required by HWMR-6, Pt. V, § 264.13, as described in the attached Waste Analysis Plan, Permit Attachment A.

The Permittee shall verify the analysis of each waste stream according to the schedule set out in Permit Attachment A. Any sampling, testing, or analytical methods not specifically described in Permit Attachment A must be as specified in Test Methods for Evaluating Solid Waste: Physical/Chemical Methods, EPA Publication SW-846, Standard Methods of Wastewater Analysis, or equivalent methods approved by the Secretary. At a minimum, the Permittee shall maintain proper functional instruments, use approved sampling and analytical methods, verify the validity of sampling and analytical procedures, and perform correct calculations. If the

Permittee uses a contract laboratory to perform analyses, the Permittee shall inform the laboratory in writing that it must operate under the waste analysis conditions set forth in this Permit.

II.D. SECURITY

The Permittee shall comply with the security provisions of HWMR-6, Pt. V, § 264.14(b)(2) and 264.14(c); and Permit Attachment B (Security Measures).

II.E. GENERAL INSPECTION REQUIREMENTS

The Permittee shall follow the inspection schedule set out in Permit Attachment C (Inspection Procedures). The Permittee shall remedy any deterioration or malfunction discovered by an inspection as required by HWMR-6, Pt. V, § 264.15(c). Records of inspection shall be kept, as required by HWMR-6, Pt. 5, § 264.15(d) and by Module I, Permit Condition I.I.2.

II.F. PERSONNEL TRAINING

The Permittee shall conduct personnel training, as required by HWMR-6, Pt. V, § 264.16. This training program shall follow the attached outline, Permit Attachment D (Personnel Training). The Permittee shall maintain training documents and records, as required by HWMR-6, Pt. V, §§ 264.16(d) and (e), and Permit Condition I.I.3.

II.G. SPECIAL PROVISIONS FOR IGNITABLE, REACTIVE, OR INCOMPATIBLE WASTE

The Permittee shall comply with the requirements of HWMR-6, Pt. V, § 264.17(a). The Permittee shall follow the procedures for handling ignitable, reactive, and incompatible wastes set forth in Permit Attachment E (Waste Handling Practices).

II.H. PREPAREDNESS AND PREVENTION

II.H.1. Required Equipment

At a minimum, the Permittee shall maintain at the facility the equipment set forth in Permit Attachment E (Waste Handling Practices) and Permit Attachment F (Contingency Plan), as required by HWMR-6, Pt. V, § 264.32.

II.H.2. Testing and Maintenance of Equipment

The Permittee shall test and maintain the equipment specified above in Permit Condition II.H.1, as

necessary, to assure its proper operation in time of emergency, as required by HWMR-6, Pt. V, § 264.33.

II.H.3. Access to Communications or Alarm System

The Permittee shall maintain access to the communications or alarm system as required by HWMR-6, Pt. V, § 264.34.

II.H.4. Required Aisle Space

At a minimum, the Permittee shall maintain aisle space as required by HWMR-6, Pt. V, § 264.35 and the plans and specifications contained in Permit Attachment E.

II.H.5. Arrangements with Local Authorities

The Permittee shall maintain preparedness and prevention arrangements with state and local authorities as required by HWMR-6, Pt. V, § 264.37. If state or local officials refuse to enter into preparedness and prevention arrangements with the Permittee, the refusal must be documented in the operating record.

II.H.6 The Permittee will maintain, in an accessible location, a current inventory showing type, location, and quantity of all hazardous materials and hazardous waste at the facility.

II.I. CONTINGENCY PLAN

II.I.1. Implementation of Plan

The Permittee shall immediately carry out the provisions of the Contingency Plan, Permit Attachment F, whenever there is a fire, explosion, or release of hazardous waste or constituents which could threaten human health or the environment.

II.I.2. Copies of Plan

The Permittee shall maintain and distribute copies of the Contingency Plan in accordance with the requirements of HWMR-6, Pt. V, 40 Section CFR 264.53.

II.I.3. Amendments to Plan

The Permittee shall review and immediately amend, if necessary, the Contingency Plan as required by HWMR-

6, Pt. V, § 264.54.

II.I.4. Emergency Coordinator

A trained emergency coordinator shall be available at all times in case of an emergency, as required by HWMR-6, Pt. V, § 264.55.

II.J. MANIFEST SYSTEM

The Permittee shall comply with the manifest requirements of HWMR-6, Pt. V, §§ 264.71, 264.72, and 264.76.

II.K RECORDKEEPING AND REPORTING

In addition to the recordkeeping and reporting requirements specified elsewhere in this Permit, the Permittee shall do the following:

II.K.1. Operating record

The Permittee shall maintain a written operating record at the facility, as required by HWMR-6, Pt. 5, § 264.73.

II.K.2. Biennial Report

The Permittee shall comply with the biennial reporting requirements of HWMR-6, Pt. V, § 264.75.

II.L. GENERAL CLOSURE REQUIREMENTS

II.L.1. Performance Standard

The Permittee shall close the facility, as required by HWMR-6, Pt. V, § 264.111 and in accordance with the Closure Plan, Permit Attachment G (the Closure Plan).

II.L.2. Amendment to Closure Plan

The Permittee shall amend the Closure Plan, in accordance with HWMR-6, Pt. V, § 264.112(c), whenever necessary.

II.L.3. Notification of Closure

The Permittee shall notify the Secretary in writing at least 45 days prior to the date on which he expects to begin closure of any of the facility as

required by HWMR-6, Pt. V, § 264.112(d).

II.L.4. Time Allowed For Closure

After receiving the final volume of hazardous waste, the Permittee shall treat or remove from the unit or facility all hazardous waste and shall complete closure activities in accordance with HWMR-6, Pt. V, § 264.113 and the schedules specified in Permit Attachment G (the Closure Plan).

II.L.5. Disposal or Decontamination of Equipment, Structures, and Soils

The Permittee shall decontaminate or dispose of all contaminated equipment, structures, and soils, as required by HWMR-6, Pt. V, § 264.114 and Permit Attachment G (the Closure Plan).

II.L.6. Certification of Closure

The Permittee shall certify that the facility has been closed in accordance with the specifications in the Closure Plan, as required by HWMR-6, Pt. V, § 264.115.

II.M. COST ESTIMATE FOR FACILITY CLOSURE

II.M.1. The Permittee shall keep at the facility a copy of the most recent closure cost estimate, based on the closure plan contained in Permit Attachment G and prepared in accordance with HWMR-6, Pt. V, § 264.142.

II.M.2. The Permittee must adjust the closure cost estimate annually for inflation in accordance with the requirements of HWMR-6, Pt. V, § 264.142(b).

II.M.3. The Permittee must revise the closure cost estimate whenever there is a change in the facility's Closure Plan, as required by HWMR-6, Pt. V, § 264.142(c).

II.N. FINANCIAL ASSURANCE FOR FACILITY CLOSURE

The permittee shall demonstrate continuous compliance with the requirements of HWMR-6, Pt. V, § 264.143. Annually during the life of this Permit, the Permittee must demonstrate continued compliance by submitting to the Secretary a copy of the documentation required by Pt. V, § 264.143 for the financial assurance mechanism(s) selected. This submission must be made at the time specified in

Pt. V, § 264.143; or, if none is specified, it must be made within thirty days after the anniversary of the issuance of this Permit. Any change in the financial assurance mechanisms used to satisfy these requirements, other than an increase in amount as required by Permit Condition II.M above, must be approved in advance by the Secretary as required by HWMR-6, Pt. V, § 264.143.

II.O. LIABILITY REQUIREMENTS

The Permittee shall demonstrate continuous compliance with the requirement of HWMR-6, Pt. V, § 264.147(a) to maintain liability coverage for sudden accidental occurrences in the amount of at least $1 million per occurrence with an annual aggregate of at least $2 million, exclusive of legal defense costs. This demonstration must be made by submitting a signed duplicate original of the insurance policy endorsement or Certificate of Insurance annually to the Secretary. This submission must be made on or before the expiration or anniversary date of the insurance policy. The wording of the endorsement or Certificate of Insurance must be identical to the wording required in HWMR-6, Pt. V, § 264.151(i) or (j).

II.P. INCAPACITY OF OWNERS OR OPERATORS, GUARANTORS, OR FINANCIAL INSTITUTIONS

The Permittee shall comply with the provisions of HWMR-6, Pt. V, § 264.148 whenever any of the events listed in that Section should occur.

II.Q. REQUIREMENTS FOR RELEASES

II.Q.1. Releases from the Container Storage Area or Tank Storage Area

If, based on information contained in reports required by Module I, Permit Conditions I.E.13.a.,b. and d., the Secretary determines that a release from the container and/or tank storage area is of such of quantity, duration or repeated occurrence that further assessment is required, he may direct the Permittee to conduct the sampling and analysis required pursuant to HWMR-6, Pt. IX, sec. 270.14(d).

II.Q.2. Releases from Newly Identified Solid Waste Management Units (SWMUs)

For newly identified SWMUs, the Permittee shall fulfill the requirements of Module V, Permit Condition V.E.

MODULE III - CONTAINER STORAGE

III.A CONTAINER STORAGE - MODULE HIGHLIGHTS

III.A.1 This permit authorizes storage of hazardous wastes in containers in the part of the warehouse equipped with secondary containment. The secondary containment is described briefly below, and more completely in Permit Attachment E (Waste Handling Practices).

III.A.2 The warehouse consists of the southern half of a metal storage building, enclosing approximately 1,530 square feet. This area is further divided into an office, restroom, and a secure area for the storage of various Safety-Kleen products, as well as an area with secondary containment for drum storage.

Spent immersion cleaner, spent dry cleaning solvents, and other dry cleaning wastes will be stored only in the area protected by a secondary containment system as described below and in Permit Attachment E. Unused Safety-Kleen chemical products may be stored in the area equipped with secondary containment. Wastes will be stored in 15-, 16-, 20-, and 30-gallon drums. The maximum volume of liquid (whether hazardous waste or any other liquid) that may be stored at any one time in the area equipped with secondary containment is 4,464 gallons. Secondary containment is provided by a flat, sealed concrete floor surrounded by a six-inch wide by four-inch high steel reinforced concrete curb, with a 448-gallon sealed concrete sump at the west end of the containment-equipped area.

III.A.3 The Permittee may store products awaiting distribution as well as hazardous waste in the storage units. However, product storage is subject to several restrictions to prevent compromising the safe storage of waste. These restrictions are set forth in Permit Conditions III.L, and include requirements that products not be stored in the same secondary containment area as any hazardous waste with which they might be incompatible, and that all liquids be counted in determining the maximum allowable liquid storage volume.

III.A.4 The Permittee will store waste in containers equivalent to the containers specified for each waste by the U. S. Department of Transportation (DOT) regulations, set forth in Title 49 of the Code of Federal Regulations, Part 173 (49 CFR 173). These containers will meet or exceed the requirements for strength and integrity specified by DOT at 49 CFR 178 for each class of container.

III.B PERMITTED AND PROHIBITED WASTE

III.B.1 The Permittee may store the following wastes in containers at the facility, subject to the terms of this Permit:

Description of Hazardous Waste	EPA Hazardous Waste Code	Maximum Volume	Number and Type of Containers
Spent Immersion Cleaner and dry cleaner waste	F002, F004, D001, D004, D005, D006, D007, D008, D009, D010, D011, D018, D019, D021, D022 D023, D024, D025, D026, D027, D028, D029, D030, D032, D033, D034, D035, D036, D037, D038, D039, D040, D041, D042, D043.	4,464 gallons	279 16-gal. drums or the equivalent volume in 5-, 15- or 30-gallon containers, stored as described in Permit Attachment E.

III.B.2 The Permittee shall not store any hazardous waste in containers that is not identified in Permit Condition III.B.1 above. If the amount of any waste code handled in a calendar year exceeds the amount listed for that waste code in Permit Attachment H (Part A of the permit application), the Permittee shall submit a report explaining the situation to ED and, if the increase in annual quantity is expected to be repeated, shall submit a revised Part A form by March 1 of the following year. The revised Part A will replace Attachment H and become part of this Permit.

III.B.3 The Permittee shall comply with the following conditions (Permit Conditions III.B.3.a through c below) regarding storage in containers of wastes identified in HWMR-6, Part VIII, 40 CFR Section 268.10, 268.11, and 268.12 as being subject to the restrictions on land disposal set forth in HWMR-6, Part VIII, 40 CFR Subpart C. The same conditions shall be imposed on the storage of any wastes that may become prohibited or restricted from land disposal by the New Mexico Hazardous Waste Management Regulations during the life of this Permit.

III.B.3.a.

i. Waste shall be stored for no longer than one year from the date of its first receipt by the Permittee, unless

ii. The Permittee furnishes proof to the Secretary that such storage for a period in excess of one year is solely for the purpose of accumulation of such quantities as are necessary to facilitate proper recovery, treatment or disposal.

III.B.3.b. Each container must be clearly marked as to its contents and the date each period of accumulation begins.

III.B.3.c. Hazardous wastes meeting the treatment standards in HWMR-6, Part VIII, 40 CFR Sections 268.41, 268.42, 268.43 are not subject to the storage prohibition in Permit Condition III.B.3.a above.

III.C CONDITION OF CONTAINERS

If a container holding hazardous waste is not in good condition (e.g., it exhibits severe rusting or other visible structural defects) or if it begins to leak, the Permittee shall transfer the hazardous waste from such container to a container that is in good condition, or otherwise manage the waste in compliance with the conditions of this Permit. (HWMR-6, Pt. V, § 264.171)

III.D COMPATIBILITY OF WASTE WITH CONTAINERS

The Permittee shall assure that the ability of the container to contain the waste is not impaired by any incompatibility with its

contents, as required by HWMR-6, Pt. V, § 264.172.

III.E MANAGEMENT OF CONTAINERS

The Permittee shall keep all containers closed during storage, except when it is necessary to add or remove waste, and shall not open, handle, or store containers in a manner which may rupture the container or cause it to leak. (HWMR-6, Pt. V, § 264.173)

III.F INSPECTION SCHEDULES AND PROCEDURES

The Permittee shall inspect the container area daily, in accordance with Permit Attachment C (Inspection Procedures) to detect leaking containers and the deterioration of containers and/or the containment system caused by corrosion or other factors. (HWMR-6, Pt. V, § 264.174)

III.G CONTAINMENT SYSTEMS

The Permittee shall maintain the containment system in a leakproof and fully operable condition in accordance with the plans and specifications contained in Permit Attachment E (HWMR-6, Pt. V, § 264.175)

III.H RECORDKEEPING

The Permittee shall place the results of all waste analyses and trial tests and any other documentation showing compliance with the requirements of Permit Conditions III.K.1 and III.K.2 and HWMR-6, Pt. V, §§ 264.17(b) and 264.177 in the facility operating record. (HWMR-6, Pt. V, § 264.73)

III.I CLOSURE

At closure of the container area, the Permittee shall remove all hazardous waste and hazardous waste residues from the containment system, in accordance with the procedures in Permit Attachment G (the Closure Plan). (HWMR-6, Pt. V, § 264.178)

III.J SPECIAL PROVISIONS FOR IGNITABLE OR REACTIVE WASTE

III.J.1 The Permittee shall not locate containers holding ignitable or reactive waste within 15 meters (50 feet) of the facility's property line. (HWMR-6, Pt. V, § 264.176)

III.J.2 The Permittee shall take precautions to prevent

accidental ignition or reaction of ignitable or reactive waste, and shall follow the procedures specified in Permit Attachment E (HWMR-6, Pt. V, § 264.17(a) and 264.176)

III.K SPECIAL PROVISIONS FOR INCOMPATIBLE WASTE

III.K.1 The Permittee shall not place incompatible wastes, or incompatible wastes and materials, in the same container. (HWMR-6, Pt. V, § 264.177(a))

III.K.2 The Permittee shall not place hazardous waste in an unwashed container that previously held an incompatible waste or material. (HWMR-6, Pt. V, § 264.177(b))

III.K.3 The Permittee shall separate containers of incompatible wastes as required by HWMR-6, Pt. V, § 264.177(c).

III.L STORAGE OF CHEMICAL PRODUCTS

The Permittee may store chemical products in the permitted storage units, subject to the conditions set forth below:

1. No products will be stored in the area of the warehouse equipped with secondary containment that might be incompatible with any waste stored there.

2. A distinct and easily identifiable location within the storage area is set aside for products, when they are present.

3. Products are clearly identifiable as such, and differentiated from wastes.

4. The volume of all liquids, product, waste, or otherwise, is included in determining the remaining available storage capacity for liquid wastes.

5. The Permittee complies with Permit Conditions III.C, III.D, and III.E, substituting the word "product" for the word "wastes" when handling chemical products.

6. The current inventory of stored chemical products (type, quantity and location) is included in the facility inventory required by Permit Condition II.H.6.

GROUND-WATER MONITORING LIST [1]—Continued

Common name [2]	CAS RN [3]	Chemical abstracts service index name [4]	Suggested methods [5]	PQL (μg/L) [6]
Endosulfan I	959-98-8	6,9-Methano-2,4,3-benzodioxathiepin, 6,7,8,9,10,10-hexachloro-1,5,5a,6,9,9a-hexahydro-, 3-oxide, (3α,5aβ,6α,9α,9aβ)-.	8080 8250	0.1 10
Endosulfan II	33213-65-9	6,9-Methano-2,4,3-benzodioxathiepin, 6,7,8,9,10,10-hexachloro- 1,5,5a,6,9,9a-hexahydro-, 3-oxide, (3α,5aα,6β,9β,9aα)-	8080	0.05
Endosulfan sulfate	1031-07-8	6,9-Methano-2,4,3-benzodioxathiepin, 6,7,8,9,10,10-hexachloro- 1,5,5a,6,9,9a-hexahydro-, 3,3-dioxide.	8080 8270	0.5 10
Endrin	72-20-8	2,7:3,6-Dimethanonaphth[2,3-b]oxirene, 3,4,5,6,9,9-hexachloro-1a,2,2a,3,6,6a,7,7a-octahydro-, (1aα, 2β,2aβ,3α,6α, 6aβ,7β,7aα)-	8080 8250	0.1 10
Endrin aldehyde	7421-93-4	1,2,4-Methenocyclopenta[cd]pentalene-5-carboxaldehyde, 2,2a,3,3,4,7-hexachlorodecahydro-, (1α,2β,2aβ,4β,4aβ,5β,6aβ,6bβ,7R*)-	8080 8270	0.2 10
Ethylbenzene	100-41-4	Benzene, ethyl-	8020 8240	2 5
Ethyl methacrylate	97-63-2	2-Propenoic acid, 2-methyl-, ethyl ester	8015 8240 8270	10 5 10
Ethyl methanesulfonate	62-50-0	Methanesulfonic acid, ethyl ester	8270	10
Famphur	52-85-7	Phosphorothioic acid, O-[4-[(dimethylamino)sulfonyl]phenyl]-O,O-dimethyl ester.	8270	10
Fluoranthene	206-44-0	Fluoranthene	8100 8270	200 10
Fluorene	86-73-7	9H-Fluorene	8100 8270	200 10
Heptachlor	76-44-8	4,7-Methano-1H-indene, 1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro-	8080 8270	0.05 10
Heptachlor epoxide	1024-57-3	2,5-Methano-2H-indeno[1,2-b]oxirene, 2,3,4,5,6,7,7-heptachloro-1a,1b,5,5a,6,6a,-hexahydro-, (1aα,1bβ,2α,5α,5aβ,6β,6aα)	8080 8270	1 10
Hexachlorobenzene	118-74-1	Benzene, hexachloro-	8120 8270	0.5 10
Hexachlorobutadiene	87-68-3	1,3-Butadiene, 1,1,2,3,4,4-hexachloro-	8120 8270	5 10
Hexachlorocyclopentadiene	77-47-4	1,3-Cyclopentadiene, 1,2,3,4,5,5-hexachloro-	8120 8270	5 10
Hexachloroethane	67-72-1	Ethane, hexachloro-	8120 8270	0.5 10
Hexachlorophene	70-30-4	Phenol, 2,2'-methylenebis[3,4,6-trichloro-	8270	10
Hexachloropropene	1888-71-7	1-Propene, 1,1,2,3,3,3-hexachloro-	8270	10
2-Hexanone	591-78-6	2-Hexanone	8240	50
Indeno(1,2,3-cd)pyrene	193-39-5	Indeno[1,2,3-cd]pyrene	8100 8270	200 10
Isobutyl alcohol	78-83-1	1-Propanol, 2-methyl-	8015	50
Isodrin	465-73-6	1,4,5,8-Dimethanonaphthalene,1,2,3,4,10,10-hexachloro-1,4,4a,5,8,8a hexahydro-(1α,4α,4aβ,5β,8β,8aβ)-.	8270	10
Isophorone	78-59-1	2-Cyclohexen-1-one, 3,5,5-trimethyl-	8090 8270	60 10
Isosafrole	120-58-1	1,3-Benzodioxole, 5-(1-propenyl)-	8270	10
Kepone	143-50-0	1,3,4-Metheno-2H-cyclobuta- [cd]pentalen-2-one, 1,1a,3,3a,4,5,5,5a,5b,6-decachlorooctahydro-	8270	10
Lead	(Total)	Lead	6010 7420 7421	40 1,000 10
Mercury	(Total)	Mercury	7470	2
Methacrylonitrile	126-98-7	2-Propenenitrile, 2-methyl-	8015 8240	5 5
Methapyrilene	91-80-5	1,2,Ethanediamine, N,N-dimethyl-N'-2-pyridinyl-N'-(2-thienylmethyl)-.	8270	10
Methoxychlor	72-43-5	Benzene, 1,1'-(2,2,2,trichloroethylidene)bis[4-methoxy-	8080 8270	2 10
Methyl bromide; Bromomethane	74-83-9	Methane, bromo-	8010 8240	20 10

GROUND-WATER MONITORING LIST [1]—Continued

Common name [2]	CAS RN [3]	Chemical abstracts service index name [4]	Suggested methods [5]	PQL (μg/L) [6]
Methyl chloride; Chloromethane	74-87-3	Methane, chloro-	8010	1
			8240	10
3-Methylcholanthrene	56-49-5	Benz[j]aceanthrylene, 1,2-dihydro-3-methyl-	8270	10
Methylene bromide; Dibromomethane.	74-95-3	Methane, dibromo-	8010	15
			8240	5
Methylene chloride; Dichloromethane.	75-09-2	Methane, dichloro-	8010	5
			8240	5
Methyl ethyl ketone; MEK	78-93-3	2-Butanone	8015	10
			8240	100
Methyl iodide; Iodomethane	74-88-4	Methane, iodo-	8010	40
			8240	5
Methyl methacrylate	80-62-6	2-Propenoic acid, 2-methyl-, methyl ester	8015	2
			8240	5
Methyl methanesulfonate	66-27-3	Methanesulfonic acid, methyl ester	8270	10
2-Methylnaphthalene	91-57-6	Naphthalene, 2-methyl-	8270	10
Methyl parathion; Parathion methyl	298-00-0	Phosphorothioic acid, O,O-dimethyl O-(4-nitrophenyl) ester.	8140	0.5
			8270	10
4-Methyl-2-pentanone; Methyl isobutyl ketone.	108-10-1	2-Pentanone, 4-methyl-	8015	5
			8240	50
Naphthalene	91-20-3	Naphthalene	8100	200
			8270	10
1,4-Naphthoquinone	130-15-4	1,4-Naphthalenedione	8270	10
1-Naphthylamine	134-32-7	1-Naphthalenamine	8270	10
2-Naphthylamine	91-59-8	2-Naphthalenamine	8270	10
Nickel	(Total)	Nickel	6010	50
			7520	400
o-Nitroaniline	88-74-4	Benzenamine, 2-nitro-	8270	50
m-Nitroaniline	99-09-2	Benzenamine, 3-nitro-	8270	50
p-Nitroaniline	100-01-6	Benzenamine, 4-nitro-	8270	50
Nitrobenzene	98-95-3	Benzene, nitro-	8090	40
			8270	10
o-Nitrophenol	88-75-5	Phenol, 2-nitro-	8040	5
			8270	10
p-Nitrophenol	100-02-7	Phenol, 4-nitro-	8040	10
			8270	50
4-Nitroquinoline 1-oxide	56-57-5	Quinoline, 4-nitro-, 1-oxide	8270	10
N-Nitrosodi-n-butylamine	924-16-3	1-Butanamine, N-butyl-N-nitroso-	8270	10
N-Nitrosodiethylamine	55-18-5	Ethanamine, N-ethyl-N-nitroso-	8270	10
N-Nitrosodimethylamine	62-75-9	Methanamine, N-methyl-N-nitroso-	8270	10
N-Nitrosodiphenylamine	86-30-6	Benzenamine, N-nitroso-N-phenyl-	8270	10
N-Nitrosodipropylamine; Di-n-propylnitrosamine.	621-64-7	1-Propanamine, N-nitroso-N-propyl-	8270	10
N-Nitrosomethylethylamine	10595-95-6	Ethanamine, N-methyl-N-nitroso-	8270	10
N-Nitrosomorpholine	59-89-2	Morpholine, 4-nitroso-	8270	10
N-Nitrosopiperidine	100-75-4	Piperidine, 1-nitroso-	8270	10
N-Nitrosopyrrolidine	930-55-2	Pyrrolidine, 1-nitroso-	8270	10
5-Nitro-o-toluidine	99-55-8	Benzenamine, 2-methyl-5-nitro-	8270	10
Parathion	56-38-2	Phosphorothioic acid, O,O-diethyl-O-(4-nitrophenyl) ester	8270	10
Polychlorinated biphenyls; PCBs	See Note 7	1,1'-Biphenyl, chloro derivatives	8080	50
			8250	100
Polychlorinated dibenzo-p-dioxins; PCDDs.	See Note 8	Dibenzo[b,e][1,4]dioxin, chloro derivatives	8280	0.01
Polychlorinated dibenzofurans; PCDFs.	See Note 9	Dibenzofuran, chloro derivatives	8280	0.01
Pentachlorobenzene	608-93-5	Benzene, pentachloro-	8270	10
Pentachloroethane	76-01-7	Ethane, pentachloro-	8240	5
			8270	10
Pentachloronitrobenzene	82-68-8	Benzene, pentachloronitro-	8270	10
Pentachlorophenol	87-86-5	Phenol, pentachloro-	8040	5
			8270	50
Phenacetin	62-44-2	Acetamide, N-(4-ethoxyphenyl)	8270	10
Phenanthrene	85-01-8	Phenanthrene	8100	200
			8270	10
Phenol	108-95-2	Phenol	8040	1
			8270	10
p-Phenylenediamine	106-50-3	1,4-Benzenediamine	8270	10

GROUND-WATER MONITORING LIST [1]—Continued

Common name [2]	CAS RN [3]	Chemical abstracts service index name [4]	Suggested methods [5]	PQL (μg/L) [6]
Phorate	298-02-2	Phosphorodithioic acid, O,O-diethyl S-[(ethylthio)methyl] ester	8140	2
			8270	10
2-Picoline	109-06-8	Pyridine, 2-methyl-	8240	5
			8270	10
Pronamide	23950-58-5	Benzamide, 3,5-dichloro-N-(1,1-dimethyl-2-propynyl)-.	8270	10
Propionitrile; Ethyl cyanide	107-12-0	Propanenitrile	8015	60
			8240	5
Pyrene	129-00-0	Pyrene	8100	200
			8270	10
Pyridine	110-86-1	Pyridine	8240	5
			8270	10
Safrole	94-59-7	1,3-Benzodioxole, 5-(2-propenyl)-	8270	10
Selenium	(Total)	Selenium	6010	750
			7740	20
			7741	20
Silver	(Total)	Silver	6010	70
			7760	100
Silvex; 2,4,5-TP	93-72-1	Propanoic acid, 2-(2,4,5-trichlorophenoxy)-	8150	2
Styrene	100-42-5	Benzene, ethenyl-	8020	1
			8240	5
Sulfide	18496-25-8	Sulfide	9030	10,000
2,4,5-T; 2,4,5-Trichlorophenoxyacetic acid.	93-76-5	Acetic acid, (2,4,5-trichlorophenoxy)-	8150	2
2,3,7,8-TCDD; 2,3,7,8-Tetrachlorodibenzo-p-dioxin	1746-01-6	Dibenzo[b,e][1,4]dioxin, 2,3,7,8-tetrachloro-	8280	0.005
1,2,4,5-Tetrachlorobenzene	95-94-3	Benzene, 1,2,4,5-tetrachloro-	8270	10
1,1,1,2-Tetrachloroethane	630-20-6	Ethane, 1,1,1,2-tetrachloro-	8010	5
			8240	5
1,1,2,2-Tetrachloroethane	79-34-5	Ethane, 1,1,2,2-tetrachloro-	8010	0.5
			8240	5
Tetrachloroethylene; Perchloroethylene; Tetrachloroethene.	127-18-4	Ethene, tetrachloro-	8010	0.5
			8240	5
2,3,4,6-Tetrachlorophenol	58-90-2	Phenol, 2,3,4,6-tetrachloro-	8270	10
Tetraethyl dithiopyrophosphate; Sulfotepp.	3689-24-5	Thiodiphosphoric acid ($[(HO)_2P(S)]_2O$), tetraethyl ester	8270	10
Thallium	(Total)	Thallium	6010	400
			7840	1,000
			7841	10
Tin	(Total)	Tin	7870	8,000
Toluene	108-88-3	Benzene, methyl-	8020	2
			8240	5
o-Toluidine	95-53-4	Benzenamine, 2-methyl-	8270	10
Toxaphene	8001-35-2	Toxaphene	8080	2
			8250	10
1,2,4-Trichlorobenzene	120-82-1	Benzene, 1,2,4-trichloro-	8270	10
1,1,1-Trichloroethane; Methylchloroform.	71-55-6	Ethane, 1,1,1-trichloro-	8240	5
1,1,2-Trichloroethane	79-00-5	Ethane, 1,1,2-trichloro-	8010	0.2
			8240	5
Trichloroethylene; Trichloroethene	79-01-6	Ethene, trichloro-	8010	1
			8240	5
Trichlorofluoromethane	75-69-4	Methane, trichlorofluoro-	8010	10
			8240	5
2,4,5-Trichlorophenol	95-95-4	Phenol, 2,4,5-trichloro-	8270	10
2,4,6-Trichlorophenol	88-06-2	Phenol, 2,4,6-trichloro-	8040	5
			8270	10
1,2,3-Trichloropropane	96-18-4	Propane, 1,2,3-trichloro-	8010	10
			8240	5
O,O,O-Triethyl phosphorothioate	126-68-1	Phosphorothioic acid, O,O,O-triethyl ester	8270	10
sym-Trinitrobenzene	99-35-4	Benzene, 1,3,5-trinitro-	8270	10
Vanadium	(Total)	Vanadium	6010	80
			7910	2,000
			7911	40
Vinyl acetate	108-05-4	Acetic acid, ethenyl ester	8240	5
Vinyl chloride	75-01-4	Ethene, chloro-	8010	2
			8240	10
Xylene (total)	1330-20-7	Benzene, dimethyl-	8020	5

GROUND-WATER MONITORING LIST [1]—Continued

Common name [2]	CAS RN [3]	Chemical abstracts service index name [4]	Suggested methods [5]	PQL (μg/L) [6]
Zinc	(Total)	Zinc	8240 6010 7950	5 20 50

[1] The regulatory requirements pertain only to the list of substances; the right hand columns (Methods and PQL) are given for informational purposes only. See also footnotes 5 and 6.

[2] Common names are those widely used in government regulations, scientific publications, and commerce; synonyms exist for many chemicals.

[3] Chemical Abstracts Service registry number. Where "Total" is entered, all species in the ground water that contain this element are included.

[4] CAS index names are those used in the 9th Cumulative Index.

[5] Suggested Methods refer to analytical procedure numbers used in EPA Report SW-846 "Test Methods for Evaluating Solid Waste", third edition, November 1986. Analytical details can be found in SW-846 and in documentation on file at the agency. CAUTION: The methods listed are representative SW-846 procedures and may not always be the most suitable method(s) for monitoring an analyte under the regulations.

[6] Practical Quantitation Limits (PQLs) are the lowest concentrations of analytes in ground waters that can be reliably determined within specified limits of precision and accuracy by the indicated methods under routine laboratory operating conditions. The PQLs listed are generally stated to one significant figure. CAUTION: The PQL values in many cases are based only on a general estimate for the method and not on a determination for individual compounds; PQLs are not a part of the regulation.

[7] Polychlorinated biphenyls (CAS RN 1336-36-3); this category contains congener chemicals, including constituents of Aroclor-1016 (CAS RN 12674-11-2), Aroclor-1221 (CAS RN 11104-28-2), Aroclor-1232 (CAS RN 11141-16-5) Aroclor-1242 (CAS RN 53469-21-9), Aroclor-1248 (CAS RN 12672-29-6), Aroclor-1254 (CAS RN 11097-69-1), and Aroclor-1260 (CAS RN 11096-82-5). The PQL shown is an average value for PCB congeners.

[8] This category contains congener chemicals, including tetrachlorodibenzo-p-dioxins (see also 2,3,7,8-TCDD), pentachlorodibenzo-p-dioxins, and hexachlorodibenzo-p-dioxins. The PQL shown is an average value for PCDD congeners.

[9] This category contains congener chemicals, including tetrachlorodibenzofurans, pentachlorodibenzofurans, and hexachlorodibenzofurans. The PQL shown is an average value for PCDF congeners.

[52 FR 25947, July 9, 1987]

PART 265—INTERIM STATUS STANDARDS FOR OWNERS AND OPERATORS OF HAZARDOUS WASTE TREATMENT, STORAGE, AND DISPOSAL FACILITIES

Subpart A—General

Sec.
265.1 Purpose, scope, and applicability.
265.2—265.3 [Reserved]
265.4 Imminent hazard action.

Subpart B—General Facility Standards

265.10 Applicability.
265.11 Identification number.
265.12 Required notices.
265.13 General waste analysis.
265.14 Security.
265.15 General inspection requirements.
265.16 Personnel training.
265.17 General requirements for ignitable, reactive, or incompatible wastes.
265.18 Location standards.

Subpart C—Preparedness and Prevention

265.30 Applicability.
265.31 Maintenance and operation of facility.
265.32 Required equipment.
265.33 Testing and maintenance of equipment.
265.34 Access to communications or alarm system.
265.35 Required aisle space.
265.36 [Reserved]
265.37 Arrangements with local authorities.

Subpart D—Contingency Plan and Emergency Procedures

265.50 Applicability.
265.51 Purpose and implementation of contingency plan.
265.52 Content of contingency plan.
265.53 Copies of contingency plan.
265.54 Amendment of contingency plan.
265.55 Emergency coordinator.
265.56 Emergency procedures.

Subpart E—Manifest System, Recordkeeping, and Reporting

265.70 Applicability.
265.71 Use of manifest system.
265.72 Manifest discrepancies.
265.73 Operating record.
265.74 Availability, retention, and disposition of records.
265.75 Biennial report.
265.76 Unmanifested waste report.
265.77 Additional reports.

Sec.

Subpart F—Ground-Water Monitoring

265.90 Applicability.
265.91 Ground-water monitoring system.
265.92 Sampling and analysis.
265.93 Preparation, evaluation, and response.
265.94 Recordkeeping and reporting.

Subpart G—Closure and Post-Closure

265.110 Applicability.
265.111 Closure performance standard.
265.112 Closure plan; amendment of plan.
265.113 Closure; time allowed for closure.
265.114 Disposal or decontamination of equipment, structures and soils.
265.115 Certification of closure.
265.116 Survey plat.
265.117 Post-closure care and use of property.
265.118 Post-closure plan; amendment of plan.
265.119 Post-closure notices.
265.120 Certification of completion of post-closure care.

Subpart H—Financial Requirements

265.140 Applicability.
265.141 Definitions of terms as used in this subpart.
265.142 Cost estimate for closure.
265.143 Financial assurance for closure.
265.144 Cost estimate for post-closure care.
265.145 Financial assurance for post-closure care.
265.146 Use of a mechanism for financial assurance of both closure and post-closure care.
265.147 Liability requirements.
265.148 Incapacity of owners or operators, guarantors, or financial institutions.
265.149 Use of State-required mechanisms.
265.150 State assumption of responsibility.

Subpart I—Use and Management of Containers

265.170 Applicability.
265.171 Condition of containers.
265.172 Compatibility of waste with container.
265.173 Management of containers.
265.174 Inspections.
265.175 [Reserved]
265.176 Special requirements for ignitable or reactive waste.
265.177 Special requirements for incompatible wastes.

Subpart J—Tank Systems

265.190 Applicability.
265.191 Assessment of existing tank system's integrity.
265.192 Design and installation of new tank systems or components.
265.193 Containment and detection of releases.
265.194 General operating requirements.
265.195 Inspections.
265.196 Response to leaks or spills and disposition of leaking or unfit-for-use tank systems.
265.197 Closure and post-closure care.
265.198 Special requirements for ignitable or reactive wastes.
265.199 Special requirements for incompatible wastes.
265.200 Waste analysis and trial tests.
265.201 Special requirements for generators of between 100 and 1,000 kg/mo that accumulate hazardous waste in tanks.

Subpart K—Surface Impoundments

265.220 Applicability.
265.221 Design requirements.
265.222 General operating requirements.
265.223 Containment system.
265.224 [Reserved]
265.225 Waste analysis and trial tests.
265.226 Inspections.
265.227 [Reserved]
265.228 Closure and post-closure care.
265.229 Special requirements for ignitable or reactive waste.
265.230 Special requirements for incompatible wastes.

Subpart L—Waste Piles

265.250 Applicability.
265.251 Protection from wind.
265.252 Waste analysis.
265.253 Containment.
265.254 Design requirements.
265.255 [Reserved]
265.256 Special requirements for ignitable or reactive waste.
265.257 Special requirements for incompatible wastes.
265.258 Closure and post-closure care.

Subpart M—Land Treatment

265.270 Applicability.
265.271 [Reserved]
265.272 General operating requirements.
265.273 Waste analysis.
265.274—265.275 [Reserved]
265.276 Food chain crops.
265.277 [Reserved]
265.278 Unsaturated zone (zone of aeration) monitoring.
265.279 Recordkeeping.
265.280 Closure and post-closure.
265.281 Special requirements for ignitable or reactive waste.

Sec.
265.282 Special requirements for incompatible wastes.

Subpart N—Landfills

265.300 Applicability.
265.301 Design requirements.
265.302 General operating requirements.
265.303—265.308 [Reserved]
265.309 Surveying and recordkeeping.
265.310 Closure and post-closure care.
265.311 [Reserved]
265.312 Special requirements for ignitable or reactive waste.
265.313 Special requirements for incompatible wastes.
265.314 Special requirements for bulk and containerized liquids.
265.315 Special requirements for containers.
265.316 Disposal of small containers of hazardous waste in overpacked drums (lab packs).

Subpart O—Incinerators

265.340 Applicability.
265.341 Waste analysis.
265.342—265.344 [Reserved]
265.345 General operating requirements.
265.346 [Reserved]
265.347 Monitoring and inspections.
265.348—265.350 [Reserved]
265.351 Closure.
265.352 Interim status incinerators burning particular hazardous wastes.
265.353—265.369 [Reserved]

Subpart P—Thermal Treatment

265.370 Other thermal treatment.
265.371—265.372 [Reserved]
265.373 General operating requirements.
265.374 [Reserved]
265.375 Waste analysis.
265.376 [Reserved]
265.377 Monitoring and inspections.
265.378—265.380 [Reserved]
265.381 Closure.
265.382 Open burning; waste explosives.
265.383 Interim status thermal treatment devices burning particular hazardous waste.

Subpart Q—Chemical, Physical, and Biological Treatment

265.400 Applicability.
265.401 General operating requirements.
265.402 Waste analysis and trial tests.
265.403 Inspections.
265.404 Closure.
265.405 Special requirements for ignitable or reactive waste.
265.406 Special requirements for incompatible wastes.

Sec.

Subpart R—Underground Injection

265.430 Applicability.

Subparts S—Z [Reserved]

Subpart AA—Air Emission Standards for Process Vents

265.1030 Applicability.
265.1031 Definitions.
265.1032 Standards: Process vents.
265.1033 Standards: Closed-vent systems and control devices.
265.1034 Test methods and procedures.
265.1035 Recordkeeping requirements.
265.1036—265.1049 [Reserved]

Subpart BB—Air Emission Standards for Equipment Leaks

265.1050 Applicability.
265.1051 Definitions.
265.1052 Standards: Pumps in light liquid service.
265.1053 Standards: Compressors.
265.1054 Standards: Pressure relief devices in gas/vapor service.
265.1055 Standards: Sampling connecting systems.
265.1056 Standards: Open-ended valves or lines.
265.1057 Standards: Valves in gas/vapor service or in light liquid service.
265.1058 Standards: Pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and flanges and other connectors.
265.1059 Standards: Delay of repair.
265.1060 Standards: Closed-vent systems and control devices.
265.1061 Alternative standards for valves in gas/vapor service or in light liquid service: percentage of valves allowed to leak.
265.1062 Alternative standards for valves in gas/vapor service or in light liquid service: skip period leak detection and repair.
265.1063 Test methods and procedures.
265.1064 Recordkeeping requirements.
265.1065—265.1079 [Reserved]

APPENDIX I—RECORDKEEPING INSTRUCTIONS
APPENDIX II—[RESERVED]
APPENDIX III—EPA INTERIM PRIMARY DRINKING WATER STANDARDS
APPENDIX IV—TESTS FOR SIGNIFICANCE
APPENDIX V—EXAMPLES OF POTENTIALLY INCOMPATIBLE WASTE

AUTHORITY: 42 U.S.C. 6905, 6912(a), 6924, 6925, and 6935.

SOURCE: 45 FR 33232, May 19, 1980, unless otherwise noted.

EDITORIAL NOTE: The reporting or recordkeeping provisions included in the final rule published at 47 FR 32274, July 26, 1982, will be submitted for approval to the Office of Management and Budget and will not become effective until OMB approval has been obtained. EPA will publish a notice in the FEDERAL REGISTER after it obtains OMB approval.

Subpart A—General

§ 265.1 Purpose, scope, and applicability.

(a) The purpose of this part is to establish minimum national standards that define the acceptable management of hazardous waste during the period of interim status and until certification of final closure or, if the facility is subject to post-closure requirements, until post-closure responsibilities are fulfilled.

(b) The standards of this part apply to owners and operators of facilities that treat, store or dispose of hazardous waste who have fully complied with the requirements for interim status under section 3005(e) of RCRA and § 270.10 of this chapter until either a permit is issued under section 3005 of RCRA or until applicable Part 265 closure and post-closure responsibilities are fulfilled, and to those owners and operators of facilities in existence on November 19, 1980 who have failed to provide timely notification as required by section 3010(a) of RCRA and/or failed to file Part A of the permit application as required by 40 CFR 270.10 (e) and (g). These standards apply to all treatment, storage and disposal of hazardous waste at these facilities after the effective date of these regulations, except as specifically provided otherwise in this part or Part 261 of this chapter.

[*Comment:* As stated in section 3005(a) of RCRA, after the effective date of regulations under that section (i.e., Parts 270 and 124 of this chapter), the treatment, storage and disposal of hazardous waste is prohibited except in accordance with a permit. Section 3005(e) of RCRA provides for the continued operation of an existing facility that meets certain conditions, until final administrative disposition of the owner's and operator's permit application is made.]

(c) The requirements of this part do not apply to:

(1) A person disposing of hazardous waste by means of ocean disposal subject to a permit issued under the Marine Protection, Research, and Sanctuaries Act;

[*Comment:* These Part 265 regulations do apply to the treatment or storage of hazardous waste before it is loaded onto an ocean vessel for incineration or disposal at sea, as provided in paragraph (b) of this section.]

(2) [Reserved]

(3) The owner or operator of a POTW which treats, stores, or disposes of hazardous waste;

[*Comment:* The owner or operator of a facility under paragraphs (c)(1) through (3) of this section is subject to the requirements of Part 264 of this chapter to the extent they are included in a permit by rule granted to such a person under Part 122 of this chapter, or are required by § 144.14 of this chapter.]

(4) A person who treats, stores, or disposes of hazardous waste in a State with a RCRA hazardous waste program authorized under Subpart A or B of Part 271 of this chapter, except that the requirements of this part will continue to apply:

(i) As stated in paragraph (c)(2) of this section, if the authorized State RCRA program does not cover disposal of hazardous waste by means of underground injection; or

(ii) To a person who treats, stores, or disposes of hazardous waste in a State authorized under Subpart A or B of Part 271 of this chapter if the State has not been authorized to carry out the requirements and prohibitions applicable to the treatment, storage, or disposal of hazardous waste at his facility which are imposed pursuant to the Hazardous and Solid Waste Act Amendments of 1984. The requirements and prohibitions that are applicable until a State receives authorization to carry them out include all Federal program requirements identified in § 271.1(j);

(5) The owner or operator of a facility permitted, licensed, or registered by a State to manage municipal or industrial solid waste, if the only hazardous waste the facility treats, stores, or disposes of is excluded from regulation under this part by § 261.5 of this chapter;

(6) The owner and operator of a facility managing recyclable materials described in § 261.6 (a)(2) and (3) of this chapter (except to the extent the requirements of this part are referred to in Subparts C, D, F, or G of Part 266 of this chapter).

(7) A generator accumulating waste on-site in compliance with § 262.34 of this chapter, except to the extent the requirements are included in § 262.34 of this chapter;

(8) A farmer disposing of waste pesticides from his own use in compliance with § 262.70 of this chapter; or

(9) The owner or operator of a totally enclosed treatment facility, as defined in § 260.10.

(10) The owner or operator of an elementary neutralization unit or a wastewater treatment unit as defined in § 260.10 of this chapter.

(11)(i) Except as provided in paragraph (c)(11)(ii) of this section, a person engaged in treatment or containment activities during immediate response to any of the following situations:

(A) A discharge of a hazardous waste;

(B) An imminent and substantial threat of a discharge of a hazardous waste;

(C) A discharge of a material which, when discharged, becomes a hazardous waste.

(ii) An owner or operator of a facility otherwise regulated by this part must comply with all applicable requirements of Subparts C and D.

(iii) Any person who is covered by paragraph (c)(11)(i) of this section and who continues or initiates hazardous waste treatment or containment activities after the immediate response is over is subject to all applicable requirements of this part and Parts 122 through 124 of this chapter for those activities.

(12) A transporter storing manifested shipments of hazardous waste in containers meeting the requirements of 40 CFR 262.30 at a transfer facility for a period of ten days or less.

(13) The addition of absorbent material to waste in a container (as defined in § 260.10 of this chapter) or the addition of waste to the absorbent material in a container provided that these actions occur at the time waste is first placed in the containers; and §§ 265.17(b), 265.171, and 265.172 are complied with.

(d) The following hazardous wastes must not be managed at facilities subject to regulation under this part.

(1) EPA Hazardous Waste Nos. FO20, FO21, FO22, FO23, FO26, or FO27 unless:

(i) The wastewater treatment sludge is generated in a surface impoundment as part of the plant's wastewater treatment system;

(ii) The waste is stored in tanks or containers;

(iii) The waste is stored or treated in waste piles that meet the requirements of § 264.250(c) as well as all other applicable requirements of Subpart L of this part;

(iv) The waste is burned in incinerators that are certified pursuant to the standards and procedures in § 265.352; or

(v) The waste is burned in facilities that thermally treat the waste in a device other than an incinerator and that are certified pursuant to the standards and procedures in § 265.383.

(e) The requirements of this part apply to owners or operators of all facilities which treat, store or dispose of hazardous waste referred to in 40 CFR part 268, and the 40 CFR part 268 standards are considered material conditions or requirements of the part 265 interim status standards.

[45 FR 33232, May 1980]

EDITORIAL NOTE: FOR FEDERAL REGISTER citations affecting § 265.1, see the List of CFR Sections Affected in the Finding Aids section of this volume.

§§ 265.2—265.3 [Reserved]

§ 265.4 Imminent hazard action.

Notwithstanding any other provisions of these regulations, enforcement actions may be brought pursuant to section 7003 of RCRA.

Subpart B—General Facility Standards

§ 265.10 Applicability

The regulations in this subpart apply to owners and operators of all hazardous waste facilities, except as § 265.1 provides otherwise.

§ 265.11 Identification number.

Every facility owner or operator must apply to EPA for an EPA identification number in accordance with the EPA notification procedures (45 FR 12746).

§ 265.12 Required notices.

(a) The owner or operator of a facility that has arranged to receive hazardous waste from a foreign source must notify the Regional Administrator in writing at least four weeks in advance of the date of the waste is expected to arrive at the facility. Notice of subsequent shipments of the same waste from the same foreign source is not required.

(b) Before transferring ownership or operation of a facility during its operating life, or of a disposal facility during the post-closure care period, the owner or operator must notify the new owner or operator in writing of the requirements of this part and Part 270 of this chapter. (Also see § 270.72 of this chapter.)

[*Comment:* An owner's or operator's failure to notify the new owner or operator of the requirements of this part in no way relieves the new owner or operator of his obligation to comply with all applicable requirements.]

(Approved by the Office of Management and Budget under control number 2050-0013)

[45 FR 33232, May 19, 1980, as amended at 48 FR 14295, Apr. 1, 1983; 50 FR 4514, Jan. 31, 1985]

§ 265.13 General waste analysis.

(a)(1) Before an owner or operator treats, stores or disposes of any hazardous wastes, or non-hazardous wastes if applicable under § 265.113(d), he must obtain a detailed chemical and physical analysis of a representative sample of the wastes.

(2) The analysis may include data developed under Part 261 of this chapter, and existing published or documented data on the hazardous waste or on waste generated from similar processes.

COMMENT: for example, the facility's records of analyses performed on the waste before the effective date of these regulations, or studies conducted on hazardous waste generated from processes similar to that which generated the waste to be managed at the facility, may be included in the data base required to comply with paragraph (a)(1) of this section. The owner or operator of an off-site facility may arrange for the generator of the hazardous waste to supply part of the information required by paragraph (a)(1) of this section, except as otherwise specified in 40 CFR 268.7 (b) and (c). If the generator does not supply the information, and the owner or operator chooses to accept a hazardous waste, the owner or operator is responsible for obtaining the information required to comply with this section.]

(3) The analysis must be repeated as necessary to ensure that it is accurate and up to date. At a minimum, the analysis must be repeated:

(i) When the owner or operator is notified, or has reason to believe, that the process or operation generating the hazardous wastes or non-hazardous wastes, if applicable, under §265.113(d) has changed; and

(ii) For off-site facilities, when the results of the inspection required in paragraph (a)(4) of this section indicate that the hazardous waste received at the facility does not match the waste designated on the accompanying manifest or shipping paper.

(4) The owner or operator of an off-site facility must inspect and, if necessary, analyze each hazardous waste movement received at the facility to determine whether it matches the identity of the waste specified on the accompanying manifest or shipping paper.

(b) The owner or operator must develop and follow a written waste analysis plan which describes the procedures which he will carry out to comply with paragraph (a) of this section. He must keep this plan at the facility. At a minimum, the plan must specify:

(1) The parameters for which each hazardous waste, or non-hazardous waste if applicable under §265.113(d), will be analyzed and the rationale for

the selection of these parameters (i.e., how analysis for these parameters will provide sufficient information on the waste's properties to comply with paragraph (a) of this section);

(2) The test methods which will be used to test for these parameters;

(3) The sampling method which will be used to obtain a representative sample of the waste to be analyzed. A representative sample may be obtained using either:

(i) One of the sampling methods described in Appendix I of Part 261 of this chapter; or

(ii) An equivalent sampling method.

[*Comment:* See § 260.20(c) of this chapter for related discussion.]

(4) The frequency with which the initial analysis of the waste will be reviewed or repeated to ensure that the analysis is accurate and up to date;

(5) For off-site facilities, the waste analyses that hazardous waste generators have agreed to supply; and

(6) Where applicable, the methods that will be used to meet the additional waste analysis requirements for specific waste management methods as specified in §§ 265.193, 265.225, 265.252, 265.273, 265.314, 265.341, 265.375, 265.402, 265.1034(d), 265.1063(d), and 268.7 of this chapter.

(7) For surface impoundments exempted from land disposal restrictions under § 268.4(a) of this chapter, the procedures and schedule for:

(i) The sampling of impoundment contents;

(ii) The analysis of test data; and,

(iii) The annual removal of residues which are not delisted under § 260.22 of this chapter or which exhibit a characteristic of hazardous waste and either:

(A) Do not meet applicable treatment standards of Part 268, Subpart D; or

(B) Where no treatment standards have been established;

(*1*) Such residues are prohibited from land disposal under § 268.32 or RCRA section 3004(d); or

(*2*) Such residues are prohibited from land disposal under § 268.33(f).

(c) For off-site facilities, the waste analysis plan required in paragraph (b) of this section must also specify the procedures which will be used to inspect and, if necessary, analyze each movement of hazardous waste received at the facility to ensure that it matches the identity of the waste designated on the accompanying manifest or shipping paper. At a minimum, the plan must describe:

(1) The procedures which will be used to determine the identity of each movement of waste managed at the facility; and

(2) The sampling method which will be used to obtain a representative sample of the waste to be identified, if the identification method includes sampling.

(Approved by the Office of Management and Budget under control number 2050-0012)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985; 50 FR 18374, Apr. 30, 1985; 51 FR 40638, Nov. 7, 1986; 52 FR 25788 July 8, 1987; 54 FR 33396, Aug. 14, 1989; 55 FR 22685, June 1, 1990; 55 FR 25506, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25506, June 21, 1990, in § 265.13, paragraph (b)(6) was revised, effective December 21, 1990. For the convenience of the user the superseded text appears as follows:

§ 265.13 General waste analysis.

* * * * *

(b) * * *

(6) Where applicable, the methods which will be used to meet the additional waste analysis requirements for specific waste management methods as specified in §§ 265.193, 265.225, 265.252, 265.273, 265.314, 265.341, 265.375, 265.402 and 268.7 of this chapter.

* * * * *

§ 265.14 Security.

(a) The owner or operator must prevent the unknowing entry, and minimize the possibility for the unauthorized entry, of persons or livestock onto the active portion of his facility, *unless:*

(1) Physical contact with the waste, structures, or equipment with the active portion of the facility will not injure unknowing or unauthorized persons or livestock which may enter the active portion of a facility, and

(2) Disturbance of the waste or equipment, by the unknowing or unauthorized entry of persons or livestock onto the active portion of a facility, will not cause a violation of the requirements of this part.

(b) Unless exempt under paragraphs (a)(1) and (2) of this section, a facility must have:

(1) A 24-hour surveillance system (e.g., television monitoring or surveillance by guards of facility personnel) which continuously monitors and controls entry onto the active portion of the facility; or

(2)(i) An artificial or natural barrier (e.g., a fence in good repair or a fence combined with a cliff), which completely surrounds the active portion of the facility; and

(ii) A means to control entry, at all times, through the gates or other entrances to the active portion of the facility (e.g., an attendant, television monitors, locked entrance, or controlled roadway access to the facility).

[*Comment:* The requirements of paragraph (b) of this section are satisfied if the facility or plant within which the active portion is located itself has a surveillance system, or a barrier and a means to control entry, which complies with the requirements of paragraph (b)(1) or (2) of this section.]

(c) Unless exempt under paragraphs (a)(1) and (a)(2) of this section, a sign with the legend, "Danger—Unauthorized Personnel Keep Out," must be posted at each entrance to the active portion of a facility, and at other locations, in sufficient numbers to be seen from any approach to this active portion. The legend must be written in English and in any other language predominant in the area surrounding the facility (e.g., facilities in counties bordering the Canadian province of Quebec must post signs in French; facilities in counties bordering Mexico must post signs in Spanish), and must be legible from a distance of at least 25 feet. Existing signs with a legend other than "Danger—Unauthorized Personnel Keep Out" may be used if the legend on the sign indicates that only authorized personnel are allowed to enter the active portion, and that entry onto the active portion can be dangerous.

[*Comment:* See § 265.117(b) for discussion of security requirements at disposal facilities during the post-closure care period.]

§ 265.15 General inspection requirements.

(a) The owner or operator must inspect his facility for malfunctions and deterioration, operator errors, and discharges which may be causing—or may lead to: (1) Release of hazardous waste constituents to the environment or (2) a threat to human health. The owner or operator must conduct these inspections often enough to identify problems in time to correct them before they harm human health or the environment.

(b)(1) The owner or operator must develop and follow a written schedule for inspecting all monitoring equipment, safety and emergency equipment, security devices, and operating and structural equipment (such as dikes and sump pumps) that are important to preventing, detecting, or responding to environmental or human health hazards.

(2) He must keep this schedule at the facility.

(3) The schedule must identify the types of problems (e.g., malfunctions or deterioration) which are to be looked for during the inspection (e.g., inoperative sump pump, leaking fitting, eroding dike, etc.).

(4) The frequency of inspection may vary for the items on the schedule. However, it should be based on the rate of possible deterioration of the equipment and the probability of an environmental or human health incident if the deterioration, or malfunction, or any operator error goes undetected between inspections. Areas subject to spills, such as loading and unloading areas, must be inspected daily when in use. At a minimum, the inspection schedule must include the terms and frequencies called for in §§ 265.174, 265.193, 265.195, 265.226, 265.347, 265.377, 265.403, 265.1033, 265.1052, 265.1053, and 265.1058.

(c) The owner or operator must remedy any deterioration or malfunction of equipment or structures which the inspection reveals on a schedule which ensures that the problem does not lead to an environmental or human health hazard. Where a hazard

is imminent or has alrea occurred, remedial action must be taken immediatel

(d The owner or operator must record inspections in an inspection log or summary. He must keep these records for at least three years from the date of inspection. At a minimum, these records must include the date and time of the inspection, the name of the inspector, a notation of the observations made, and the date and nature of any repairs or other remedial actions.

(Approved by the Office of Management and Budget under control number 2050-0013)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985; 51 FR 25478, July 14, 1986; 55 FR 25506, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25506, June 21, 1990, in § 265.15, the last sentence of paragraph (b)(4) was revised, effective December 21, 1990. For the convenience of the user the superseded text appears as follows:

* * * * *

(b) * * *

(4) * * * At a minimum, the inspection schedule must include the items and frequencies called for in §§ 265.174, 265.193, 265.195, 265.226, 265.347, 265.377, and 265.403.

* * * * *

§ 265.16 Personnel training.

(a)(1) Facility personnel must successfully complete a program of classroom instruction or on-the-job training that teaches them to perform their duties in a way that ensures the facility's compliance with the requirements of this part. The owner or operator must ensure that this program includes all the elements described in the document required under paragraph (d)(3) of this section.

(2) This program must be directed by a person trained in hazardous waste management procedures, and must include instruction which teaches facility personnel hazardous waste management procedures (including contingency plan implementation) relevant to the positions in which they are employed.

(3) At a minimum, the training program must be designed to ensure that facility personnel are able to respond effectively to emergencies by familiarizing them with emergency procedures, emergency equipment, and emergency systems, including where applicable:

(i) Procedures for using, inspecting, repairing, and replacing facility emergency and monitoring equipment;

(ii) Key parameters for automatic waste feed cut-off systems;

(iii) Communications or alarm systems;

(iv) Response to fires or explosions;

(v) Response to ground-water contamination incidents; and

(vi) Shutdown of operations.

(b) Facility personnel must successfuly complete the program required in paragraph (a) of this section within six months after the effective date of these regulations or six months after the date of their employment or assignment to a facility, or to a new position at a facility, whichever is later. Employees hired after the effective date of these regulations must not work in unsupervised positions until they have completed the training requirements of paragraph (a) of this section.

(c) Facility personnel must take part in an annual review of the initial training required in paragraph (a) of this section.

(d) The owner or operator must maintain the following documents and records at the facility:

(1) The job title for each position at the facility related to hazardous waste management, and the name of the employee filling each job;

(2) A written job description for each position listed under paragraph (d)(1) of this Section. This description may be consistent in its degree of specificity with descriptions for other similar positions in the same company location or bargaining unit, but must include the requisite skill, education, or other qualifications, and duties of facility personnel assigned to each position;

(3) A written description of the type and amount of both introductory and continuing training that will be given to each person filling a position listed under paragraph (d)(1) of this section;

(4) Records that document that the training or job experience required under paragraphs (a), (b), and (c) of this section has been given to, and completed by, facility personnel.

(e) Training records on current personnel must be kept until closure of the facility. Training records on former employees must be kept for at least three years from the date the employee last worked at the facility. Personnel training racords may accompany personnel transferred within the same company.

(Approved by the Office of Management and Budget under control number 2050-0013)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 265.17 General requirements for ignitable, reactive, or incompatible wastes.

(a) The owner or operator must take precautions to prevent accidental ignition or reaction of ignitable or reactive waste. This waste must be separated and protected from sources of ignition or reaction including but not limited to: Open flames, smoking, cutting and welding, hot surfaces, frictional heat, sparks (static, electrical, or mechanical), spontaneous ignition (e.g., from heat-producing chemical reactions), and radiant heat. While ignitable or reactive waste is being handled, the owner or operator must confine smoking and open flame to specially designated locations. "No Smoking" signs must be conspicuously placed wherever there is a hazard from ignitable or reactive waste.

(b) Where specifically required by other sections of this part, the treatment, storage, or disposal of ignitable or reactive waste, and the mixture or commingling of incompatible wastes, or incompatible wastes and materials, must be conducted so that it does not:

(1) Generate extreme heat or pressure, fire or explosion, or violent reaction;

(2) Produce uncontrolled toxic mists, fumes, dusts, or gases in sufficient quantities to threaten human health;

(3) Produce uncontrolled flammable fumes or gases in sufficient quantities to pose a risk of fire or explosions;

(4) Damage the structural integrity of the device or facility containing the waste; or

(5) Through other like means threaten human health or the environment.

§ 265.18 Location standards.

The placement of any hazardous waste in a salt dome, salt bed formation, underground mine or cave is prohibited, except for the Department of Energy Waste Isolation Pilot Project in New Mexico.

[50 FR 28749, July 15, 1985]

Subpart C—Preparedness and Prevention

§ 265.30 Applicability.

The regulations in this subpart apply to owners and operators of all hazardous waste facilities, except as § 265.1 provides otherwise.

§ 265.31 Maintenance and operation of facility.

Facilities must be maintained and operated to minimize the possibility of a fire, explosion, or any unplanned sudden or non-sudden release of hazardous waste or hazardous waste constituents to air, soil, or surface water which could threaten human health or the environment.

§ 265.32 Required equipment.

All facilities must be equipped with the following, *unless* none of the hazards posed by waste handled at the facility could require a particular kind of equipment specified below:

(a) An internal communications or alarm system capable of providing immediate emergency instruction (voice or signal) to facility personnel;

(b) A device, such as a telephone (immediately available at the scene of operations) or a hand-held two-way radio, capable of summoning emergency assistance from local police departments, fire departments, or State or local emergency response teams;

(c) Portable fire extinguishers, fire control equipment (including special extinguishing equipment, such as that using foam, inert gas, or dry chemi-

cals), spill control equipment, and decontamination equipment; and

(d) Water at adequate volume and pressure to supply water hose streams, or foam producing equipment, or automatic sprinklers, or water spray systems.

§ 265.33 Testing and maintenance of equipment.

All facility communications or alarm systems, fire protection equipment, spill control equipment, and decontamination equipment, where required, must be tested and maintained as necessary to assure its proper operation in time of emergency.

§ 265.34 Access to communications or alarm system.

(a) Whenever hazardous waste is being poured, mixed, spread, or otherwise handled, all personnel involved in the operation must have immediate access to an internal alarm or emergency communication device, either directly or through visual or voice contact with another employee, *unless* such a device is not required under § 265.32.

(b) If there is ever just one employee on the premises while the facility is operating, he must have immediate access to a device, such as a telephone (immediately available at the scene of operation) or a hand-held two-way radio, capable of summoning external emergency assistance, *unless* such a device is not required under § 265.32.

§ 265.35 Required aisle space.

The owner or operator must maintain aisle space to allow the unobstructed movement of personnel, fire protection equipment, spill control equipment, and decontamination equipment to any area of facility operation in an emergency, *unless* aisle space is not needed for any of these purposes.

§ 265.36 [Reserved]

§ 265.37 Arrangements with local authorities.

(a) The owner or operator must attempt to make the following arrangements, as appropriate for the type of waste handled at his facility and the potential need for the services of these organizations:

(1) Arrangements to familiarize police, fire departments, and emergency response teams with the layout of the facility, properties of hazardous waste handled at the facility and associated hazards, places where facility personnel would normally be working, entrances to roads inside the facility, and possible evacuation routes;

(2) Where more than one police and fire department might respond to an emergency, agreements designating primary emergency authority to a specific police and a specific fire department, and agreements with any others to provide support to the primary emergency authority;

(3) Agreements with State emergency response teams, emergency response contractors, and equipment suppliers; and

(4) Arrangements to familiarize local hospitals with the properties of hazardous waste handled at the facility and the types of injuries or illnesses which could result from fires, explosions, or releases at the facility.

(b) Where State or local authorities decline to enter into such arrangements, the owner or operator must document the refusal in the operating record.

Subpart D—Contingency Plan and Emergency Procedures

§ 265.50 Applicability.

The regulations in this subpart apply to owners and operators of all hazardous waste facilities, except as § 265.1 provides otherwise.

§ 265.51 Purpose and implementation of contingency plan.

(a) Each owner or operator must have a contingency plan for his facility. The contingency plan must be designed to minimize hazards to human health or the environment from fires, explosions, or any unplanned sudden or non-sudden release of hazardous waste or hazardous waste constituents to air, soil, or surface water.

(b) The provisions of the plan must be carried out immediately whenever there is a fire, explosion, or release of

hazardous waste or hazardous waste constituents which could threaten human health or the environment.

(Approved by the Office of Management and Budget under control number 2050-0002)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 265.52 Content of contingency plan.

(a) The contingency plan must describe the actions facility personnel must take to comply with §§ 265.51 and 265.56 in response to fires, explosions, or any unplanned sudden or non-sudden release of hazardous waste or hazardous waste constituents to air, soil, or surface water at the facility.

(b) If the owner or operator has already prepared a Spill Prevention, Control, and Countermeasures (SPCC) Plan in accordance with Part 112 of this chapter, or Part 1510 of Chapter V, or some other emergency or contingency plan, he need only amend that plan to incorporate hazardous waste management provisions that are sufficient to comply with the requirements of this part.

(c) The plan must describe arrangements agreed to by local police departments, fire departments, hospitals, contractors, and State and local emergency response teams to coordinate emergency services, pursuant to § 265.37.

(d) The plan must list names, addresses, and phone numbers (office and home) of all persons qualified to act as emergency coordinator (see § 265.55), and this list must be kept up to date. Where more than one person is listed, one must be named as primary emergency coordinator and others must be listed in the order in which they will assume responsibility as alternates.

(e) The plan must include a list of all emergency equipment at the facility (such as fire extinguishing systems, spill control equipment, communications and alarm systems (internal and external), and decontamination equipment), where this equipment is required. This list must be kept up to date. In addition, the plan must include the location and a physical description of each item on the list, and a brief outline of its capabilities.

(f) The plan must include an evacuation plan for facility personnel where there is a possibility that evacuation could be necessary. This plan must describe signal(s) to be used to begin evacuation, evacuation routes, and alternate evacuation routes (in cases where the primary routes could be blocked by releases of hazardous waste or fires).

(Approved by the Office of Management and Budget under control number 2050-0002)

[45 FR 33232, May 19, 1980, as amended at 46 FR 27480, May 20, 1981; 50 FR 4514, Jan. 31, 1985]

§ 265.53 Copies of contingency plan.

A copy of the contingency plan and all revisions to the plan must be:

(a) Maintained at the facility; and

(b) Submitted to all local police departments, fire departments, hospitals, and State and local emergency response teams that may be called upon to provide emergency services.

(Approved by the Office of Management and Budget under control number 2050-0002)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 265.54 Amendment of contingency plan.

The contingency plan must be reviewed, and immediately amended, if necessary, whenever:

(a) Applicable regulations are revised;

(b) The plan fails in an emergency;

(c) The facility changes—in its design, construction, operation, maintenance, or other circumstances—in a way that materially increases the potential for fires, explosions, or releases of hazardous waste or hazardous waste constituents, or changes the response necessary in an emergency;

(d) The list of emergency coordinators changes; or

(e) The list of emergency equipment changes.

(Approved by the Office of Management and Budget under control number 2050-0002)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 265.55 Emergency coordinator.

At all times, there must be at least one employee either on the facility premises or on call (i.e., available to respond to an emergency by reaching the facility within a short period of time) with the responsibility for coordinating all emergency response measures. This emergency coordinator must be thoroughly familiar with all aspects of the facility's contingency plan, all operations and activities at the facility, the location and characteristics of waste handled, the location of all records within the facility, and the facility layout. In addition, this person must have the authority to commit the resources needed to carry out the contingency plan.

[*Comment:* The emergency coordinator's responsibilities are more fully spelled out in § 265.56. Applicable responsibilities for the emergency coordinator vary, depending on factors such as type and variety of waste(s) handled by the facility, and type and complexity of the facility.]

§ 265.56 Emergency procedures.

(a) Whenever there is an imminent or actual emergency situation, the emergency coordinator (or his designee when the emergency coordinator is on call) must immediately:

(1) Activate internal facility alarms or communication systems, where applicable, to notify all facility personnel; and

(2) Notify appropriate State or local agencies with designated response roles if their help is needed.

(b) Whenever there is a release, fire, or explosion, the emergency coordinator must immediately identify the character, exact source, amount, and a real extent of any released materials. He may do this by observation or review of facility records or manifests and, if necessary, by chemical analysis.

(c) Concurrently, the emergency coordinator must assess possible hazards to human health or the environment that may result from the release, fire, or explosion. This assessment must consider both direct and indirect effects of the release, fire, or explosion (e.g., the effects of any toxic, irritating, or asphyxiating gases that are generated, or the effects of any hazardous surface water run-offs from water or chemical agents used to control fire and heat-induced explosions).

(d) If the emergency coordinator determines that the facility has had a release, fire, or explosion which could threaten human health, or the environment, outside the facility, he must report his findings as follows:

(1) If his assessment indicates that evacuation of local areas may be advisable, he must immediately notify appropriate local authorities. He must be available to help appropriate officials decide whether local areas should be evacuated; and

(2) He must immediately notify either the government official designated as the on-scene coordinator for that geographical area (in the applicable regional contingency plan under Part 1510 of this title), or the National Response Center (using their 24-hour toll free number 800/424-8802). The report must include:

(i) Name and telephone number of reporter;

(ii) Name and address of facility;

(iii) Time and type of incident (e.g., release, fire);

(iv) Name and quantity of material(s) involved, to the extent known;

(v) The extent of injuries, if any; and

(vi) The possible hazards to human health, or the environment, outside the facility.

(e) During an emergency, the emergency coordinator must take all reasonable measures necessary to ensure that fires, explosions, and releases do not occur, recur, or spread to other hazardous waste at the facility. These measures must include, where applicable, stopping processes and operations, collecting and containing released waste, and removing or isolating containers.

(f) If the facility stops operations in response to a fire, explosion or release, the emergency coordinator must monitor for leaks, pressure buildup, gas generation, or ruptures in valves, pipes, or other equipment, wherever this is appropriate.

(g) Immediately after an emergency, the emergency coordinator must provide for treating, storing, or disposing of recovered waste, contaminated soil

or surface water, or any other material that results from a release, fire, or explosion at the facility.

[*Comment:* Unless the owner or operator can demonstrate, in accordance with § 261.3(c) or (d) of this chapter, that the recovered material is not a hazardous waste, the owner or operator becomes a generator of hazardous waste and must manage it in accordance with all applicable requirements of Parts 262, 263, and 265 of this chapter.]

(h) The emergency coordinator must ensure that, in the affected area(s) of the facility:

(1) No waste that may be incompatible with the released material is treated, stored, or disposed of until cleanup procedures are completed; and

(2) All emergency equipment listed in the contingency plan is cleaned and fit for its intended use before operations are resumed.

(i) The owner or operator must notify the Regional Administrator, and appropriate State and local authorities, that the facility is in compliance with paragraph (h) of this section before operations are resumed in the affected area(s) of the facility.

(j) The owner or operator must note in the operating record the time, date, and details of any incident that requires implementing the contingency plan. Within 15 days after the incident, he must submit a written report on the incident to the Regional Administrator. The report must include:

(1) Name, address, and telephone number of the owner or operator;

(2) Name, address, and telephone number of the facility;

(3) Date, time, and type of incident (e.g., fire, explosion);

(4) Name and quantity of material(s) involved;

(5) The extent of injuries, if any;

(6) An assessment of actual or potential hazards to human health or the environment, where this is applicable; and

(7) Estimated quantity and disposition of recovered material that resulted from the incident.

(Approved by the Office of Management and Budget under control number 2050-0002)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

Subpart E—Manifest System, Recordkeeping, and Reporting

§ 265.70 Applicability.

The regulations in this subpart apply to owners and operators of both on-site and off-site facilities, except as § 265.1 provides otherwise. Sections 265.71, 265.72, and 265.76 do not apply to owners and operators of on-site facilities that do not receive any hazardous waste from off-site sources.

§ 265.71 Use of manifest system.

(a) If a facility receives hazardous waste accompanied by a manifest, the owner or operator, or his agent, must:

(1) Sign and date each copy of the manifest to certify that the hazardous waste covered by the manifest was received;

(2) Note any significant discrepancies in the manifest (as defined in § 265.72(a)) on each copy of the manifest;

[*Comment*: The Agency does not intend that the owner or operator of a facility whose procedures under § 265.13(c) include waste analysis must perform that analysis before signing the manifest and giving it to the transporter. Section 265.72(b), however, requires reporting an unreconciled discrepancy discovered during later analysis.]

(3) Immediately give the transporter at least one copy of the signed manifest;

(4) Within 30 days after the delivery, send a copy of the manifest to the generator; and

(5) Retain at the facility a copy of each manifest for at least three years from the date of delivery.

(b) If a facility receives, from a rail or water (bulk shipment) transporter, hazardous waste which is accompanied by a shipping paper containing all the information required on the manifest (excluding the EPA identification numbers, generator's certification, and signatures), the owner or operator, or his agent, must:

(1) Sign and date each copy of the manifest or shipping paper (if the manifest has not been received) to certify that the hazardous waste covered by the manifest or shipping paper was received;

(2) Note any significa discrepancies (as defined in § 265.)) in the manifest or shipping p. (if the manifest has not been ived) on each copy of the manifest or shipping paper;

[*Comment:* The Agency does not intend that the owner or operator of a facility whose procedures under § 265.13(c) include waste analysis must perform that analysis before signing the shipping paper and giving it to the transporter. Section 265.72(b), however, requires reporting an unreconciled discrepancy discovered during later analysis.]

(3) Immediately give the rail or water (bulk shipment) transporter at least one copy of the manifest or shipping paper (if the manifest has not been received);

(4) Within 30 days after the delivery, send a copy of the signed and dated manifest to the generator; however, if the manifest has not been received within 30 days after delivery, the owner or operator, or his agent, must send a copy of the shipping paper signed and dated to the generator; and

[*Comment:* Section 262.23(c) of this chapter requires the generator to send three copies of the manifest to the facility when hazardous waste is sent by rail or water (bulk shipment).]

(5) Retain at the facility a copy of the manifest and shipping paper (if signed in lieu of the manifest at the time of delivery) for at least three years from the date of delivery.

(c) Whenever a shipment of hazardous waste is initiated from a facility, the owner or operator of that facility must comply with the requirements of Part 262 of this chapter.

[*Comment:* The provisions of § 262.34 are applicable to the on-site accumulation of hazardous wastes by generators. Therefore, the provisions of § 262.34 only apply to owners or operators who are shipping hazardous waste which they generated at that facility.]

(Approved by the Office of Management and Budget under control number 2050-0039)

[45 FR 33232, May 19, 1980, as amended at 45 FR 86970, 86974, Dec. 31, 1980; 50 FR 4514, Jan. 31, 1985]

§ 265.72 Manifest discrepancies.

(a) Manifest discrepancies are differences between the quantity or type of hazardous waste designated on the manifest or shipping paper, and the quantity or type of hazardous waste a facility actually receives. Significant discrepancies in quantity are: (1) For bulk waste, variations greater than 10 percent in weight, and (2) for batch waste, any variation in piece count, such as a discrepancy of one drum in a truckload. Significant discrepancies in type are obvious differences which can be discovered by inspection or waste analysis, such as waste solvent substituted for waste acid, or toxic constituents not reported on the manifest or shipping paper.

(b) Upon discovering a significant discrepancy, the owner or operator must attempt to reconcile the discrepancy with the waste generator or transporter (e.g., with telephone conversations). If the discrepancy is not resolved within 15 days after receiving the waste, the owner or operator must immediately submit to the Regional Administrator a letter describing the discrepancy and attempts to reconcile it, and a copy of the manifest or shipping paper at issue.

(Approved by the Office of Management and Budget under control number 2050-0039)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 265.73 Operating record.

(a) The owner or operator must keep a written operating record at his facility.

(b) The following information must be recorded, as it becomes available, and maintained in the operating record until closure of the facility:

(1) A description and the quantity of each hazardous waste received, and the method(s) and date(s) of its treatment, storage, or disposal at the facility as required by Appendix I;

(2) The location of each hazardous waste within the facility and the quantity at each location. For disposal facilities, the location and quantity of each hazardous waste must be recorded on a map or diagram of each cell or disposal area. For all facilities, this in-

formation must include cross-references to specific manifest document numbers, if the waste was accompanied by a manifest;

[*Comment:* See §§ 265.119, 265.279, and 265.309 for related requirements.]

(3) Records and results of waste analyses and trial tests performed as specified in §§ 265.13, 265.193, 265.225, 265.252, 265.273, 265.314, 265.341, 265.375, 265.402, 265.1034, 265.1063, 268.4(a), and 268.7 of this chapter.

(4) Summary reports and details of all incidents that require implementing the contingency plan as specified in § 265.56(j);

(5) Records and results of inspections as required by § 265.15(d) (except these data need be kept only three years);

(6) Monitoring, testing or analytical data when required by §§ 265.90, 265.94, 265.191, 265.193, 265.195, 265.276, 265.278, 265.280(d)(1), 265.347, 265.377, 265.1034(c)-265.1034(f), 265.1035, 265.1063(d)-265.1063(i), and 265.1064.

[*Comment:* As required by § 265.94, monitoring data at disposal facilities must be kept throughout the post-closure period.]

(7) All closure cost estimates under § 265.142 and, for disposal facilities, all post-closure cost estimates under § 265.144.

(8) Records of the quantities (and date of placement) for each shipment of hazardous waste placed in land disposal units under an extension to the effective date of any land disposal restriction granted pursuant to § 268.5, monitoring data required pursuant to a petition under § 268.6, or a certification under § 268.8, and the applicable notice required by a generator under § 268.7(a).

(9) For an off-site treatment facility, a copy of the notice, and the certification and demonstration if applicable, required by the generator or the owner or operator under § 268.7 or § 268.8;

(10) For an on-site treatment facility, the information contained in the notice (except the manifest number), and the certification and demonstration if applicable, required by the generator or the owner or operator under § 268.7 or § 268.8;

(11) For an off-site land disposal facility, a copy of the notice, and the certification and demonstration if applicable, required by the generator or the owner or operator of a treatment facility under § 268.7 or § 268.8;

(12) For an on-site land disposal facility, the information contained in the notice (except the manifest number), and the certification and demonstration if applicable, required by the generator or the owner or operator of a treatment facility under § 268.7 or § 268.8.

(13) For an off-site storage facility, a copy of the notice, and the certification and demonstration if applicable, required by the generator or the owner or operator under § 268.7 or § 268.8; and

(14) For an on-site storage facility, the information contained in the notice (except the manifest number), and the certification and demonstration if applicable, required by the generator or the owner or operator of a treatment facility under § 268.7 or § 268.8.

(Approved by Office of Management and Budget under control numbers 2050-0038, and 2040-0042)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985; 50 FR 18374, Apr. 30, 1985; 51 FR 40638, Nov. 7, 1986; 53 FR 31211, Aug. 17, 1988; 54 FR 26648, June 23, 1989; 55 FR 25507, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25507, June 21, 1990, in § 265.73, paragraphs (b)(3) and (6) were revised, effective December 21, 1990. For the convenience of the user the superseded text appears as follows:

§ 265.73 Operating record.

* * * * *

(b) * * *

(3) Records and results of waste analysis and trial tests performed as specified in §§ 265.13, 265.193, 265.225, 265.252, 265.273, 265.314, 265.341, 265.375, 265.402, 268.4(a) and 268.7 of this chapter.

* * * * *

(6) Monitoring, testing, or analytical data when required by §§ 265.90, 265.94, 265.191,

265.193, 265.195, 265.276, 265.278, 265.280(d)(1), 265.347, and 265.377; and

* * * * *

§ 265.74 Availability, retention, and disposition of records.

(a) All records, including plans, required under this part must be furnished upon request, and made available at all reasonable times for inspection, by any officer, employee, or representative of EPA who is duly designated by the Administrator.

(b) The retention period for all records required under this part is extended automatically during the course of any unresolved enforcement action regarding the facility or as requested by the Administrator.

(c) A copy of records of waste disposal locations and quantities under § 265.73(b)(2) must be submitted to the Regional Administrator and local land authority upon closure of the facility (see § 265.119).

(Approved by the Office of Management and Budget under control number 2050-0013)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 265.75 Biennial report.

The owner or operator must prepare and submit a single copy of a biennial report to the Regional Administrator by March 1 of each even numbered year. The biennial report must be submitted on EPA Form 8700-13B. The report must cover facility activities during the previous calendar year and must include the following information:

(a) The EPA identification number, name, and address of the facility;

(b) The calendar year covered by the report;

(c) For off-site facilities, the EPA identification number of each hazardous waste generator from which the facility received a hazardous waste during the year; for imported shipments, the report must give the name and address of the foreign generator;

(d) A description and the quantity of each hazardous waste the facility received during the year. For off-site facilities, this information must be listed by EPA identification number of each generator;

(e) The method of treatment, storage or disposal for each hazardous waste;

(f) Monitoring data under § 265.94(a)(2)(ii) and (iii), and (b)(2), where required;

(g) The most recent closure cost estimate under § 265.142, and, for disposal facilities, the most recent post-closure cost estimate under § 265.144; and

(h) For generators who treat, store, or dispose of hazardous waste on-site, a description of the efforts undertaken during the year to reduce the volume and toxicity of waste generated.

(i) For generators who treat, store, or dispose of hazardous waste on-site, a description of the changes in volume and toxicity of waste actually achieved during the year in comparison to previous years to the extent such information is available for the years prior to 1984.

(j) The certification signed by the owner or operator of the facility or his authorized representative.

(Approved by the Office of Management and Budget under control number 2050-0024)

[45 FR 33232, May 19, 1980, as amended at 48 FR 3982, Jan. 28, 1983; 50 FR 4514, Jan. 31, 1985; 51 FR 28556, Aug. 8, 1986]

§ 265.76 Unmanifested waste report.

If a facility accepts for treatment, storage, or disposal any hazardous waste from an off-site source without an accompanying manifest, or without an accompanying shipping paper as described in § 263.20(e)(2) of this chapter, and if the waste is not excluded from the manifest requirement by § 261.5 of this chapter, then the owner or operator must prepare and submit a single copy of a report to the Regional Administrator within fifteen days after receiving the waste. The unmanifested waste report must be submitted on EPA form 8700-13B. Such report must be designated 'Unmanifested Waste Report' and include the following information:

(a) The EPA identification number, name, and address of the facility;

(b) The date the facility received the waste;

(c) The EPA identification number, name, and address of the generator and the transporter, if available;

(d) A description and the quantity of each unmanifested hazardous waste the facility received;

(e) The method of treatment, storage, or disposal for each hazardous waste;

(f) The certification signed by the owner or operator of the facility or his authorized representative; and

(g) A brief explanation of why the waste was unmanifested, if known.

[*Comment:* Small quantities of hazardous waste are excluded from regulation under this part and do not require a manifest. Where a facility receives unmanifested hazardous wastes, the Agency suggests that the owner or operator obtain from each generator a certification that the waste qualifies for exclusion. Otherwise, the Agency suggests that the owner or operator file an unmanifested waste report for the hazardous waste movement.]

(Approved by the Office of Management and Budget under control number 2050-0013)

[45 FR 33232, May 19, 1980, as amended at 48 FR 3982, Jan. 28, 1983; 50 FR 4514, Jan. 31, 1985]

§ 265.77 Additional reports.

In addition to submitting the biennial report and unmanifested waste reports described in §§ 265.75 and 265.76, the owner or operator must also report to the Regional Administrator:

(a) Releases, fires, and explosions as specified in § 265.56(j);

(b) Ground-water contamination and monitoring data as specified in §§ 265.93 and 265.94; and

(c) Facility closure as specified in § 265.115.

(d) As otherwise required by Subparts AA and BB.

[45 FR 33232, May 19, 1980, as amended at 48 FR 3982, Jan. 28, 1983; 55 FR 25507, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25507, June 21, 1990, in § 265.77, paragraph (d) was added, effective December 21, 1990.

Subpart F—Ground-Water Monitoring

§ 265.90 Applicability.

(a) Within one year after the effective date of these regulations, the owner or operator of a surface impoundment, landfill, or land treatment facility which is used to manage hazardous waste must implement a ground-water monitoring program capable of determining the facility's impact on the quality of ground water in the uppermost aquifer underlying the facility, except as § 265.1 and paragraph (c) of this section provide otherwise.

(b) Except as paragraphs (c) and (d) of this section provide otherwise, the owner or operator must install, operate, and maintain a ground-water monitoring system which meets the requirements of § 265.91, and must comply with §§ 265.92 through 265.94. This ground-water monitoring program must be carried out during the active life of the facility, and for disposal facilities, during the post-closure care period as well.

(c) All or part of the ground-water monitoring requirements of this subpart may be waived if the owner or operator can demonstrate that there is a low potential for migration of hazardous waste or hazardous waste constituents from the facility via the uppermost aquifer to water supply wells (domestic, industrial, or agricultural) or to surface water. This demonstration must be in writing, and must be kept at the facility. This demonstration must be certified by a qualified geologist or geotechnical engineer and must establish the following:

(1) The potential for migration of hazardous waste or hazardous waste constituents from the facility to the uppermost aquifer, by an evaluation of:

(i) A water balance of precipitation, evapotranspiration, runoff, and infiltration; and

(ii) Unsaturated zone characteristics (i.e., geologic materials, physical properties, and depth to ground water); and

(2) The potential for hazardous waste or hazardous waste constituents which enter the uppermost aquifer to migrate to a water supply well or surface water, by an evaluation of:

(i) Saturated zone characteristics (i.e., geologic materials, physical properties, and rate of ground-water flow); and

(ii) The proximity of the facility to water supply wells or surface water.

(d) If an owner or operator assumes (or knows) that ground-water monitoring of indicator parameters in accordance with §§ 265.91 and 265.92 would show statistically significant increases (or decreases in the case of pH) when evaluated under § 265.93(b), he may, install, operate, and maintain an alternate ground-water monitoring system (other than the one described in §§ 265.91 and 265.92). If the owner or operator decides to use an alternate ground-water monitoring system he must:

(1) Within one year after the effective date of these regulations, submit to the Regional Administrator a specific plan, certified by a qualified geologist or geotechnical engineer, which satisfies the requirements of § 265.93(d)(3), for an alternate ground-water monitoring system;

(2) Not later than one year after the effective date of these regulations, initiate the determinations specified in § 265.93(d)(4);

(3) Prepare and submit a written report in accordance with § 265.93(d)(5);

(4) Continue to make the determinations specified in § 265.93(d)(4) on a quarterly basis until final closure of the facility; and

(5) Comply with the recordkeeping and reporting requirements in § 265.94(b).

(e) The ground-water monitoring requirements of this subpart may be waived with respect to any surface impoundment that (1) Is used to neutralize wastes which are hazardous solely because they exhibit the corrosivity characteristic under § 261.22 of this chapter or are listed as hazardous wastes in Subpart D of Part 261 of this chapter only for this reason, and (2) contains no other hazardous wastes, if the owner or operator can demonstrate that there is no potential for migration of hazardous wastes from the impoundment. The demonstration must establish, based upon consideration of the characteristics of the wastes and the impoundment, that the corrosive wastes will be neutralized to the extent that they no longer meet the corrosivity characteristic before they can migrate out of the impoundment. The demonstration must be in writing and must be certified by a qualified professional.

(Approved by the Office of Management and Budget under control number 2050-0033)

[45 FR 33232, May 19, 1980, as amended at 47 FR 1255, Jan. 11, 1982; 50 FR 4514, Jan. 31, 1985]

§ 265.91 Ground-water monitoring system.

(a) A ground-water monitoring system must be capable of yielding ground-water samples for analysis and must consist of:

(1) Monitoring wells (at least one) installed hydraulically upgradient (i.e., in the direction of increasing static head) from the limit of the waste management area. Their number, locations, and depths must be sufficient to yield ground-water samples that are:

(i) Representative of background ground-water quality in the uppermost aquifer near the facility; and

(ii) Not affected by the facility; and

(2) Monitoring wells (at least three) installed hydraulically downgradient (i.e., in the direction of decreasing static head) at the limit of the waste management area. Their number, locations, and depths must ensure that they immediately detect any statistically significant amounts of hazardous waste or hazardous waste constituents that migrate from the waste management area to the uppermost aquifer.

(b) Separate monitoring systems for each waste management component of a facility are not required provided that provisions for sampling upgradient and downgradient water quality will detect any discharge from the waste management area.

(1) In the case of a facility consisting of only one surface impoundment, landfill, or land treatment area, the waste management area is described by the waste boundary (perimeter).

(2) In the case of a facility consisting of more than one surface impoundment, landfill, or land treatment area, the waste management area is described by an imaginary boundary line which circumscribes the several waste management components.

(c) All monitoring wells must be cased in a manner that maintains the integrity of the monitoring well bore hole. This casing must be screened or perforated, and packed with gravel or sand where necessary, to enable sample collection at depths where appropriate aquifer flow zones exist. The annular space (i.e., the space between the bore hole and well casing) above the sampling depth must be sealed with a suitable material (e.g., cement grout or bentonite slurry) to prevent contamination of samples and the ground water.

(Approved by the Office of Management and Budget under control number 2050-0033)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 265.92 Sampling and analysis.

(a) The owner or operator must obtain and analyze samples from the installed ground-water monitoring system. The owner or operator must develop and follow a ground-water sampling and analysis plan. He must keep this plan at the facility. The plan must include procedures and techniques for:

(1) Sample collection;

(2) Sample preservation and shipment;

(3) Analytical procedures; and

(4) Chain of custody control.

[*Comment:* See "Procedures Manual For Ground-water Monitoring At Solid Waste Disposal Facilities," EPA-530/SW-611, August 1977 and "Methods for Chemical Analysis of Water and Wastes," EPA-600/4-79-020, March 1979 for discussions of sampling and analysis procedures.]

(b) The owner or operator must determine the concentration or value of the following parameters in ground-water samples in accordance with paragraphs (c) and (d) of this section:

(1) Parameters characterizing the suitability of the ground water as a drinking water supply, as specified in Appendix III.

(2) Parameters establishing ground-water quality:

(i) Chloride

(ii) Iron

(iii) Manganese

(iv) Phenols

(v) Sodium

(vi) Sulfate

[*Comment:* These parameters are to be used as a basis for comparison in the event a ground-water quality assessment is required under § 265.93(d).]

(3) Parameters used as indicators of ground-water contamination:

(i) pH

(ii) Specific Conductance

(iii) Total Organic Carbon

(iv) Total Organic Halogen

(c)(1) For all monitoring wells, the owner or operator must establish initial background concentrations or values of all parameters specified in paragraph (b) of this section. He must do this quarterly for one year.

(2) For each of the indicator parameters specified in paragraph (b)(3) of this section, at least four replicate measurements must be obtained for each sample and the initial background arithmetic mean and variance must be determined by pooling the replicate measurements for the respective parameter concentrations or values in samples obtained from upgradient wells during the first year.

(d) After the first year, all monitoring wells must be sampled and the samples analyzed with the following frequencies:

(1) Samples collected to establish ground-water quality must be obtained and analyzed for the parameters specified in paragraph (b)(2) of this section at least annually.

(2) Samples collected to indicate ground-water contamination must be obtained and analyzed for the parameters specified in paragraph (b)(3) of this section at least semi-annually.

(e) Elevation of the ground-water surface at each monitoring well must be determined each time a sample is obtained.

(Approved by the Office of Management and Budget under control number 2050-0033)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 265.93 Preparation, evaluation, and response.

(a) Within one year after the effective date of these regulations, the owner or operator must prepare an *outline* of a ground-water quality as-

sessment program. The outline must describe a more comprehensive ground-water monitoring program (than that described in §§ 265.91 and 265.92) capable of determining:

(1) Whether hazardous waste or hazardous waste constituents have entered the ground water;

(2) The rate and extent of migration of hazardous waste or hazardous waste constituents in the ground water; and

(3) The concentrations of hazardous waste or hazardous waste constituents in the ground water.

(b) For each indicator parameter specified in § 265.92(b)(3), the owner or operator must calculate the arithmetic mean and variance, based on at least four replicate measurements on each sample, for each well monitored in accordance with § 265.92(d)(2), and compare these results with its initial background arithmetic mean. The comparison must consider individually each of the wells in the monitoring system, and must use the Student's t-test at the 0.01 level of significance (see Appendix IV) to determine statistically significant increases (and decreases, in the case of pH) over initial background.

(c)(1) If the comparisons for the *upgradient* wells made under paragraph (b) of this section show a significant increase (or pH decrease), the owner or operator must submit this information in accordance with § 265.94(a)(2)(ii).

(2) If the comparisons for *downgradient* wells made under paragraph (b) of this section show a significant increase (or pH decrease), the owner or operator must then immediately obtain additional ground-water samples from those downgradient wells where a significant difference was detected, split the samples in two, and obtain analyses of all additional samples to determine whether the significant difference was a result of laboratory error.

(d)(1) If the analyses performed under paragraph (c)(2) of this section confirm the significant increase (or pH decrease), the owner or operator must provide written notice to the Regional Administrator—within seven days of the date of such confirmation—that the facility may be affecting ground-water quality.

(2) Within 15 days after the notification under paragraph (d)(1) of this section, the owner or operator must develop and submit to the Regional Administrator a specific plan, based on the outline required under paragraph (a) of this section and certified by a qualified geologist or geotechnical engineer, for a ground-water quality assessment program at the facility.

(3) The plan to be submitted under § 265.90(d)(1) or paragraph (d)(2) of this section must specify:

(i) The number, location, and depth of wells;

(ii) Sampling and analytical methods for those hazardous wastes or hazardous waste constituents in the facility;

(iii) Evaluation procedures, including any use of previously-gathered ground-water quality information; and

(iv) A schedule of implementation.

(4) The owner or operator must implement the ground-water quality assessment plan which satisfies the requirements of paragraph (d)(3) of this section, and, at a minimum, determine:

(i) The rate and extent of migration of the hazardous waste or hazardous waste constituents in the ground water; and

(ii) The concentrations of the hazardous waste or hazardous waste constituents in the ground water.

(5) The owner or operator must make his first determination under paragraph (d)(4) of this section as soon as technically feasible, and, within 15 days after that determination, submit to the Regional Administrator a written report containing an assessment of the ground-water quality.

(6) If the owner or operator determines, based on the results of the first determination under paragraph (d)(4) of this section, that no hazardous waste or hazardous waste constituents from the facility have entered the ground water, then he may reinstate the indicator evaluation program described in § 265.92 and paragraph (b) of this section. If the owner or operator reinstates the indicator evaluation program, he must so notify the Regional Administrator in the report

submitted under paragraph (d)(5) of this section.

(7) If the owner or operator determines, based on the first determination under paragraph (d)(4) of this section, that hazardous waste or hazardous waste constituents from the facility have entered the ground water, then he:

(i) Must continue to make the determinations required under paragraph (d)(4) of this section on a quarterly basis until final closure of the facility, if the ground-water quality assessment plan was implemented prior to final closure of the facility; or

(ii) May cease to make the determinations required under paragraph (d)(4) of this section, if the ground-water quality assessment plan was implemented during the post-closure care period.

(e) Notwithstanding any other provision of this subpart, any ground-water quality assessment to satisfy the requirements of § 265.93(d)(4) which is initiated prior to final closure of the facility must be completed and reported in accordance with § 265.93(d)(5).

(f) Unless the ground water is monitored to satisfy the requirements of § 265.93(d)(4), at least annually the owner or operator must evaluate the data on ground-water surface elevations obtained under § 265.92(e) to determine whether the requirements under § 265.91(a) for locating the monitoring wells continues to be satisfied. If the evaluation shows that § 265.91(a) is no longer satisfied, the owner or operator must immediately modify the number, location, or depth of the monitoring wells to bring the ground-water monitoring system into compliance with this requirement.

(Approved by the Office of Management and Budget under control number 2050-0033)

[45 FR 33232, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 265.94 Recordkeeping and reporting.

(a) Unless the ground water is monitored to satisfy the requirements of § 265.93(d)(4), the owner or operator must:

(1) Keep records of the analyses required in § 265.92(c) and (d), the associated ground-water surface elevations required in § 265.92(e), and the evaluations required in § 265.93(b) throughout the active life of the facility, and, for disposal facilities, throughout the post-closure care period as well; and

(2) Report the following ground-water monitoring information to the Regional Administrator:

(i) During the first year when initial background concentrations are being established for the facility: concentrations or values of the parameters listed in § 265.92(b)(1) for each ground-water monitoring well within 15 days after completing each quarterly analysis. The owner or operator must separately identify for each monitoring well any parameters whose concentration or value has been found to exceed the maximum contaminant levels listed in Appendix III.

(ii) Annually: Concentrations or values of the parameters listed in § 265.92(b)(3) for each ground-water monitoring well, along with the required evaluations for these parameters under § 265.93(b). The owner or operator must separately identify any significant differences from initial background found in the upgradient wells, in accordance with § 265.93(c)(1). During the active life of the facility, this information must be submitted no later than March 1 following each calendar year.

(iii) No later than March 1 following each calendar year: Results of the evaluations of ground-water surface elevations under § 265.93(f), and a description of the response to that evaluation, where applicable.

(b) If the ground water is monitored to satisfy the requirements of § 265.93(d)(4), the owner or operator must:

(1) Keep records of the analyses and evaluations specified in the plan, which satisfies the requirements of § 265.93(d)(3), throughout the active life of the facility, and, for disposal facilities, throughout the post-closure care period as well; and

(2) Annually, until final closure of the facility, submit to the Regional Administrator a report containing the results of his or her ground-water quality assessment program which includes, but is not limited to, the calculated (or measured) rate of migration

of hazardous waste or hazardous waste constituents in the ground water during the reporting period. This information must be submitted no later than March 1 following each calendar year.

(Approved by the Office of Management and Budget under control number 2050-0033)

[45 FR 33232, May 19, 1980, as amended at 48 FR 3982, Jan. 28, 1983; 50 FR 4514, Jan. 31, 1985]

Subpart G—Closure and Post-Closure

SOURCE: 51 FR 16451, May 2, 1986, unless otherwise noted.

§ 265.110 Applicability.

Except as § 265.1 provides otherwise:

(a) Sections 265.111 through 265.115 (which concern closure) apply to the owners and operators of all hazardous waste management facilities; and

(b) Sections 265.116 through 265.120 (which concern post-closure care) apply to the owners and operators of:

(1) All hazardous waste disposal facilities; and

(2) Waste piles and surface impoundments for which the owner or operator intends to remove the wastes at closure to the extent that these sections are made applicable to such facilities in § 265.228 or § 265.258; and

(3) Tank systems that are required under § 265.197 to meet requirements for landfills.

[51 FR 16451, May 2, 1986, as amended at 51 FR 25479, July 14, 1986; 53 FR 34086, Sept. 2, 1988]

§ 265.111 Closure performance standard.

The owner or operator must close the facility in a manner that:

(a) Minimizes the need for further maintenance, and

(b) Controls, minimizes or eliminates, to the extent necessary to protect human health and the environment, post-closure escape of hazardous waste, hazardous constituents, leachate, contaminated run-off, or hazardous waste decomposition products to the ground or surface waters or to the atmosphere, and

(c) Complies with the closure requirements of this subpart including, but not limited to, the requirements of §§ 265.197, 265.228, 265.258, 265.280, 265.310, 265.351, 265.381 and 265.404.

§ 265.112 Closure plan; amendment of plan.

(a) *Written plan.* By May 19, 1981, the owner or operator of a hazardous waste management facility must have a written closure plan. Until final closure is completed and certified in accordance with § 265.115, a copy of the most current plan must be furnished to the Regional Administrator upon request, including request by mail. In addition, for facilities without approved plans, it must also be provided during site inspections, on the day of inspection, to any officer, employee or representative of the Agency who is duly designated by the Administrator.

(b) *Content of plan.* The plan must identify steps necessary to perform partial and/or final closure of the facility at any point during its active life. The closure plan must include, at least:

(1) A description of how each hazardous waste management unit at the facility will be closed in accordance with § 265.111; and

(2) A description of how final closure of the facility will be conducted in accordance with § 265.111. The description must identify the maximum extent of the operation which will be unclosed during the active life of the facility; and

(3) An estimate of the maximum inventory of hazardous wastes ever onsite over the active life of the facility and a detailed description of the methods to be used during partial and final closure, including, but not limited to methods for removing, transporting, treating, storing or disposing of all hazardous waste, identification of and the type(s) of off-site hazardous waste management unit(s) to be used, if applicable; and

(4) A detailed description of the steps needed to remove or decontaminate all hazardous waste residues and contaminated containment system components, equipment, structures, and soils during partial and final closure including, but not limited to, procedures for cleaning equipment and removing contaminated soils, methods

for sampling and testing surrounding soils, and criteria for determining the extent of decontamination necessary to satisfy the closure performance standard; and

(5) A detailed description of other activities necessary during the partial and final closure period to ensure that all partial closures and final closure satisfy the closure performance standards, including, but not limited to, ground-water monitoring, leachate collection, and run-on and run-off control; and

(6) A schedule for closure of each hazardous waste management unit and for final closure of the facility. The schedule must include, at a minimum, the total time required to close each hazardous waste management unit and the time required for intervening closure activities which will allow tracking of the progress of partial and final closure. (For example, in the case of a landfill unit, estimates of the time required to treat or dispose of all hazardous waste inventory and of the time required to place a final cover must be included.); and

(7) An estimate of the expected year of final closure for facilities that use trust funds to demonstrate financial assurance under § 265.143 or § 265.145 and whose remaining operating life is less than twenty years, and for facilities without approved closure plans.

(c) *Amendment of plan.* The owner or operator may amend the closure plan at any time prior to the notification of partial or final closure of the facility. An owner or operator with an approved closure plan must submit a written request to the Regional Administrator to authorize a change to the approved closure plan. The written request must include a copy of the amended closure plan for approval by the Regional Administrator.

(1) The owner or operator must amend the closure plan whenever:

(i) Changes in operating plans or facility design affect the closure plan, or

(ii) There is a change in the expected year of closure, if applicable, or

(iii) In conducting partial or final closure activities, unexpected events require a modification of the closure plan.

(2) The owner or operator must amend the closure plan at least 60 days prior to the proposed change in facility design or operation, or no later than 60 days after an unexpected event has occurred which has affected the closure plan. If an unexpected event occurs during the partial or final closure period, the owner or operator must amend the closure plan no later than 30 days after the unexpected event. These provisions also apply to owners or operators of surface impoundments and waste piles who intended to remove all hazardous wastes at closure, but are required to close as landfills in accordance with § 265.310.

(3) An owner or operator with an approved closure plan must submit the modified plan to the Regional Administrator at least 60 days prior to the proposed change in facility design or operation, or no more than 60 days after an unexpected event has occurred which has affected the closure plan. If an unexpected event has occurred during the partial or final closure period, the owner or operator must submit the modified plan no more than 30 days after the unexpected event. These provisions also apply to owners or operators of surface impoundments and waste piles who intended to remove all hazardous wastes at closure but are required to close as landfills in accordance with § 265.310. If the amendment to the plan is a Class 2 or 3 modification according to the criteria in § 270.42, the modification to the plan will be approved according to the procedures in § 265.112(d)(4).

(4) The Regional Administrator may request modifications to the plan under the conditions described in paragraph (c)(1) of this section. An owner or operator with an approved closure plan must submit the modified plan within 60 days of the request from the Regional Administrator, or within 30 days if the unexpected event occurs during partial or final closure. If the amendment is considered a Class 2 or 3 modification according to the criteria in § 270.42, the modification to the plan will be approved in accordance with the procedures in § 265.112(d)(4).

(d) *Notification of partial closure and final closure.* (1) The owner or operator must submit the closure plan to the Regional Administrator at least 180 days prior to the date on which he expects to begin closure of the first surface impoundment, waste pile, land treatment, or landfill unit, or final closure if it involves such a unit, whichever is earlier. The owner or operator must submit the closure plan to the Regional Administrator at least 45 days prior to the date on which he expects to begin final closure of a facility with only tanks, container storage, or incinerator units. Owners or operators with approved closure plans must notify the Regional Administrator in writing at least 60 days prior to the date on which he expects to begin closure of a surface impoundment, waste pile, landfill, or land treatment unit, or final closure of a facility involving such a unit. Owners and operators with approved closure plans must notify the Regional Administrator in writing at least 45 days prior to the date on which he expects to begin final closure of a facility with only tanks, container storage, or incinerator units.

(2) The date when he "expects to begin closure" must be either:

(i) Within 30 days after the date on which any hazardous waste management unit receives the known final volume of hazardous wastes or, if there is a reasonable possibility that the hazardous waste management unit will receive additional hazardous wastes, no later than one year after the date on which the unit received the most recent volume of hazardous wastes. If the owner or operator of a hazardous waste management unit can demonstrate to the Regional Administrator that the hazardous waste management unit or facility has the capacity to receive additional hazardous wastes and he has taken, and will continue to take, all steps to prevent threats to human health and the environment, including compliance with all applicable interim status requirements, the Regional Administrator may approve an extension to this one-year limit; or

(ii) For units meeting the requirements of § 265.113(d), no later than 30 days after the date on which the hazardous waste management unit receives the known final volume of non-hazardous wastes, or if there is a reasonable possibility that the hazardous waste management unit will receive additional non-hazardous wastes, no later than one year after the date on which the unit received the most recent volume of non-hazardous wastes. If the owner or operator can demonstrate to the Regional Administrator that the hazardous waste management unit has the capacity to receive additional non-hazardous wastes and he has taken, and will continue to take, all steps to prevent threats to human health and the environment, including compliance with all applicable interim status requirements, the Regional Administrator may approve an extension to this one-year limit.

(3) The owner or operator must submit his closure plan to the Regional Administrator no later than 15 days after:

(i) Termination of interim status except when a permit is issued simultaneously with termination of interim status; or

(ii) Issuance of a judicial decree or final order under section 3008 of RCRA to cease receiving hazardous wastes or close.

(4) The Regional Administrator will provide the owner or operator and the public, through a newspaper notice, the opportunity to submit written comments on the plan and request modifications to the plan no later than 30 days from the date of the notice. He will also, in response to a request or at his own discretion, hold a public hearing whenever such a hearing might clarify one or more issues concerning a closure plan. The Regional Administrator will give public notice of the hearing at least 30 days before it occurs. (Public notice of the hearing may be given at the same time as notice of the opportunity for the public to submit written comments, and the two notices may be combined.) The Regional Administrator will approve, modify, or disapprove the plan within 90 days of its receipt. If the Regional Administrator does not approve the plan he shall provide the owner or operator with a detailed written state-

ment of reasons for the refusal and the owner or operator must modify the plan or submit a new plan for approval within 30 days after receiving such written statement. The Regional Administrator will approve or modify this plan in writing within 60 days. If the Regional Administrator modifies the plan, this modified plan becomes the approved closure plan. The Regional Administrator must assure that the approved plan is consistent with §§ 265.111 through 265.115 and the applicable requirements of §§ 265.90 *et seq.*, 265.197, 265.228, 265,258, 265.280, 265.310, 265.351, 265.381, and 265.404. A copy of the modified plan with a detailed statement of reasons for the modifications must be mailed to the owner or operator.

(e) *Removal of wastes and decontamination or dismantling of equipment.* Nothing in this section shall preclude the owner or operator from removing hazardous wastes and decontaminating or dismantling equipment in accordance with the approved partial or final closure plan at any time before or after notification of partial or final closure.

[51 FR 16451, May 2, 1986, as amended at 54 FR 37935, Sept. 28, 1988; 54 FR 33396, Aug. 14, 1989]

§ 265.113 Closure; time allowed for closure.

(a) Within 90 days after receiving the final volume of hazardous wastes, or the final volume of non-hazardous wastes if the owner or operator complies with all applicable requirements in paragraphs (d) and (e) of this section, at a hazardous waste management unit or facility, or within 90 days after approval of the closure plan, whichever is later, the owner or operator must treat, remove from the unit or facility, or dispose of on-site, all hazardous wastes in accordance with the approved closure plan. The Regional Administrator may approve a longer period if the owner or operator demonstrates that:

(1)(i) The activities required to comply with this paragraph will, of necessity, take longer than 90 days to complete; or

(ii)(A) The hazardous waste management unit or facility has the capacity to receive additional hazardous wastes, or has the capacity to receive non-hazardous wastes if the facility owner or operator complies with paragraphs (d) and (e) of this section; and

(B) There is a reasonable likelihood that he or another person will recommence operation of the hazardous waste management unit or the facility within one year; and

(C) Closure of the hazardous waste management unit or facility would be incompatible with continued operation of the site; and

(2) He has taken and will continue to take all steps to prevent threats to human health and the environment, including compliance with all applicable interim status requirements.

(b) The owner or operator must complete partial and final closure activities in accordance with the approved closure plan and within 180 days after receiving the final volume of hazardous wastes, or the final volume of non-hazardous wastes if the owner or operator complies with all applicable requirements in paragraphs (d) and (e) of this section, at the hazardous waste management unit or facility, or 180 days after approval of the closure plan, if that is later. The Regional Administrator may approve an extension to the closure period if the owner or operator demonstrates that:

(1) (i) The partial or final closure activities will, of necessity, take longer than 180 days to complete; or

(ii)(A) The hazardous waste management unit or facility has the capacity to receive additional hazardous wastes, or has the capacity to receive non-hazardous wastes if the facility owner or operator complies with paragraphs (d) and (e) of this section; and

(B) There is reasonable likelihood that he or another person will recommence operation of the hazardous waste management unit or the facility within one year; and

(C) Closure of the hazardous waste management unit or facility would be incompatible with continued operation of the site; and

(2) He has taken and will continue to take all steps to prevent threats to human health and the environment from the unclosed but not operating hazardous waste management unit or

facility, including compliance with all applicable interim status requirements.

(c) The demonstrations referred to in paragraphs (a)(1) and (b)(1) of this section must be made as follows:

(1) The demonstrations in paragraph (a)(1) of this section must be made at least 30 days prior to the expiration of the 90-day period in paragraph (a) of this section; and

(2) The demonstration in paragraph (b)(1) of this section must be made at least 30 days prior to the expiration of the 180-day period in paragraph (b) of this section, unless the owner or operator is otherwise subject to the deadlines in paragraph (d) of this section.

(d) The Regional Administrator may allow an owner or operator to receive non-hazardous wastes in a landfill, land treatment, or surface impoundment unit after the final receipt of hazardous wastes at that unit if:

(1) The owner or operator submits an amended part B application, or a part B application, if not previously required, and demonstrates that:

(i) The unit has the existing design capacity as indicated on the part A application to receive non-hazardous wastes; and

(ii) There is a reasonable likelihood that the owner or operator or another person will receive non-hazardous wastes in the unit within one year after the final receipt of hazardous wastes; and

(iii) The non-hazardous wastes will not be incompatible with any remaining wastes in the unit or with the facility design and operating requirements of the unit or facility under this part; and

(iv) Closure of the hazardous waste management unit would be incompatible with continued operation of the unit or facility; and

(v) The owner or operator is operating and will continue to operate in compliance with all applicable interim status requirements; and

(2) The part B application includes an amended waste analysis plan, ground-water monitoring and response program, human exposure assessment required under RCRA section 3019, and closure and post-closure plans, and updated cost estimates and demonstrations of financial assurance for closure and post- closure care as necessary and appropriate to reflect any changes due to the presence of hazardous constituents in the non-hazardous wastes, and changes in closure activities, including the expected year of closure if applicable under § 265.112(b)(7), as a result of the receipt of non-hazardous wastes following the final receipt of hazardous wastes; and

(3) The part B application is amended, as necessary and appropriate, to account for the receipt of non-hazardous wastes following receipt of the final volume of hazardous wastes; and

(4) The part B application and the demonstrations referred to in paragraphs (d)(1) and (d)(2) of this section are submitted to the Regional Administrator no later than 180 days prior to the date on which the owner or operator of the facility receives the known final volume of hazardous wastes, or no later than 90 days after the effective date of this rule in the state in which the unit is located, whichever is later.

(e) In addition to the requirements in paragraph (d) of this section, an owner or operator of a hazardous waste surface impoundment that is not in compliance with the liner and leachate collection system requirements in 42 U.S.C. 3004(o)(1) and 3005(j)(1) or 42 U.S.C. 3004(o)(2) or (3) or 3005(j) (2), (3), (4) or (13) must:

(1) Submit with the part B application:

(i) A contingent corrective measures plan; and

(ii) A plan for removing hazardous wastes in compliance with paragraph (e)(2) of this section; and

(2) Remove all hazardous wastes from the unit by removing all hazardous liquids and removing all hazardous sludges to the extent practicable without impairing the integrity of the liner(s), if any.

(3) Removal of hazardous wastes must be completed no later than 90 days after the final receipt of hazardous wastes. The Regional Administrator may approve an extension to this deadline if the owner or operator demonstrates that the removal of hazardous wastes will, of necessity, take

longer than the allotted period to complete and that an extension will not pose a threat to human health and the environment.

(4) If a release that is a statistically significant increase (or decrease in the case of pH) in hazardous oonstituents over background levels is detected in accordance with the requirements in subpart F of this part, the owner or operator of the unit:

(i) Must implement corrective measures in accordance with the approved contingent corrective measures plan required by paragraph (e)(1) of this section no later than one year after detection of the release, or approval of the contingent corrective measures plan, whichever is later;

(ii) May receive wastes at the unit following detection of the release only if the approved corrective measures plan includes a demonstration that continued receipt of wastes will not impede corrective action; and

(iii) May be required by the Regional Administrator to implement corrective measures in less than one year or to cease receipt of wastes until corrective measures have been implemented if necessary to protect human health and the environment.

(5) During the period of corrective action, the owner or operator shall provide semi-annual reports to the Regional Administrator that describe the progress of the corrective action program, compile all ground-water monitoring data, and evaluate the effect of the continued receipt of non-hazardous wastes on the effectiveness of the corrective action.

(6) The Regional Administrator may require the owner or operator to commence closure of the unit if the owner or operator fails to implement corrective action measures in accordance with the approved contingent corrective measures plan within one year as required in paragraph (e)(4) of this section, or fails to make substantial progress in implementing corrective action and achieving the facility's background levels.

(7) If the owner or operator fails to implement corrective measures as required in paragraph (e)(4) of this section, or if the Regional Administrator determines that substantial progress has not been made pursuant to paragraph (e)(6) of this section he shall:

(i) Notify the owner or operator in writing that the owner or operator must begin closure in accordance with the deadline in paragraphs (a) and (b) of this section and provide a detailed statement of reasons for this determination, and

(ii) Provide the owner or operator and the public, through a newspaper notice, the opportunity to submit written comments on the decision no later than 20 days after the date of the notice.

(iii) If the Regional Administrator receives no written comments, the decision will become final five days after the close of the comment period. The Regional Administrator will notify the owner or operator that the decision is final, and that a revised closure plan, if necessary, must be submitted within 15 days of the final notice and that closure must begin in accordance with the deadlines in paragraphs (a) and (b) of this section.

(iv) If the Regional Administrator receives written comments on the decision, he shall make a final decision within 30 days after the end of the comment period, and provide the owner or operator in writing and the public through a newspaper notice, a detailed statement of reasons for the final decision. If the Regional Administrator determines that substantial progress has not been made, closure must be initiated in accordance with the deadlines in paragraphs (a) and (b) of this section.

(v) The final determinations made by the Regional Administrator under paragraphs (e)(7) (iii) and (iv) of this section are not subject to administrative appeal.

[51 FR 16451, May 2, 1986, as amended at 54 FR 33396, Aug. 14, 1989]

§ 265.114 Disposal or decontamination of equipment, structures and soils.

During the partial and final closure periods, all contaminated equipment, structures and soil must be properly disposed of, or decontaminated unless specified otherwise in §§ 265.197, 265.228, 265.258, 265.280, or 265.310. By removing all hazardous wastes or

hazardous constituents during partial and final closure, the owner or operator may become a generator of hazardous waste and must handle that hazardous waste in accordance with all applicable requirements of Part 262 of this chapter.

[51 FR 16451, May 2, 1986, as amended at 53 FR 34086, Sept. 2, 1988]

§ 265.115 Certification of closure.

Within 60 days of completion of closure of each hazardous waste surface impoundment, waste pile, land treatment, and landfill unit, and within 60 days of completion of final closure, the owner or operator must submit to the Regional Administrator, by registered mail, a certification that the hazardous waste management unit or facility, as applicable, has been closed in accordance with the specifications in the approved closure plan. The certification must be signed by the owner or operator and by an independent registered professional engineer. Documentation supporting the independent registered professional engineer's certification must be furnished to the Regional Administrator upon request until he releases the owner or operator from the financial assurance requirements for closure under § 265.143(h).

§ 265.116 Survey plat.

No later than the submission of the certification of closure of each hazardous waste disposal unit, an owner or operator must submit to the local zoning authority, or the authority with jurisdiction over local land use, and to the Regional Administrator, a survey plat indicating the location and dimensions of landfill cells or other hazardous waste disposal units with respect to permanently surveyed benchmarks. This plat must be prepared and certified by a professional land surveyor. The plat filed with the local zoning authority, or the authority with jurisdiction over local land use must contain a note, prominently displayed, which states the owner's or operator's obligation to restrict disturbance of the hazardous waste disposal unit in accordance with the applicable Subpart G regulations.

§ 265.117 Post-closure care and use of property.

(a)(1) Post-closure care for each hazardous waste management unit subject to the requirements of §§ 265.117 through 265.120 must begin after completion of closure of the unit and continue for 30 years after that date. It must consist of at least the following:

(i) Monitoring and reporting in accordance with the requirements of Subparts F, K, L, M, and N of this part; and

(ii) Maintenance and monitoring of waste containment systems in accordance with the requirements of Subparts F, K, L, M, and N of this part.

(2) Any time preceding closure of a hazardous waste management unit subject to post-closure care requirements or final closure, or any time during the post-closure period for a particular hazardous waste disposal unit, the Regional Administrator may:

(i) Shorten the post-closure care period applicable to the hazardous waste management unit, or facility, if all disposal units have been closed, if he finds that the reduced period is sufficient to protect human health and the environment (e.g., leachate or ground-water monitoring results, characteristics of the hazardous waste, application of advanced technology, or alternative disposal, treatment, or reuse techniques indicate that the hazardous waste management unit or facility is secure); or

(ii) Extend the post-closure care period applicable to the hazardous waste management unit or facility, if he finds that the extended period is necessary to protect human health and the environment (e.g., leachate or ground-water monitoring results indicate a potential for migration of hazardous wastes at levels which may be harmful to human health and the environment).

(b) The Regional Administator may require, at partial and final closure, continuation of any of the security requirements of § 265.14 during part or all of the post-closure period when:

(1) Hazardous wastes may remain exposed after completion of partial or final closure; or

(2) Access by the public or domestic livestock may pose a hazard to human health.

(c) Post-closure use of property on or in which hazardous wastes remain after partial or final closure must never be allowed to disturb the integrity of the final cover, liner(s), or any other components of the containment system, or the function of the facility's monitoring systems, unless the Regional Administrator finds that the disturbance:

(1) Is necessary to the proposed use of the property, and will not increase the potential hazard to human health or the environment; or

(2) Is necessary to reduce a threat to human health or the environment.

(d) All post-closure care activities must be in accordance with the provisions of the approved post-closure plan as specified in § 265.118.

§ 265.118 Post-closure plan; amendment of plan.

(a) *Written plan.* By May 19, 1981, the owner or operator of a hazardous waste disposal unit must have a written post-closure plan. An owner or operator of a surface impoundment or waste pile that intends to remove all hazardous wastes at closure must prepare a post-closure plan and submit it to the Regional Administrator within 90 days of the date that the owner or operator or Regional Administrator determines that the hazardous waste management unit or facility must be closed as a landfill, subject to the requirements of §§ 265.117 through 265.120.

(b) Until final closure of the facility, a copy of the most current post-closure plan must be furnished to the Regional Administrator upon request, including request by mail. In addition, for facilities without approved post-closure plans, it must also be provided during site inspections, on the day of inspection, to any officer, employee or representative of the Agency who is duly designated by the Administrator. After final closure has been certified, the person or office specified in § 265.118(c)(3) must keep the approved post-closure plan during the post-closure period.

(c) For each hazardous waste management unit subject to the requirements of this section, the post-closure plan must identify the activities that will be carried on after closure of each disposal unit and the frequency of these activities, and include at least:

(1) A description of the planned monitoring activities and frequencies at which they will be performed to comply with Subparts F, K, L, M, and N of this part during the post-closure care period; and

(2) A description of the planned maintenance activities, and frequencies at which they will be performed, to ensure:

(i) The integrity of the cap and final cover or other containment systems in accordance with the requirements of Subparts K, L, M, and N of this part; and

(ii) The function of the monitoring equipment in accordance with the requirements of Subparts F, K, L, M, and N of this part; and

(3) The name, address, and phone number of the person or office to contact about the hazardous waste disposal unit or facility during the post-closure care period.

(d) *Amendment of plan.* The owner or operator may amend the post-closure plan any time during the active life of the facility or during the post-closure care period. An owner or operator with an approved post-closure plan must submit a written request to the Regional Administrator to authorize a change to the approved plan. The written request must include a copy of the amended post-closure plan for approval by the Regional Administrator.

(1) The owner or operator must amend the post-closure plan whenever:

(i) Changes in operating plans or facility design affect the post-closure plan, or

(ii) Events which occur during the active life of the facility, including partial and final closures, affect the post-closure plan.

(2) The owner or operator must amend the post-closure plan at least 60 days prior to the proposed change in facility design or operation, or no later than 60 days after an unexpected

event has occurred which has affected the post-closure plan.

(3) An owner or operator with an approved post-closure plan must submit the modified plan to the Regional Administrator at least 60 days prior to the proposed change in facility design or operation, or no more than 60 days after an unexpected event has occurred which has affected the post-closure plan. If an owner or operator of a surface impoundment or a waste pile who intended to remove all hazardous wastes at closure in accordance with § 265.228(b) or § 265.258(a) is required to close as a landfill in accordance with § 265.310, the owner or operator must submit a post-closure plan within 90 days of the determination by the owner or operator or Regional Administrator that the unit must be closed as a landfill. If the amendment to the post-closure plan is a Class 2 or 3 modification according to the criteria in § 270.42, the modification to the plan will be approved according to the procedures in § 265.118(f).

(4) The Regional Administrator may request modifications to the plan under the conditions described in paragraph (d)(1) of this section. An owner or operator with an approved post-closure plan must submit the modified plan no later than 60 days of the request from the Regional Administrator. If the amendment to the plan is considered a Class 2 or 3 modification according to the criteria in § 270.42, the modifications to the post-closure plan will be approved in accordance with the procedures in § 265.118(f). If the Regional Administrator determines that an owner or operator of a surface impoundment or waste pile who intended to remove all hazardous wastes at closure must close the facility as a landfill, the owner or operator must submit a post-closure plan for approval to the Regional Administrator within 90 days of the determination.

(e) The owner or operator of a facility with hazardous waste management units subject to these requirements must submit his post-closure plan to the Regional Administrator at least 180 days before the date he expects to begin partial or final closure of the first hazardous waste disposal unit. The date he "expects to begin closure" of the first hazardous waste disposal unit must be either within 30 days after the date on which the hazardous waste management unit receives the known final volume of hazardous waste or, if there is a reasonable possibility that the hazardous waste management unit will receive additional hazardous wastes, no later than one year after the date on which the unit received the most recent volume of hazardous wastes. The owner or operator must submit the post-closure plan to the Regional Administrator no later than 15 days after:

(1) Termination of interim status (except when a permit is issued to the facility simultaneously with termination of interim status); or

(2) Issuance of a judicial decree or final orders under section 3008 of RCRA to cease receiving wastes or close.

(f) The Regional Administrator will provide the owner or operator and the public, through a newspaper notice, the opportunity to submit written comments on the post-closure plan and request modifications to the plan no later than 30 days from the date of the notice. He will also, in response to a request or at his own discretion, hold a public hearing whenever such a hearing might clarify one or more issues concerning a post-closure plan. The Regional Administrator will give public notice of the hearing at least 30 days before it occurs. (Public notice of the hearing may be given at the same time as notice of the opportunity for the public to submit written comments, and the two notices may be combined.) The Regional Administrator will approve, modify, or disapprove the plan within 90 days of its receipt. If the Regional Administrator does not approve the plan he shall provide the owner or operator with a detailed written statement of reasons for the refusal and the owner or operator must modify the plan or submit a new plan for approval within 30 days after receiving such written statement. The Regional Administrator will approve or modify this plan in writing within 60 days. If the Regional Administrator modifies the plan, this modified plan becomes the approved post-closure

plan. The Regional Administrator must ensure that the approved post-closure plan is consistent with §§ 265.117 through 265.120. A copy of the modified plan with a detailed statement of reasons for the modifications must be mailed to the owner or operator.

(g) The post-closure plan and length of the post-closure care period may be modified any time prior to the end of the post-closure care period in either of the following two ways:

(1) The owner or operator or any member of the public may petition the Regional Administrator to extend or reduce the post-closure care period applicable to a hazardous waste management unit or facility based on cause, or alter the requirements of the post-closure care period based on cause.

(i) The petition must include evidence demonstrating that:

(A) The secure nature of the hazardous waste management unit or facility makes the post-closure care requirement(s) unnecessary or supports reduction of the post-closure care period specified in the current post-closure plan (e.g., leachate or ground-water monitoring results, characteristics of the wastes, application of advanced technology, or alternative disposal, treatment, or re-use techniques indicate that the facility is secure), or

(B) The requested extension in the post-closure care period or alteration of post-closure care requirements is necessary to prevent threats to human health and the environment (e.g., leachate or ground-water monitoring results indicate a potential for migration of hazardous wastes at levels which may be harmful to human health and the environment).

(ii) These petitions will be considered by the Regional Administrator only when they present new and relevant information not previously considered by the Regional Administrator. Whenever the Regional Administrator is considering a petition, he will provide the owner or operator and the public, through a newspaper notice, the opportunity to submit written comments within 30 days of the date of the notice. He will also, in response to a request or at his own discretion, hold a public hearing whenever a hearing might clarify one or more issues concerning the post-closure plan. The Regional Administrator will give the public notice of the hearing at least 30 days before it occurs. (Public notice of the hearing may be given at the same time as notice of the opportunity for written public comments, and the two notices may be combined.) After considering the comments, he will issue a final determination, based upon the criteria set forth in paragraph (g)(1) of this section.

(iii) If the Regional Administrator denies the petition, he will send the petitioner a brief written response giving a reason for the denial.

(2) The Regional Administrator may tentatively decide to modify the post-closure plan if he deems it necessary to prevent threats to human health and the environment. He may propose to extend or reduce the post-closure care period applicable to a hazardous waste management unit or facility based on cause or alter the requirements of the post-closure care period based on cause.

(i) The Regional Administrator will provide the owner or operator and the affected public, through a newspaper notice, the opportunity to submit written comments within 30 days of the date of the notice and the opportunity for a public hearing as in paragraph (g)(1)(ii) of this section. After considering the comments, he will issue a final determination.

(ii) The Regional Administrator will base his final determination upon the same criteria as required for petitions under paragraph (g)(1)(i) of this section. A modification of the post-closure plan may include, where appropriate, the temporary suspension rather than permanent deletion of one or more post-closure care requirements. At the end of the specified period of suspension, the Regional Administrator would then determine whether the requirement(s) should be permanently discontinued or reinstated to prevent threats to human health and the environment.

[51 FR 16451, May 2, 1986, as amended at 53 FR 37935, Sept. 28, 1988]

§ 265.119 Post-closure notices.

(a) No later than 60 days after certification of closure of each hazardous waste disposal unit, the owner or operator must submit to the local zoning authority, or the authority with jurisdiction over local land use, and to the Regional Administrator, a record of the type, location, and quantity of hazardous wastes disposed of within each cell or other disposal unit of the facility. For hazardous wastes disposed of before January 12, 1981, the owner or operator must identify the type, location and quantity of the hazardous wastes to the best of his knowledge and in accordance with any records he has kept.

(b) Within 60 days of certification of closure of the first hazardous waste disposal unit and within 60 days of certification of closure of the last hazardous waste disposal unit, the owner or operator must:

(1) Record, in accordance with State law, a notation on the deed to the facility property—or on some other instrument which is normally examined during title search—that will in perpetuity notify any potential purchaser of the property that:

(i) The land has been used to manage hazardous wastes; and

(ii) Its use is restricted under 40 CFR Subpart G regulations; and

(iii) The survey plat and record of the type, location, and quantity of hazardous wastes disposed of within each cell or other hazardous waste disposal unit of the facility required by §§ 265.116 and 265.119(a) have been filed with the local zoning authority or the authority with jurisdiction over local land use and with the Regional Administrator; and

(2) Submit a certification signed by the owner or operator that he has recorded the notation specified in paragraph (b)(1) of this section and a copy of the document in which the notation has been placed, to the Regional Administrator.

(c) If the owner or operator or any subsequent owner of the land upon which a hazardous waste disposal unit was located wishes to remove hazardous wastes and hazardous waste residues, the liner, if any, and all contaminated structures, equipment, and soils, he must request a modification to the approved post-closure plan in accordance with the requirements of § 265.118(g). The owner or operator must demonstrate that the removal of hazardous wastes will satisfy the criteria of § 265.117(c). By removing hazardous waste, the owner or operator may become a generator of hazardous waste and must manage it in accordance with all applicable requirements of this chapter. If the owner or operator is granted approval to conduct the removal activities, the owner or operator may request that the Regional Administrator approve either:

(1) The removal of the notation on the deed to the facility property or other instrument normally examined during title search, or

(2) The addition of a notation to the deed or instrument indicating the removal of the hazardous waste.

§ 265.120 Certification of completion of post-closure care.

No later than 60 days after the completion of the established post-closure care period for each hazardous waste disposal unit, the owner or operator must submit to the Regional Administrator, by registered mail, a certification that the post-closure care period for the hazardous waste disposal unit was performed in accordance with the specifications in the approved post-closure plan. The certification must be signed by the owner or operator and an independent registered professional engineer. Documentation supporting the independent registered professional engineer's certification must be furnished to the Regional Administrator upon request until he releases the owner or operator from the financial assurance requirements for post-closure care under § 265.145(h).

(The information collection requirements in Subpart G are approved by the Office of Management and Budget under control number 2050-0008)

Subpart H—Financial Requirements

SOURCE: 47 FR 15064, Apr. 7, 1982, unless otherwise noted.

§ 265.140 Applicability.

(a) The requirements of §§ 265.142, 265.143 and 265.147 through 265.150 apply to owners or operators of all hazardous waste facilities, except as provided otherwise in this section or in § 265.1.

(b) The requirements of §§ 265.144 and 265.146 apply only to owners and operators of disposal facilities and tank systems that are required under § 265.197 to meet the requirements for landfills

(c) States and the Federal government are exempt from the requirements of this subpart.

[47 FR 15064, Apr. 7, 1982, as amended at 51 FR 16455, May 2, 1986; 51 FR 25479, July 14, 1986]

§ 265.141 Definitions of terms as used in this subpart.

(a) "Closure plan" means the plan for closure prepared in accordance with the requirements of § 265.112.

(b) "Current closure cost estimate" means the most recent of the estimates prepared in accordance with § 265.142 (a), (b), and (c).

(c) "Current post-closure cost estimate" means the most recent of the estimates prepared in accordance with § 265.144 (a), (b), and (c).

(d) "Parent corporation" means a corporation which directly owns at least 50 percent of the voting stock of the corporation which is the facility owner or operator; the latter corporation is deemed a "subsidiary" of the parent corporation.

(e) "Post-closure plan" means the plan for post-closure care prepared in accordance with the requirements of §§ 265.117 through 265.120.

(f) The following terms are used in the specifications for the financial tests for closure, post-closure care, and liability coverage. The definitions are intended to assist in the understanding of these regulations and are not intended to limit the meanings of terms in a way that conflicts with generally accepted accounting practices.

"Assets" means all existing and all probable future economic benefits obtained or controlled by a particular entity.

"Current assets" means cash or other assets or resources commonly identified as those which are reasonably expected to be realized in cash or sold or consumed during the normal operating cycle of the business.

"Current liabilities" means obligations whose liquidation is reasonably expected to require the use of existing resources properly classifiable as current assets or the creation of other current liabilities.

"Current plugging and abandonment cost estimate" means the most recent of the estimates prepared in accordance with § 144.62(a), (b), and (c) of this title.

"Independently audited' refers to an audit performed by an independent certified public accountant in accordance with generally accepted auditing standards.

"Liabilities" means probable future sacrifices of economic benefits arising from present obligations to transfer assets or provide services to other entities in the future as a result of past transactions or events.

"Net working capital" means current assets minus current liabilities.

"Net worth" means total assets minus total liabilities and is equivalent to owner's equity.

"Tangible net worth" means the tangible assets that remain after deducting liabilities; such assets would not include intangibles such as goodwill and rights to patents or royalties.

(g) In the liability insurance requirements the terms "bodily injury" and "property damage" shall have the meanings given these terms by applicable State law. However, these terms do not include those liabilities which, consistent with standard industry practice, are excluded from coverage in liability policies for bodily injury and property damage. The Agency intends the meanings of other terms used in the liability insurance requirements to be consistent with their common meanings within the insurance industry. The definitions given below of several of the terms are intended to assist in the understanding of these regulations and are not intended to limit their meanings in a way that conflicts with general insurance industry usage.

"Accidental occurrence" means an accident, including continuous or re-

peated exposure to conditions, which results in bodily injury or property damage neither expected nor intended from the standpoint of the insured.

"Legal defense costs" means any expenses that an insurer incurs in defending against claims of third parties brought under the terms and conditions of an insurance policy.

"Nonsudden accidental occurrence" means an occurrence which takes place over time and involves continuous or repeated exposure.

"Sudden accidental occurrence" means an occurrence which is not continuous or repeated in nature.

(h) "Substantial business relationship" means the extent of a business relationship necessary under applicable State law to make a guarantee contract issued incident to that relationship valid and enforceable. A "substantial business relationship" must arise from a pattern of recent or ongoing business transactions, in addition to the guarantee itself, such that a currently existing business relationship between the guarantor and the owner or operator is demonstrated to the satisfaction of the applicable EPA Regional Administrator.

[47 FR 16558, Apr. 16, 1982, as amended at 51 FR 16456, May 2, 1986; 53 FR 33959, Sept. 1, 1988]

§ 265.142 Cost estimate for closure.

(a) The owner or operator must have a detailed written estimate, in current dollars, of the cost of closing the facility in accordance with the requirements in §§ 265.111 through 265.115 and applicable closure requirements of §§ 265.178, 265.197, 265.228, 265.258, 265.280, 265.310, 265.351, 265.381 and 265.404.

(1) The estimate must equal the cost of final closure at the point in the facility's active life when the extent and manner of its operation would make closure the most expensive, as indicated by its closure plan (see § 265.112(b)); and

(2) The closure cost estimate must be based on the costs to the owner or operator of hiring a third party to close the facility. A third party is a party who is neither a parent nor a subsidiary of the owner or operator. (See definition of parent corporation in § 265.141(d).) The owner or operator may use costs for on-site disposal if he can demonstrate that on-site disposal capacity will exist at all times over the life of the facility.

(3) The closure cost estimate may not incorporate any salvage value that may be realized with the sale of hazardous wastes, or non-hazardous wastes if applicable under § 265.113(d), facility structures or equipment, land, or other assets associated with the facility at the time of partial or final closure.

(4) The owner or operator may not incorporate a zero cost for hazardous wastes, or non-hazardous wastes if applicable under § 265.113(d), that might have economic value.

(b) During the active life of the facility, the owner or operator must adjust the closure cost estimate for inflation within 60 days prior to the anniversary date of the establishment of the financial instrument(s) used to comply with § 265.143. For owners and operators using the financial test or corporate guarantee, the closure cost estimate must be updated for inflation within 30 days after the close of the firm's fiscal year and before submission of updated information to the Regional Administrator as specified in § 265.143(e)(3). The adjustment may be made by recalculating the closure cost estimate in current dollars, or by using an inflation factor derived from the most recent Implicit Price Deflator for Gross National Product published by the U.S. Department of Commerce in its *Survey of Current Business*, as specified in paragraphs (b)(1) and (2) of this section. The inflation factor is the result of dividing the latest published annual Deflator by the Deflator for the previous year.

(1) The first adjustment is made by multiplying the closure cost estimate by the inflation factor. The result is the adjusted closure cost estimate.

(2) Subsequent adjustments are made by multiplying the latest adjusted closure cost estimate by the latest inflation factor.

(c) During the active life of the facility, the owner or operator must revise the closure cost estimate no later than 30 days after a revision has been made to the closure plan which increases

the cost of closure. If the owner or operator has an approved closure plan, the closure cost estimate must be revised no later than 30 days after the Regional Administrator has approved the request to modify the closure plan, if the change in the closure plan increases the cost of closure. The revised closure cost estimate must be adjusted for inflation as specified in § 265.142(b).

(d) The owner or operator must keep the following at the facility during the operating life of the facility: The latest closure cost estimate prepared in accordance with §§ 265.142 (a) and (c) and, when this estimate has been adjusted in accordance with § 265.142(b), the latest adjusted closure cost estimate.

(Approved by the Office of Management and Budget under control number 2050-0036)

[47 FR 15064, Apr. 7, 1982, as amended at 50 FR 4514, Jan. 31, 1985; 51 FR 16456, May 2, 1986; 54 FR 33397, Aug. 14, 1989]

§ 265.143 Financial assurance for closure.

By the effective date of these regulations, an owner or operator of each facility must establish financial assurance for closure of the facility. He must choose from the options as specified in paragraphs (a) through (e) of this section.

(a) *Closure trust fund.* (1) An owner or operator may satisfy the requirements of this section by establishing a closure trust fund which conforms to the requirements of this paragraph and submitting an originally signed duplicate of the trust agreement to the Regional Administrator. The trustee must be an entity which has the authority to act as a trustee and whose trust operations are regulated and examined by a Federal or State agency.

(2) The wording of the trust agreement must be identical to the wording specified in § 264.151(a)(1), and the trust agreement must be accompanied by a formal certification of acknowledgment (for example, see § 264.151(a)(2)). Schedule A of the trust agreement must be updated within 60 days after a change in the amount of the current closure cost estimate covered by the agreement.

(3) Payments into the trust fund must be made annually by the owner or operator over the 20 years beginning with the effective date of these regulations or over the remaining operating life of the facility as estimated in the closure plan, whichever period is shorter; this period is hereafter referred to as the "pay-in period." The payments into the closure trust fund must be made as follows:

(i) The first payment must be made by the effective date of these regulations, except as provided in paragraph (a)(5) of this section. The first payment must be at least equal to the current closure cost estimate, except as provided in § 265.143(f), divided by the number of years in the pay-in period.

(ii) Subsequent payments must be made no later than 30 days after each anniversary date of the first payment. The amount of each subsequent payment must be determined by this formula:

$$\text{Next payment} = \frac{CE - CV}{Y}$$

where CE is the current closure cost estimate, CV is the current value of the trust fund, and Y is the number of years remaining in the pay-in period.

(4) The owner or operator may accelerate payments into the trust fund or he may deposit the full amount of the current closure cost estimate at the time the fund is established. However, he must maintain the value of the fund at no less than the value that the fund would have if annual payments were made as specified in paragraph (a)(3) of this section.

(5) If the owner or operator establishes a closure trust fund after having used one or more alternate mechanisms specified in this section, his first payment must be in at least the amount that the fund would contain if the trust fund were established initially and annual payments made as specified in paragraph (a)(3) of this section.

(6) After the pay-in period is completed, whenever the current closure cost estimate changes, the owner or operator must compare the new estimate with the trustee's most recent

annual valuation of the trust fund. If the value of the fund is less than the amount of the new estimate, the owner or operator, within 30 days after the change in the cost estimate, must either deposit an amount into the fund so that its value after this deposit at least equals the amount of the current closure cost estimate, or obtain other financial assurance as specified in this section to cover the difference.

(7) If the value of the trust fund is greater than the total amount of the current closure cost estimate, the owner or operator may submit a written request to the Regional Administrator for release of the amount in excess of the current closure cost estimate.

(8) If an owner or operator substitutes other financial assurance as specified in this section for all or part of the trust fund, he may submit a written request to the Regional Administrator for release of the amount in excess of the current closure cost estimate covered by the trust fund.

(9) Within 60 days after receiving a request from the owner or operator for release of funds as specified in paragraph (a) (7) or (8) of this section, the Regional Administrator will instruct the trustee to release to the owner or operator such funds as the Regional Administrator specifies in writing.

(10) After beginning partial or final closure, an owner or operator or another person authorized to conduct partial or final closure may request reimbursements for partial or final closure expenditures by submitting itemized bills to the Regional Administrator. The owner or operator may request reimbursements for partial closure only if sufficient funds are remaining in the trust fund to cover the maximum costs of closing the facility over its remaining operating life. No later than 60 days after receiving bills for partial or final closure activities, the Regional Administrator will instruct the trustee to make reimbursements in those amounts as the Regional Administrator specifies in writing, if the Regional Administrator determines that the partial or final closure expenditures are in accordance with the approved closure plan, or otherwise justified. If the Regional Administrator has reason to believe that the maximum cost of closure over the remaining life of the facility will be significantly greater than the value of the trust fund, he may withhold reimbursements of such amounts as he deems prudent until he determines, in accordance with § 265.143(h) that the owner or operator is no longer required to maintain financial assurance for final closure of the facility. If the Regional Administrator does not instruct the trustee to make such reimbursements, he will provide to the owner or operator a detailed written statement of reasons.

(11) The Regional Administrator will agree to termination of the trust when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 265.143(h).

(b) *Surety bond guaranteeing payment into a closure trust fund.* (1) An owner or operator may satisfy the requirements of this section by obtaining a surety bond which conforms to the requirements of this paragraph and submitting the bond to the Regional Administrator. The surety company issuing the bond must, at a minimum, be among those listed as acceptable sureties on Federal bonds in Circular 570 of the U.S. Department of the Treasury.

(2) The wording of the surety bond must be identical to the wording specified in § 264.151(b).

(3) The owner or operator who uses a surety bond to satisfy the requirements of this section must also establish a standby trust fund. Under the terms of the bond, all payments made thereunder will be deposited by the surety directly into the standby trust fund in accordance with instructions from the Regional Administrator. This standby trust fund must meet the requirements specified in § 265.143(a), except that:

(i) An originally signed duplicate of the trust agreement must be submit-

ted to the Regional Administrator with the surety bond; and

(ii) Until the standby trust fund is funded pursuant to the requirements of this section, the following are not required by these regulations:

(A) Payments into the trust fund as specified in § 265.143(a);

(B) Updating of Schedule A of the trust agreement (see § 264.151(a)) to show current closure cost estimates;

(C) Annual valuations as required by the trust agreement; and

(D) Notices of nonpayment as required by the trust agreement.

(4) The bond must guarantee that the owner or operator will:

(i) Fund the standby trust fund in an amount equal to the penal sum of the bond before the beginning of final closure of the facility; or

(ii) Fund the standby trust fund in an amount equal to the penal sum within 15 days after an administrative order to begin final closure issued by the Regional Administrator becomes final, or within 15 days after an order to begin final closure is issued by a U.S. district court or other court of competent jurisdiction; or

(iii) Provide alternate financial assurance as specified in this section, and obtain the Regional Administrator's written approval of the assurance provided, within 90 days after receipt by both the owner or operator and the Regional Administrator of a notice of cancellation of the bond from the surety.

(5) Under the terms of the bond, the surety will become liable on the bond obligation when the owner or operator fails to perform as guaranteed by the bond.

(6) The penal sum of the bond must be in an amount at least equal to the current closure cost estimate, except as provided in § 265.143(f).

(7) Whenever the current closure cost estimate increases to an amount greater than the penal sum, the owner or operator, within 60 days after the increase, must either cause the penal sum to be increased to an amount at least equal to the current closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. Whenever the current closure cost estimate decreases, the penal sum may be reduced to the amount of the current closure cost estimate following written approval by the Regional Administrator.

(8) Under the terms of the bond, the surety may cancel the bond by sending notice of cancellation by certified mail to the owner or operator and to the Regional Administrator. Cancellation may not occur, however, during the 120 days beginning on the date of receipt of the notice of cancellation by both the owner or operator and the Regional Administrator, as evidenced by the return receipts.

(9) The owner or operator may cancel the bond if the Regional Administrator has given prior written consent based on his receipt of evidence of alternate financial assurance as specified in this section.

(c) *Closure letter of credit.* (1) An owner or operator may satisfy the requirements of this section by obtaining an irrevocable standby letter of credit which conforms to the requirements of this paragraph and submitting the letter to the Regional Administrator. The issuing institution must be an entity which has the authority to issue letters of credit and whose letter-of-credit operations are regulated and examined by a Federal or State agency.

(2) The wording of the letter of credit must be identical to the wording specified in § 264.151(d).

(3) An owner or operator who uses a letter of credit to satisfy the requirements of this section must also establish a standby trust fund. Under the terms of the letter of credit, all amounts paid pursuant to a draft by the Regional Administrator will be deposited by the issuing institution directly into the standby trust fund in accordance with instructions from the Regional Administrator. This standby trust fund must meet the requirements of the trust fund specified in § 265.143(a), except that:

(i) An originally signed duplicate of the trust agreement must be submitted to the Regional Administrator with the letter of credit; and

(ii) Unless the standby trust fund is funded pursuant to the requirements

of this section, the following are not required by these regulations:

(A) Payments into the trust fund as specified in § 265.143(a);

(B) Updating of Schedule A of the trust agreement (see § 264.151(a)) to show current closure cost estimates;

(C) Annual valuations as required by the trust agreement; and

(D) Notices of nonpayment as required by the trust agreement.

(4) The letter of credit must be accompanied by a letter from the owner or operator referring to the letter of credit by number, issuing institution, and date, and providing the following information: The EPA Identification Number, name, and address of the facility, and the amount of funds assured for closure of the facility by the letter of credit.

(5) The letter of credit must be irrevocable and issued for a period of at least 1 year. The letter of credit must provide that the expiration date will be automatically extended for a period of at least 1 year unless, at least 120 days before the current expiration date, the issuing institution notifies both the owner or operator and the Regional Administrator by certified mail of a decision not to extend the expiration date. Under the terms of the letter of credit, the 120 days will begin on the date when both the owner or operator and the Regional Administrator have received the notice, as evidenced by the return receipts.

(6) The letter of credit must be issued in an amount at least equal to the current closure cost estimate, except as provided in § 265.143(f).

(7) Whenever the current closure cost estimate increases to an amount greater than the amount of the credit, the owner or operator, within 60 days after the increase, must either cause the amount of the credit to be increased so that it at least equals the current closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. Whenever the current closure cost estimate decreases, the amount of the credit may be reduced to the amount of the current closure cost estimate following written approval by the Regional Administrator.

(8) Following a final administrative determination pursuant to section 3008 of RCRA that the owner or operator has failed to perform final closure in accordance with the approved closure plan when required to do so, the Regional Administrator may draw on the letter of credit.

(9) If the owner or operator does not establish alternate financial assurance as specified in this section and obtain written approval of such alternate assurance from the Regional Administrator within 90 days after receipt by both the owner or operator and the Regional Administrator of a notice from the issuing institution that it has decided not to extend the letter of credit beyond the current expiration date, the Regional Administrator will draw on the letter of credit. The Regional Administrator may delay the drawing if the issuing institution grants an extension of the term of the credit. During the last 30 days of any such extension the Regional Administrator will draw on the letter of credit if the owner or operator has failed to provide alternate financial assurance as specified in this section and obtain written approval of such assurance from the Regional Administrator.

(10) The Regional Administrator will return the letter of credit to the issuing institution for termination when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 265.143(h).

(d) *Closure insurance.* (1) An owner or operator may satisfy the requirements of this section by obtaining closure insurance which conforms to the requirements of this paragraph and submitting a certificate of such insurance to the Regional Administrator. By the effective date of these regulations the owner or operator must submit to the Regional Administrator a letter from an insurer stating that the insurer is considering issuance of closure insurance conforming to the requirements of this paragraph to the owner or operator. Within 90 days

after the effective date of these regulations, the owner or operator must submit the certificate of insurance to the Regional Administrator or establish other financial assurance as specified in this section. At a minimum, the insurer must be licensed to transact the business of insurance, or eligible to provide insurance as an excess or surplus lines insurer, in one or more States.

(2) The wording of the certificate of insurance must be identical to the wording specified in § 264.151(e).

(3) The closure insurance policy must be issued for a face amount at least equal to the current closure cost estimate, except as provided in § 265.143(f). The term "face amount" means the total amount the insurer is obligated to pay under the policy. Actual payments by the insurer will not change the face amount, although the insurer's future liability will be lowered by the amount of the payments.

(4) The closure insurance policy must guarantee that funds will be available to close the facility whenever final closure occurs. The policy must also guarantee that once final closure begins, the insurer will be responsible for paying out funds, up to an amount equal to the face amount of the policy, upon the direction of the Regional Administrator, to such party or parties as the Regional Administrator specifies.

(5) After beginning partial or final closure, an owner or operator or any other person authorized to conduct closure may request reimbursements for closure expenditures by submitting itemized bills to the Regional Administrator. The owner or operator may request reimbursements for partial closure only if the remaining value of the policy is sufficient to cover the maximum costs of closing the facility over its remaining operating life. Within 60 days after receiving bills for closure activities, the Regional Administrator will instruct the insurer to make reimbursements in such amounts as the Regional Administrator specifies in writing if the Regional Administrator determines that the partial or final closure expenditures are in accordance with the approved closure plan or otherwise justified. If the Regional Administrator has reason to believe that the maximum cost of closure over the remaining life of the facility will be significantly greater than the face amount of the policy, he may withhold reimbursement of such amounts as he deems prudent until he determines, in accordance with § 265.143(h), that the owner or operator is no longer required to maintain financial assurance for final closure of the particular facility. If the Regional Administrator does not instruct the insurer to make such reimbursements, he will provide to the owner or operator a detailed written statement of reasons.

(6) The owner or operator must maintain the policy in full force and effect until the Regional Administrator consents to termination of the policy by the owner or operator as specified in paragraph (d)(10) of this section. Failure to pay the premium, without substitution of alternate financial assurance as specified in this section, will constitute a significant violation of these regulations, warranting such remedy as the Regional Administrator deems necessary. Such violation will be deemed to begin upon receipt by the Regional Administrator of a notice of future cancellation, termination, or failure to renew due to nonpayment of the premium, rather than upon the date of expiration.

(7) Each policy must contain a provision allowing assignment of the policy to a successor owner or operator. Such assignment may be conditional upon consent of the insurer, provided such consent is not unreasonably refused.

(8) The policy must provide that the insurer may not cancel, terminate, or fail to renew the policy except for failure to pay the premium. The automatic renewal of the policy must, at a minimum, provide the insured with the option of renewal at the face amount of the expiring policy. If there is a failure to pay the premium, the insurer may elect to cancel, terminate, or fail to renew the policy by sending notice by certified mail to the owner or operator and the Regional Administrator. Cancellation, termination, or failure to renew may not occur, however, during the 120 days beginning with the date of receipt of the notice by both the Regional Administrator and

the owner or operator, as evidenced by the return receipts. Cancellation, termination, or failure to renew may not occur and the policy will remain in full force and effect in the event that on or before the date of expiration:

(i) The Regional Administrator deems the facility abandoned; or

(ii) Interim status is terminated or revoked; or

(iii) Closure is ordered by the Regional Administrator or a U.S. district court or other court of competent jurisdiction; or

(iv) The owner or operator is named as debtor in a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code; or

(v) The premium due is paid.

(9) Whenever the current closure cost estimate increases to an amount greater than the face amount of the policy, the owner or operator, within 60 days after the increase, must either cause the face amount to be increased to an amount at least equal to the current closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. Whenever the current closure cost estimate decreases, the face amount may be reduced to the amount of the current closure cost estimate following written approval by the Regional Administrator.

(10) The Regional Administrator will give written consent to the owner or operator that he may terminate the insurance policy when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 265.143(h).

(e) *Financial test and corporate guarantee for closure.* (1) An owner or operator may satisfy the requirements of this section by demonstrating that he passes a financial test as specified in this paragraph. To pass this test the owner or operator must meet the criteria of either paragraph (e)(1)(i) or (ii) of this section:

(i) The owner or operator must have:

(A) Two of the following three ratios: A ratio of total liabilities to net worth less than 2.0; a ratio of the sum of net income plus depreciation, depletion, and amortization to total liabilities greater than 0.1; and a ratio of current assets to current liabilities greater than 1.5; and

(B) Net working capital and tangible net worth each at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates; and

(C) Tangible net worth of at least $10 million; and

(D) Assets located in the United States amounting to at least 90 percent of total assets or at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates.

(ii) The owner or operator must have:

(A) A current rating for his most recent bond issuance of AAA, AA, A, or BBB as issued by Standard and Poor's or Aaa, Aa, A, or Baa as issued by Moody's; and

(B) Tangible net worth at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates; and

(C) Tangible net worth of at least $10 million; and

(D) Assets located in the United States amounting to at least 90 percent of total assets or at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates.

(2) The phrase "current closure and post-closure cost estimates" as used in paragraph (e)(1) of this section refers to the cost estimates required to be shown in paragraphs 1-4 of the letter from the owner's or operator's chief financial officer (§ 264.151(f)). The phrase "current plugging and abandonment cost estimates" as used in paragraph (e)(1) of this section refers to the cost estimates required to be shown in paragraphs 1-4 of the letter from the owner's or operator's chief financial officer (§ 144.70(f) of this title).

(3) To demonstrate that he meets this test, the owner or operator must submit the following items to the Regional Administrator:

(i) A letter signed by the owner's or operator's chief financial officer and worded as specified in § 264.151(f); and

(ii) A copy of the independent certified public accountant's report on examination of the owner's or operator's financial statements for the latest completed fiscal year; and

(iii) A special report from the owner's or operator's independent certified public accountant to the owner or operator stating that:

(A) He has compared the data which the letter from the chief financial officer specifies as having been derived from the independently audited, year-end financial statements for the latest fiscal year with the amounts in such financial statements; and

(B) In connection with that procedure, no matters came to his attention which caused him to believe that the specified data should be adjusted.

(4) The owner or operator may obtain an extension of the time allowed for submission of the documents specified in paragraph (e)(3) of this section if the fiscal year of the owner or operator ends during the 90 days prior to the effective date of these regulations and if the year-end financial statements for that fiscal year will be audited by an independent certified public accountant. The extension will end no later than 90 days after the end of the owner's or operator's fiscal year. To obtain the extension, the owner's or operator's chief financial officer must send, by the effective date of these regulations, a letter to the Regional Administrator of each Region in which the owner's or operator's facilities to be covered by the financial test are located. This letter from the chief financial officer must:

(i) Request the extension;

(ii) Certify that he has grounds to believe that the owner or operator meets the criteria of the financial test;

(iii) Specify for each facility to be covered by the test the EPA Identification Number, name, address, and current closure and post-closure cost estimates to be covered by the test;

(iv) Specify the date ending the owner's or operator's last complete fiscal year before the effective date of these regulations;

(v) Specify the date, no later than 90 days after the end of such fiscal year, when he will submit the documents specified in paragraph (e)(3) of this section; and

(vi) Certify that the year-end financial statements of the owner or operator for such fiscal year will be audited by an independent certified public accountant.

(5) After the initial submission of items specified in paragraph (e)(3) of this section, the owner or operator must send updated information to the Regional Administrator within 90 days after the close of each succeeding fiscal year. This information must consist of all three items specified in paragraph (e)(3) of this section.

(6) If the owner or operator no longer meets the requirements of paragraph (e)(1) of this section, he must send notice to the Regional Administrator of intent to establish alternate financial assurance as specified in this section. The notice must be sent by certified mail within 90 days after the end of the fiscal year for which the year-end financial data show that the owner or operator no longer meets the requirements. The owner or operator must provide the alternate financial assurance within 120 days after the end of such fiscal year.

(7) The Regional Administrator may, based on a reasonable belief that the owner or operator may no longer meet the requirements of paragraph (e)(1) of this section, require reports of financial condition at any time from the owner or operator in addition to those specified in paragraph (e)(3) of this section. If the Regional Administrator finds, on the basis of such reports or other information, that the owner or operator no longer meets the requirements of paragraph (e)(1) of this section, the owner or operator must provide alternate financial assurance as specified in this section within 30 days after notification of such a finding.

(8) The Regional Administrator may disallow use of this test on the basis of qualifications in the opinion expressed

by the independent certified public accountant in his report on examination of the owner's or operator's financial statements (see paragraph (e)(3)(ii) of this section). An adverse opinion or a disclaimer of opinion will be cause for disallowance. The Regional Administrator will evaluate other qualifications on an individual basis. The owner or operator must provide alternate financial assurance as specified in this section within 30 days after notification of the disallowance.

(9) The owner or operator is no longer required to submit the items specified in paragraph (e)(3) of this section when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 265.143(h).

(10) An owner or operator may meet the requirements of this section by obtaining a written guarantee, hereafter referred to as "corporate guarantee." The guarantor must be the parent corporation of the owner or operator. The guarantor must meet the requirements for owners or operators in paragraphs (e)(1) through (8) of this section and must comply with the terms of the corporate guarantee. The wording of the corporate guarantee must be identical to the wording specified in § 264.151(h). The corporate guarantee must accompany the items sent to the Regional Administrator as specified in paragraph (e)(3) of this section. The terms of the corporate guarantee must provide that:

(i) If the owner or operator fails to perform final closure of a facility covered by the corporate guarantee in accordance with the closure plan and other interim status requirements whenever required to do so, the guarantor will do so or establish a trust fund as specified in § 265.143(a) in the name of the owner or operator.

(ii) The corporate guarantee will remain in force unless the guarantor sends notice of cancellation by certified mail to the owner or operator and to the Regional Administrator. Cancellation may not occur, however, during the 120 days beginning on the date of receipt of the notice of cancellation by both the owner or operator and the Regional Administrator, as evidenced by the return receipts.

(iii) If the owner or operator fails to provide alternate financial assurance as specified in this section and obtain the written approval of such alternate assurance from the Regional Administrator within 90 days after receipt by both the owner or operator and the Regional Administrator of a notice of cancellation of the corporate guarantee from the guarantor, the guarantor will provide such alternate financial assurance in the name of the owner or operator.

(f) *Use of multiple financial mechanisms.* An owner or operator may satisfy the requirements of this section by establishing more than one financial mechanism per facility. These mechanisms are limited to trust funds, surety bonds, letters of credit, and insurance. The mechanisms must be as specified in paragraphs (a) through (d), respectively, of this section, except that it is the combination of mechanisms, rather than the single mechanism, which must provide financial assurance for an amount at least equal to the current closure cost estimate. If an owner or operator uses a trust fund in combination with a surety bond or a letter of credit, he may use the trust fund as the standby trust fund for the other mechanisms. A single standby trust fund may be established for two or more mechanisms. The Regional Administrator may use any or all of the mechanisms to provide for closure of the facility.

(g) *Use of a financial mechanism for multiple facilities.* An owner or operator may use a financial assurance mechanism specified in this section to meet the requirements of this section for more than one facility. Evidence of financial assurance submitted to the Regional Administrator must include a list showing, for each facility, the EPA Identification Number, name, address, and the amount of funds for closure assured by the mechanism. If the facilities covered by the mechanism are in more than one Region, identical evidence of financial assurance must be submitted to and maintained with the Regional Administrators of all such

Regions. The amount of funds available through the mechanism must be no less than the sum of funds that would be available if a separate mechanism had been established and maintained for each facility. In directing funds available through the mechanism for closure of any of the facilities covered by the mechanism, the Regional Administrator may direct only the amount of funds designated for that facility, unless the owner or operator agrees to the use of additional funds available under the mechanism.

(h) *Release of the owner or operator from the requirements of this section.* Within 60 days after receiving certifications from the owner or operator and an independent registered professional engineer that final closure has been completed in accordance with the approved closure plan, the Regional Administrator will notify the owner or operator in writing that he is no longer required by this section to maintain financial assurance for final closure of the facility, unless the Regional Administrator has reason to believe that final closure has not been in accordance with the approved closure plan. The Regional Administrator shall provide the owner or operator a detailed written statement of any such reason to believe that closure has not been in accordance with the approved closure plan.

[47 FR 15064, Apr. 7, 1982, as amended at 51 FR 16456, May 2, 1986]

§ 265.144 Cost estimate for post-closure care.

(a) The owner or operator of a hazardous waste disposal unit must have a detailed written estimate, in current dollars, of the annual cost of post-closure monitoring and maintenance of the facility in accordance with the applicable post-closure regulations in §§ 265.117 through 265.120, 265.228, 265.258, 265.280, and 265.310.

(1) The post-closure cost estimate must be based on the costs to the owner or operator of hiring a third party to conduct post-closure care activities. A third party is a party who is neither a parent nor subsidiary of the owner or operator. (See definition of parent corporation in § 265.141(d).)

(2) The post-closure cost estimate is calculated by multiplying the annual post-closure cost estimate by the number of years of post-closure care required under § 265.117.

(b) During the active life of the facility, the owner or operator must adjust the post-closure cost estimate for inflation within 60 days prior to the anniversary date of the establishment of the financial instrument(s) used to comply with § 265.145. For owners or operators using the financial test or corporate guarantee, the post-closure care cost estimate must be updated for inflation no later than 30 days after the close of the firm's fiscal year and before submission of updated information to the Regional Administrator as specified in § 265.145(d)(5). The adjustment may be made by recalculating the post-closure cost estimate in current dollars or by using an inflation factor derived from the most recent Implicit Price Deflator for Gross National Product published by the U.S. Department of Commerce in its *Survey of Current Business* as specified in § 265.145 (b)(1) and (2). The inflation factor is the result of dividing the latest published annual Deflator by the Deflator for the previous year.

(1) The first adjustment is made by multiplying the post-closure cost estimate by the inflation factor. The result is the adjusted post-closure cost estimate.

(2) Subsequent adjustments are made by multiplying the latest adjusted post-closure cost estimate by the latest inflation factor.

(c) During the active life of the facility, the owner or operator must revise the post-closure cost estimate no later than 30 days after a revision to the post-closure plan which increases the cost of post-closure care. If the owner or operator has an approved post-closure plan, the post-closure cost estimate must be revised no later than 30 days after the Regional Administrator has approved the request to modify the plan, if the change in the post-closure plan increases the cost of post-closure care. The revised post-closure cost estimate must be adjusted for inflation as specified in § 265.144(b).

(d) The owner or operator must keep the following at the facility during the

operating life of the facility: the latest post-closure cost estimate prepared in accordance with § 265.144 (a) and (c) and, when this estimate has been adjusted in accordance with § 265.144(b), the latest adjusted post-closure cost estimate.

(Approved by the Office of Management and Budget under control number 2050-0036)

[47 FR 15064, Apr. 7, 1982, as amended at 50 FR 4514, Jan. 31, 1985; 51 FR 16457, May 2, 1986]

§ 265.145 Financial assurance for post-closure care.

By the effective date of these regulations, an owner or operator of a facility with a hazardous waste disposal unit must establish financial assurance for post-closure care of the disposal unit(s).

(a) *Post-closure trust fund.* (1) An owner or operator may satisfy the requirements of this section by establishing a post-closure trust fund which conforms to the requirements of this paragraph and submitting an originally signed duplicate of the trust agreement to the Regional Administrator. The trustee must be an entity which has the authority to act as a trustee and whose trust operations are regulated and examined by a Federal or State agency.

(2) The wording of the trust agreement must be identical to the wording specified in § 264.151(a)(1), and the trust agreement must be accompanied by a formal certification of acknowledgment (for example, see § 264.151(a)(2)). Schedule A of the trust agreement must be updated within 60 days after a change in the amount of the current post-closure cost estimate covered by the agreement.

(3) Payments into the trust fund must be made annually by the owner or operator over the 20 years beginning with the effective date of these regulations or over the remaining operating life of the facility as estimated in the closure plan, whichever period is shorter; this period is hereafter referred to as the "pay-in period." The payments into the post-closure trust fund must be made as follows:

(i) The first payment must be made by the effective date of these regulations, except as provided in paragraph (a)(5) of this section. The first payment must be at least equal to the current post-closure cost estimate, except as provided in § 265.145(f), divided by the number of years in the pay-in period.

(ii) Subsequent payments must be made no later than 30 days after each anniversary date of the first payment. The amount of each subsequent payment must be determined by this formula:

$$\text{Next payment} = \frac{CE - CV}{Y}$$

where CE is the current post-closure cost estimate, CV is the current value of the trust fund, and Y is the number of years remaining in the pay-in period.

(4) The owner or operator may accelerate payments into the trust fund or he may deposit the full amount of the current post-closure cost estimate at the time the fund is established. However, he must maintain the value of the fund at no less than the value that the fund would have if annual payments were made as specified in paragraph (a)(3) of this section.

(5) If the owner or operator establishes a post-closure trust fund after having used one or more alternate mechanisms specified in this section, his first payment must be in at least the amount that the fund would contain if the trust fund were established initially and annual payments made as specified in paragraph (a)(3) of this section.

(6) After the pay-in period is completed, whenever the current post-closure cost estimate changes during the operating life of the facility, the owner or operator must compare the new estimate with the trustee's most recent annual valuation of the trust fund. If the value of the fund is less than the amount of the new estimate, the owner or operator, within 60 days after the change in the cost estimate, must either deposit an amount into the fund so that its value after this de-

posit at least equals the amount of the current post-closure cost estimate, or obtain other financial assurance as specified in this section to cover the difference.

(7) During the operating life of the facility, if the value of the trust fund is greater than the total amount of the current post-closure cost estimate, the owner or operator may submit a written request to the Regional Administrator for release of the amount in excess of the current post-closure cost estimate.

(8) If an owner or operator substitutes other financial assurance as specified in this section for all or part of the trust fund, he may submit a written request to the Regional Administrator for release of the amount in excess of the current post-closure cost estimate covered by the trust fund.

(9) Within 60 days after receiving a request from the owner or operator for release of funds as specified in paragraph (a) (7) or (8) of this section, the Regional Administrator will instruct the trustee to release to the owner or operator such funds as the Regional Administrator specifies in writing.

(10) During the period of post-closure care, the Regional Administrator may approve a release of funds if the owner or operator demonstrates to the Regional Administrator that the value of the trust fund exceeds the remaining cost of post-closure care.

(11) An owner or operator or any other person authorized to conduct post-closure care may request reimbursements for post-closure expenditures by submitting itemized bills to the Regional Administrator. Within 60 days after receiving bills for post-closure care activities, the Regional Administrator will instruct the trustee to make reimbursements in those amounts as the Regional Administrator specifies in writing, if the Regional Administrator determines that the post-closure expenditures are in accordance with the approved post-closure plan or otherwise justified. If the Regional Administrator does not instruct the trustee to make such reimbursements, he will provide the owner or operator with a detailed written statement of reasons.

(12) The Regional Administrator will agree to termination of the trust when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 265.145(h).

(b) *Surety bond guaranteeing payment into a post-closure trust fund.* (1) An owner or operator may satisfy the requirements of this section by obtaining a surety bond which conforms to the requirements of this paragraph and submitting the bond to the Regional Administrator. The surety company issuing the bond must, at a minimum, be among those listed as acceptable sureties on Federal bonds in Circular 570 of the U.S. Department of the Treasury.

(2) The wording of the surety bond must be identical to the wording specified in § 264.151(b).

(3) The owner or operator who uses a surety bond to satisfy the requirements of this section must also establish a standby trust fund. Under the terms of the bond, all payments made thereunder will be deposited by the surety directly into the standby trust fund in accordance with instructions from the Regional Administrator. This standby trust fund must meet the requirements specified in § 265.145(a), except that:

(i) An originally signed duplicate of the trust agreement must be submitted to the Regional Administrator with the surety bond; and

(ii) Until the standby trust fund is funded pursuant to the requirements of this section, the following are not required by these regulations:

(A) Payments into the trust fund as specified in § 265.145(a);

(B) Updating of Schedule A of the trust agreement (see § 264.151(a)) to show current post-closure cost estimates;

(C) Annual valuations as required by the trust agreement; and

(D) Notices of nonpayment as required by the trust agreement.

(4) The bond must guarantee that the owner or operator will:

(i) Fund the standby trust fund in an amount equal to the penal sum of the bond before the beginning of final closure of the facility; or

(ii) Fund the standby trust fund in an amount equal to the penal sum within 15 days after an administrative order to begin final closure issued by the Regional Administrator becomes final, or within 15 days after an order to begin final closure is issued by a U.S. district court or other court of competent jurisdiction; or

(iii) Provide alternate financial assurance as specified in this section, and obtain the Regional Administrator's written approval of the assurance provided, within 90 days after receipt by both the owner or operator and the Regional Administrator of a notice of cancellation of the bond from the surety.

(5) Under the terms of the bond, the surety will become liable on the bond obligation when the owner or operator fails to perform as guaranteed by the bond.

(6) The penal sum of the bond must be in an amount at least equal to the current post-closure cost estimate, except as provided in § 265.145(f).

(7) Whenever the current post-closure cost estimate increases to an amount greater than the penal sum, the owner or operator, within 60 days after the increase, must either cause the penal sum to be increased to an amount at least equal to the current post-closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. Whenever the current post-closure cost estimate decreases, the penal sum may be reduced to the amount of the current post-closure cost estimate following written approval by the Regional Administrator.

(8) Under the terms of the bond, the surety may cancel the bond by sending notice of cancellation by certified mail to the owner or operator and to the Regional Administrator. Cancellation may not occur, however, during the 120 days beginning on the date of receipt of the notice of cancellation by both the owner or operator and the Regional Administrator, as evidenced by the return receipts.

(9) The owner or operator may cancel the bond if the Regional Administrator has given prior written consent based on his receipt of evidence of alternate financial assurance as specified in this section.

(c) *Post-closure letter of credit.* (1) An owner or operator may satisfy the requirements of this section by obtaining an irrevocable standby letter of credit which conforms to the requirements of this paragraph and submitting the letter to the Regional Administrator. The issuing institution must be an entity which has the authority to issue letters of credit and whose letter-of-credit operations are regulated and examined by a Federal or State agency.

(2) The wording of the letter of credit must be identical to the wording specified in § 264.151(d).

(3) An owner or operator who uses a letter of credit to satisfy the requirements of this section must also establish a standby trust fund. Under the terms of the letter of credit, all amounts paid pursuant to a draft by the Regional Administrator will be deposited by the issuing institution directly into the standby trust fund in accordance with instructions from the Regional Administrator. This standby trust fund must meet the requirements of the trust fund specified in § 265.145(a), except that:

(i) An originally signed duplicate of the trust agreement must be submitted to the Regional Administrator with the letter of credit; and

(ii) Unless the standby trust fund is funded pursuant to the requirements of this section, the following are not required by these regulations:

(A) Payments into the trust fund as specified in § 265.145(a);

(B) Updating of Schedule A of the trust agreement (see § 264.151(a)) to show current post-closure cost estimates;

(C) Annual valuations as required by the trust agreement; and

(D) Notices of nonpayment as required by the trust agreement.

(4) The letter of credit must be accompanied by a letter from the owner

or operator referring to the letter of credit by number, issuing institution, and date, and providing the following information: The EPA Identification Number, name, and address of the facility, and the amount of funds assured for post-closure care of the facility by the letter of credit.

(5) The letter of credit must be irrevocable and issued for a period of at least 1 year. The letter of credit must provide that the expiration date will be automatically extended for a period of at least 1 year unless, at least 120 days before the current expiration date, the issuing institution notifies both the owner or operator and the Regional Administrator by certified mail of a decision not to extend the expiration date. Under the terms of the letter of credit, the 120 days will begin on the date when both the owner or operator and the Regional Administrator have received the notice, as evidenced by the return receipts.

(6) The letter of credit must be issued in an amount at least equal to the current post-closure cost estimate, except as provided in § 265.145(f).

(7) Whenever the current post-closure cost estimate increases to an amount greater than the amount of the credit during the operating life of the facility, the owner or operator, within 60 days after the increase, must either cause the amount of the credit to be increased so that it at least equals the current post-closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. Whenever the current post-closure cost estimate decreases during the operating life of the facility, the amount of the credit may be reduced to the amount of the current post-closure cost estimate following written approval by the Regional Administrator.

(8) During the period of post-closure care, the Regional Administrator may approve a decrease in the amount of the letter of credit if the owner or operator demonstrates to the Regional Administrator that the amount exceeds the remaining cost of post-closure care.

(9) Following a final administrative determination pursuant to section 3008 of RCRA that the owner or operator has failed to perform post-closure care in accordance with the approved post-closure plan and other permit requirements, the Regional Administrator may draw on the letter of credit.

(10) If the owner or operator does not establish alternate financial assurance as specified in this section and obtain written approval of such alternate assurance from the Regional Administrator within 90 days after receipt by both the owner or operator and the Regional Administrator of a notice from the issuing institution that it has decided not to extend the letter of credit beyond the current expiration date, the Regional Administrator will draw on the letter of credit. The Regional Administrator may delay the drawing if the issuing institution grants an extension of the term of the credit. During the last 30 days of any such extension the Regional Administrator will draw on the letter of credit if the owner or operator has failed to provide alternate financial assurance as specified in this section and obtain written approval of such assurance from the Regional Administrator.

(11) The Regional Administrator will return the letter of credit to the issuing institution for termination when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 265.145(h).

(d) *Post-closure insurance.* (1) An owner or operator may satisfy the requirements of this section by obtaining post-closure insurance which conforms to the requirements of this paragraph and submitting a certificate of such insurance to the Regional Administrator. By the effective date of these regulations the owner or operator must submit to the Regional Administrator a letter from an insurer stating that the insurer is considering issuance of post-closure insurance conforming to the requirements of this paragraph to the owner or operator. Within 90 days after the effective date of these regulations, the owner or op-

erator must submit the certificate of insurance to the Regional Administrator or establish other financial assurance as specified in this section. At a minimum, the insurer must be licensed to transact the business of insurance, or eligible to provide insurance as an excess or surplus lines insurer, in one or more States.

(2) The wording of the certificate of insurance must be identical to the wording specified in § 264.151(e).

(3) The post-closure insurance policy must be issued for a face amount at least equal to the current post-closure cost estimate, except as provided in § 265.145(f). The term "face amount" means the total amount the insurer is obligated to pay under the policy. Actual payments by the insurer will not change the face amount, although the insurer's future liability will be lowered by the amount of the payments.

(4) The post-closure insurance policy must guarantee that funds will be available to provide post-closure care of the facility whenever the post-closure period begins. The policy must also guarantee that once post-closure care begins the insurer will be responsible for paying out funds, up to an amount equal to the face amount of the policy, upon the direction of the Regional Administrator, to such party or parties as the Regional Administrator specifies.

(5) An owner or operator or any other person authorized to perform post-closure care may request reimbursement for post-closure care expenditures by submitting itemized bills to the Regional Administrator. Within 60 days after receiving bills for post-closure care activities, the Regional Administrator will instruct the insurer to make reimbursements in those amounts as the Regional Administrator specifies in writing, if the Regional Administrator determines that the post-closure expenditures are in accordance with the approved post-closure plan or otherwise justified. If the Regional Administrator does not instruct the insurer to make such reimbursements, he will provide a detailed written statement of reasons.

(6) The owner or operator must maintain the policy in full force and effect until the Regional Administrator consents to termination of the policy by the owner or operator as specified in paragraph (d)(11) of this section. Failure to pay the premium, without substitution of alternate financial assurance as specified in the section, will constitute a significant violation of these regulations, warranting such remedy as the Regional Administrator deems necessary. Such violation will be deemed to begin upon receipt by the Regional Administrator of a notice of future cancellation, termination, or failure to renew due to nonpayment of the premium, rather than upon the date of expiration.

(7) Each policy most contain a provision allowing assignment of the policy to a successor owner or operator. Such assignment may be conditional upon consent of the insurer, provided such consent is not unreasonably refused.

(8) The policy must provide that the insurer may not cancel, terminate, or fail to renew the policy except for failure to pay the premium. The automatic renewal of the policy must, at a minimum, provide the insured with the option of renewal at the face amount of the expiring policy. If there is a failure to pay the premium, the insurer may elect to cancel, terminate, or fail to renew the policy by sending notice by certified mail to the owner or operator and the Regional Administrator. Cancellation, termination, or failure to renew may not occur, however, during the 120 days beginning with the date of receipt of the notice by both the Regional Administrator and the owner or operator, as evidenced by the return receipts. Cancellation, termination, or failure to renew may not occur and the policy will remain in full force and effect in the event that on or before the date of expiration:

(i) The Regional Administrator deems the facility abandoned; or

(ii) Interim status is terminated or revoked; or

(iii) Closure is ordered by the Regional Administrator or a U.S. district court or other court of competent jurisdiction; or

(iv) The owner or operator is named as debtor in a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code; or

(v) The premium due is paid.

(9) Whenever the current post-closure cost estimate increases to an amount greater than the face amount of the policy during the operating life of the facility, the owner or operator, within 60 days after the increase, must either cause the face amount to be increased to an amount at least equal to the current post-closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. Whenever the current post-closure cost estimate decreases during the operating life of the facility, the face amount may be reduced to the amount of the current post-closure cost estimate following written approval by the Regional Administrator.

(10) Commencing on the date that liability to make payments pursuant to the policy accrues, the insurer will thereafter annually increase the face amount of the policy. Such increase must be equivalent to the face amounts of the policy, less any payments made, multiplied by an amount equivalent to 85 percent of the most recent investment rate or of the equivalent coupon-issue yield announced by the U.S. Treasury for 26-week Treasury securities.

(11) The Regional Administrator will give written consent to the owner or operator that he may terminate the insurance policy when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 265.145(h).

(e) *Financial test and corporate guarantee for post-closure care.* (1) An owner or operator may satisfy the requirements of this section by demonstrating that he passes a financial test as specified in this paragraph. To pass this test the owner or operator must meet the criteria either of paragraph (e)(1)(i) or (ii) of this section:

(i) The owner or operator must have:

(A) Two of the following three ratios: a ratio of total liabilities to net worth less than 2.0; a ratio of the sum of net income plus depreciation, depletion, and amortization to total liabilities greater than 0.1; and a ratio of current assets to current liabilities greater than 1.5; and

(B) Net working capital and tangible net worth each at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates; and

(C) Tangible net worth of at least $10 million; and

(D) Assets in the United States amounting to at least 90 percent of his total assets or at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates.

(ii) The owner or operator must have:

(A) A current rating for his most recent bond issuance of AAA, AA, A, or BBB as issued by Standard and Poor's or Aaa, Aa, A, or Baa as issued by Moody's; and

(B) Tangible net worth at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates; and

(C) Tangible net worth of at least $10 million; and

(D) Assets located in the United States amounting to at least 90 percent of his total assets or at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates.

(2) The phrase "current closure and post-closure cost estimates" as used in paragraph (e)(1) of this section refers to the cost estimates required to be shown in paragraphs 1-4 of the letter from the owner's or operator's chief financial officer (§ 264.151(f)). The phrase "current plugging and abandonment cost estimates" as used in paragraph (e)(1) of this section refers to the cost estimates required to be shown in paragraphs 1-4 of the letter from the owner's or operator's chief financial officer (§ 144.70(f) of this title).

(3) To demonstrate that he meets this test, the owner or operator must submit the following items to the Regional Administrator:

(i) A letter signed by the owner's or operator's chief financial officer and worded as specified in § 264.151(f); and

(ii) A copy of the independent certified public accountant's report on examination of the owner's or operator's financial statements for the latest completed fiscal year; and

(iii) A special report from the owner's or operator's independent certified public accountant to the owner or operator stating that:

(A) He has compared the data which the letter from the chief financial officer specifies as having been derived from the independently audited, year-end financial statements for the latest fiscal year with the amounts in such financial statements; and

(B) In connection with that procedure, no matters came to his attention which caused him to believe that the specified data should be adjusted.

(4) The owner or operator may obtain an extension of the time allowed for submission of the documents specified in paragraph (e)(3) of this section if the fiscal year of the owner or operator ends during the 90 days prior to the effective date of these regulations and if the year-end financial statements for that fiscal year will be audited by an independent certified public accountant. The extension will end no later than 90 days after the end of the owner's or operator's fiscal year. To obtain the extension, the owner's or operator's chief financial officer must send, by the effective date of these regulations, a letter to the Regional Administrator of each Region in which the owner's or operator's facilities to be covered by the financial test are located. This letter from the chief financial officer must:

(i) Request the extension;

(ii) Certify that he has grounds to believe that the owner or operator meets the criteria of the financial test;

(iii) Specify for each facility to be covered by the test the EPA Identification Number, name, address, and the current closure and post-closure cost estimates to be covered by the test;

(iv) Specify the date ending the owner's or operator's latest complete fiscal year before the effective date of these regulations;

(v) Specify the date, no later than 90 days after the end of such fiscal year, when he will submit the documents specified in paragraph (e)(3) of this section; and

(vi) Certify that the year-end financial statements of the owner or operator for such fiscal year will be audited by an independent certified public accountant.

(5) After the initial submission of items specified in paragraph (e)(3) of this section, the owner or operator must send updated information to the Regional Administrator within 90 days after the close of each succeeding fiscal year. This information must consist of all three items specified in paragraph (e)(3) of this section.

(6) If the owner or operator no longer meets the requirements of paragraph (e)(1) of this section, he must send notice to the Regional Administrator of intent to establish alternate financial assurance as specified in this section. The notice must be sent by certified mail within 90 days after the end of the fiscal year for which the year-end financial data show that the owner or operator no longer meets the requirements. The owner or operator must provide the alternate financial assurance within 120 days after the end of such fiscal year.

(7) The Regional Administrator may, based on a reasonable belief that the owner or operator may no longer meet the requirements of paragraph (e)(1) of this section, require reports of financial condition at any time from the owner or operator in addition to those specified in paragraph (e)(3) of this section. If the Regional Administrator finds, on the basis of such reports or other information, that the owner or operator no longer meets the requirements of paragraph (e)(1) of this section, the owner or operator must provide alternate financial assurance as specified in this section within 30 days after notification of such a finding.

(8) The Regional Administrator may disallow use of this test on the basis of qualifications in the opinion expressed by the independent certified public accountant in his report on examination of the owner's or operator's financial statements (see paragraph (e)(3)(ii) of

this section). An adverse opinion or a disclaimer of opinion will be cause for disallowance. The Regional Administrator will evaluate other qualifications on an individual basis. The owner or operator must provide alternate financial assurance as specified in this section within 30 days after notification of the disallowance.

(9) During the period of post-closure care, the Regional Administrator may approve a decrease in the current post-closure cost estimate for which this test demonstrates financial assurance if the owner or operator demonstrates to the Regional Administrator that the amount of the cost estimate exceeds the remaining cost of post-closure care.

(10) The owner or operator is no longer required to submit the items specified in paragraph (e)(3) of this section when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 265.145(h).

(11) An owner or operator may meet the requirements of this section by obtaining a written guarantee, hereafter referred to as "corporate guarantee." The guarantor must be the parent corporation of the owner or operator. The guarantor must meet the requirements for owners or operators in paragraphs (e)(1) through (9) of this section and must comply with the terms of the corporate guarantee. The wording of the corporate guarantee must be identical to the wording specified in § 264.151(h). The corporate guarantee must accompany the items sent to the Regional Administrator as specified in paragraph (e)(3) of this section. The terms of the corporate guarantee must provide that:

(i) If the owner or operator fails to perform post-closure care of a facility covered by the corporate guarantee in accordance with the post-closure plan and other interim status requirements whenever required to do so, the guarantor will do so or establish a trust fund as specified in § 265.145(a) in the name of the owner or operator.

(ii) The corporate guarantee will remain in force unless the guarantor sends notice of cancellation by certified mail to the owner or operator and to the Regional Administrator. Cancellation may not occur, however, during the 120 days beginning on the date of receipt of the notice of cancellation by both the owner or operator and the Regional Administrator, as evidenced by the return receipts.

(iii) If the owner or operator fails to provide alternate financial assurance as specified in this section and obtain the written approval of such alternate assurance from the Regional Administrator within 90 days after receipt by both the owner or operator and the Regional Administrator of a notice of cancellation of the corporate guarantee from the guarantor, the guarantor will provide such alternate financial assurance in the name of the owner or operator.

(f) *Use of multiple financial mechanisms.* An owner or operator may satisfy the requirements of this section by establishing more than one financial mechanism per facility. These mechanisms are limited to trust funds, surety bonds, letters of credit, and insurance. The mechanisms must be as specified in paragraphs (a) through (d), respectively, of this section, except that it is the combination of mechanisms, rather than the single mechanism, which must provide financial assurance for an amount at least equal to the current post-closure cost estimate. If an owner or operator uses a trust fund in combination with a surety bond or a letter of credit, he may use the trust fund as the standby trust fund for the other mechanisms. A single standby trust fund may be established for two or more mechanisms. The Regional Administrator may use any or all of the mechanisms to provide for post-closure care of the facility.

(g) *Use of a financial mechanism for multiple facilities.* An owner or operator may use a financial assurance mechanism specified in this section to meet the requirements of this section for more than one facility. Evidence of financial assurance submitted to the Regional Administrator must include a list showing, for each facility, the EPA

Identification Number, name, address, and the amount of funds for post-closure care assured by the mechanism. If the facilities covered by the mechanism are in more than one Region, identical evidence of financial assurance must be submitted to and maintained with the Regional Administrators of all such Regions. The amount of funds available through the mechanism must be no less than the sum of funds that would be available if a separate mechanism had been established and maintained for each facility. In directing funds available through the mechanism for post-closure care of any of the facilities covered by the mechanism, the Regional Administrator may direct only the amount of funds designated for that facility, unless the owner or operator agrees to the use of additional funds available under the mechanism.

(h) *Release of the owner or operator from the requirements of this section.* Within 60 days after receiving certifications from the owner or operator and an independent registered professional engineer that the post-closure care period has been completed in accordance with the approved post-closure plan, the Regional Administrator will notify the owner or operator in writing that he is no longer required by this section to maintain financial assurance for post-closure care of that unit, unless the Regional Administrator has reason to believe that post-closure care has not been in accordance with the approved post-closure plan. The Regional Administrator will provide the owner or operator a detailed written statement of any such reason to believe that post-closure care has not been in accordance with the approved post-closure plan.

[47 FR 15064, Apr. 7, 1982, as amended at 51 FR 16457, May 2, 1986]

§ 265.146 Use of a mechanism for financial assurance of both closure and post-closure care.

An owner or operator may satisfy the requirements for financial assurance for both closure and post-closure care for one or more facilities by using a trust fund, surety bond, letter of credit, insurance, financial test, or corporate guarantee that meets the specifications for the mechanism in both § 265.143 and 265.145. The amount of funds available through the mechanism must be no less than the sum of funds that would be available if a separate mechanism had been established and maintained for financial assurance of closure and of post-closure care.

§ 265.147 Liability requirements.

(a) *Coverage for sudden accidental occurrences.* An owner or operator of a hazardous waste treatment, storage, or disposal facility, or a group of such facilities, must demonstrate financial responsibility for bodily injury and property damage to third parties caused by sudden accidental occurrences arising from operations of the facility or group of facilities. The owner or operator must have and maintain liability coverage for sudden accidental occurrences in the amount of at least $1 million per occurrence with an annual aggregate of at least $2 million, exclusive of legal defense costs. This liability coverage may be demonstrated as specified in paragraphs (a) (1), (2), (3), (4), (5), or (6) of this section:

(1) An owner or operator may demonstrate the required liability coverage by having liability insurance as specified in this paragraph.

(2) An owner or operator may meet the requirements of this section by passing a financial test or using the guarantee for liability coverage as specified in paragraph (g) of this section.

(3) An owner or operator may meet the requirements of this section by obtaining a letter of credit for liability coverage as specified in paragraph (h) of this section.

(4) An owner or operator may meet the requirements of this section by obtaining a surety bond for liability coverage as specified in paragraph (i) of this section.

(5) An owner or operator may meet the requirements of this section by obtaining a trust fund for liability coverage as specified in paragraph (j) of this section.

(6) An owner or operator may demonstrate the required liability coverage through the use of combinations

of insurance, financial test, guarantee, letter of credit, surety bond, and trust fund, except that the owner or operator may not combine a financial test covering part of the liability coverage requirement with a guarantee unless the financial statement of the owner or operator is not consolidated with the financial statement of the guarantor. The amounts of coverage demonstrated must total at least the minimum amounts required by this section. If the owner or operator demonstrates the required coverage through the use of a combination of financial assurances under this paragraph, the owner or operator shall specify at least one such assurance as "primary" coverage and shall specify other assurance as "excess" coverage.

(7) An owner or operator shall notify the Regional Administrator in writing within 30 days (i) whenever a claim for bodily injury or property damages caused by the operation of a hazardous waste treatment, storage, or disposal facility is made against the owner or operator or an instrument providing financial assurance for liability coverage under this section and (ii) whenever the amount of financial assurance for liability coverage under this section provided by a financial instrument authorized by paragraphs (a)(1) through (a)(6) of this section is reduced.

(b) *Coverage for nonsudden accidental occurrences.* An owner or operator of a surface impoundment, landfill, or land treatment facility which is used to manage hazardous waste, or a group of such facilities, must demonstrate financial responsibility for bodily injury and property damage to third parties caused by nonsudden accidental occurrences arising from operations of the facility or group of facilities. The owner or operator must have and maintain liability coverage for nonsudden accidental occurrences in the amount of at least $3 million per occurrence with an annual aggregate of at least $6 million, exclusive of legal defense costs. An owner or operator who must meet the requirements of this section may combine the required per-occurrence coverage levels for sudden and nonsudden accidental occurrences into a single per-occurrence level, and combine the required annual aggregate coverage levels for sudden and nonsudden accidental occurrences into a single annual aggregate level. Owners or operators who combine coverage levels for sudden and nonsudden accidental occurrences must maintain liability coverage in the amount of at least $4 million per occurrence and $8 million annual aggregate. This liability coverage may be demonstrated as specified in paragraph (b) (1), (2), (3), (4), (5), or (6) of this section:

(1) An owner or operator may demonstrate the required liability coverage by having liability insurance as specified in this paragraph.

(2) An owner or operator may meet the requirements of this section by passing a financial test or using the guarantee for liability coverage as specified in paragraphs (f) and (g) of this section.

(3) An owner or operator may meet the requirements of this section by obtaining a letter of credit for liability coverage as specified in paragraph (h) of this section.

(4) An owner or operator may meet the requirements of this section by obtaining a surety bond for liability coverage as specified in paragraph (i) of this section.

(5) An owner or operator may meet the requirements of this section by obtaining a trust fund for liability coverage as specified in paragraph (j) of this section.

(6) An owner or operator may demonstrate the required liability coverage through the use of combinations of insurance, financial test, guarantee, letter of credit, surety bond, and trust fund, except that the owner or operator may not combine a financial test covering part of the liability coverage requirement with a guarantee unless the financial statement of the owner or operator is not consolidated with the financial statement of the guarantor. The amounts of coverage demonstrated must total at least the minimum amounts required by this section. If the owner or operator demonstrates the required coverage through the use of a combination of financial assurances under this paragraph, the owner or operator shall specify at

least one such assurance as "primary" coverage and shall specify other assurance as "excess" coverage.

(7) An owner or operator shall notify the Regional Administrator in writing within 30 days (i) whenever a claim for bodily injury or property damages caused by the operation of a hazardous waste treatment, storage, or disposal facility is made against the owner or operator or an instrument providing financial assurance for liability coverage under this section and (ii) whenever the amount of financial assurance for liability coverage under this section provided by a financial instrument authorized by paragraphs (a)(1) through (a)(6) of this section is reduced.

(c) *Request for variance.* If an owner or operator can demonstrate to the satisfaction of the Regional Administrator that the levels of financial responsibility required by paragraph (a) or (b) of this section are not consistent with the degree and duration of risk associated with treatment, storage, or disposal at the facility or group of facilities, the owner or operator may obtain a variance from the Regional Administrator. The request for a variance must be submitted in writing to the Regional Administrator. If granted, the variance will take the form of an adjusted level of required liability coverage, such level to be based on the Regional Administrator's assessment of the degree and duration of risk associated with the ownership or operation of the facility or group of facilities. The Regional Administrator may require an owner or operator who requests a variance to provide such technical and engineering information as is deemed necessary by the Regional Administrator to determine a level of financial responsibility other than that required by paragraph (a) or (b) of this section. The Regional Administrator will process a variance request as if it were a permit modification request under § 270.41(a)(5) of this chapter and subject to the procedures of § 124.5 of this chapter. Notwithstanding any other provision, the Regional Administrator may hold a public hearing at his discretion or whenever he finds, on the basis of requests for a public hearing, a significant degree of public interest in a tentative decision to grant a variance.

(d) *Adjustments by the Regional Administrator.* If the Regional Administrator determines that the levels of financial responsibility required by paragraph (a) or (b) of this section are not consistent with the degree and duration of risk associated with treatment, storage, or disposal at the facility or group of facilities, the Regional Administrator may adjust the level of financial responsibility required under paragraph (a) or (b) of this section as may be necessary to protect human health and the environment. This adjusted level will be based on the Regional Administrator's assessment of the degree and duration of risk associated with the ownership or operation of the facility or group of facilities. In addition, if the Regional Administrator determines that there is a significant risk to human health and the environment from nonsudden accidental occurrences resulting from the operations of a facility that is not a surface impoundment, landfill, or land treatment facility, he may require that an owner or operator of the facility comply with paragraph (b) of this section. An owner or operator must furnish to the Regional Administrator, within a reasonable time, any information which the Regional Administrator requests to determine whether cause exists for such adjustments of level or type of coverage. The Regional Administrator will process an adjustment of the level of required coverage as if it were a permit modification under § 270.41(a)(5) of this chapter and subject to the procedures of § 124.5 of this chapter. Notwithstanding any other provision, the Regional Administrator may hold a public hearing at his discretion or whenever he finds, on the basis of requests for a public hearing, a significant degree of public interest in a tentative decision to adjust the level or type of required coverage.

(e) *Period of coverage.* Within 60 days after receiving certifications from the owner or operator and an independent registered professional engineer that final closure has been completed in accordance with the approved closure plan, the Regional Ad-

ministrator will notify the owner or operator in writing that he is no longer required by this section to maintain liability coverage for that facility, unless the Regional Administrator has reason to believe that closure has not been in accordance with the approved closure plan.

(f) *Financial test for liability coverage.* (1) An owner or operator may satisfy the requirements of this section by demonstrating that he passes a financial test as specified in this paragraph. To pass this test the owner or operator must meet the criteria of paragraph (f)(1)(i) or (ii) of this section:

(i) The owner or operator must have:

(A) Net working capital and tangible net worth each at least six times the amount of liability coverage to be demonstrated by this test; and

(B) Tangible net worth of at least $10 million; and

(C) Assets in the United States amounting to either: (*1*) At least 90 percent of his total assets; or (*2*) at least six times the amount of liability coverage to be demonstrated by this test.

(ii) The owner or operator must have:

(A) A current rating for his most recent bond issuance of AAA, AA, A, or BBB as issued by Standard and Poor's, or Aaa, Aa, A, or Baa as issued by Moody's; and

(B) Tangible net worth of at least $10 million; and

(C) Tangible net worth at least six times the amount of liability coverage to be demonstrated by this test; and

(D) Assets in the United States amounting to either: (*1*) At least 90 percent of his total assets; or (*2*) at least six times the amount of liability coverage to be demonstrated by this test.

(2) The phrase "amount of liability coverage" as used in paragraph (f)(1) of this section refers to the annual aggregate amounts for which coverage is required under paragraphs (a) and (b) of this section.

(3) To demonstrate that he meets this test, the owner or operator must submit the following three items to the Regional Administrator:

(i) A letter signed by the owner's or operator's chief financial officer and worded as specified in § 264.151(g). If an owner or operator is using the financial test to demonstrate both assurance for closure or post-closure care, as specified by §§ 264.143(f), 264.145(f), 265.143(e), and 265.145(e), *and* liability coverage, he must submit the letter specified in § 264.151(g) to cover both forms of financial responsibility; a separate letter as specified in § 264.151(f) is not required.

(ii) A copy of the independent certified public accountant's report on examination of the owner's or operator's financial statements for the latest completed fiscal year.

(iii) A special report from the owner's or operator's independent certified public accountant to the owner or operator stating that:

(A) He has compared the data which the letter from the chief financial officer specifies as having been derived from the independently audited, year-end financial statements for the latest fiscal year with the amounts in such financial statements; and

(B) In connection with that procedure, no matters came to his attention which caused him to believe that the specified data should be adjusted.

(4) The owner or operator may obtain a one-time extension of the time allowed for submission of the documents specified in paragraph (f)(3) of this section if the fiscal year of the owner or operator ends during the 90 days prior to the effective date of these regulations and if the year-end financial statements for that fiscal year will be audited by an independent certified public accountant. The extension will end no later than 90 days after the end of the owner's or operator's fiscal year. To obtain the extension, the owner's or operator's chief financial officer must send, by the effective date of these regulations, a letter to the Regional Administrator of each Region in which the owner's or operator's facilities to be covered by the financial test are located. This letter from the chief financial officer must:

(i) Request the extension;

(ii) Certify that he has grounds to believe that owner or operator meets the criteria of the financial test;

(iii) Specify each facility to be covered by the test the EPA Identification Number, name, address, the amount of liability coverage and, when applicable, current closure and post-closure cost estimates to be covered by the test;

(iv) Specify the date ending the owner's or operator's last complete fiscal year before the effective date of these regulations;

(v) Specify the date, no later than 90 days after the end of such fiscal year, when he will submit the documents specified in paragraph (f)(3) of this section; and

(vi) Certify that the year-end financial statements of the owner or operator for such fiscal year will be audited by an independent certified public accountant.

(5) After the initial submission of items specified in paragraph (f)(3) of this section, the owner or operator must send updated information to the Regional Administrator within 90 days after the close of each succeeding fiscal year. This information must consist of all three items specified in paragraph (f)(3) of this section.

(6) If the owner or operator no longer meets the requirements of paragraph (f)(1) of this section, he must obtain insurance for the entire amount of required liability coverage as specified in this section. Evidence of insurance must be submitted to the Regional Administrator within 90 days after the end of the fiscal year for which the year-end financial data show that the owner or operator no longer meets the test requirements.

(7) The Regional Administrator may disallow use of this test on the basis of qualifications in the opinion expressed by the independent certified public accountant in his report on examination of the owner's or operator's financial statements (see paragraph (f)(3)(ii) of this section). An adverse opinion or a disclaimer of opinion will be cause for disallowance. The Regional Administrator will evaluate other qualifications on an individual basis. The owner or operator must provide evidence of insurance for the entire amount of required liability coverage as specified in this section within 30 days after notification of disallowance.

(g) *Guarantee for liability coverage.* (1) Subject to paragraph (g)(2) of this section, an owner or operator may meet the requirements of this section by obtaining a written guarantee, hereinafter referred to as "guarantee." The guarantor must be the direct or higher-tier parent corporation of the owner or operator, a firm whose parent corporation is also the parent corporation of the owner or operator, or a firm with a "substantial business relationship" with the owner or operator. The guarantor must meet the requirements for owners or operators in paragraphs (f)(1) through (f)(6) of this section. The wording of the guarantee must be identical to the wording specified in § 264.151(h)(2) of this chapter. A certified copy of the guarantee must accompany the items sent to the Regional Administrator as specified in paragraph (f)(3) of this section. One of these items must be the letter from the guarantor's chief financial officer. If the guarantor's parent corporation is also the parent corporation of the owner or operator, this letter must describe the value received in consideration of the guarantee. If the guarantor is a firm with a "substantial business relationship" with the owner or operator, this letter must describe this "substantial business relationship" and the value received in consideration of the guarantee.

(i) If the owner or operator fails to satisfy a judgment based on a determination of liability for bodily injury or property damage to third parties caused by sudden or nonsudden accidental occurrences (or both as the case may be), arising from the operation of facilities covered by this corporate guarantee, or fails to pay an amount agreed to in settlement of claims arising from or alleged to arise from such injury or damage, the guarantor will do so up to the limits of coverage.

(ii) [Reserved]

(2)(i) In the case of corporations incorporated in the United States, a guarantee may be used to satisfy the requirements of this section only if the Attorneys General or Insurance

Commissioners of (A) the State in which the guarantor is incorporated, and (B) each State in which a facility covered by the guarantee is located have submitted a written statement to EPA that a guarantee executed as described in this section and § 264.151(h)(2) is a legally valid and enforceable obligation in that State.

(ii) In the case of corporations incorporated outside the United States, a guarantee may be used to satisfy the requirements of this section only if (A) the non-U.S. corporation has identified a registered agent for service of process in each State in which a facility covered by the guarantee is located and in the State in which it has its principal place of business, and if (B) the Attorney General or Insurance Commissioner of each State in which a facility covered by the guarantee is located and the State in which the guarantor corporation has its principal place of business, has submitted a written statement to EPA that a guarantee executed as described in this section and § 264.151(h)(2) is a legally valid and enforceable obligation in that State.

(h) *Letter of credit for liability coverage.* (1) An owner or operator may satisfy the requirements of this section by obtaining an irrevocable standby letter of credit that conforms to the requirements of this paragraph and submitting a copy of the letter of credit to the Regional Administrator.

(2) The financial institution issuing the letter of credit must be an entity that has the authority to issue letters of credit and whose letter of credit operations are regulated and examined by a Federal or State agency.

(3) The wording of the letter of credit must be identical to the wording specified in § 264.151(k) of this chapter.

(i) *Surety bond for liability coverage.* (1) An owner or operator may satisfy the requirements of this section by obtaining a surety bond that conforms to the requirements of this paragraph and submitting a copy of the bond to the Regional Administrator.

(2) The surety company issuing the bond must be among those listed as acceptable sureties on Federal bonds in the most recent Circular 570 of the U.S. Department of the Treasury.

(3) The wording of the surety bond must be identical to the wording specified in § 264.151(l) of this chapter.

(4) A surety bond may be used to satisfy the requirements of this section only if the Attorneys General or Insurance Commissioners of (i) the State in which the surety is incorporated, and (ii) each State in which a facility covered by the surety bond is located have submitted a written statement to EPA that a surety bond executed as described in this section and § 264.151(l) of this chapter is a legally valid and enforceable obligation in that State.

(j) *Trust fund for liability coverage.* (1) An owner or operator may satisfy the requirements of this section by establishing a trust fund that conforms to the requirements of this paragraph and submitting an originally signed duplicate of the trust agreement to the Regional Administrator.

(2) The trustee must be an entity which has the authority to act as a trustee and whose trust operations are regulated and examined by a Federal or State agency.

(3) The trust fund for liability coverage must be funded for the full amount of the liability coverage to be provided by the trust fund before it may be relied upon to satisfy the requirements of this section. If at any time after the trust fund is created the amount of funds in the trust fund is reduced below the full amount of the liability coverage to be provided, the owner or operator, by the anniversary date of the establishment of the Fund, must either add sufficient funds to the trust fund to cause its value to equal the full amount of liability coverage to be provided, or obtain other financial assurance as specified in this section to cover the difference. For purposes of this paragraph, "the full amount of the liability coverage to be provided" means the amount of coverage for sudden and/or nonsudden occurrences required to be provided by the owner or operator by this section, less the amount of financial assurance for liability coverage that is being provided by other financial assurance mechanisms being used to demonstrate fi-

nancial assurance by the owner or operator.

(4) The wording of the trust fund must be identical to the wording specified in § 264.151(m) of this part.

(k) Notwithstanding any other provision of this part, an owner or operator using liability insurance to satisfy the requirements of this section may use, until October 16, 1982, a Hazardous Waste Facility Liability Endorsement or Certificate of Liability Insurance that does not certify that the insurer is licensed to transact the business of insurance, or eligible as an excess or surplus lines insurer, in one or more States.

(Approved by the Office of Management and Budget under control number 2000-0445, for paragraphs (a)(1)(i), (b)(1)(i), (b)(5), (c), (d), and (f) (3) through (6))

[47 FR 16558, Apr. 16, 1982, as amended at 47 FR 28627, July 1, 1982; 47 FR 30447, July 13, 1982; 48 FR 30115, June 30, 1983; 51 FR 16458, May 2, 1986; 51 FR 25355, July 11, 1986; 52 FR 44321, Nov. 18, 1987; 53 FR 33959, Sept. 1, 1988]

§ 265.148 Incapacity of owners or operators, guarantors, or financial institutions.

(a) An owner or operator must notify the Regional Administrator by certified mail of the commencement of a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code, naming the owner or operator as debtor, within 10 days after commencement of the proceeding. A guarantor of a corporate guarantee as specified in §§ 265.143(e) and 265.145(e) must make such a notification if he is named as debtor, as required under the terms of the corporate guarantee (§ 264.151(h)).

(b) An owner or operator who fulfills the requirements of § 265.143, § 265.145, or § 265.147 by obtaining a trust fund, surety bond, letter of credit, or insurance policy will be deemed to be without the required financial assurance or liability coverage in the event of bankruptcy of the trustee or issuing institution, or a suspension or revocation of the authority of the trustee institution to act as trustee or of the institution issuing the surety bond, letter of credit, or insurance policy to issue such instruments. The owner or operator must establish other financial assurance or liability coverage within 60 days after such an event.

§ 265.149 Use of State-required mechanisms.

(a) For a facility located in a State where EPA is administering the requirements of this subpart but where the State has hazardous waste regulations that include requirements for financial assurance of closure or post-closure care or liability coverage, an owner or operator may use State-required financial mechanisms to meet the requirements of § 265.143, § 265.145, or § 265.147 if the Regional Administrator determines that the State mechanisms are at least equivalent to the financial mechanisms specified in this subpart. The Regional Administrator will evaluate the equivalency of the mechanisms principally in terms of (1) certainty of the availability of funds for the required closure or post-closure care activities or liability coverage and (2) the amount of funds that will be made available. The Regional Administrator may also consider other factors as he deems appropriate. The owner or operator must submit to the Regional Administrator evidence of the establishment of the mechanism together with a letter requesting that the State-required mechanism be considered acceptable for meeting the requirements of this subpart. The submission must include the following information: The facility's EPA Identification Number, name, and address, and the amount of funds for closure or post-closure care or liability coverage assured by the mechanism. The Regional Administrator will notify the owner or operator of his determination regarding the mechanism's acceptability in lieu of financial mechanisms specified in this subpart. The Regional Administrator may require the owner or operator to submit additional information as is deemed necessary to make this determination. Pending this determination, the owner or operator will be deemed to be in compliance with the requirements of § 265.143, § 265.145, or § 265.147, as applicable.

(b) If a State-required mechanism is found acceptable as specified in paragraph (a) of this section except for the amount of funds available, the owner or operator may satisfy the requirements of this subpart by increasing the funds available through the State-required mechanism or using additional financial mechanisms as specified in this subpart. The amount of funds available through the State and Federal mechanisms must at least equal the amount required by this subpart.

§ 265.150 State assumption of responsibility.

(a) If a State either assumes legal responsibility for an owner's or operator's compliance with the closure, post-closure care, or liability requirements of this part or assures that funds will be available from State sources to cover those requirements, the owner or operator will be in compliance with the requirements of § 265.143, § 265.145, or § 265.147 if the Regional Administrator determines that the State's assumption of responsibility is at least equivalent to the financial mechanisms specified in this subpart. The Regional Administrator will evaluate the equivalency of State guarantees principally in terms of (1) certainty of the availability of funds for the required closure or post-closure care activities or liability coverage and (2) the amount of funds that will be made available. The Regional Administrator may also consider other factors as he deems appropriate. The owner or operator must submit to the Regional Administrator a letter from the State describing the nature of the State's assumption of responsibility together with a letter from the owner or operator requesting that the State's assumption of responsibility be considered acceptable for meeting the requirements of this subpart. The letter from the State must include, or have attached to it, the following information: The facility's EPA Identification Number, name, and address, and the amount of funds for closure or post-closure care or liability coverage that are guaranteed by the State. The Regional Administrator will notify the owner or operator of his determination regarding the acceptability of the State's guarantee in lieu of financial mechanisms specified in this subpart. The Regional Administrator may require the owner or operator to submit additional information as is deemed necessary to make this determination. Pending this determination, the owner or operator will be deemed to be in compliance with the requirements of §§ 265.143, § 265.145, or § 265.147, as applicable.

(b) If a State's assumption of responsibility is found acceptable as specified in paragraph (a) of this section except for the amount of funds available, the owner or operator may satisfy the requirements of this subpart by use of both the State's assurance *and* additional financial mechanisms as specified in this subpart. The amount of funds available through the State and Federal mechanisms must at least equal the amount required by this subpart.

Subpart I—Use and Management of Containers

§ 265.170 Applicability.

The regulations in this subpart apply to owners and operators of all hazardous waste facilities that store containers of hazardous waste, except as § 265.1 provides otherwise.

§ 265.171 Condition of containers.

If a container holding hazardous waste is not in good condition, or if it begins to leak, the owner or operator must transfer the hazardous waste from this container to a container that is in good condition, or manage the waste in some other way that complies with the requirements of this part.

§ 265.172 Compatibility of waste with container.

The owner or operator must use a container made of or lined with materials which will not react with, and are otherwise compatible with, the hazardous waste to be stored, so that the ability of the container to contain the waste is not impaired.

§ 265.173 Management of containers.

(a) A container holding hazardous waste must always be closed during

storage, except when it is necessary to add or remove waste.

(b) A container holding hazardous waste must not be opened, handled, or stored in a manner which may rupture the container or cause it to leak.

[*Comment:* Re-use of containers in transportation is governed by U.S. Department of Transportation regulations, including those set forth in 49 CFR 173.28.]

[45 FR 33232, May 19, 1980, as amended at 45 FR 78529, Nov. 25, 1980]

§ 265.174 Inspections.

The owner or operator must inspect areas where containers are stored, at least weekly, looking for leaks and for deterioration caused by corrosion or other factors.

[*Comment:* See § 265.171 for remedial action required if deterioration or leaks are detected.]

§ 265.175 [Reserved]

§ 265.176 Special requirements for ignitable or reactive waste.

Containers holding ignitable or reactive waste must be located at least 15 meters (50 feet) from the facility's property line.

[*Comment:* See § 265.17(a) for additional requirements.]

§ 265.177 Special requirements for incompatible wastes.

(a) Incompatible wastes, or incompatible wastes and materials, (see Appendix V for examples) must not be placed in the same container, unless § 265.17(b) is complied with.

(b) Hazardous waste must not be placed in an unwashed container that previously held an incompatible waste or material (see Appendix V for examples), unless § 265.17(b) is complied with.

(c) A storage container holding a hazardous waste that is incompatible with any waste or other materials stored nearby in other containers, piles, open tanks, or surface impoundments must be separated from the other materials or protected from them by means of a dike, berm, wall, or other device.

[*Comment:* The purpose of this is to prevent fires, explosions, gaseous emissions, leaching, or other discharge of hazardous waste or hazardous waste constituents which could result from the mixing of incompatible wastes or materials if containers break or leak.]

Subpart J—Tank Systems

SOURCE: 51 FR 25479, July 14, 1986, unless otherwise noted.

§ 265.190 Applicability.

The regulations of this subpart apply to owners or operators of facilities that use tank systems for storing or treating hazardous waste, except as otherwise provided in paragraphs (a) and (b) of this section or in § 265.1 of this part.

(a) Tank systems that are used to store or treat hazardous waste which contains no free liquids and that are situated inside a building with an impermeable floor are exempted from the requirements in § 265.193. To demonstrate the absence or presence of free liquids in the stored/treated waste, EPA Method 9095 (Paint Filter Liquids Test) as described in "Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods" (EPA Publication No. SW-846) must be used.

(b) Tank systems, including sumps, as defined in § 260.10, that serve as part of a secondary containment system to collect or contain releases of hazardous wastes are exempted from the requirements in § 265.193(a).

(Information collection requirement contained in paragraph (a) was approved by the Office of Management and Budget under control number 2050-0050)

[51 FR 25479, July 14, 1986, as amended at 53 FR 34087, Sept. 2, 1988]

§ 265.191 Assessment of existing tank system's integrity.

(a) For each existing tank system that does not have secondary containment meeting the requirements of § 265.193, the owner or operator must determine that the tank system is not leaking or is unfit for use. Except as provided in paragraph (c) of this section, the owner or operator must obtain and keep on file at the facility a written assessment reviewed and certified by an independent, qualified, registered professional engineer in ac-

cordance with § 270.11(d), that attests to the tank system's integrity by January 12, 1988.

(b) This assessment must determine that the tank system is adequately designed and has sufficient structural strength and compatibility with the waste(s) to be stored or treated to ensure that it will not collapse, rupture, or fail. At a minimum, this assessment must consider the following:

(1) Design standard(s), if available, according to which the tank and ancillary equipment were constructed;

(2) Hazardous characteristics of the waste(s) that have been or will be handled;

(3) Existing corrosion protection measures;

(4) Documented age of the tank system, if available, (otherwise, an estimate of the age); and

(5) Results of a leak test, internal inspection, or other tank integrity examination such that:

(i) For non-enterable underground tanks, this assessment must consist of a leak test that is capable of taking into account the effects of temperature variations, tank end deflection, vapor pockets, and high water table effects,

(ii) For other than non-enterable underground tanks and for ancillary equipment, this assessment must be either a leak test, as described above, or an internal inspection and/or other tank integrity examination certified by an independent, qualified, registered professional engineer in accordance with § 270.11(d) that addresses cracks, leaks, corrosion, and erosion.

[NOTE: The practices described in the American Petroleum Institute (API) Publication, Guide for Inspection of Refinery Equipment, Chapter XIII, "Atmospheric and Low-Pressure Storage Tanks," 4th edition, 1981, may be used, where applicable, as guidelines in conducting the integrity examination of an other than non-enterable underground tank system.]

(c) Tank systems that store or treat materials that become hazardous wastes subsequent to July 14, 1986 must conduct this assessment within 12 months after the date that the waste becomes a hazardous waste.

(d) If, as a result of the assessment conducted in accordance with paragraph (a) of this section, a tank system is found to be leaking or unfit for use, the owner or operator must comply with the requirements of § 265.196.

(Information collection requirements contained in paragraphs (a)-(d) were approved by the Office of Management and Budget under control number 2050-0050)

§ 265.192 Design and installation of new tank systems or components.

(a) Owners or operators of new tank systems or components must ensure that the foundation, structural support, seams, connections, and pressure controls (if applicable) are adequately designed and that the tank system has sufficient structural strength, compatibility with the waste(s) to be stored or treated, and corrosion protection so that it will not collapse, rupture, or fail. The owner or operator must obtain a written assessment reviewed and certified by an independent, qualified, registered professional engineer in accordance with § 270.11(d) attesting that the system has sufficient structural integrity and is acceptable for the storing and treating of hazardous waste. This assessment must include, at a minimum, the following information:

(1) Design standard(s) according to which the tank(s) and ancillary equipment is or will be constructed.

(2) Hazardous characteristics of the waste(s) to be handled.

(3) For new tank systems or components in which the external shell of a metal tank or any external metal component of the tank system is or will be in contact with the soil or with water, a determination by a corrosion expert of:

(i) Factors affecting the potential for corrosion, including but not limited to:

(A) Soil moisture content;

(B) Soil pH;

(C) Soil sulfides level;

(D) Soil resistivity;

(E) Structure to soil potential;

(F) Influence of nearby underground metal structures (e.g., piping);

(G) Stray electric current; and,

(H) Existing corrosion-protection measures (e.g., coating, cathodic protection), and

(ii) The type and degree of external corrosion protection that are needed to ensure the integrity of the tank system during the use of the tank system or component, consisting of one or more of the following:

(A) Corrosion-resistant materials of construction such as special alloys or fiberglass-reinforced plastic;

(B) Corrosion-resistant coating (such as epoxy or fiberglass) with cathodic protection (e.g., impressed current or sacrificial anodes); and

(C) Electrical isolation devices such as insulating joints and flanges.

NOTE: The practices described in the National Association of Corrosion Engineers (NACE) standard, "Recommended Practice (RP-02-85)—Control of External Corrosion on Metallic Buried, Partially Buried, or Submerged Liquid Storage Systems," and the American Petroleum Institute (API) Publication 1632, "Cathodic Protection of Underground Petroleum Storage Tanks and Piping Systems," may be used, where applicable, as guidelines in providing corrosion protection for tank systems.

(4) For underground tank system components that are likely to be affected by vehicular traffic, a determination of design or operational measures that will protect the tank system against potential damage; and

(5) Design considerations to ensure that:

(i) Tank foundations will maintain the load of a full tank;

(ii) Tank systems will be anchored to prevent flotation or dislodgement where the tank system is placed in a saturated zone, or is located within a seismic fault zone; and

(iii) Tank systems will withstand the effects of frost heave.

(b) The owner or operator of a new tank system must ensure that proper handling procedures are adhered to in order to prevent damage to the system during installation. Prior to covering, enclosing, or placing a new tank system or component in use, an independent, qualified installation inspector or an independent, qualified, registered professional engineer, either of whom is trained and experienced in the proper installation of tank systems, must inspect the system or component for the presence of any of the following items:

(1) Weld breaks;

(2) Punctures;

(3) Scrapes of protective coatings;

(4) Cracks;

(5) Corrosion;

(6) Other structural damage or inadequate construction or installation.

All discrepancies must be remedied before the tank system is covered, enclosed, or placed in use.

(c) New tank systems or components and piping that are placed underground and that are backfilled must be provided with a backfill material that is a noncorrosive, porous, homogeneous substance and that is carefully installed so that the backfill is placed completely around the tank and compacted to ensure that the tank and piping are fully and uniformly supported.

(d) All new tanks and ancillary equipment must be tested for tightness prior to being covered, enclosed or placed in use. If a tank system is found not to be tight, all repairs necessary to remedy the leak(s) in the system must be performed prior to the tank system being covered, enclosed, or placed in use.

(e) Ancillary equipment must be supported and protected against physical damage and excessive stress due to settlement, vibration, expansion or contraction.

NOTE: The piping system installation procedures described in American Petroleum Institute (API) Publication 1615 (November 1979), "Installation of Underground Petroleum Storage Systems," or ANSI Standard B31.3, "Petroleum Refinery System," may be used, where applicable, as guidelines for proper installation of piping systems.

(f) The owner or operator must provide the type and degree of corrosion protection necessary, based on the information provided under paragraph (a)(3) of this section, to ensure the integrity of the tank system during use of the tank system. The installation of a corrosion protection system that is field fabricated must be supervised by an independent corrosion expert to ensure proper installation.

(g) The owner or operator must obtain and keep on file at the facility

written statements by those persons required to certify the design of the tank system and supervise the installation of the tank system in accordance with the requirements of paragraphs (b) through (f) of this section to attest that the tank system was properly designed and installed and that repairs, pursuant to paragraphs (b) and (d) of this section were performed. These written statements must also include the certification statement as required in § 270.11(d) of this chapter.

(Information collection requirements contained in paragraphs (a) and (g) were approved by the Office of Management and Budget under control number 2050-0050)

[51 FR 25479, July 14, 1986; 51 FR 29430, Aug. 15, 1986]

§ 265.193 Containment and detection of releases.

(a) In order to prevent the release of hazardous waste or hazardous constituents to the environment, secondary containment that meets the requirements of this section must be provided (except as provided in paragraphs (f) and (g) of this section):

(1) For all new tank systems or components, prior to their being put into service;

(2) For all existing tanks used to store or treat EPA Hazardous Waste Nos. F020, F021, F022, F023, F026, and F027, within two years after January 12, 1987;

(3) For those existing tank systems of known and documentable age, within two years after January 12, 1987, or when the tank systems have reached 15 years of age, whichever comes later;

(4) For those existing tank system for which the age cannot be documented, within eight years of January 12, 1987; but if the age of the facility is greater than seven years, secondary containment must be provided by the time the facility reaches 15 years of age, or within two years of January 12, 1987, whichever comes later; and

(5) For tank systems that store or treat materials that become hazardous wastes subsequent to January 12, 1987, within the time intervals required in paragraphs (a)(1) through (a)(4) of this section, except that the date that a material becomes a hazardous waste must be used in place of January 12, 1987.

(b) Secondary containment systems must be:

(1) Designed, installed, and operated to prevent any migration of wastes or accumulated liquid out of the system to the soil, ground water, or surface water at any time during the use of the tank system; and

(2) Capable of detecting and collecting releases and accumulated liquids until the collected material is removed.

(c) To meet the requirements of paragraph (b) of this section, secondary containment systems must be at a minimum:

(1) Constructed of or lined with materials that are compatible with the waste(s) to be placed in the tank system and must have sufficient strength and thickness to prevent failure due to pressure gradients (including static head and external hydrological forces), physical contact with the waste to which they are exposed, climatic conditions, the stress of installation, and the stress of daily operation (including stresses from nearby vehicular traffic);

(2) Placed on a foundation or base capable of providing support to the secondary containment system and resistance to pressure gradients above and below the system and capable of preventing failure due to settlement, compression, or uplift;

(3) Provided with a leak detection system that is designed and operated so that it will detect the failure of either the primary and secondary containment structure or any release of hazardous waste or accumulated liquid in the secondary containment system within 24 hours, or at the earliest practicable time if the existing detection technology or site conditions will not allow detection of a release within 24 hours;

(4) Sloped or otherwise designed or operated to drain and remove liquids resulting from leaks, spills, or precipitation. Spilled or leaked waste and accumulated precipitation must be removed from the secondary containment system within 24 hours, or in as timely a manner as is possible to prevent harm to human health or the en-

vironment, if removal of the released waste or accumulated precipitation cannot be accomplished within 24 hours.

NOTE: If the collected material is a hazardous waste under Part 261 of this chapter, it is subject to management as a hazardous waste in accordance with all applicable requirements of Parts 262 through 265 of this chapter. If the collected material is discharged through a point source to waters of the United States, it is subject to the requirements of sections 301, 304, and 402 of the Clean Water Act, as amended. If discharged to Publicly Owned Treatment Works (POTWs), it is subject to the requirements of section 307 of the Clear Water Act, as amended. If the collected material is released to the environment, it may be subject to the reporting requirements of 40 CFR Part 302.

(d) Secondary containment for tanks must include one or more of the following devices:

(1) A liner (external to the tank);

(2) A vault;

(3) A double-walled tank; or

(4) An equivalent device as approved by the Regional Administrator.

(e) In addition to the requirements of paragraphs (b), (c), and (d) of this section, secondary containment systems must satisfy the following requirements:

(1) External liner systems must be:

(i) Designed or operated to contain 100 percent of the capacity of the largest tank within its boundary;

(ii) Designed or operated to prevent run-on or infiltration of precipitation into the secondary containment system unless the collection system has sufficient excess capacity to contain run-on or infiltration. Such additional capacity must be sufficient to contain precipitation from a 25-year, 24-hour rainfall event;

(iii) Free of cracks or gaps; and

(iv) Designed and installed to completely surround the tank and to cover all surrounding earth likely to come into contact with the waste if released from the tank(s) (i.e., capable of preventing lateral as well as vertical migration of the waste).

(2) Vault systems must be:

(i) Designed or operated to contain 100 percent of the capacity of the largest tank within its boundary;

(ii) Designed or operated to prevent run-on or infiltration of precipitation into the secondary containment system unless the collection system has sufficient excess capacity to contain run-on or infiltration. Such additional capacity must be sufficient to contain precipitation from a 25-year, 24-hour rainfall event;

(iii) Constructed with chemical-resistant water stops in place at all joints (if any);

(iv) Provided with an impermeable interior coating or lining that is compatible with the stored waste and that will prevent migration of waste into the concrete;

(v) Provided with a means to protect against the formation of and ignition of vapors within the vault, if the waste being stored or treated:

(A) Meets the definition of ignitable waste under § 262.21 of this chapter, or

(B) Meets the definition of reactive waste under § 262.21 of this chapter and may form an ignitable or explosive vapor; and

(vi) Provided with an exterior moisture barrier or be otherwise designed or operated to prevent migration of moisture into the vault if the vault is subject to hydraulic pressure.

(3) Double-walled tanks must be:

(i) Designed as an integral structure (i.e., an inner tank within an outer shell) so that any release from the inner tank is contained by the outer shell;

(ii) Protected, if constructed of metal, from both corrosion of the primary tank interior and the external surface of the outer shell; and

(iii) Provided with a built-in, continuous leak detection system capable of detecting a release within 24 hours or at the earliest practicable time, if the owner or operator can demonstrate to the Regional Administrator, and the Regional Administrator concurs, that the existing leak detection technology or site conditions will not allow detection of a release within 24 hours.

NOTE: The provisions outlined in the Steel Tank Institute's (STI) "Standard for Dual Wall Underground Steel Storage Tank" may be used as guidelines for aspects of the design of underground steel double-walled tanks.

(f) Ancillary equipment must be provided with full secondary containment (e.g., trench, jacketing, double-walled piping) that meets the requirements of paragraphs (b) and (c) of this section except for:

(1) Aboveground piping (exclusive of flanges, joints, valves, and connections) that are visually inspected for leaks on a daily basis;

(2) Welded flanges, welded joints, and welded connections that are visually inspected for leaks on a daily basis;

(3) Sealless or magnetic coupling pumps and sealless valves, that are visually inspected for leaks on a daily basis; and

(4) Pressurized aboveground piping systems with automatic shut-off devices (e.g., excess flow check valves, flow metering shutdown devices, loss of pressure actuated shut-off devices) that are visually inspected for leaks on a daily basis.

(g) The owner or operator may obtain a variance from the requirements of this Section if the Regional Administrator finds, as a result of a demonstration by the owner or operator, either: that alternative design and operating practices, together with location characteristics, will prevent the migration of hazardous waste or hazardous constituents into the ground water *or* surface water at least as effectively as secondary containment during the active life of the tank system *or* that in the event of a release that does migrate to ground water or surface water, no substantial present or potential hazard will be posed to human health or the environment. New underground tank systems may not, per a demonstration in accordance with paragraph (g)(2) of this section, be exempted from the secondary containment requirements of this section. Application for a variance as allowed in paragraph (g) of this section does not waive compliance with the requirements of this subpart for new tank systems. (1) In deciding whether to grant a variance based on a demonstration of equivalent protection of ground water and surface water, the Regional Administrator will consider:

(i) The nature and quantity of the waste;

(ii) The proposed alternate design and operation;

(iii) The hydrogeologic setting of the facility, including the thickness of soils between the tank system and ground water; and

(iv) All other factors that would influence the quality and mobility of the hazardous constituents and the potential for them to migrate to ground water or surface water.

(2) In deciding whether to grant a variance, based on a demonstration of no substantial present or potential hazard, the Regional Administrator will consider:

(i) The potential adverse effects on ground water, surface water, and land quality taking into account:

(A) The physical and chemical characteristics of the waste in the tank system, including its potential for migration,

(B) The hydrogeological characteristics of the facility and surrounding land,

(C) The potential for health risks caused by human exposure to waste constituents,

(D) The potential for damage to wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents, and

(E) The persistence and permanence of the potential adverse effects;

(ii) The potential adverse effects of a release on ground-water quality, taking into account:

(A) The quantity and quality of ground water and the direction of ground-water flow,

(B) The proximity and withdrawal rates of water in the area,

(C) The current and future uses of ground water in the area, and

(D) The existing quality of ground water, including other sources of contamination and their cumulative impact on the ground-water quality;

(iii) The potential adverse effects of a release on surface water quality, taking into account:

(A) The quantity and quality of ground water and the direction of ground-water flow,

(B) The patterns of rainfall in the region,

(C) The proximity of the tank system to surface waters,

(D) The current and future uses of surface waters in the area and any water quality standards established for those surface waters, and

(E) The existing quality of surface water, including other sources of contamination and the cumulative impact on surface-water quality; and

(iv) The potential adverse effects of a release on the land surrounding the tank system, taking into account:

(A) The patterns of rainfall in the region, and

(B) The current and future uses of the surrounding land.

(3) The owner or operator of a tank system, for which a variance from secondary containment had been granted in accordance with the requirements of paragraph (g)(1) of this section, at which a release of hazardous waste has occurred from the primary tank system but has not migrated beyond the zone of engineering control (as established in the variance), must:

(i) Comply with the requirements of § 265.196, except paragraph (d); and

(ii) Decontaminate or remove contaminated soil to the extent necessary to:

(A) Enable the tank system, for which the variance was granted, to resume operation with the capability for the detection of and response to releases at least equivalent to the capability it had prior to the release, and

(B) Prevent the migration of hazardous waste or hazardous constituents to ground water or surface water; and

(iii) If contaminated soil cannot be removed or decontaminated in accordance with paragraph (g)(3)(ii) of this section, comply with the requirements of § 265.197(b);

(4) The owner or operator of a tank system, for which a variance from secondary containment had been granted in accordance with the requirements of paragraph (g)(1) of this section, at which a release of hazardous waste has occurred from the primary tank system and has migrated beyond the zone of engineering control (as established in the variance), must:

(i) Comply with the requirements of § 265.196(a), (b), (c), and (d); and

(ii) Prevent the migration of hazardous waste or hazardous constituents to ground water or surface water, if possible, and decontaminate or remove contaminated soil. If contaminated soil cannot be decontaminated or removed, or if ground water has been contaminated, the owner or operator must comply with the requirements of § 265.197(b);

(iii) If repairing, replacing, or reinstalling the tank system, provide secondary containment in accordance with the requirements of paragraphs (a) through (f) of this section or reapply for a variance from secondary containment and meet the requirements for new tank systems in § 265.192 if the tank system is replaced. The owner or operator must comply with these requirements even if contaminated soil can be decontaminated or removed, and ground water or surface water has not been contaminated.

(h) The following procedures must be followed in order to request a variance from secondary containment:

(1) The Regional Administrator must be notified in writing by the owner or operator that he intends to conduct and submit a demonstration for a variance from secondary containment as allowed in paragraph (g) of this section according to the following schedule:

(i) For existing tank systems, at least 24 months prior to the date that secondary containment must be provided in accordance with paragraph (a) of this section; and

(ii) For new tank systems, at least 30 days prior to entering into a contract for installation of the tank system.

(2) As part of the notification, the owner or operator must also submit to the Regional Administrator a description of the steps necessary to conduct the demonstration and a timetable for completing each of the steps. The demonstration must address each of the factors listed in paragraph (g)(1) or paragraph (g)(2) of this section.

(3) The demonstration for a variance must be completed and submitted to the Regional Administrator within 180 days after notifying the Regional Administrator of intent to conduct the demonstration.

(4) The Regional Administrator will inform the public, through a newspaper notice, of the availability of the demonstration for a variance. The notice shall be placed in a daily or weekly major local newspaper of general circulation and shall provide at least 30 days from the date of the notice for the public to review and comment on the demonstration for a variance. The Regional Administrator also will hold a public hearing, in response to a request or at his own discretion, whenever such a hearing might clarify one or more issues concerning the demonstration for a variance. Public notice of the hearing will be given at least 30 days prior to the date of the hearing and may be given at the same time as notice of the opportunity for the public to review and comment on the demonstration. These two notices may be combined.

(5) The Regional Administrator will approve or disapprove the request for a variance within 90 days of receipt of the demonstration from the owner or operator and will notify in writing the owner or operator and each person who submitted written comments or requested notice of the variance decision. If the demonstration for a variance is incomplete or does not include sufficient information, the 90-day time period will begin when the Regional Administrator receives a complete demonstration, including all information necessary to make a final determination. If the public comment period in paragraph (h)(4) of this section is extended, the 90-day time period will be similarly extended.

(i) All tank systems, until such time as secondary containment meeting the requirements of this section is provided, must comply with the following:

(1) For non-enterable underground tanks, a leak test that meets the requirements of § 265.191(b)(5) must be conducted at least annually;

(2) For other than non-enterable underground tanks and for all ancillary equipment, an annual leak test, as described in paragraph (i)(1) of this section, or an internal inspection or other tank integrity examination by an independent, qualified, registered professional engineer that addresses cracks, leaks, corrosion, and erosion must be conducted at least annually. The owner or operator must remove the stored waste from the tank, if necessary, to allow the condition of all internal tank surfaces to be assessed.

NOTE: The practices described in the American Petroleum Institute (API) Publication Guide for Inspection of Refining Equipment, Chapter XIII, "Atmospheric and Low Pressure Storage Tanks," 4th edition, 1981, may be used, when applicable, as guidelines for assessing the overall condition of the tank system.

(3) The owner or operator must maintain on file at the facility a record of the results of the assessments conducted in accordance with paragraphs (i)(1) through (i)(3) of this section.

(4) If a tank system or component is found to be leaking or unfit-for-use as a result of the leak test or assessment in paragraphs (i)(1) through (i)(3) of this section, the owner or operator must comply with the requirements of § 265.196.

(Information collection requirements contained in paragraphs (c)-(e) and (g)-(i) were approved by the Office of Management and Budget under control number 2050-0050)

[51 FR 25479, July 14, 1986; 51 FR 29430, Aug. 15, 1986, as amended at 53 FR 34087, Sept. 2, 1988]

§ 265.194 General operating requirements.

(a) Hazardous wastes or treatment reagents must not be placed in a tank system if they could cause the tank, its ancillary equipment, or the secondary containment system to rupture, leak, corrode, or otherwise fail.

(b) The owner or operator must use appropriate controls and practices to prevent spills and overflows from tank or secondary containment systems. These include at a minimum:

(1) Spill prevention controls (e.g., check valves, dry discount couplings);

(2) Overfill prevention controls (e.g., level sensing devices, high level alarms, automatic feed cutoff, or bypass to a standby tank); and

(3) Maintenance of sufficient freeboard in uncovered tanks to prevent overtopping by wave or wind action or by precipitation.

(c) The owner or operator must comply with the requirements of

10-147 O—90——12

§ 265.196 if a leak or spill occurs in the tank system.

(Information collection requirements contained in paragraph (c) were approved by the Office of Management and Budget under control number 2050-0050)

§ 265.195 Inspections.

(a) The owner or operator must inspect, where present, at least once each operating day:

(1) Overfill/spill control equipment (e.g., waste-feed cutoff systems, bypass systems, and drainage systems) to ensure that it is in good working order;

(2) The aboveground portions of the tank system, if any, to detect corrosion or releases of waste;

(3) Data gathered from monitoring equipment and leak-detection equipment, (e.g., pressure and temperature gauges, monitoring wells) to ensure that the tank system is being operated according to its design; and

(4) The construction materials and the area immediately surrounding the externally accessible portion of the tank system including secondary containment structures (e.g., dikes) to detect erosion or signs of releases of hazardous waste (e.g., wet spots, dead vegetation);

NOTE: Section 265.15(c) requires the owner or operator to remedy any deterioration or malfunction he finds. Section 265.196 requires the owner or operator to notify the Regional Administrator within 24 hours of confirming a release. Also, 40 CFR Part 302 may require the owner or operator to notify the National Response Center of a release.

(b) The owner or operator must inspect cathodic protection systems, if present, according to, at a minimum, the following schedule to ensure that they are functioning properly:

(1) The proper operation of the cathodic protection system must be confirmed within six months after initial installation, and annually thereafter; and

(2) All sources of impressed current must be inspected and/or tested, as appropriate, at least bimonthly (i.e., every other month).

NOTE: The practices described in the National Association of Corrosion Engineers (NACE) standard, "Recommended Practice (RP-02-85)—Control of External Corrosion on Metallic Buried, Partially Buried, or Submerged Liquid Storage Systems," and the American Petroleum Institute (API) Publication 1632, "Cathodic Protection of Underground Petroleum Storage Tanks and Piping Systems," may be used, where applicable, as guidelines in maintaining and inspecting cathodic protection systems.

(c) The owner or operator must document in the operating record of the facility an inspection of those items in paragraphs (a) and (b) of this section.

(Information collection requirements contained in paragraphs (a)-(c) were approved by the Office of Management and Budget under control number 2050-0050)

§ 265.196 Response to leaks or spills and disposition of leaking or unfit-for-use tank systems.

A tank system or secondary containment system from which there has been a leak or spill, or which is unfit for use, must be removed from service immediately, and the owner or operator must satisfy the following requirements:

(a) *Cessation of use; prevent flow or addition of wastes.* The owner or operator must immediately stop the flow of hazardous waste into the tank system or secondary containment system and inspect the system to determine the cause of the release.

(b) *Removal of waste from tank system or secondary containment system.* (1) If the release was from the tank system, the owner or operator must, within 24 hours after detection of the leak or, if the owner or operator demonstrates that that is not possible, at the earliest practicable time remove as much of the waste as is necessary to prevent further release of hazardous waste to the environment and to allow inspection and repair of the tank system to be performed.

(2) If the release was to a secondary containment system, all released materials must be removed within 24 hours or in as timely a manner as is possible to prevent harm to human health and the environment.

(c) *Containment of visible releases to the environment.* The owner or operator must immediately conduct a visual inspection of the release and, based upon that inspection:

(1) Prevent further migration of the leak or spill to soils or surface water; and

(2) Remove, and properly dispose of, any visible contamination of the soil or surface water.

(d) *Notifications, reports.* (1) Any release to the environment, except as provided in paragraph (d)(2) of this section, must be reported to the Regional Administrator within 24 hours of detection. If the release has been reported pursuant to 40 CFR Part 302, that report will satisfy this requirement.

(2) A leak or spill of hazardous waste that is:

(i) Less than or equal to a quantity of one (1) pound, and

(ii) Immediately contained and cleaned-up is exempted from the requirements of this paragraph.

(3) Within 30 days of detection of a release to the environment, a report containing the following information must be submitted to the Regional Administrator:

(i) Likely route of migration of the release;

(ii) Characteristics of the surrounding soil (soil composition, geology, hydrogeology, climate);

(iii) Results of any monitoring or sampling conducted in connection with the release, (if available). If sampling or monitoring data relating to the release are not available within 30 days, these data must be submitted to the Regional Administrator as soon as they become available.;

(iv) Proximity to downgradient drinking water, surface water, and population areas; and

(v) Description of response actions taken or planned.

(e) *Provision of secondary containment, repair, or closure.* (1) Unless the owner or operator satisfies the requirements of paragraphs (e) (2) through (4) of this section, the tank system must be closed in accordance with § 265.197.

(2) If the cause of the release was a spill that has not damaged the integrity of the system, the owner/operator may return the system to service as soon as the released waste is removed and repairs, if necessary, are made.

(3) If the cause of the release was a leak from the primary tank system into the secondary containment system, the system must be repaired prior to returning the tank system to service.

(4) If the source of the release was a leak to the environment from a component of a tank system without secondary containment, the owner/operator must provide the component of the system from which the leak occurred with secondary containment that satisfies the requirements of § 265.193 before it can be returned to service, unless the source of the leak is an aboveground portion of a tank system. If the source is an aboveground component that can be inspected visually, the component must be repaired and may be returned to service without secondary containment as long as the requirements of paragraph (f) of this section are satisfied. If a component is replaced to comply with the requirements of this subparagraph, that component must satisfy the requirements for new tank systems or components in §§ 265.192 and 265.193. Additionally, if a leak has occurred in any portion of a tank system component that is not readily accessible for visual inspection (e.g., the bottom of an inground or onground tank), the entire component must be provided with secondary containment in accordance with § 265.193 prior to being returned to use.

(f) *Certification of major repairs.* If the owner or operator has repaired a tank system in accordance with paragraph (e) of this section, and the repair has been extensive (e.g., installation of an internal liner; repair of a ruptured primary containment or secondary containment vessel), the tank system must not be returned to service unless the owner/operator has obtained a certification by an independent, qualified, registered professional engineer in accordance with § 270.11(d) that the repaired system is capable of handling hazardous wastes without release for the intended life of the system. This certification must be submitted to the Regional Administrator within seven days after returning the tank system to use.

NOTE: The Regional Administrator may, on the basis of any information received that there is or has been a release of hazardous waste or hazardous constituents into the environment, issue an order under RCRA section 3004(v), 3008(h), or 7003(a) requiring corrective action or such other response as deemed necessary to protect human health or the environment.

NOTE: See § 265.15(c) for the requirements necessary to remedy a failure. Also, 40 CFR Part 302 requires the owner or operator to notify the National Response Center of a release of any "reportable quantity."

(Information collection requirements contained in paragraphs (d)-(f) were approved by the Office of Management and Budget under control number 2050-0050)

[51 FR 25479, July 14, 1986, as amended at 53 FR 34087, Sept. 2, 1988]

§ 265.197 Closure and post-closure care.

(a) At closure of a tank system, the owner or operator must remove or decontaminate all waste residues, contaminated containment system components (liners, etc.), contaminated soils, and structures and equipment contaminated with waste, and manage them as hazardous waste, unless § 261.3(d) of this Chapter applies. The closure plan, closure activities, cost estimates for closure, and financial responsibility for tank systems must meet all of the requirements specified in Subparts G and H of this Part.

(b) If the owner or operator demonstrates that not all contaminated soils can be practicably removed or decontaminated as required in paragraph (a) of this section, then the owner or operator must close the tank system and perform post-closure care in accordance with the closure and post-closure care requirements that apply to landfills (§ 265.310) In addition, for the purposes of closure, post-closure, and financial responsibility, such a tank system is then considered to be a landfill, and the owner or operator must meet all of the requirements for landfills specified in Subparts G and H of this part.

(c) If an owner or operator has a tank system which does not have secondary containment that meets the requirements of § 265.193(b) through (f) and which is not exempt from the secondary containment requirements in accordance with § 265.193(g), then,

(1) The closure plan for the tank system must include both a plan for complying with paragraph (a) of this section and a contingent plan for complying with paragraph (b) of this section.

(2) A contingent post-closure plan for complying with paragraph (b) of this section must be prepared and submitted as part of the permit application.

(3) The cost estimates calculated for closure and post-closure care must reflect the costs of complying with the contingent closure plan and the contingent post-closure plan, if these costs are greater than the costs of complying with the closure plan prepared for the expected closure under paragraph (a) of this section.

(4) Financial assurance must be based on the cost estimates in paragraph (c)(3) of this section.

(5) For the purposes of the contingent closure and post-closure plans, such a tank system is considered to be a landfill, and the contingent plans must meet all of the closure, post-closure, and financial responsibility requirements for landfills under Subparts G and H of this Part.

(Information collection requirements contained in paragraphs (a)-(c) were approved by the Office of Management and Budget under control number 2050-0050)

§ 265.198 Special requirements for ignitable or reactive wastes.

(a) Ignitable or reactive waste must not be placed in a tank system, unless:

(1) The waste is treated, rendered, or mixed before or immediately after placement in the tank system so that:

(i) The resulting waste, mixture, or dissolved material no longer meets the definition of ignitable or reactive waste under §§ 261.21 or 261.23 of this chapter; and

(ii) Section 265.17(b) is complied with; or

(2) The waste is stored or treated in such a way that it is protected from any material or conditions that may cause the waste to ignite or react; or

(3) The tank system is used solely for emergencies.

(b) The owner or operator of a facility where ignitable or reactive waste is stored or treated in tanks must comply with the requirements for the maintenance of protective distances between the waste management area and any public ways, streets, alleys, or an adjoining property line that can be built upon as required in Tables 2-1 through 2-6 of the National Fire Protection Association's "Flammable and Combustible Liquids Code," (1977 or 1981), (incorporated by reference, see § 260.11).

§ 265.199 Special requirements for incompatible wastes.

(a) Incompatible wastes, or incompatible waste and materials, must not be placed in the same tank system, unless § 265.17(b) is complied with.

(b) Hazardous waste must not be placed in a tank system that has not been decontaminated and that previously held an incompatible waste or material, unless § 265.17(b) is complied with.

§ 265.200 Waste analysis and trial tests.

In addition to performing the waste analysis required by § 265.13, the owner or operator must, whenever a tank system is to be used to treat chemically or to store a hazardous waste that is substantially different from waste previously treated or stored in that tank system; or treat chemically a hazardous waste with a substantially different process than any previously used in that tank system:

(a) Conduct waste analyses and trial treatment or storage tests (e.g., bench-scale or pilot-plant scale tests); or

(b) Obtain written, documented information on similar waste under similar operating conditions to show that the proposed treatment or storage will meet the requirements of § 265.194(a).

NOTE: Section 265.13 requires the waste analysis plan to include analyses needed to comply with §§ 265.198 and 265.199. Section 265.73 requires the owner or operator to place the results from each waste analysis and trial test, or the documented information, in the operating record of the facility.

§ 265.201 Special requirements for generators of between 100 and 1,000 kg/mo that accumulate hazardous waste in tanks.

(a) The requirements of this section apply to small quantity generators of more than 100 kg but less than 1,000 kg of hazardous waste in a calendar month, that accumulate hazardous waste in tanks for less than 180 days (or 270 days if the generator must ship the waste greater than 200 miles), and do not accumulate over 6,000 kg on-site at any time.

(b) Generators of between 100 and 1,000 kg/mo hazardous waste must comply with the following general operating requirements:

(1) Treatment or storage of hazardous waste in tanks must comply with § 265.17(b).

(2) Hazardous wastes or treatment reagents must not be placed in a tank if they could cause the tank or its inner liner to rupture, leak, corrode, or otherwise fail before the end of its intended life.

(3) Uncovered tanks must be operated to ensure at least 60 centimeters (2 feet) of freeboard, unless the tank is equipped with a containment structure (e.g., dike or trench), a drainage control system, or a diversion structure (e.g., standby tank) with a capacity that equals or exceeds the volume of the top 60 centimeters (2 feet) of the tank.

(4) Where hazardous waste is continuously fed into a tank, the tank must be equipped with a means to stop this inflow (e.g., waste feed cutoff system or by-pass system to a stand-by tank).

NOTE: These systems are intended to be used in the event of a leak or overflow from the tank due to a system failure (e.g., a malfunction in the treatment process, a crack in the tank, etc.).

(c) Generators of between 100 and 1,000 kg/mo accumulating hazardous waste in tanks must inspect, where present:

(1) Discharge control equipment (e.g., waste feed cutoff systems, by-pass systems, and drainage systems) at least once each operating day, to ensure that it is in good working order;

(2) Data gathered from monitoring equipment (e.g., pressure and temperature gauges) at least once each operating day to ensure that the tank is being operated according to its design;

(3) The level of waste in the tank at least once each operating day to ensure compliance with § 265.201(b)(3);

(4) The construction materials of the tank at least weekly to detect corrosion or leaking of fixtures or seams; and

(5) The construction materials of, and the area immediately surrounding, discharge confinement structures (e.g., dikes) at least weekly to detect erosion or obvious signs of leakage (e.g., wet spots or dead vegetation).

NOTE: As required by § 265.15(c), the owner or operator must remedy any deterioration or malfunction he finds.

(d) Generators of between 100 and 1,000 kg/mo accumulating hazardous waste in tanks must, upon closure of the facility, remove all hazardous waste from tanks, discharge control equipment, and discharge confinement structures.

NOTE: At closure, as throughout the operating period, unless the owner or operator can demonstrate, in accordance with § 261.3(c) or (d) of this chapter, that any solid waste removed from his tank is not a hazardous waste, the owner or operator becomes a generator of hazardous waste and must manage it in accordance with all applicable requirements of Parts 262, 263, and 265 of this chapter.

(e) Generators of between 100 and 1,000 kg/mo must comply with the following special requirements for ignitable or reactive waste:

(1) Ignitable or reactive waste must not be placed in a tank, unless:

(i) The waste is treated, rendered, or mixed before or immediately after placement in a tank so that (A) the resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under § 261.21 or § 261.23 of this chapter, and (B) § 265.17(b) is complied with; or

(ii) The waste is stored or treated in such a way that it is protected from any material or conditions that may cause the waste to ignite or react; or

(iii) The tank is used solely for emergencies.

(2) The owner or operator of a facility which treats or stores ignitable or reactive waste in covered tanks must comply with the buffer zone requirements for tanks contained in Tables 2-1 through 2-6 of the National Fire Protection Association's "Flammable and Combustible Liquids Code," (1977 or 1981) (incorporated by reference, see § 260.11).

(f) Generators of between 100 and 1,000 kg/mo must comply with the following special requirements for incompatible wastes:

(1) Incompatible wastes, or incompatible wastes and materials, (see Appendix V for examples) must not be placed in the same tank, unless § 265.17(b) is complied with.

(2) Hazardous waste must not be placed in an unwashed tank which previously held an incompatible waste or material, unless § 265.17(b) is complied with.

[51 FR 25479, July 14, 1986, as amended at 53 FR 34087, Sept. 2, 1988]

Subpart K—Surface Impoundments

§ 265.220 Applicability.

The regulations in this subpart apply to owners and operators of facilities that use surface impoundments to treat, store, or dispose of hazardous waste, except as § 265.1 provides otherwise.

§ 265.221 Design requirements.

(a) The owner or operator of a surface impoundment must install two or more liners and leachate collection system in accordance with § 264.221(c) of this chapter, with respect to each new unit, replacement of an existing unit, or lateral expansion of an existing unit that is within the area identified in the Part A permit application, and with respect to waste received beginning May 8, 1985.

(b) The owner or operator of each unit referred to in paragraph (a) of this section must notify the Regional Administrator at least sixty days prior to receiving waste. The owner or operator of each facility submitting notice must file a Part B application within

six months of the receipt of such notice.

(c) Paragraph (a) of this section will not apply if the owner or operator demonstrates to the Regional Administrator, and the Regional Administrator finds for such surface impoundment, that alternative design and operating practices, together with location characteristics, will prevent the migration of any hazardous constituent into the ground water or surface water at least as effectively as such liners and leachate collection systems.

(d) The double liner requirement set forth in paragraph (a) of this section may be waived by the Regional Administrator for any monofill, if:

(1) The monofill contains only hazardous wastes from foundry furnace emission controls or metal casting molding sand, and such wastes do not contain constituents which would render the wastes hazardous for reasons other than the Toxicity Characteristic in § 261.24 of this chapter, with EPA Hazardous Waste Numbers D004 through D017; and

(2)(i)(A) The monofill has at least one liner for which there is no evidence that such liner in leaking. For the purposes of this paragraph the term "liner" means a liner designed, constructed, installed, and operated to prevent hazardous waste from passing into the liner at any time during the active life of the facility, or a liner designed, constructed, installed, and operated to prevent hazardous waste from migrating beyond the liner to adjacent subsurface soil, ground water, or surface water at any time during the active life of the facility. In the case of any surface impoundment which has been exempted from the requirements of paragraph (a) of this section on the basis of a liner designed, constructed, installed, and operated to prevent hazardous waste from passing beyond the liner, at the closure of such impoundment the owner or operator must remove or decontaminate all waste residues, all contaminated liner material, and contaminated soil to the extent practicable. If all contaminated soil it is not removed or decontaminated, the owner of operator of such impoundment must comply with appropriate post-closure requirements, including but not limited to ground-water monitoring and corrective action;

(B) The monofill is located more than one-quarter mile from an underground source of drinking water (as that term is defined in § 144.3 of this chapter); and

(C) The monofill is in compliance with generally applicable groundwater monitoring requirements for facilities with permits under RCRA section 3005(c); or

(ii) The owner or operator demonstrates that the monofill is located, designed and operated so as to assure that there will be no migration of any hazardous constituent into ground water or surface water at any future time.

(e) In the case of any unit in which the liner and leachate collection system has been installed pursuant to the requirements of paragraph (a) of this section and in good faith compliance with paragraph (a) of this section and with guidance documents governing liners and leachate collection systems under paragraph (a) of this section, no liner or leachate collection system which is different from that which was so installed pursuant to paragraph (a) of this section will be required for such unit by the Regional Administrator when issuing the first permit to such facility, except that the Regional Administrator will not be precluded from requiring installation of a new liner when the Regional Administrator has reason to believe that any liner installed pursuant to the requirements of paragraph (a) of this section is leaking.

[50 FR 28749, July 15, 1985, as amended at 55 FR 11876, Mar. 29, 1990]

EFFECTIVE DATE NOTE: At 55 FR 11876, Mar. 29, 1990, § 265.221 paragraph (d)(1) was revised, effective September 25, 1990. For the convenience of the user, the superseded text is set forth below:

§ 265.221 Design requirements.

* * * * *

(d)* * *

(1) The monofill contains only hazardous wastes from foundry furnace emission controls or metal casting molding sand, and such wastes do not contain constituents

which [illegible] id r[illegible] er the wastes hazardous for reas[illegible] oth[illegible] han the EP toxicity characteristics in § [illegible] 4 of this chapter; and

* * * * *

§ 265.222 General operating requirements.

(a) A surface impoundment must maintain enough freeboard to prevent any overtopping of the dike by overfilling, wave action, or a storm. Except as provided in paragraph (b) of this section, there must be at least 60 centimeters (two feet) of freeboard.

(b) A freeboard level less than 60 centimeters (two feet) may be maintained if the owner or operator obtains certification by a qualified engineer that alternate design features or operating plans will, to the best of his knowledge and opinion, prevent overtopping of the dike. The certification, along with a written identification of alternate design features or operating plans preventing overtopping, must be maintained at the facility.

(Approved by the Office of Management and Budget under the control number 2050-0007)

[50 FR 16048, Apr. 23, 1985]

§ 265.223 Containment system.

All earthen dikes must have a protective cover, such as grass, shale, or rock, to minimize wind and water erosion and to preserve their structural integrity.

§ 265.224 [Reserved]

§ 265.225 Waste analysis and trial tests.

(a) In addition to the waste analyses required by § 265.13, whenever a surface impoundment is to be used to:

(1) Chemically treat a hazardous waste which is substantially different from waste previously treated in that impoundment; or

(2) Chemically treat hazardous waste with a substantially different process than any previously used in that impoundment; the owner or operator must, before treating the different waste or using the different process:

(i) Conduct waste analyses and trial treatment tests (e.g., bench scale or pilot plant scale tests); or

(ii) Obtain written, documented information on similar treatment of similar waste under similar operating conditions; to show that this treatment [illegible] comply with § 265.17(b).

[*Comment:* As required by § 265.13, the waste analysis plan must include analyses needed to comply with §§ 265.229 and 265.230. As required by § 265.73, the owner or operator must place the results from each waste analysis and trial test or the documented information, in the operating record of the facility.]

§ 265.226 Inspections.

(a) The owner or operator must inspect:

(1) The freeboard level at least once each operating day to ensure compliance with § 265.222, and

(2) The surface impoundment, including dikes and vegetation surrounding the dike, at least once a week to detect any leaks, deterioration, or failures in the impoundment.

[*Comment:* As required by § 265.15(c), the owner or operator must remedy any deterioration or malfunction he finds.]

§ 265.227 [Reserved]

§ 265.228 Closure and post-closure care.

(a) At closure, the owner or operator must:

(1) Remove or decontaminate all waste residues, contaminated containment system components (liners, etc.), contaminated subsoils, and structures and equipment contaminated with waste and leachate, and manage them as hazardous waste unless § 261.3(d) of this chapter applies; or

(2) Close the impoundment and provide post-closure care for a landfill under Subpart G and § 265.310, including the following:

(i) Eliminate free liquids by removing liquid wastes or solidifying the remaining wastes and waste residues;

(ii) Stabilize remaining wastes to a bearing capacity sufficient to support the final cover; and

(iii) Cover the surface impoundment with a final cover designed and constructed to:

(A) Provide long-term minimization of the migration of liquids through the closed impoundment;

(B) Function with minimum maintenance;

(C) Promote drainage and minimize erosion or abrasion of the cover;

(D) Accommodate settling and subsidence so that the cover's integrity is maintained; and

(E) Have a permeability less than or equal to the permeability of any bottom liner system or natural subsoils present.

(b) In addition to the requirements of Subpart G, and § 265.310, during the post-closure care period, the owner or operator of a surface impoundment in which wastes, waste residues, or contaminated materials remain after closure in accordance with the provisions of paragraph (a)(2) of this section must:

(1) Maintain the integrity and effectiveness of the final cover, including making repairs to the cover as necessary to correct the effects of settling, subsidence, erosion, or other events;

(2) Maintain and monitor the ground-water monitoring system and comply with all other applicable requirements of Subpart F of this part; and

(3) Prevent run-on and run-off from eroding or otherwise damaging the final cover.

[52 FR 8708, Mar. 19, 1987]

§ 265.229 Special requirements for ignitable or reactive waste.

Ignitable or reactive waste must not be placed in a surface impoundment, unless the waste and impoundment satisfy all applicable requirements of 40 CFR part 268, and:

(a) The waste is treated, rendered, or mixed before or immediately after placement in the impoundment so that:

(1) The resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under § 261.21 or § 261.23 of this chapter; and

(2) Section 265.17(b) is complied with; or

(b)(1) The waste is managed in such a way that it is protected from any material or conditions which may cause it to ignite or react; and

(2) The owner or operator obtains a certification from a qualified chemist or engineer that, to the best of his knowledge and opinion, the design features or operating plans of the facility will prevent ignition or reaction; and

(3) The certification and the basis for it are maintained at the facility; or

(c) The surface impoundment is used solely for emergencies.

(Approved by the Office of Management and Budget under control number 2050-0007)

[50 FR 16048, Apr. 23, 1985, as amended at 55 FR 22685, June 1, 1990]

§ 265.230 Special requirements for incompatible wastes.

Incompatible wastes, or incompatible wastes and materials, (see Appendix V for examples) must not be placed in the same surface impoundment, unless § 265.17(b) is complied with.

Subpart L—Waste Piles

§ 265.250 Applicability.

The regulations in this subpart apply to owners and operators of facilities that treat or store hazardous waste in piles, except as § 265.1 provides otherwise. Alternatively, a pile of hazardous waste may be managed as a landfill under Subpart N.

§ 265.251 Protection from wind.

The owner or operator of a pile containing hazardous waste which could be subject to dispersal by wind must cover or otherwise manage the pile so that wind dispersal is controlled.

§ 265.252 Waste analysis.

In addition to the waste analyses required by § 265.13, the owner or operator must analyze a representative sample of waste from each incoming movement before adding the waste to any existing pile, *unless* (1) The only wastes the facility receives which are amenable to piling are compatible with each other, or (2) the waste received is compatible with the waste in the pile to which it is to be added. The analysis conducted must be capable of differentiating between the types of hazardous waste the owner or operator places in piles, so that mixing of incompatible waste does not inadvert-

ently occur. T[illegible]alysis must include a visual comparison of color and texture.

[*Comment:* As required by § 265.13, the waste analysis plan must include analyses needed to comply with §§ 265.256 and 265.257. As required by § 265.73, the owner or operator must place the results of this analysis in the operating record of the facility.]

§ 265.253 Containment.

If leachate or run-off from a pile is a hazardous waste, then either:

(a)(1) The pile must be placed on an impermeable base that is compatible with the waste under the conditions of treatment or storage;

(2) The owner or operator must design, construct, operate, and maintain a run-on control system capable of preventing flow onto the active portion of the pile during peak discharge from at least a 25-year storm;

(3) The owner or operator must design, construct, operate, and maintain a run-off management system to collect and control at least the water volume resulting from a 24-hour, 25-year storm; and

(4) Collection and holding facilities (e.g., tanks or basins) associated with run-on and run-off control systems must be emptied or otherwise managed expeditiously to maintain design capacity of the system; or

(b)(1) The pile must be protected from precipitation and run-on by some other means; and

(2) No liquids or wastes containing free liquids may be placed in the pile.

[*Comment:* If collected leachate or run-off is discharged through a point source to waters of the United States, it is subject to the requirements of section 402 of the Clean Water Act, as amended.]

[45 FR 33232, May 19, 1980, as amended at 47 FR 32367, July 26, 1982]

§ 265.254 Design requirements.

The owner or operator of a waste pile is subject to the requirements for liners and leachate collection systems or equivalent protection provided in § 264.251 of this chapter, with respect to each new unit, replacement of an existing unit, or lateral expansion of an existing unit that is within the area indentified in the Part A permit application, and with respect to waste received beginning May 8, 1985.

[50 FR 28750, July 15, 1985]

§ 265.255 [Reserved]

§ 265.256 Special requirements for ignitable or reactive waste.

(a) Ignitable or reactive waste must not be placed in a pile unless the waste and pile satisfy all applicable requirements of 40 CFR part 268, and:

(1) Addition of the waste to an existing pile (i) results in the waste or mixture no longer meeting the definition of ignitable or reactive waste under § 261.21 or § 261.23 of this chapter, and (ii) complies with § 265.17(b); or

(2) The waste is managed in such a way that it is protected from any material or conditions which may cause it to ignite or react.

[45 FR 33232, May 19, 1980, as amended at 55 FR 22685, June 1, 1990]

§ 265.257 Special requirements for incompatible wastes.

(a) Incompatible wastes, or incompatible wastes and materials, (see Appendix V for examples) must not be placed in the same pile, unless § 265.17(b) is complied with.

(b) A pile of hazardous waste that is incompatible with any waste or other material stored nearby in other containers, piles, open tanks, or surface impoundments must be separated from the other materials, or protected from them by means of a dike, berm, wall, or other device.

[*Comment:* The purpose of this is to prevent fires, explosions, gaseous emissions, leaching, or other discharge of hazardous waste or hazardous waste constituents which could result from the contact or mixing of incompatible wastes or materials.]

(c) Hazardous waste must not be piled on the same area where incompatible wastes or materials were previously piled, unless that area has been decontaminated sufficiently to ensure compliance with § 265.17(b).

§ 265.258 Closure and post-closure care.

(a) At closure, the owner or operator must remove or decontaminate all waste residues, contaminated contain-

ment system components (liners, etc.), contaminated subsoils, and structures and equipment contaminated with waste and leachate, and manage them as hazardous waste unless § 261.3(d) of this chapter applies; or

(b) If, after removing or decontaminating all residues and making all reasonable efforts to effect removal or decontamination of contaminated components, subsoils, structures, and equipment as required in paragraph (a) of this section, the owner or operator finds that not all contaminated subsoils can be practicably removed or decontaminated, he must close the facility and perform post-closure care in accordance with the closure and post-closure requirements that apply to landfills (§ 265.310).

[47 FR 32368, July 26, 1982]

Subpart M—Land Treatment

§ 265.270 Applicability.

The regulations in this subpart apply to owners and operators of hazardous waste land treatment facilities, except as § 265.1 provides otherwise.

§ 265.271 [Reserved]

§ 265.272 General operating requirements.

(a) Hazardous waste must not be placed in or on a land treatment facility unless the waste can be made less hazardous or nonhazardous by degradation, transformation, or immobilization processes occurring in or on the soil.

(b) The owner or operator must design, construct, operate, and maintain a run-on control system capable of preventing flow onto the active portions of the facility during peak discharge from at least a 25-year storm.

(c) The owner or operator must design, construct, operate, and maintain a run-off management system capable of collecting and controlling a water volume at least equivalent to a 24-hour, 25-year storm.

(d) Collection and holding facilities (e.g., tanks or basins) associated with run-on and run-off control systems must be emptied or otherwise managed expeditiously after storms to maintain design capacity of the system.

(e) If the treatment zone contains particulate matter which may be subject to wind dispersal, the owner or operator must manage the unit to control wind dispersal.

[45 FR 33232, May 19, 1980, as amended at 47 FR 32368, July 26, 1982; 50 FR 16048, Apr. 23, 1985]

§ 265.273 Waste analysis.

In addition to the waste analyses required by § 265.13, before placing a hazardous waste in or on a land treatment facility, the owner or operator must:

(a) Determine the concentrations in the waste of any substances which equal or exceed the maximum concentrations contained in Table 1 of § 261.24 of this chapter that cause a waste to exhibit the Toxicity Characteristic;

(b) For any waste listed in Part 261, Subpart D, of this chapter, determine the concentrations of any substances which caused the waste to be listed as a hazardous waste; and

(c) If food chain crops are grown, determine the concentrations in the waste of each of the following constituents: arsenic, cadmium, lead, and mercury, *unless* the owner or operator has written, documented data that show that the constituent is not present.

[*Comment:* Part 261 of this chapter specifies the substances for which a waste is listed as a hazardous waste. As required by § 265.13, the waste analysis plan must include analyses needed to comply with §§ 265.281 and 265.282. As required by § 265.73, the owner or operator must place the results from each waste analysis, or the documented information, in the operating record of the facility.]

[45 FR 33232, May 19, 1980, as amended at 55 FR 11876, Mar. 29, 1990]

EFFECTIVE DATE NOTE: At 55 FR 11876, Mar. 29, 1990, § 265.273 paragraph (a) was revised, effective September 25, 1990. For the convenience of the user, the superseded text is set forth below:

§ 265.273 Waste analysis.

* * * * *

(a) Determine the concentrations in the waste of any substances which exceed the maximum concentrations contained in

Table I of § 261.24 of this chapter cause a waste to exhibit the EP toxicity characteristic;

* * * * *

§§ 265.274—265.275 [Reserved]

§ 265.276 Food chain crops.

(a) An owner or operator of a hazardous waste land treatment facility on which food chain crops are being grown, or have been grown and will be grown in the future, must notify the Regional Administrator within 60 days after the effective date of this part.

[*Comment:* The growth of food chain crops at a facility which has never before been used for this purpose is a significant change in process under § 122.72(c) of this chapter. Owners or operators of such land treatment facilities who propose to grow food chain crops after the effective date of this part must comply with § 122.72(c) of this chapter.]

(b)(1) Food chain crops must not be grown on the treated area of a hazardous waste land treatment facility unless the owner or operator can demonstrate, based on field testing, that any arsenic, lead, mercury, or other constituents identified under § 265.273(b):

(i) Will not be transferred to the food portion of the crop by plant uptake or direct contact, and will not otherwise be ingested by food chain animals (e.g., by grazing); or

(ii) Will not occur in greater concentrations in the crops grown on the land treatment facility than in the same crops grown on untreated soils under similar conditions in the same region.

(2) The information necessary to make the demonstration required by paragraph (b)(1) of this section must be kept at the facility and must, at a minimum:

(i) Be based on tests for the specific waste and application rates being used at the facility; and

(ii) Include descriptions of crop and soil characteristics, sample selection criteria, sample size determination, analytical methods, and statistical procedures.

(c) Food chain crops must not be grown on a land treatment facility receiving waste that contains cadmium unless all requirements of paragraphs (c)(1) (i) through (iii) of this section or all requirements of paragraphs (c)(2) (i) through (iv) of this section are met.

(1)(i) The pH of the waste and soil mixture is 6.5 or greater at the time of each waste application, except for waste containing cadmium at concentrations of 2 mg/kg (dry weight) or less;

(ii) The annual application of cadmium from waste does not exceed 0.5 kilograms per hectare (kg/ha) on land used for production of tobacco, leafy vegetables, or root crops grown for human consumption. For other food chain crops, the annual cadmium application rate does not exceed:

Time period	Annual Cd application rate (kg/ha)
Present to June 30, 1984	2.0
July 1, 1984 to December 31, 1986	1.25
Beginning January 1, 1987	0.5

(iii) The cumulative application of cadmium from waste does not exceed the levels in either paragraph (c)(1)(iii)(A) or (B) of this section.

(A)

Soil caption exchange capacity (meq/100g)	Maximum cumulative application (kg/ha)	
	Background soil pH less than 6.5	Background soil pH greater than 6.5
Less than 5	5	5
5 to 15	5	10
Greater than 15	5	20

(B) For soils with a background pH of less than 6.5, the cumulative cadmium application rate does not exceed the levels below: *Provided*, that the pH of the waste and soil mixture is adjusted to and maintained at 6.5 or greater whenever food chain crops are grown.

Soil caption exchange capacity (meq/100g)	Maximum cumulative application (kg/ha)
Less than 5	5
5 to 15	10

Soil caption exchange capacity (meq/100g)	Maximum cumulative application (kg/ha)
Greater than 15	20

(2)(i) The only food chain crop produced is animal feed.

(ii) The pH of the waste and soil mixture is 6.5 or greater at the time of waste application or at the time the crop is planted, whichever occurs later, and this pH level is maintained whenever food chain crops are grown.

(iii) There is a facility operating plan which demonstrates how the animal feed will be distributed to preclude ingestion by humans. The facility operating plan describes the measures to be taken to safeguard against possible health hazards from cadmium entering the food chain, which may result from alternative land uses.

(iv) Future property owners are notified by a stipulation in the land record or property deed which states that the property has received waste at high cadmium application rates and that food chain crops must not be grown except in compliance with paragraph (c)(2) of this section.

[*Comment:* As required by § 265.73, if an owner or operator grows food chain crops on his land treatment facility, he must place the information developed in this section in the operating record of the facility.]

[45 FR 33232, May 19, 1980, as amended at 47 FR 32368, July 26, 1982; 48 FR 14295, Apr. 1, 1983]

§ 265.277 [Reserved]

§ 265.278 Unsaturated zone (zone of aeration) monitoring.

(a) The owner or operator must have in writing, and must implement, an unsaturated zone monitoring plan which is designed to:

(1) Detect the vertical migration of hazardous waste and hazardous waste constituents under the active portion of the land treatment facility, and

(2) Provide information on the background concentrations of the hazardous waste and hazardous waste constituents in similar but untreated soils nearby; this background monitoring must be conducted before or in conjunction with the monitoring required under paragraph (a)(1) of this section.

(b) The unsaturated zone monitoring plan must include, at a minimum:

(1) Soil monitoring using soil cores, and

(2) Soil-pore water monitoring using devices such as lysimeters.

(c) To comply with paragraph (a)(1) of this section, the owner or operator must demonstrate in his unsaturated zone monitoring plan that:

(1) The depth at which soil and soil-pore water samples are to be taken is below the depth to which the waste is incorporated into the soil;

(2) The number of soil and soil-pore water samples to be taken is based on the variability of:

(i) The hazardous waste constituents (as identified in § 265.273(a) and (b)) in the waste and in the soil; and

(ii) The soil type(s); and

(3) The frequency and timing of soil and soil-pore water sampling is based on the frequency, time, and rate of waste application, proximity to ground water, and soil permeability.

(d) The owner or operator must keep at the facility his unsaturated zone monitoring plan, and the rationale used in developing this plan.

(e) The owner or operator must analyze the soil and soil-pore water samples for the hazardous waste constituents that were found in the waste during the waste analysis under § 265.273 (a) and (b).

[*Comment:* As required by § 265.73, all data and information developed by the owner or operator under this section must be placed in the operating record of the facility.]

§ 265.279 Recordkeeping.

The owner or operator must include hazardous waste application dates and rates in the operating record required under § 265.73.

[47 FR 32368, July 26, 1982]

§ 265.280 Closure and post-closure.

(a) In the closure plan under § 265.112 and the post-closure plan under § 265.118, the owner or operator must address the following objectives and indicate how they will be achieved:

(1) Control of the migration of hazardous waste and hazardous waste constituents from the treated area into the ground water;

(2) Control of the release of contaminated run-off from the facility into surface water;

(3) Control of the release of airborne particulate contaminants caused by wind erosion; and

(4) Compliance with § 265.276 concerning the gowth of food-chain crops.

(b) The owner or operator must consider at least the following factors in addressing the closure and post-closure care objectives of paragraph (a) of this section:

(1) Type and amount of hazardous waste and hazardous waste constituents applied to the land treatment facility;

(2) The mobility and the expected rate of migration of the hazardous waste and hazardous waste constituents;

(3) Site location, topography, and surrounding land use, with respect to the potential effects of pollutant migration (e.g., proximity to ground water, surface water and drinking water sources);

(4) Climate, including amount, frequency, and pH of precipitation;

(5) Geological and soil profiles and surface and subsurface hydrology of the site, and soil characteristics, including cation exchange capacity, total organic carbon, and pH;

(6) Unsaturated zone monitoring information obtained under § 265.278; and

(7) Type, concentration, and depth of migration of hazardous waste constituents in the soil as compared to their background concentrations.

(c) The owner or operator must consider at least the following methods in addressing the closure and post-closure care objectives of paragraph (a) of this section:

(1) Removal of contaminated soils;

(2) Placement of a final cover, considering:

(i) Functions of the cover (e.g., infiltration control, erosion and run-off control, and wind erosion control); and

(ii) Characteristics of the cover, including material, final surface contours, thickness, porosity and permeability, slope, length of run of slope, and type of vegetation on the cover; and

(3) Monitoring of ground water.

(d) In addition to the requirements of Subpart G of this part, during the closure period the owner or operator of a land treatment facility must:

(1) Continue unsaturated zone monitoring in a manner and frequency specified in the closure plan, except that soil pore liquid monitoring may be terminated 90 days after the last application of waste to the treatment zone;

(2) Maintain the run-on control system required under § 265.272(b);

(3) Maintain the run-off management system required under § 265.272(c); and

(4) Control wind dispersal of particulate matter which may be subject to wind dispersal.

(e) For the purpose of complying with § 265.115, when closure is completed the owner or operator may submit to the Regional Administrator certification both by the owner or operator and by an independent qualified soil scientist, in lieu of an independent registered professional engineer, that the facility has been closed in accordance with the specifications in the approved closure plan.

(f) In addition to the requirements of § 265.117, during the post-closure care period the owner or operator of a land treatment unit must:

(1) Continue soil-core monitoring by collecting and analyzing samples in a manner and frequency specified in the post-closure plan;

(2) Restrict access to the unit as appropriate for its post-closure use;

(3) Assure that growth of food chain crops complies with § 265.276; and

(4) Control wind dispersal of hazardous waste.

[45 FR 33232, May 19, 1980, as amended at 47 FR 32368, July 26, 1982]

§ 265.281 Special requirements for ignitable or reactive waste.

The owner or operator must not apply ignitable or reactive waste to the treatment zone unless the waste and treatment zone meet all applicable requirements of 40 CFR part 268, and:

(a) The waste is immediately incorporated into the soil so that:

(1) The resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under § 265.21 or § 261.23 of this chapter; and

(2) Section 264.17(b) is complied with; or

(b) The waste is managed in such a way that it is protected from any material or conditions which may cause it to ignite or react.

[47 FR 32368, July 26, 1982, as amended at 55 FR 22686, June 1, 1990]

§ 265.282 Special requirements for incompatible wastes.

Incompatible wastes, or incompatible wastes and materials (see Appendix V for examples), must not be placed in the same land treatment area, unless § 265.17(b) is complied with.

Subpart N—Landfills

§ 265.300 Applicability.

The regulations in this subpart apply to owners and operators of facilities that dispose of hazardous waste in landfills, except as § 265.1 provides otherwise. A waste pile used as a disposal facility is a landfill and is governed by this subpart.

§ 265.301 Design requirements.

(a) The owner or operator of a landfill must install two or more liners and leachate collection systems above and between such liners in accordance with § 264.301(c) of this chapter, with respect to each new unit, replacement of an existing unit, or lateral expansion of an existing unit that is within the area identified in the Part A permit application, and with respect to waste received beginning May 8, 1985.

(b) The owner or operator of each unit referred to in paragraph (a) of this section must notify the Regional Administrator at least sixty days prior to receiving waste. The owner or operator of each facility submitting notice must file a Part B application within six months of the receipt of such notice.

(c) Paragraph (a) of this section will not apply if the owner or operator demonstrates to the Regional Administrator, and the Regional Administrator finds for such landfill, that alternative design and operating practices, together with location characteristics, will prevent the migration of any hazardous constituent into the ground water or surface water at least as effectively as such liners and leachate collection systems.

(d) The double liner requirement set forth in paragraph (a) of this section may be waived by the Regional Administrator for any monofill, if:

(1) The monofill contains only hazardous wastes from foundry furnace emission controls or metal casting molding sand, and such wastes do not contain constituents which would render the wastes hazardous for reasons other than the EP toxicity characteristics in § 261.24 of this chapter; and

(2)(i)(A) The monofill has at least one liner for which there is no evidence that such liner is leaking;

(B) The monofill is located more than one-quarter mile from an underground source of drinking water (as that term is defined in § 144.3 of this chapter); and

(C) The monofill is in compliance with generally applicable groundwater monitoring requirements for facilities with permits under RCRA section 3005(c); or

(ii) The owner or operator demonstrates that the monofill is located, designed and operated so as to assure that there will be no migration of any hazardous constituent into ground water or surface water at any future time.

(e) In the case of any unit in which the liner and leachate collection system has been installed pursuant to the requirements of paragraph (a) of this section and in good faith compliance with paragraph (a) of this section and with guidance documents governing liners and leachate collection systems under paragraph (a) of this section, no liner or leachate collection system which is different from that which was so installed pursuant to paragraph (a) of this section will be required for such unit by the Regional

Administrator when issuing the first permit to such facility, except that the Regional Administrator will not be precluded from requiring installation of a new liner when the Regional Administrator has reason to believe that any liner installed pursuant to the requirements of paragraph (a) of this section is leaking.

[50 FR 28750, July 15, 1985]

§ 265.302 General operating requirements.

(a) The owner or operator must design, construct, operate, and maintain a run-on control system capable of preventing flow onto the active portion of the landfill during peak discharge from at least a 25-year storm.

(b) The owner or operator must design, construct, operate and maintain a run-off management system to collect and control at least the water volume resulting from a 24-hour, 25-year storm.

(c) Collection and holding facilities (e.g., tanks or basins) associated with run-on and run-off control systems must be emptied or otherwise managed expeditiously after storms to maintain design capacity of the system.

(d) The owner or operator of a landfill containing hazardous waste which is subject to dispersal by wind must cover or otherwise manage the landfill so that wind dispersal of the hazardous waste is controlled.

[*Comment*: As required by § 265.13, the waste analysis plan must include analyses needed to comply with §§ 265.312, 265.313, and 265.314. As required by § 265.73, the owner or operator must place the results of these analyses in the operating record of the facility.]

[45 FR 33232, May 19, 1980, as amended at 47 FR 32368, July 26, 1982; 50 FR 18374, Apr. 30, 1985]

§§ 265.303—265.308 [Reserved]

§ 265.309 Surveying and recordkeeping.

The owner or operator of a landfill must maintain the following items in the operating record required in § 265.73:

(a) On a map, the exact location and dimensions, including depth, of each cell with respect to permanently surveyed benchmarks; and

(b) The contents of each cell and the approximate location of each hazardous waste type within each cell.

§ 265.310 Closure and post-closure care.

(a) At final closure of the landfill or upon closure of any cell, the owner or operator must cover the landfill or cell with a final cover designed and constructed to:

(1) Provide long-term minimization of migration of liquids through the closed landfill;

(2) Function with minimum maintenance;

(3) Promote drainage and minimize erosion or abrasion of the cover;

(4) Accommodate settling and subsidence so that the cover's integrity is maintained; and

(5) Have a permeability less than or equal to the permeability of any bottom liner system or natural subsoils present.

(b) After final closure, the owner or operator must comply with all post-closure requirements contained in §§ 265.117 through 265.120 including maintenance and monitoring throughout the post-closure care period. The owner or operator must:

(1) Maintain the integrity and effectiveness of the final cover, including making repairs to the cover as necessary to correct the effects of settling, subsidence, erosion, or other events;

(2) Maintain and monitor the ground-water monitoring system and comply with all other applicable requirements of Subpart F of this part;

(3) Prevent run-on and run-off from eroding or otherwise damaging the final cover; and

(4) Protect and maintain surveyed benchmarks used in complying with § 265.309.

[50 FR 16048, Apr. 23, 1985]

§ 265.311 [Reserved]

§ 265.312 Special requirements for ignitable or reactive waste.

(a) Except as provided in paragraph (b) of this section, and in § 265.316, ignitable or reactive waste must not be placed in a landfill, unless the waste and landfill meets all applicable requirements of 40 CFR part 268, and:

(1) The resulting waste, mixture, or dissolution or material no longer meets the definition of ignitable or reactive waste under § 261.21 or § 261.23 of this chapter; and

(2) Section 265.17(b) is complied with.

(b) Except for prohibited wastes which remain subject to treatment standards in subpart D of part 268, ignitable wastes in containers may be landfilled without meeting the requirements of paragraph (a) of this section, provided that the wastes are disposed of in such a way that they are protected from any material or conditions which may cause them to ignite. At a minimum, ignitable wastes must be disposed of in non-leaking containers which are carefully handled and placed so as to avoid heat, sparks, rupture, or any other condition that might cause ignition of the wastes; must be covered daily with soil or other non-combustible material to minimize the potential for ignition of the wastes; and must not be disposed of in cells that contain or will contain other wastes which may generate heat sufficient to cause ignition of the waste.

[47 FR 32368, July 26, 1982, as amended at 55 FR 22686, June 1, 1990]

§ 265.313 Special requirements for incompatible wastes.

Incompatible wastes, or incompatible wastes and materials, (see Appendix V for examples) must not be placed in the same landfill cell, unless § 265.17(b) is complied with.

§ 265.314 Special requirements for bulk and containerized liquids.

(a) Bulk or non-containerized liquid waste or waste containing free liquids may be placed in a landfill prior to May 8, 1985 only if:

(1) The landfill has a liner and leachate collection and removal system that meets the requirements of § 264.301(a) of this chapter; or

(2) Before disposal, the liquid waste or waste containing free liquids is treated or stabilized, chemically or physically (e.g., by mixing with an absorbent solid), so that free liquids are no longer present.

(b) Effective May 8, 1985, the placement of bulk or non-containerized liquid hazardous waste or hazardous waste containing free liquids (whether or not absorbents have been added) in any landfill is prohibited.

(c) Containers holding free liquids must not be placed in a landfill unless:

(1) All free-standing liquid (i) has been removed by decanting, or other methods, (ii) has been mixed with absorbent or solidified so that free-standing liquid is no longer observed or (iii) had been otherwise eliminated; or

(2) The container is very small, such as an ampule; or

(3) The container is designed to hold free liquids for use other than storage, such as a battery or capacitor; or

(4) The container is a lab pack as defined in § 265.316 and is disposed of in accordance with § 265.316.

(d) To demonstrate the absence or presence of free liquids in either a containerized or a bulk waste, the following test must be used: Method 9095 (Paint Filter Liquids Test) as described in "Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods." [EPA Publication No. SW-846].

(e) The date for compliance with paragraph (a) of this section is November 19, 1981. The date for compliance with paragraph (c) of this section is March 22, 1982.

(f) Effective November 8, 1985, the placement of any liquid which is not a hazardous waste in a landfill is prohibited unless the owner or operator of such landfill demonstrates to the Regional Administrator, or the Regional Administrator determines, that:

(1) The only reasonably available alternative to the placement in such landfill is placement in a landfill or unlined surface impoundment, whether or not permitted or operating under interim status, which contains, or may reasonably be anticipated to contain, hazardous waste; and

(2) Placement in such owner or operator's landfill will not present a risk of contamination of any underground source of drinking water (as that term is defined in § 144.3 of this chapter).

(Approved by the Office of Management and Budget under control number 2050-0037)

[45 FR 33232, May 19, 1980, as amended at 47 FR 12318, Mar. 22, 1982; 47 FR 32369, July 26, 1982; 50 FR 18374, Apr. 30, 1985; 50 FR 28750, July 15, 1985; 51 FR 19177, May 28, 1986]

§ 265.315 Special requirements for containers.

Unless they are very small, such as an ampule, containers must be either:

(a) At least 90 percent full when placed in the landfill; or

(b) Crushed, shredded, or similarly reduced in volume to the maximum practical extent before burial in the landfill.

[50 FR 16048, Apr. 23, 1985]

§ 265.316 Disposal of small containers of hazardous waste in overpacked drums (lab packs).

Small containers of hazardous waste in overpacked drums (lab packs) may be placed in a landfull if the following requirements are met:

(a) Hazardous waste must be packaged in non-leaking inside containers. The inside containers must be of a design and constructed of a material that will not react dangerously with, be decomposed by, or be ignited by the waste held therein. Inside containers must be tightly and securely sealed. The inside containers must be of the size and type specified in the Department of Transportation (DOT) hazardous materials regulations (49 CFR Parts 173, 178 and 179), if those regulations specify a particular inside container for the waste.

(b) The inside containers must be overpacked in an open head DOT-specification metal shipping container (49 CFR Parts 178 and 179) of no more than 416-liter (110 gallon) capacity and surrounded by, at a minimum, a sufficient quantity of absorbent material to completely absorb all of the liquid contents of the inside containers. The metal outer container must be full after packing with inside containers and absorbent material.

(c) The absorbent material used must not be capable of reacting dangerously with, being decomposed by, or being ignited by the contents of the inside containers, in accordance with § 265.17(b).

(d) Incompatible wastes, as defined in § 260.10(a) of this chapter, must not be placed in the same outside container.

(e) Reactive waste, other than cyanide- or sulfide-bearing waste as defined in § 261.23(a)(5) of this chapter, must be treated or rendered non-reactive prior to packaging in accordance with paragraphs (a) through (d) of this section. Cyanide- and sulfide-bearing reactive waste may be packaged in accordance with paragraphs (a) through (d) of this section without first being treated or rendered non-reactive.

(f) Such disposal is in compliance with the requirements of 40 CFR part 268. Persons who incinerate lab packs according to the requirements in 40 CFR 268.42(c)(1) may use fiber drums in place of metal outer containers. Such fiber drums must meet the DOT specifications in 49 CFR 173.12 and be overpacked according to the requirements in paragraph (b) of this section.

[46 FR 56596, Nov. 17, 1981, as amended at 55 FR 22686, June 1, 1990]

Subpart O—Incinerators

SOURCE: 46 FR 7680, Jan. 23, 1981, unless otherwise noted.

§ 265.340 Applicability.

(a) The regulations in this subpart apply to owners or operators of facilities that incinerate hazardous waste, except as § 264.1 provides otherwise. The following facility owners or operators are considered to incinerate hazardous waste:

(1) Owners or operators of hazardous waste incinerators (as defined in § 260.10 of this chapter); and

(2) Owners or operators who burn hazardous waste in boilers or in industrial furnaces in order to destroy them, or who burn hazardous waste in boilers or in industrial furnaces for any recycling purpose and elect to be regulated under this subpart.

(b) Owners and operators of incinerators burning hazardous waste are exempt from all of the requirements of this subpart, except § 265.351 (Clo-

sure), provided that the owner or operator has documented, in writing, that the waste would not reasonably be expected to contain any of the hazardous constituents listed in Part 261, Appendix VIII, of this chapter, and such documentation is retained at the facility, if the waste to be burned is:

(1) Listed as a hazardous waste in Part 261, Subpart D, of this chapter solely because it is ignitable (Hazard Code I), corrosive (Hazard Code C), or both; or

(2) Listed as a hazardous waste in Part 261, Subpart D, of this chapter solely because it is reactive (Hazard Code R) for characteristics other than those listed in § 261.23(a) (4) and (5), and will not be burned when other hazardous wastes are present in the combustion zone; or

(3) A hazardous waste solely because it possesses the characteristic of ignitability, corrosivity, or both, as determined by the tests for characteristics of hazardous wastes under Part 261, Subpart C, of this chapter; or

(4) A hazardous waste solely because it possesses the reactivity characteristics described by § 261.23(a) (1), (2), (3), (6), (7), or (8) of this chapter, and will not be burned when other hazardous wastes are present in the combustion zone.

[47 FR 27533, June 24, 1982 and 50 FR 666, Jan. 4, 1985, as amended at 50 FR 49203, Nov. 29, 1985]

§ 265.341 Waste analysis.

In addition to the waste analyses required by § 265.13, the owner or operator must sufficiently analyze any waste which he has not previously burned in his incinerator to enable him to establish steady state (normal) operating conditions (including waste and auxiliary fuel feed and air flow) and to determine the type of pollutants which might be emitted. At a minimum, the analysis must determine:

(a) Heating value of the waste;

(b) Halogen content and sulfur content in the waste; and

(c) Concentrations in the waste of lead and mercury, unless the owner or operator has written, documented data that show that the element is not present.

[*Comment:* As required by § 265.73, the owner or operator must place the results from each waste analysis, or the documented information, in the operating record of the facility.]

§§ 265.342—265.344 [Reserved]

§ 265.345 General operating requirements.

During start-up and shut-down of an incinerator, the owner or operator must not feed hazardous waste unless the incinerator is at steady state (normal) conditions of operation, including steady state operating temperature and air flow.

§ 265.346 [Reserved]

§ 265.347 Monitoring and inspections.

The owner or operator must conduct, as a minimum, the following monitoring and inspections when incinerating hazardous waste:

(a) Existing instruments which relate to combustion and emission control must be monitored at least every 15 minutes. Appropriate corrections to maintain steady state combustion conditions must be made immediately either automatically or by the operator. Instruments which relate to combustion and emission control would normally include those measuring waste feed, auxiliary fuel feed, air flow, incinerator temperature, scrubber flow, scrubber pH, and relevant level controls.

(b) The complete incinerator and associated equipment (pumps, valves, conveyors, pipes, etc.) must be inspected at least daily for leaks, spills, and fugitive emissions, and all emergency shutdown controls and system alarms must be checked to assure proper operation.

[46 FR 7678, Jan. 23, 1981, as amended at 47 FR 27533, June 24, 1982]

§§ 265.348—265.350 [Reserved]

§ 265.351 Closure.

At closure, the owner or operator must remove all hazardous waste and hazardous waste residues (including but not limited to ash, scrubber waters, and scrubber sludges) from the incinerator.

[*Comment:* closure, as throughout the operating period, unless the owner or operator can demonstrate, in accordance with § 261.3(d) of this chapter, that the residue removed from his incinerator is not a hazardous waste, the owner or operator becomes a generator of hazardous waste and must manage it in accordance with all applicable requirements of Parts 262 through 266 of this chapter.]

§ 265.352 Interim status incinerators burning particular hazardous wastes.

(a) Owners or operators of incinerators subject to this subpart may burn EPA Hazardous Wastes FO20, FO21, FO22, FO23, FO26, or FO27 if they receive a certification from the Assistant Administrator for Solid Waste and Emergency Response that they can meet the performance standards of Subpart O of Part 264 when they burn these wastes.

(b) The following standards and procedures will be used in determining whether to certify an incinerator:

(1) The owner or operator will submit an application to the Assistant Administrator for Solid Waste and Emergency Response containing applicable information in §§ 270.19 and 270.62 demonstrating that the incinerator can meet the performance standards in Subpart O of Part 264 when they burn these wastes.

(2) The Assistant Administrator for Solid Waste and Emergency Response will issue a tentative decision as to whether the incinerator can meet the performance standards in Subpart O of Part 264. Notification of this tentative decision will be provided by newspaper advertisement and radio broadcast in the jurisdiction where the incinerator is located. The Assistant Administrator for Solid Waste and Emergency Response will accept comment on the tentative decision for 60 days. The Assistant Administrator for Solid Waste and Emergency Response also may hold a public hearing upon request or at his discretion.

(3) After the close of the public comment period, the Assistant Administrator for Solid Waste and Emergency Response will issue a decision whether or not to certify the incinerator.

[50 FR 2005, Jan. 14, 1985]

§§ 265.353—265.369 [Reserved]

Subpart P—Thermal Treatment

§ 265.370 Other thermal treatment.

The regulations in this subpart apply to owners or operators of facilities that thermally treat hazardous waste in devices other than enclosed devices using controlled flame combustion, except as § 265.1 provides otherwise. Thermal treatment in enclosed devices using controlled flame combustion is subject to the requirements of Subpart O if the unit is an incinerator.

[50 FR 666, Jan. 4, 1985]

§§ 265.371—265.372 [Reserved]

§ 265.373 General operating requirements.

Before adding hazardous waste, the owner or operator must bring his thermal treatment process to steady state (normal) conditions of operation—including steady state operating temperature—using auxiliary fuel or other means, unless the process is a non-continuous (batch) thermal treatment process which requires a complete thermal cycle to treat a discrete quantity of hazardous waste.

§ 265.374 [Reserved]

§ 265.375 Waste analysis.

In addition to the waste analyses required by § 265.13, the owner or operator must sufficiently analyze any waste which he has not previously treated in his thermal process to enable him to establish steady state (normal) or other appropriate (for a non-continuous process) operating conditions (including waste and auxiliary fuel feed) and to determine the type of pollutants which might be emitted. At a minimum, the analysis must determine:

(a) Heating value of the waste;

(b) Halogen content and sulfur content in the waste; and

(c) Concentrations in the waste of lead and mercury, *unless* the owner or operator has written, documented data that show that the element is not present.

[*Comment:* As required by § 265.73, the owner or operator must place the results

from each waste analysis, or the documented information, in the operating record of the facility.]

§ 265.376 [Reserved]

§ 265.377 Monitoring and inspections.

(a) The owner or operator must conduct, as a minimum, the following monitoring and inspections when thermally treating hazardous waste:

(1) Existing instruments which relate to temperature and emission control (if an emission control device is present) must be monitored at least every 15 minutes. Appropriate corrections to maintain steady state or other appropriate thermal treatment conditions must be made immediately either automatically or by the operator. Instruments which relate to temperature and emission control would normally include those measuring waste feed, auxiliary fuel feed, treatment process temperature, and relevant process flow and level controls.

(2) The stack plume (emissions), where present, must be observed visually at least hourly for normal appearance (color and opacity). The operator must immediately make any indicated operating corrections necessary to return any visible emissions to their normal appearance.

(3) The complete thermal treatment process and associated equipment (pumps, valves, conveyors, pipes, etc.) must be inspected at least daily for leaks, spills, and fugitive emissions, and all emergency shutdown controls and system alarms must be checked to assure proper operation.

§§ 265.378—265.380 [Reserved]

§ 265.381 Closure.

At closure, the owner or operator must remove all hazardous waste and hazardous waste residues (including, but not limited to, ash) from the thermal treatment process or equipment.

[*Comment:* At closure, as throughout the operating period, unless the owner or operator can demonstrate, in accordance with § 261.3(c) or (d) of this chapter, that any solid waste removed from his thermal treatment process or equipment is not a hazardous waste, the owner or operator becomes a generator of hazardous waste and must manage it in accordance with all applicable requirements of Parts 262, 263, and 265 of this chapter.]

§ 265.382 Open burning; waste explosives.

Open burning of hazardous waste is prohibited except for the open burning and detonation of waste explosives. Waste explosives include waste which has the potential to detonate and bulk military propellants which cannot safely be disposed of through other modes of treatment. Detonation is an explosion in which chemical transformation passes through the material faster than the speed of sound (0.33 kilometers/second at sea level). Owners or operators choosing to open burn or detonate waste explosives must do so in accordance with the following table and in a manner that does not threaten human health or the environment.

Pounds of waste explosives or propellants	Minimum distance from open burning or detonation to the property of others
0 to 100	204 meters (670 feet).
101 to 1,000	380 meters (1,250 feet).
1,001 to 10,000	530 meters (1,730 feet).
10,001 to 30,000	690 meters (2,260 feet).

§ 265.383 Interim status thermal treatment devices burning particular hazardous waste.

(a) Owners or operators of thermal treatment devices subject to this subpart may burn EPA Hazardous Wastes FO20, FO21, FO22, FO23, FO26, or FO27 if they receive a certification from the Assistant Administrator for Solid Waste and Emergency Response that they can meet the performance standards of Subpart O of Part 264 when they burn these wastes.

(b) The following standards and procedures will be used in determining whether to certify a thermal treatment unit:

(1) The owner or operator will submit an application to the Assistant Administrator for Solid Waste and Emergency Response containing the applicable information in §§ 270.19 and 270.62 demonstrating that the thermal treatment unit can meet the performance standard in Subpart O of Part 264 when they burn these wastes.

(2) The Assistant Administrator for Solid Waste and Emergency Response will issue a tentative decision as to whether the thermal treatment unit can meet the performance standards in Subpart O of Part 264. Notification of this tentative decision will be provided by newspaper advertisement and radio broadcast in the jurisdiction where the thermal treatment device is located. The Assistant Administrator for Solid Waste and Emergency Response will accept comment on the tentative decision for 60 days. The Assistant Administrator for Solid Waste and Emergency Response also may hold a public hearing upon request or at his discretion.

(3) After the close of the public comment period, the Assistant Administrator for Solid Waste and Emergency Response will issue a decision whether or not to certify the thermal treatment unit.

[50 FR 2005, Jan. 14, 1985]

Subpart Q—Chemical, Physical, and Biological Treatment

§ 265.400 Applicability.

The regulations in this subpart apply to owners and operators of facilities which treat hazardous wastes by chemical, physical, or biological methods in other than tanks, surface impoundments, and land treatment facilities, except as § 265.1 provides otherwise. Chemical, physical, and biological treatment of hazardous waste in tanks, surface impoundments, and land treatment facilities must be conducted in accordance with Subparts J, K, and M, respectively.

§ 265.401 General operating requirements.

(a) Chemical, physical, or biological treatment of hazardous waste must comply with § 265.17(b).

(b) Hazardous wastes or treatment reagents must not be placed in the treatment process or equipment if they could cause the treatment process or equipment to rupture, leak, corrode, or otherwise fail before the end of its intended life.

(c) Where hazardous waste is continuously fed into a treatment process or equipment, the process or equipment must be equipped with a means to stop this inflow (e.g., a waste feed cut-off system or by-pass system to a standby containment device).

[*Comment:* These systems are intended to be used in the event of a malfunction in the treatment process or equipment.]

§ 265.402 Waste analysis and trial tests.

(a) In addition to the waste analysis required by § 265.13, whenever:

(1) A hazardous waste which is substantially different from waste previously treated in a treatment process or equipment at the facility is to be treated in that process or equipment, or

(2) A substantially different process than any previously used at the facility is to be used to chemically treat hazardous waste;

the owner or operator must, before treating the different waste or using the different process or equipment:

(i) Conduct waste analyses and trial treatment tests (e.g., bench scale or pilot plant scale tests); or

(ii) Obtain written, documented information on similar treatment of similar waste under similar operating conditions;

to show that this proposed treatment will meet all applicable requirements of § 265.401 (a) and (b).

[*Comment:* As required by § 265.13, the waste analysis plan must include analyses needed to comply with §§ 265.405 and 265.406. As required by § 265.73, the owner or operator must place the results from each waste analysis and trial test, or the documented information, in the operating record of the facility.]

§ 265.403 Inspections.

(a) The owner or operator of a treatment facility must inspect, where present:

(1) Discharge control and safety equipment (e.g., waste feed cut-off systems, by-pass systems, drainage systems, and pressure relief systems) at least once each operating day, to ensure that it is in good working order;

(2) Data gathered from monitoring equipment (e.g., pressure and temperature gauges), at least once each operating day, to ensure that the treatment process or equipment is being operated according to its design;

(3) The construction materials of the treatment process or equipment, at least weekly, to detect corrosion or leaking of fixtures or seams; and

(4) The construction materials of, and the area immediately surrounding, discharge confinement structures (e.g., dikes), at least weekly, to detect erosion or obvious signs of leakage (e.g., wet spots or dead vegetation).

[*Comment:* As required by § 265.15(c), the owner or operator must remedy any deterioration or malfunction he finds.]

§ 265.404 Closure.

At closure, all hazardous waste and hazardous waste residues must be removed from treatment processes or equipment, discharge control equipment, and discharge confinement structures.

[*Comment:* At closure, as throughout the operating period, unless the owner or operator can demonstrate, in accordance with § 261.3 (c) or (d) of this chapter, that any solid waste removed from his treatment process or equipment is not a hazardous waste, the owner or operator becomes a generator of hazardous waste and must manage it in accordance with all applicable requirements of Parts 262, 263, and 265 of this chapter.]

§ 265.405 Special requirements for ignitable or reactive waste.

(a) Ignitable or reactive waste must not be placed in a treatment process or equipment unless:

(1) The waste is treated, rendered, or mixed before or immediately after placement in the treatment process or equipment so that (i) the resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under § 261.21 or 261.23 or this chapter, and (ii) § 265.17(b) is complied with; or

(2) The waste is treated in such a way that it is protected from any material or conditions which may cause the waste to ignite or react.

§ 265.406 Special requirements for incompatible wastes.

(a) Incompatible wastes, or incompatible wastes and materials, (see Appendix V for examples) must not be placed in the same treatment process or equipment, unless § 265.17(b) is complied with.

(b) Hazardous waste must not be placed in unwashed treatment equipment which previously held an incompatible waste or material, unless § 265.17(b) is complied with.

Subpart R—Underground Injection

§ 265.430 Applicability.

Except as § 265.1 provides otherwise:

(a) The owner or operator of a facility which disposes of hazardous waste by underground injection is excluded from the requirements of Subparts G and H of this part.

(b) The requirements of this subpart apply to owners and operators of wells used to dispose of hazardous waste which are classified as Class I under § 144.6(a) of this chapter and which are classified as Class IV under § 144.6(d) of this chapter.

[*Comment:* In addition to the requirements of Subparts A through E of this part, the owner or operator of a facility which disposes of hazardous waste by underground injection ultimately must comply with the requirements of §§ 265.431 through 265.437. These sections are reserved at this time. The Agency will propose regulations that would establish those requirements.]

[45 FR 33232, May 19, 1980, as amended at 48 FR 30115, June 30, 1983]

Subparts S—Z [Reserved]

Subpart AA—Air Emission Standards for Process Vents

SOURCE: 55 FR 25507, June 21, 1990, unless otherwise noted.

EFFECTIVE DATE NOTE: At 55 FR 25507, June 21, 1990, §§ 265.1030 through 265.1049 (Subpart AA) were added, effective December 21, 1990.

§ 265.1030 Applicability.

(a) The regulations in this subpart apply to owners and operators of facilities that treat, store, or dispose of hazardous wastes (except as provided in § 265.1).

(b) Except for §§ 265.1034(d) and 265.1035(d), this subpart applies to process vents associated with distillation, fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operations that

manage hazardous wastes with organic concentrations of at least 10 ppmw, if these operations are conducted in:

(1) Units that are subject to the permitting requirements of part 270, or

(2) Hazardous waste recycling units that are located on hazardous waste management facilities otherwise subject to the permitting requirements of part 270.

[NOTE: The requirements of §§ 265.1032 through 265.1036 apply to process vents on hazardous waste recycling units previously exempt under paragraph 261.6(c)(1). Other exemptions under §§ 261.4, 262.34, and 265.1(c) are not affected by these requirements.]

§ 265.1031 Definitions.

As used in this subpart, all terms shall have the meaning given them in § 264.1031, the Act, and parts 260–266.

§ 265.1032 Standards: Process vents.

(a) The owner or operator of a facility with process vents associated with distillation, fractionation, thin-film evaporation, solvent extraction or air or steam stripping operations managing hazardous wastes with organic concentrations at least 10 ppmw shall either:

(1) Reduce total organic emissions from all affected process vents at the facility below 1.4 kg/h (3 lb/h) and 2.8 Mg/yr (3.1 tons/yr), or

(2) Reduce, by use of a control device, total organic emissions from all affected process vents at the facility by 95 weight percent.

(b) If the owner or operator installs a closed-vent system and control device to comply with the provisions of paragraph (a) of this section, the closed-vent system and control device must meet the requirements of § 265.1033.

(c) Determinations of vent emissions and emission reductions or total organic compound concentrations achieved by add-on control devices may be based on engineering calculations or performance tests. If performance tests are used to determine vent emissions, emission reductions, or total organic compound concentrations achieved by add-on control devices, the performance tests must conform with the requirements of § 265.1034(c).

(d) When an owner or operator and the Regional Administrator do not agree on determinations of vent emissions and/or emission reductions or total organic compound concentrations achieved by add-on control devices based on engineering calculations, the test methods in § 265.1034(c) shall be used to resolve the disagreement.

§ 265.1033 Standards: Closed-vent systems and control devices.

(a)(1) Owners or operators of closed-vent systems and control devices used to comply with provisions of this part shall comply with the provisions of this section.

(2) The owner or operator of an existing facility who cannot install a closed-vent system and control device to comply with the provisions of this subpart on the effective date that the facility becomes subject to the provisions of this subpart must prepare an implementation schedule that includes dates by which the closed-vent system and control device will be installed and in operation. The controls must be installed as soon as possible, but the implementation schedule may allow up to 18 months after the effective date that the facility becomes subject to this subpart for installation and startup. All units that begin operation after December 21, 1990 must comply with the rules immediately (i.e., must have control devices installed and operating on startup of the affected unit); the 2-year implementation schedule does not apply to these units.

(b) A control device involving vapor recovery (e.g., a condenser or adsorber) shall be designed and operated to recover the organic vapors vented to it with an efficiency of 95 weight percent or greater unless the total organic emission limits of § 265.1032(a)(1) for all affected process vents can be attained at an efficiency less than 95 weight percent.

(c) An enclosed combustion device (e.g., a vapor incinerator, boiler, or process heater) shall be designed and operated to reduce the organic emissions vented to it by 95 weight percent or greater; to achieve a total organic compound concentration of 20 ppmv,

expressed as the sum of the actual compounds, not carbon equivalents, on a dry basis corrected to 3 percent oxygen; or to provide a minimum residence time of 0.50 seconds at a minimum temperature of 760 °C. If a boiler or process heater is used as the control device, then the vent stream shall be introduced into the flame combustion zone of the boiler or process heater.

(d)(1) A flare shall be designed for and operated with no visible emissions as determined by the methods specified in paragraph (e)(1) of this section, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours.

(2) A flare shall be operated with a flame present at all times, as determined by the methods specified in paragraph (f)(2)(iii) of this section.

(3) A flare shall be used only if the net heating value of the gas being combusted is 11.2 MJ/scm (300 Btu/scf) or greater, if the flare is steam-assisted or air-assisted; or if the net heating value of the gas being combusted is 7.45 MJ/scm (200 Btu/scf) or greater if the flare is nonassisted. The net heating value of the gas being combusted shall be determined by the methods specified in paragraph (e)(2) of this section.

(4)(i) A steam-assisted or nonassisted flare shall be designed for and operated with an exit velocity, as determined by the methods specified in paragraph (e)(3) of this section, of less than 18.3 m/s (60 ft/s), except as provided in paragraphs (d)(4) (ii) and (iii) of this section.

(ii) A steam-assisted or nonassisted flare designed for and operated with an exit velocity, as determined by the methods specified in paragraph (e)(3) of this section, equal to or greater than 18.3 m/s (60 ft/s) but less than 122 m/s (400 ft/s) is allowed if the net heating value of the gas being combusted is greater than 37.3 MJ/scm (1,000 Btu/scf).

(iii) A steam-assisted or nonassisted flare designed for and operated with an exit velocity, as determined by the methods specified in paragraph (e)(3) of this section, less than the velocity, V_{max}, as determined by the method specified in paragraph (e)(4) of this section, and less than 122 m/s (400 ft/s) is allowed.

(5) An air-assisted flare shall be designed and operated with an exit velocity less than the velocity, V_{max}, as determined by the method specified in paragraph (e)(5) of this section.

(6) A flare used to comply with this section shall be steam-assisted, air-assisted, or nonassisted.

(e)(1) Reference Method 22 in 40 CFR part 60 shall be used to determine the compliance of a flare with the visible emission provisions of this subpart. The observation period is 2 hours and shall be used according to Method 22.

(2) The net heating value of the gas being combusted in a flare shall be calculated using the following equation:

$$H_T = K \left[\sum_{i=1}^{n} C_i H_i \right]$$

where:

H_T = Net heating value of the sample, MJ/scm; where the net enthalpy per mole of offgas is based on combustion at 25 °C and 760 mm Hg, but the standard temperature for determining the volume corresponding to 1 mol is 20 °C;

K = Constant, 1.74×10^{-7} (1/ppm) (g mol/scm) (MJ/kcal) where standard temperature for (g mol/scm) is 20 °C;

C_i = Concentration of sample component i in ppm on a wet basis, as measured for organics by Reference Method 18 in 40 CFR part 60 and measured for hydrogen and carbon monoxide by ASTM D 1946-82 (incorporated by reference as specified in § 260.11); and

H_i = Net heat of combustion of sample component i, kcal/g mol at 25 °C and 760 mm Hg. The heats of combustion may be determined using ASTM D 2382-83 (incorporated by reference as specified in § 260.11) if published values are not available or cannot be calculated.

(3) The actual exit velocity of a flare shall be determined by dividing the volumetric flow rate (in units of standard temperature and pressure), as determined by Reference Methods 2, 2A, 2C, or 2D in 40 CFR part 60 as appropriate, by the unobstructed (free) cross-sectional area of the flare tip.

(4) The maximum allowed velocity in m/s, V_{max}, for a flare complying

with paragraph (d)(4)(iii) of this section shall be determined by the following equation:

$$Log_{10}(V_{max}) = (H_T + 28.8)/31.7$$

where:

H_T = The net heating value as determined in paragraph (e)(2) of this section.
28.8 = Constant,
31.7 = Constant.

(5) The maximum allowed velocity in m/s, V_{max}, for an air-assisted flare shall be determined by the following equation:

$$V_{max} = 8.706 + 0.7084 (H_T)$$

where:

8.706 = Constant.
0.7084 = Constant.
H_T = The net heating value as determined in paragraph (e)(2) of this section.

(f) The owner or operator shall monitor and inspect each control device required to comply with this section to ensure proper operation and maintenance of the control device by implementing the following requirements:

(1) Install, calibrate, maintain, and operate according to the manufacturer's specifications a flow indicator that provides a record of vent stream flow from each affected process vent to the control device at least once every hour. The flow indicator sensor shall be installed in the vent stream at the nearest feasible point to the control device inlet, but before being combined with other vent streams.

(2) Install, calibrate, maintain, and operate according to the manufacturer's specifications a device to continuously monitor control device operation as specified below:

(i) For a thermal vapor incinerator, a temperature monitoring device equipped with a continuous recorder. The device shall have an accuracy of ±1 percent of the temperature being monitored in °C or ±0.5 °C, whichever is greater. The temperature sensor shall be installed at a location in the combustion chamber downstream of the combustion zone.

(ii) For a catalytic vapor incinerator, a temperature monitoring device equipped with a continuous recorder. The device shall be capable of monitoring temperature at two locations and have an accuracy of ±1 percent of the temperature being monitored in °C or ±0.5 °C, whichever is greater. One temperature sensor shall be installed in the vent stream at the nearest feasible point to the catalyst bed inlet and a second temperature sensor shall be installed in the vent stream at the nearest feasible point to the catalyst bed outlet.

(iii) For a flare, a heat sensing monitoring device equipped with a continuous recorder that indicates the continuous ignition of the pilot flame.

(iv) For a boiler or process heater having a design heat input capacity less than 44 MW, a temperature monitoring device equipped with a continuous recorder. The device shall have an accuracy of ±1 percent of the temperature being monitored in °C or ±0.5 °C, whichever is greater. The temperature sensor shall be installed at a location in the furnace downstream of the combustion zone.

(v) For a boiler or process heater having a design heat input capacity greater than or equal to 44 MW, a monitoring device equipped with a continuous recorder to measure a parameter(s) that indicates good combustion operating practices are being used.

(vi) For a condenser, either:

(A) A monitoring device equipped with a continuous recorder to measure the concentration level of the organic compounds in the exhaust vent stream from the condenser; or

(B) A temperature monitoring device equipped with a continuous recorder. The device shall be capable of monitoring temperature at two locations and have an accuracy of ±1 percent of the temperature being monitored in °C or ±0.5 °C, whichever is greater. One temperature sensor shall be installed at a location in the exhaust vent stream from the condenser, and a second temperature sensor shall be installed at a location in the coolant fluid exiting the condenser.

(vii) For a carbon adsorption system such as a fixed-bed carbon adsorber that regenerates the carbon bed directly in the control device, either:

(A) A monitoring device equipped with a continuous recorder to measure the concentration level of the organic compounds in the exhaust vent stream from the carbon bed, or

(B) A monitoring device equipped with a continuous recorder to measure a parameter that indicates the carbon bed is regenerated on a regular, predetermined time cycle.

(3) Inspect the readings from each monitoring device required by paragraphs (f) (1) and (2) of this section at least once each operating day to check control device operation and, if necessary, immediately implement the corrective measures necessary to ensure the control device operates in compliance with the requirements of this section.

(g) An owner or operator using a carbon adsorption system such as a fixed-bed carbon adsorber that regenerates the carbon bed directly onsite in the control device, shall replace the existing carbon in the control device with fresh carbon at a regular, predetermined time interval that is no longer than the carbon service life established as a requirement of § 265.1035(b)(4)(iii)(F).

(h) An owner or operator using a carbon adsorption system such as a carbon canister that does not regenerate the carbon bed directly onsite in the control device shall replace the existing carbon in the control device with fresh carbon on a regular basis by using one of the following procedures:

(1) Monitor the concentration level of the organic compounds in the exhaust vent stream from the carbon adsorption system on a regular schedule and replace the existing carbon with fresh carbon immediately when carbon breakthrough is indicated. The monitoring frequency shall be daily or at an interval no greater than 20 percent of the time required to consume the total carbon working capacity established as a requirement of § 265.1035(b)(4)(iii)(G), whichever is longer.

(2) Replace the existing carbon with fresh carbon at a regular, predetermined time interval that is less than the design carbon replacement interval established as a requirement of § 265.1035(b)(4)(iii)(G).

(i) An owner or operator of an affected facility seeking to comply with the provisions of this part by using a control device other than a thermal vapor incinerator, catalytic vapor incinerator, flare, boiler, process heater, condenser, or carbon adsorption system is required to develop documentation including sufficient information to describe the control device operation and identify the process parameter or parameters that indicate proper operation and maintenance of the control device.

(j)(1) Closed-vent systems shall be designed for and operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background and by visual inspections, as determined by the methods specified as § 265.1034(b).

(2) Closed-vent systems shall be monitored to determine compliance with this section during the initial leak detection monitoring which shall be conducted by the date that the facility becomes subject to the provisions of this section, annually, and at other times as requested by the Regional Administrator.

(3) Detectable emissions, as indicated by an instrument reading greater than 500 ppm and visual inspections, shall be controlled as soon as practicable, but not later than 15 calendar days after the emission is detected.

(4) A first attempt at repair shall be made no later than 5 calendar days after the emission is detected.

(k) Closed-vent systems and control devices used to comply with provisions of this subpart shall be operated at all times when emissions may be vented to them.

§ 265.1034 Test methods and procedures.

(a) Each owner or operator subject to the provisions of this subpart shall comply with the test methods and procedures requirements provided in this section.

(b) When a closed-vent system is tested for compliance with no detectable emissions, as required in § 265.1033(j), the test shall comply with the following requirements:

(1) Monitoring shall comply with Reference Method 21 in 40 CFR part 60.

(2) The detection instrument shall meet the performance criteria of Reference Method 21.

(3) The instrument shall be calibrated before use on each day of its use by the procedures specified in Reference Method 21.

(4) Calibration gases shall be:

(i) Zero air (less than 10 ppm of hydrocarbon in air).

(ii) A mixture of methane or n-hexane and air at a concentration of approximately, but less than, 10,000 ppm methane or n-hexane.

(5) The background level shall be determined as set forth in Reference Method 21.

(6) The instrument probe shall be traversed around all potential leak interfaces as close to the interface as possible as described in Reference Method 21.

(7) The arithmetic difference between the maximum concentration indicated by the instrument and the background level is compared with 500 ppm for determining compliance.

(c) Performance tests to determine compliance with § 265.1032(a) and with the total organic compound concentration limit of § 265.1033(c) shall comply with the following:

(1) Performance tests to determine total organic compound concentrations and mass flow rates entering and exiting control devices shall be conducted and data reduced in accordance with the following reference methods and calculation procedures:

(i) Method 2 in 40 CFR part 60 for velocity and volumetric flow rate.

(ii) Method 18 in 40 CFR part 60 for organic content.

(iii) Each performance test shall consist of three separate runs; each run conducted for at least 1 hour under the conditions that exist when the hazardous waste management unit is operating at the highest load or capacity level reasonably expected to occur. For the purpose of determining total organic compound concentrations and mass flow rates, the average of results of all runs shall apply. The average shall be computed on a time-weighted basis.

(iv) Total organic mass flow rates shall be determined by the following equation:

$$E_h = Q_{sd} \left[\sum_{i=1}^{n} C_i MW_i \right] [0.0416] [10^{-6}]$$

where:

E_h = Total organic mass flow rate, kg/h;

Q_{sd} = Volumetric flow rate of gases entering or exiting control device, as determined by Method 2, dscm/h;

n = Number of organic compounds in the vent gas;

C_i = Organic concentration in ppm, dry basis, of compound i in the vent gas, as determined by Method 18;

MW_i = Molecular weight of organic compound i in the vent gas, kg/kg-mol;

0.0416 = Conversion factor for molar volume, kg-mol/m^3 (@ 293 K and 760 mm Hg);

10^{-6} = Conversion from ppm, ppm^{-1}.

(v) The annual total organic emission rate shall be determined by the following equation:

$$E_A = (E_h)(H)$$

where:

E_A = Total organic mass emission rate, kg/y;

E_h = Total organic mass flow rate for the process vent, kg/h;

H = Total annual hours of operations for the affected unit, h.

(vi) Total organic emissions from all affected process vents at the facility shall be determined by summing the hourly total organic mass emission rates (E_h, as determined in paragraph (c)(1)(v) of this section) and by summing the annual total organic mass emission rates (E_A, as determined in paragraph (c)(1)(v) of this section) for all affected process vents at the facility.

(2) The owner or operator shall record such process information as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test.

(3) The owner or operator of an affected facility shall provide, or cause to be provided, performance testing facilities as follows:

(i) Sampling ports adequate for the test methods specified in paragraph (c)(1) of this section.

(ii) Safe sampling platform(s).

(iii) Safe access to sampling platform(s).

(iv) Utilities for sampling and testing equipment.

(4) For the purpose of making compliance determinations, the time-weighted average of the results of the three runs shall apply. In the event that a sample is accidentally lost or conditions occur in which one of the three runs must be discontinued because of forced shutdown, failure of an irreplaceable portion of the sample train, extreme meteorological conditions, or other circumstances beyond the owner or operator's control, compliance may, upon the Regional Administrator's approval, be determined using the average of the results of the two other runs.

(d) To show that a process vent associated with a hazardous waste distillation, fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operation is not subject to the requirements of this subpart, the owner or operator must make an initial determination that the time-weighted, annual average total organic concentration of the waste managed by the waste management unit is less than 10 ppmw using one of the following two methods:

(1) Direct measurement of the organic concentration of the waste using the following procedures:

(i) The owner or operator must take a minimum of four grab samples of waste for each waste stream managed in the affected unit under process conditions expected to cause the maximum waste organic concentration.

(ii) For waste generated onsite, the grab samples must be collected at a point before the waste is exposed to the atmosphere such as in an enclosed pipe or other closed system that is used to transfer the waste after generation to the first affected distillation fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operation. For waste generated offsite, the grab samples must be collected at the inlet to the first waste management unit that receives the waste provided the waste has been transferred to the facility in a closed system such as a tank truck and the waste is not diluted or mixed with other waste.

(iii) Each sample shall be analyzed and the total organic concentration of the sample shall be computed using Method 9060 or 8240 of SW-846 (incorporated by reference under § 260.11).

(iv) The arithmetic mean of the results of the analyses of the four samples shall apply for each waste stream managed in the unit in determining the time-weighted, annual average total organic concentration of the waste. The time-weighted average is to be calculated using the annual quantity of each waste stream processed and the mean organic concentration of each waste stream managed in the unit.

(2) Using knowledge of the waste to determine that its total organic concentration is less than 10 ppmw. Documentation of the waste determination is required. Examples of documentation that shall be used to support a determination under this provision include production process information documenting that no organic compounds are used, information that the waste is generated by a process that is identical to a process at the same or another facility that has previously been demonstrated by direct measurement to generate a waste stream having a total organic content less than 10 ppmw, or prior speciation analysis results on the same waste stream where it can also be documented that no process changes have occurred since that analysis that could affect the waste total organic concentration.

(e) The determination that distillation fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operations manage hazardous wastes with time-weighted annual average total organic concentrations less than 10 ppmw shall be made as follows:

(1) By the effective date that the facility becomes subject to the provi-

sions of this subpart or by the date when the waste is first managed in a waste management unit, whichever is later; and

(2) For continuously generated waste, annually; or

(3) Whenever there is a change in the waste being managed or a change in the process that generates or treats the waste.

(f) When an owner or operator and the Regional Administrator do not agree on whether a distillation, fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operation manages a hazardous waste with organic concentrations of at least 10 ppmw based on knowledge of the waste, the procedures in Method 8240 can be used to resolve the dispute.

§ 265.1035 Recordkeeping requirements.

(a)(1) Each owner or operator subject to the provisions of this subpart shall comply with the recordkeeping requirements of this section.

(2) An owner or operator of more than one hazardous waste management unit subject to the provisions of this subpart may comply with the recordkeeping requirements for these hazardous waste management units in one recordkeeping system if the system identifies each record by each hazardous waste management unit.

(b) Owners and operators must record the following information in the facility operating record:

(1) For facilities that comply with the provisions of § 265.1033(a)(2), an implementation schedule that includes dates by which the closed-vent system and control device will be installed and in operation. The schedule must also include a rationale of why the installation cannot be completed at an earlier date. The implementation schedule must be in the facility operating record by the effective date that the facility becomes subject to the provisions of this subpart.

(2) Up-to-date documentation of compliance with the process vent standards in § 265.1032, including:

(i) Information and data identifying all affected process vents, annual throughput end operating hours of each affected unit, estimated emission rates for each affected vent and for the overall facility (i.e., the total emissions for all affected vents at the facility), and the approximate location within the facility of each affected unit (e.g., identify the hazardous waste management units on a facility plot plan); and

(ii) Information and data supporting determinations of vent emissions and emission reductions achieved by add-on control devices based on engineering calculations or source tests. For the purpose of determining compliance, determinations of vent emissions and emission reductions must be made using operating parameter values (e.g., temperatures, flow rates or vent stream organic compounds and concentrations) that represent the conditions that result in maximum organic emissions, such as when the waste management unit is operating at the highest load or capacity level reasonably expected to occur. If the owner or operator takes any action (e.g., managing a waste of different composition or increasing operating hours of affected waste management units) that would result in an increase in total organic emissions from affected process vents at the facility, then a new determination is required.

(3) Where an owner or operator chooses to use test data to determine the organic removal efficiency or total organic compound concentration achieved by the control device, a performance test plan. The test plan must include:

(i) A description of how it is determined that the planned test is going to be conducted when the hazardous waste management unit is operating at the highest load or capacity level reasonably expected to occur. This shall include the estimated or design flow rate and organic content of each vent stream and define the acceptable operating ranges of key process and control device parameters during the test program.

(ii) A detailed engineering description of the closed-vent system and control device including:

(A) Manufacturer's name and model number of control device.

(B) Type of control device.

(C) Dimensions of the control device.

(D) Capacity.

(E) Construction materials.

(iii) A detailed description of sampling and monitoring procedures, including sampling and monitoring locations in the system, the equipment to be used, sampling and monitoring frequency, and planned analytical procedures for sample analysis.

(4) Documentation of compliance with § 265.1033 shall include the following information:

(i) A list of all information references and sources used in preparing the documentation.

(ii) Records including the dates of each compliance test required by § 265.1033(j).

(iii) If engineering calculations are used, a design analysis, specifications, drawings, schematics, and piping and instrumentation diagrams based on the appropriate sections of "APTI Course 415: Control of Gaseous Emissions" (incorporated by reference as specified in § 260.11) or other engineering texts acceptable to the Regional Administrator that present basic control device design information. Documentation provided by the control device manufacturer or vendor that describes the control device design in accordance with paragraphs (b)(4)(iii)(A) through (b)(4)(iii)(G) of this section may be used to comply with this requirement. The design analysis shall address the vent stream characteristics and control device operation parameters as specified below.

(A) For a thermal vapor incinerator, the design analysis shall consider the vent stream composition, constituent concentrations, and flow rate. The design analysis shall also establish the design minimum and average temperature in the combustion zone and the combustion zone residence time.

(B) For a catalytic vapor incinerator, the design analysis shall consider the vent stream composition, constituent concentrations, and flow rate. The design analysis shall also establish the design minimum and average temperatures across the catalyst bed inlet and outlet.

(C) For a boiler or process heater, the design analysis shall consider the vent stream composition, constituent concentrations, and flow rate. The design analysis shall also establish the design minimum and average flame zone temperatures, combustion zone residence time, and description of method and location where the vent stream is introduced into the combustion zone.

(D) For a flare, the design analysis shall consider the vent stream composition, constituent concentrations, and flow rate. The design analysis shall also consider the requirements specified in § 265.1033(d).

(E) For a condenser, the design analysis shall consider the vent stream composition, constituent concentrations, flow rate, relative humidity, and temperature. The design analysis shall also establish the design outlet organic compound concentration level, design average temperature of the condenser exhaust vent stream, and design average temperatures of the coolant fluid at the condenser inlet and outlet.

(F) For a carbon adsorption system such as a fixed-bed adsorber that regenerates the carbon bed directly onsite in the control device, the design analysis shall consider the vent stream composition, constituent concentrations, flow rate, relative humidity, and temperature. The design analysis shall also establish the design exhaust vent stream organic compound concentration level, number and capacity of carbon beds, type and working capacity of activated carbon used for carbon beds, design total steam flow over the period of each complete carbon bed regeneration cycle, duration of the carbon bed steaming and cooling/drying cycles, design carbon bed temperature after regeneration, design carbon bed regeneration time, and design service life of carbon.

(G) For a carbon adsorption system such as a carbon canister that does not regenerate the carbon bed directly onsite in the control device, the design analysis shall consider the vent stream composition, constituent concentrations, flow rate, relative humidity, and temperature. The design analysis shall also establish the design outlet organic concentration level, capacity of carbon bed, type and working capacity of activated carbon used for carbon bed, and design carbon replacement interval based on the total carbon working ca-

pacity of the control device and source operating schedule.

(iv) A statement signed and dated by the owner or operator certifying that the operating parameters used in the design analysis reasonably represent the conditions that exist when the hazardous waste management unit is or would be operating at the highest load or capacity level reasonably expected to occur.

(v) A statement signed and dated by the owner or operator certifying that the control device is designed to operate at an efficiency of 95 percent or greater unless the total organic concentration limit of § 265.1032(a) is achieved at an efficiency less than 95 weight percent or the total organic emission limits of § 265.1032(a) for affected process vents at the facility can be attained by a control device involving vapor recovery at an efficiency less than 95 weight percent. A statement provided by the control device manufacturer or vendor certifying that the control equipment meets the design specifications may be used to comply with this requirement.

(vi) If performance tests are used to demonstrate compliance, all test results.

(c) Design documentation and monitoring, operating, and inspection information for each closed-vent system and control device required to comply with the provisions of this part shall be recorded and kept up-to-date in the facility operating record. The information shall include:

(1) Description and date of each modification that is made to the closed-vent system or control device design.

(2) Identification of operating parameter, description of monitoring device, and diagram of monitoring sensor location or locations used to comply with § 265.1033(f)(1) and (f)(2).

(3) Monitoring, operating and inspection information required by paragraphs (f) through (j) of § 265.1033.

(4) Date, time, and duration of each period that occurs while the control device is operating when any monitored parameter exceeds the value established in the control device design analysis as specified below:

(i) For a thermal vapor incinerator designed to operate with a minimum residence time of 0.50 seconds at a minimum temperature of 760 °C. period when the combustion temperature is below 760 °C.

(ii) For a thermal vapor incinerator designed to operate with an organic emission reduction efficiency of 95 percent or greater, period when the combustion zone temperature is more than 28 °C below the design average combustion zone temperature established as a requirement of paragraph (b)(4)(iii)(A) of this section.

(iii) For a catalytic vapor incinerator, period when:

(A) Temperature of the vent stream at the catalyst bed inlet is more than 28 °C below the average temperature of the inlet vent stream established as a requirement of paragraph (b)(4)(iii)(B) of this section; or

(B) Temperature difference across the catalyst bed is less than 80 percent of the design average temperature difference established as a requirement of paragraph (b)(4)(iii)(B) of this section.

(iv) For a boiler or process heater, period when:

(A) Flame zone temperature is more than 28 °C below the design average flame zone temperature established as a requirement of paragraph (b)(4)(iii)(C) of this section; or

(B) Position changes where the vent stream is introduced to the combustion zone from the location established as a requirement of paragraph (b)(4)(iii)(C) of this section.

(v) For a flare, period when the pilot flame is not ignited.

(vi) For a condenser that complies with § 265.1033(f)(2)(vi)(A), period when the organic compound concentration level or readings of organic compounds in the exhaust vent stream from the condenser are more than 20 percent greater than the design outlet organic compound concentration level established as a requirement of paragraph (b)(4)(iii)(E) of this section.

(vii) For a condenser that complies with § 265.1033(f)(2)(vi)(B), period when:

(A) Temperature of the exhaust vent stream from the condenser is more than 6 °C above the design aver-

age exhaust vent stream temperature established as a requirement of paragraph (b)(4)(iii)(E) of this section; or

(B) Temperature of the coolant fluid exiting the condenser is more than 6 °C above the design average coolant fluid temperature at the condenser outlet established as a requirement of paragraph (b)(4)(iii)(E) of this section.

(viii) For a carbon adsorption system such as a fixed-bed carbon adsorber that regenerates the carbon bed directly onsite in the control device and complies with § 265.1033(f)(2)(vii)(A), period when the organic compound concentration level or readings of organic compounds in the exhaust vent stream from the carbon bed are more than 20 percent greater than the design exhaust vent stream organic compound concentration level established as a requirement of paragraph (b)(4)(iii)(F) of this section.

(ix) For a carbon adsorption system such as a fixed-bed carbon adsorber that regenerates the carbon bed directly onsite in the control device and complies with § 265.1033(f)(2)(vii)(B), period when the vent stream continues to flow through the control device beyond the predetermined carbon bed regeneration time established as a requirement of paragraph (b)(4)(iii)(F) of this section.

(5) Explanation for each period recorded under paragraph (3) of the cause for control device operating parameter exceeding the design value and the measures implemented to correct the control device operation.

(6) For carbon adsorption systems operated subject to requirements specified in § 265.1033(g) or § 265.1033(h)(2), date when existing carbon in the control device is replaced with fresh carbon.

(7) For carbon adsorption systems operated subject to requirements specified in § 265.1033(h)(1), a log that records:

(i) Date and time when control device is monitored for carbon breakthrough and the monitoring device reading.

(ii) Date when existing carbon in the control device is replaced with fresh carbon.

(8) Date of each control device startup and shutdown.

(d) Records of the monitoring, operating, and inspection information required by paragraphs (c)(3) through (c)(8) of this section need be kept only 3 years.

(e) For a control device other than a thermal vapor incinerator, catalytic vapor incinerator, flare, boiler, process heater, condenser, or carbon adsorption system, monitoring and inspection information indicating proper operation and maintenance of the control device must be recorded in the facility operating record.

(f) Up-to-date information and data used to determine whether or not a process vent is subject to the requirements in § 265.1032 including supporting documentation as required by § 265.1034(d)(2) when application of the knowledge of the nature of the hazardous waste stream or the process by which it was produced is used, shall be recorded in a log that is kept in the facility operating record.

(Approved by the Office of Management and Budget under control number 2060-0195)

§§ 265.1036—265.1049 [Reserved]

Subpart BB—Air Emission Standards for Equipment Leaks

SOURCE: 55 FR 25512, June 21, 1990, unless otherwise noted.

EFFECTIVE DATE NOTE: At 55 FR 25512, June 21, 1990, §§ 265.1050 through 265.1079 (Subpart BB) were added, effective December 21, 1990.

§ 265.1050 Applicability.

(a) The regulations in this subpart apply to owners and operators of facilities that treat, store, or dispose of hazardous wastes (except as provided in § 265.1).

(b) Except as provided in § 265.1064(j), this subpart applies to equipment that contains or contacts hazardous wastes with organic concentrations of at least 10 percent by weight that are managed in:

(1) Units that are subject to the permitting requirements of part 270, or

(2) Hazardous waste recycling units that are located on hazardous waste management facilities otherwise sub-

ject to the permitting requirements of part 270.

(c) Each piece of equipment to which this subpart applies shall be marked in such a manner that it can be distinguished readily from other pieces of equipment.

(d) Equipment that is in vacuum service is excluded from the requirements of § 265.1052 to § 265.1060 if it is identified as required in § 265.1064(g)(5).

[NOTE: The requirements of §§ 265.1052 through 265.1064 apply to equipment associated with hazardous waste recycling units previously exempt under paragraph 261.6(c)(1). Other exemptions under §§ 261.4, 262.34, and 265.1(c) are not affected by these requirements.]

§ 265.1051 Definitions.

As used in this subpart, all terms shall have the meaning given them in § 264.1031, the Act, and parts 260-266.

§ 265.1052 Standards: Pumps in light liquid service.

(a)(1) Each pump in light liquid service shall be monitored monthly to detect leaks by the methods specified in § 265.1063(b), except as provided in paragraphs (d), (e), and (f) of this section.

(2) Each pump in light liquid service shall be checked by visual inspection each calendar week for indications of liquids dripping from the pump seal.

(b)(1) If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(2) If there are indications of liquids dripping from the pump seal, a leak is detected.

(c)(1) When a leak is detected, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in § 265.1059.

(2) A first attempt at repair (e.g., tightening the packing gland) shall be made no later than 5 calendar days after each leak is detected.

(d) Each pump equipped with a dual mechanical seal system that includes a barrier fluid system is exempt from the requirements of paragraph (a), *provided* the following requirements are met:

(1) Each dual mechanical seal system must be:

(i) Operated with the barrier fluid at a pressure that is at all times greater than the pump stuffing box pressure, or

(ii) Equipped with a barrier fluid degassing reservoir that is connected by a closed-vent system to a control device that complies with the requirements of § 265.1060, or

(iii) Equipped with a system that purges the barrier fluid into a hazardous waste stream with no detectable emissions to the atmosphere.

(2) The barrier fluid system must not be a hazardous waste with organic concentrations 10 percent or greater by weight.

(3) Each barrier fluid system must be equipped with a sensor that will detect failure of the seal system, the barrier fluid system or both.

(4) Each pump must be checked by visual inspection, each calendar week, for indications of liquids dripping from the pump seals.

(5)(i) Each sensor as described in paragraph (d)(3) of this section must be checked daily or be equipped with an audible alarm that must be checked monthly to ensure that it is functioning properly.

(ii) The owner or operator must determine, based on design considerations and operating experience, a criterion that indicates failure of the seal system, the barrier fluid system, or both.

(6)(i) If there are indications of liquids dripping from the pump seal or the sensor indicates failure of the seal system, the barrier fluid system, or both based on the criterion determined in paragraph (d)(5)(ii) of this section, a leak is detected.

(ii) When a leak is detected, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in § 265.1059.

(iii) A first attempt at repair (e.g., relapping the seal) shall be made no later than 5 calendar days after each leak is detected.

(e) Any pump that is designated, as described in § 265.1064(g)(2), for no detectable emissions, as indicated by an instrument reading of less than 500

ppm above background, is exempt from the requirements of paragraphs (a), (c), and (d) of this section if the pump meets the following requirements:

(1) Must have no externally actuated shaft penetrating the pump housing.

(2) Must operate with no detectable emissions as indicated by an instrument reading of less than 500 ppm above background as measured by the methods specified in § 265.1063(c).

(3) Must be tested for compliance with paragraph (a)(2) of this section initially upon designation, annually, and at other times as requested by the Regional Administrator.

(f) If any pump is equipped with a closed-vent system capable of capturing and transporting any leakage from the seal or seals to a control device that complies with the requirements of § 265.1060, it is exempt from the requirements of paragraphs (a) through (e) of this section.

§ 265.1053 Standards: Compressors.

(a) Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of total organic emissions to the atmosphere, except as provided in paragraphs (h) and (i) of this section.

(b) Each compressor seal system as required in paragraph (a) of this section shall be:

(1) Operated with the barrier fluid at a pressure that is at all times greater than the compressor stuffing box pressure, or

(2) Equipped with a barrier fluid system that is connected by a closed-vent system to a control device that complies with the requirements of § 265.1060, or

(3) Equipped with a system that purges the barrier fluid into a hazardous waste stream with no detectable emissions to atmosphere.

(c) The barrier fluid must not be a hazardous waste with organic concentrations 10 percent or greater by weight.

(d) Each barrier fluid system as described in paragraphs (a) through (c) of this section shall be equipped with a sensor that will detect failure of the seal system, barrier fluid system, or both.

(e)(1) Each sensor as required in paragraph (d) of this section shall be checked daily or shall be equipped with an audible alarm that must be checked monthly to ensure that it is functioning properly unless the compressor is located within the boundary of an unmanned plant site, in which case the sensor must be checked daily.

(2) The owner or operator shall determine, based on design considerations and operating experience, a criterion that indicates failure of the seal system, the barrier fluid system or both.

(f) If the sensor indicates failure of the seal system, the barrier fluid system, or both based on the criterion determined under paragraph (e)(2) of this section, a leak is detected.

(g)(1) When a leak is detected, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in § 265.1059.

(2) A first attempt at repair (e.g., tightening the packing gland) shall be made no later than 5 calendar days after each leak is detected.

(h) A compressor is exempt from the requirements of paragraphs (a) and (b) of this section if it is equipped with a closed-vent system capable of capturing and transporting any leakage from the seal to a control device that complies with the requirements of § 265.1060, except as provided in paragraph (i) of fhis section.

(i) Any compressor that is designated, as described in § 265.1064(g)(2), for no detectable emission as indicated by an instrument reading of less than 500 ppm above background is exempt from the requirements of paragraphs (a) through (h) of this section if the compressor:

(1) Is determined to be operating with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as measured by the method specified in § 265.1063(c).

(2) Is tested for compliance with paragraph (i)(1) of this section initially upon designation, annually, and at other times as requested by the Regional Administrator.

§ 265.1054 Standards: Pressure relief devices in gas/vapor service.

(a) Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as measured by the method specified in § 265.1063(c).

(b)(1) After each pressure release, the pressure relief device shall be returned to a condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as soon as practicable, but no later than 5 calendar days after each pressure release, except as provided in § 265.1059.

(2) No later than 5 calendar days after the pressure release, the pressure relief device shall be monitored to confirm the condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as measured by the method specified in § 265.1063(c).

(c) Any pressure relief device that is equipped with a closed-vent system capable of capturing and transporting leakage from the pressure relief device to a control device as described in § 265.1060 is exempt from the requirements of paragraphs (a) and (b) of this section.

§ 265.1055 Standards: Sampling connecting systems.

(a) Each sampling connection system shall be equipped with a closed-purge system or closed-vent system.

(b) Each closed-purge system or closed-vent system as required in paragraph (a) shall:

(1) Return the purged hazardous waste stream directly to the hazardous waste management process line with no detectable emissions to atmosphere, or

(2) Collect and recycle the purged hazardous waste stream with no detectable emissions to atmosphere, or

(3) Be designed and operated to capture and transport all the purged hazardous waste stream to a control device that complies with the requirements of § 265.1060.

(c) *In situ* sampling systems are exempt from the requirements of paragraphs (a) and (b) of this section.

§ 265.1056 Standards: Open-ended valves or lines.

(a)(1) Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve.

(2) The cap, blind flange, plug, or second valve shall seal the open end at all times except during operations requiring hazardous waste stream flow through the open-ended valve or line.

(b) Each open-ended valve or line equipped with a second valve shall be operated in a manner such that the valve on the hazardous waste stream end is closed before the second valve is closed.

(c) When a double block and bleed system is being used, the bleed valve or line may remain open during operations that require venting the line between the block valves but shall comply with paragraph (a) of this section at all other times.

§ 265.1057 Standards: Valves in gas/vapor service or in light liquid service.

(a) Each valve in gas/vapor or light liquid service shall be monitored monthly to detect leaks by the methods specified in § 265.1063(b) and shall comply with paragraphs (b) through (e) of this section, except as provided in paragraphs (f), (g), and (h) of this section' and §§ 265.1061 and 265.1062.

(b) If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(c)(1) Any valve for which a leak is not detected for two successive months may be monitored the first month of every succeeding quarter, beginning with the next quarter, until a leak is detected.

(2) If a leak is detected, the valve shall be monitored monthly until a leak is not detected for 2 successive months.

(d)(1) When a leak is detected, it shall be repaired as soon as practicable, but no later than 15 calendar days after the leak is detected, except as provided in § 265.1059.

(2) A first attempt at repair shall be made no later than 5 calendar days after each leak is detected.

(e) First attempts at repair include, but are not limited to, the following best practices where practicable:

(1) Tightening of bonnet bolts.

(2) Replacement of bonnet bolts.

(3) Tightening of packing gland nuts.

(4) Injection of lubricant into lubricated packing.

(f) Any valve that is designated, as described in § 265.1064(g)(2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of paragraph (a) of this section if the valve:

(1) Has no external actuating mechanism in contact with the hazardous waste stream.

(2) Is operated with emissions less than 500 ppm above background as determined by the method specified in § 265.1063(c).

(3) Is tested for compliance with paragraph (f)(2) of this section initially upon designation, annually, and at other times as requested by the Regional Administrator.

(g) Any valve that is designated, as described in § 265.1064(h)(1), as an unsafe-to-monitor valve is exempt from the requirements of paragraph (a) of this section if:

(1) The owner or operator of the valve determines that the valve is unsafe to monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with paragraph (a) of this section.

(2) The owner or operator of the valve adheres to a written plan that requires monitoring of the valve as frequently as practicable during safe-to-monitor times.

(h) Any valve that is designated, as described in § 265.1064(h)(2), as a difficult-to-monitor valve is exempt from the requirements of paragraph (a) of this section if:

(1) The owner or operator of the valve determines that the valve cannot be monitored without elevating the monitoring personnel more than 2 meters above a support surface.

(2) The hazardous waste management unit within which the valve is located was in operation before June 21, 1990.

(3) The owner or operator of the valve follows a written plan that requires monitoring of the valve at least once per calendar year.

§ 265.1058 Standards: Pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and flanges and other connectors.

(a) Pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and flanges and other connectors shall be monitored within 5 days by the method specified in § 265.1063(b) if evidence of a potential leak is found by visual, audible, olfactory, or any other detection method.

(b) If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(c)(1) When a leak is detected, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in § 265.1059.

(2) The first attempt at repair shall be made no later than 5 calendar days after each leak is detected.

(d) First attempts at repair include, but are not limited to, the best practices described under § 265.1057(e).

§ 265.1059 Standards: Delay of repair.

(a) Delay of repair of equipment for which leaks have been detected will be allowed if the repair is technically infeasible without a hazardous waste management unit shutdown. In such a case repair of this equipment shall occur before the end of the next hazardous waste management unit shutdown.

(b) Delay of repair of equipment for which leaks have been detected will be allowed for equipment that is isolated from the hazardous waste management unit and that does not continue to contain or contact hazardous waste with organic concentrations at least 10 percent by weight.

(c) Delay of repair for valves will be allowed if:

(1) The owner or operator determines that emissions of purged material resulting from immediate repair are greater than the emissions likely to result from delay of repair.

(2) When repair procedures are effected, the purged material is collected and destroyed or recovered in a control device complying with § 265.1060.

(d) Delay of repair for pumps will be allowed if:

(1) Repair requires the use of a dual mechanical seal system that includes a barrier fluid system.

(2) Repair is completed as soon as practicable, but not later than 6 months after the leak was detected.

(e) Delay of repair beyond a hazardous waste management unit shutdown will be allowed for a valve if valve assembly replacement is necessary during the hazardous waste management unit shutdown, valve assembly supplies have been depleted, and valve assembly supplies had been sufficiently stocked before the supplies were depleted. Delay of repair beyond the next hazardous waste management unit shutdown will not be allowed unless the next hazardous waste management unit shutdown occurs sooner than 6 months after the first hazardous waste management unit shutdown.

§ 265.1060 Standards: Closed-vent systems and control devices.

Owners or operators of closed-vent systems and control devices shall comply with the provisions of § 265.1033.

§ 265.1061 Alternative standards for valves in gas/vapor service or in light liquid service: percentage of valves allowed to leak.

(a) An owner or operator subject to the requirements of § 265.1057 may elect to have all valves within a hazardous waste management unit comply with an alternative standard which allows no greater than 2 percent of the valves to leak.

(b) The following requirements shall be met if an owner or operator decides to comply with the alternative standard of allowing 2 percent of valves to leak:

(1) An owner or operator must notify the Regional Administrator that the owner or operator has elected to comply with the requirements of this section.

(2) A performance test as specified in paragraph (c) of this section shall be conducted initially upon designation, annually, and at other times requested by the Regional Administrator.

(3) If a valve leak is detected, it shall be repaired in accordance with § 265.1057 (d) and (e).

(c) Performance tests shall be conducted in the following manner:

(1) All valves subject to the requirements in § 265.1057 within the hazardous waste management unit shall be monitored within 1 week by the methods specified in § 265.1063(b).

(2) If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(3) The leak percentage shall be determined by dividing the number of valves subject to the requirements in § 265.1057 for which leaks are detected by the total number of valves subject to the requirements in § 265.1057 within the hazardous waste management unit.

(d) If an owner or operator decides no longer to comply with this section, the owner or operator must notify the Regional Administrator in writing that the work practice standard described in § 265.1057 (a) through (e) will be followed.

§ 265.1062 Alternative standards for valves in gas/vapor service or in light liquid service: skip period leak detection and repair.

(a)(1) An owner or operator subject to the requirements of § 265.1057 may elect for all valves within a hazardous waste management unit to comply with one of the alternative work practices specified in paragraphs (b) (2) and (3) of this section.

(2) An owner or operator must notify the Regional Administrator before implementing one of the alternative work practices.

(b)(1) An owner or operator shall comply with the requirements for valves, as described in § 265.1057, except as described in paragraphs (b)(2) and (b)(3) of this section.

(2) After two consecutive quarterly leak detection periods with the percentage of valves leaking equal to or less than 2 percent, an owner or operator may begin to skip one of the quarterly leak detection periods for the valves subject to the requirements in § 265.1057.

(3) After five consecutive quarterly leak detection periods with the percentage of valves leaking equal to or less than 2 percent, an owner or operator may begin to skip three of the quarterly leak detection periods for the valves subject to the requirements in § 265.1057.

(4) If the percentage of valves leaking is greater than 2 percent, the owner or operators hall monitor monthly in compliance with the requirements in § 265.1057, but may again elect to use this section after meeting the requirements of § 265.1057(c)(1).

§ 265.1063 Test methods and procedures.

(a) Each owner or operator subject to the provisions of this subpart shall comply with the test methods and procedures requirements provided in this section.

(b) Leak detection monitoring, as required in §§ 265.1052-265.1062, shall comply with the following requirements:

(1) Monitoring shall comply with Reference Method 21 in 40 CFR Part 60.

(2) The detection instrument shall meet the performance criteria of Reference Method 21.

(3) The instrument shall be calibrated before use on each day of its use by the procedures specified in Reference Method 21.

(4) Calibration gases shall be:

(i) Zero air (less than 10 ppm of hydrocarbon in air).

(ii) A mixture of methane or n-hexane and air at a concentration of approximately, but less than, 10.000 ppm methane or n-hexane.

(5) The instrument probe shall be traversed around all potential leak interfaces as close to the interface as possible as described in Reference Method 21.

(c) When equipment is tested for compliance with no detectable emissions, as required in §§ 265.1052(e), 265.1053(i), 265.1054, and 265.1057(f), the test shall comply with the following requirements:

(1) The requirements of paragraphs (b)(1) through (4) of this section shall apply.

(2) The background level shall be determined, as set forth in Reference Method 21.

(3) The instrument probe shall be traversed around all potential leak interfaces as close to the interface as possible as described in Reference Method 21.

(4) The arithmetic difference between the maximum concentration indicated by the instrument and the background level is compared with 500 ppm for determining compliance.

(d) In accordance with the waste analysis plan required by § 265.13(b), an owner or operator of a facility must determine, for each piece of equipment, whether the equipment contains or contacts a hazardous waste with organic concentration that equals or exceeds 10 percent by weight using the following:

(1) Methods described in ASTM Methods D 2267-88, E 169-87, E 168-88, E 260-85 (incorporated by reference under § 260.11);

(2) Method 9060 or 8240 of SW-846 (incorporated by reference under § 260.11); or

(3) Application of the knowledge of the nature of the hazardous waste stream or the process by which it was produced. Documentation of a waste determination by knowledge is required. Examples of documentation that shall be used to support a determination under this provision include production process information documenting that no organic compounds are used, information that the waste is generated by a process that is identical to a process at the same or another facility that has previously been demonstrated by direct measurement to have a total organic content less than 10 percent, or prior speciation analysis results on the same waste stream where it can also be documented that no process changes have occurred since that analysis that could affect the waste total organic concentration.

(e) If an owner or operator determines that a piece of equipment contains or contacts a hazardous waste with organic concentrations at least 10 percent by weight, the determination can be revised only after following the procedures in paragraph (d)(1) or (d)(2) of this section.

(f) When an owner or operator and the Regional Administrator do not agree on whether a piece of equipment contains or contacts a hazardous waste with organic concentrations at least 10 percent by weight, the procedures in paragraph (d)(1) or (d)(2) of this section can be used to resolve the dispute.

(g) Samples used in determining the percent organic content shall be representative of the highest total organic content hazardous waste that is expected to be contained in or contact the equipment.

(h) To determine if pumps or valves are in light liquid service, the vapor pressures of constituents may be obtained from standard reference texts or may be determined by ASTM D-2879-86 (incorporated by reference under § 260.11).

(i) Performance tests to determine if a control device achieves 95 weight percent organic emission reduction shall comply with the procedures of § 265.1034 (c)(1) through (c)(4).

§ 265.1064 Recordkeeping requirements.

(a)(1) Each owner or operator subject to the provisions of this subpart shall comply with the recordkeeping requirements of this section.

(2) An owner or operator of more than one hazardous waste management unit subject to the provisions of this subpart may comply with the recordkeeping requirements for these hazardous waste management units in one recordkeeping system if the system identifies each record by each hazardous waste management unit.

(b) Owners and operators must record the following information in the facility operating record:

(1) For each piece of equipment to which subpart BB of part 265 applies:

(i) Equipment identification number and hazardous waste management unit identification.

(ii) Approximate locations within the facility (e.g., identify the hazardous waste management unit on a facility plot plan).

(iii) Type of equipment (e.g., a pump or pipeline valve).

(iv) Percent-by-weight total organics in the hazardous waste stream at the equipment.

(v) Hazardous waste state at the equipment (e.g., gas/vapor or liquid).

(vi) Method of compliance with the standard (e.g., "monthly leak detection and repair" or "equipped with dual mechanical seals").

(2) For facilities that comply with the provisions of § 265.1033(a)(2), an implementation schedule as specified in § 265.1033(a)(2).

(3) Where an owner or operator chooses to use test data to demonstrate the organic removal efficiency or total organic compound concentration achieved by the control device, a performance test plan as specified in § 265.1035(b)(3).

(4) Documentation of compliance with § 265.1060, including the detailed design documentation or performance test results specified in § 265.1035(b)(4).

(c) When each leak is detected as specified in §§ 265.1052, 265.1953, 265.1057, and 265.1058, the following requirements apply:

(1) A weatherproof and readily visible identification, marked with the equipment identification number, the date evidence of a potential leak was found in accordance with § 265.1058(a), and the date the leak was detected, shall be attached to the leaking equipment.

(2) The identification on equipment, except on a valve, may be removed after it has been repaired.

(3) The identification on a valve may be removed after it has been monitored for 2 successive months as specified in § 265.1057(c) and no leak has been detected during those 2 months.

(d) When each leak is detected as specified in §§ 265.1052, 265.1053, 265.1057, and 265.1058, the following information shall be recorded in an inspection log and shall be kept in the facility operating record:

(1) The instrument and operator identification numbers and the equipment identification number.

(2) The date evidence of a potential leak was found in accordance with § 265.1058(a).

(3) The date the leak was detected and the dates of each attempt to repair the leak.

(4) Repair methods applied in each attempt to repair the leak.

(5) "Above 10,000" if the maximum instrument reading measured by the methods specified in § 265.1063(b) after each repair attempt is equal to or greater than 10,000 ppm.

(6) "Repair delayed" and the reason for the delay if a leak is not repaired within 15 calendar days after discovery of the leak.

(7) Documentation supporting the delay of repair of a valve in compliance with § 265.1059(c).

(8) The signature of the owner or operator (or designate) whose decision it was that repair could not be effected without a hazardous waste management unit shutdown.

(9) The expected date of successful repair of the leak if a leak is not repaired within 15 calendar days.

(10) The date of successful repair of the leak.

(e) Design documentation and monitoring, operating, and inspection information for each closed-vent system and control device required to comply with the provisions of § 265.1060 shall be recorded and kept up-to-date in the facility operating record as specified in § 265.1035(c). Design documentation is specified in § 265.1035 (c)(1) and (c)(2) and monitoring, operating, and inspection information in § 265.1035 (c)(3)-(c)(8).

(f) For a control device other than a thermal vapor incinerator, catalytic vapor incinerator, flare, boiler, process heater, condenser, or carbon adsorption system, monitoring and inspection information indicating proper operation and maintenance of the control device must be recorded in the facility operating record.

(g) The following information pertaining to all equipment subject to the requirements in §§ 265.1052 through 265.1060 shall be recorded in a log that is kept in the facility operating record:

(1) A list of identification numbers for equipment (except welded fittings) subject to the requirements of this subpart.

(2)(i) A list of identification numbers for equipment that the owner or operator elects to designate for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, under the provisions of §§ 265.1052(e), 265.1053(i), and 265.1057(f).

(ii) The designation of this equipment as subject to the requirements of §§ 265.1052(e), 265.1053(i), or 265.1057(f) shall be signed by the owner or operator.

(3) A list of equipment identification numbers for pressure relief devices required to comply with § 265.1054(a).

(4)(i) The dates of each compliance test required in §§ 265.1052(e), 265.1053(i), 265.1054, and 265.1057(f).

(ii) The background level measured during each compliance test.

(iii) The maximum instrument reading measured at the equipment during each compliance test.

(5) A list of identification numbers for equipment in vacuum service.

(h) The following information pertaining to all valves subject to the requirements of § 265.1057 (g) and (h) shall be recorded in a log that is kept in the facility operating record:

(1) A list of identification numbers for valves that are designated as unsafe to monitor, an explanation for each valve stating why the valve is unsafe to monitor, and the plan for monitoring each valve.

(2) A list of identification numbers for valves that are designated as difficult to monitor, an explanation for each valve stating why the valve is difficult to monitor, and the planned schedule for monitoring each valve.

(i) The following information shall be recorded in the facility operating record for valves complying with § 265.1062:

(1) A schedule of monitoring.

(2) The percent of valves found leaking during each monitoring period.

(j) The following information shall be recorded in a log that is kept in the facility operating record:

(1) Criteria required in §§ 265.1052(d)(5)(ii) and 265.1053(e)(2) and an explanation of the criteria.

(2) Any changes to these criteria and the reasons for the changes.

(k) The following information shall be recorded in a log that is kept in the facility operating record for use in determining exemptions as provided in the applicability section of this subpart and other specific subparts:

(1) An analysis determining the design capacity of the hazardous waste management unit.

(2) A statement listing the hazardous waste influent to and effluent from each hazardous waste management unit subject to the requirements in §§ 265.1052 through 265.1060 and an analysis determining whether these hazardous wastes are heavy liquids.

(3) An up-to-date analysis and the supporting information and data used to determine whether or not equipment is subject to the requirements in §§ 265.1052 through 265.1060. The record shall include supporting documentation as required by § 265.1063(d)(3) when application of the knowledge of the nature of the hazardous waste stream or the process by which it was produced is used. If the owner or operator takes any action (e.g., changing the process that produced the waste) that could result in an increase in the total organic content of the waste contained in or contacted by equipment determined not to be subject to the requirements in §§ 265.1052 through 265.1060, then a new determination is required.

(l) Records of the equipment leak information required by paragraph (d) of this section and the operating information required by paragraph (e) of this section need be kept only 3 years.

(m) The owner or operator of any facility that is subject to this subpart and to regulations at 40 CFR part 60, subpart VV, or 40 CFR part 61, subpart V, may elect to determine compliance with this subpart by documentation either pursuant to § 265.1064 of this subpart, or pursuant to those provisions of 40 CFR part 60 or 61, to the extent that the documentation under the regulation at 40 CFR part 60 or part 61 duplicates the documentation required under this subpart. The documentation under the regulation at 40 CFR part 60 or part 61 shall be kept with or made readily available with the facility operating record.

(Approved by the Office of Management and Budget under control number 2060-0195)

§§ 265.1065—265.1079 [Reserved]

APPENDIX I—RECORDKEEPING INSTRUCTIONS

The recordkeeping provisions of § 265.73 specify that an owner or operator must keep a written operating record at his facility. This appendix provides additional instructions for keeping *portions* of the operating record. See § 265.73(b) for additional recordkeeping requirements.

The following information must be recorded, as it becomes available, and maintained in the operating record until closure of the facility in the following manner:

Records of each hazardous waste received, treated, stored, or disposed of at the facility which include the following:

(1) A description by its common name and the EPA Hazardous Waste Number(s) from Part 261 of this chapter which apply to the waste. The waste description also must include the waste's physical form, i.e., liquid, sludge, solid, or contained gas. If the waste is not listed in Part 261, Subpart D, of this chapter, the description also must include the process that produced it (for example, solid filter cake from production of ———, EPA Hazardous Waste Number W051).

Each hazardous waste listed in Part 261, Subpart D, of this chapter, and each hazardous waste characteristic defined in Part 261, Subpart C, of this chapter, has a four-digit EPA Hazardous Waste Number assigned to it. This number must be used for recordkeeping and reporting purposes. Where a hazardous waste contains more than one listed hazardous waste, or where more than one hazardous waste characteristic applies to the waste, the waste description must include all applicable EPA Hazardous Waste Numbers.

(2) The estimated or manifest-reported weight, or volume and density, where applicable, in one of the units of measure specified in Table 1; and

TABLE 1

Unit of measure	Symbol [1]	Density
Pounds	P	
Short tons (2000 lbs)	T	
Gallons (U.S.)	G	P/G
Cubic yards	Y	T/Y
Kilograms	K	
Tonnes (1000 kg)	M	

TABLE 1—Continued

Unit of measure	Symbol [1]	Density
Liters	L	K/L
Cubic meters	C	M/C

[1] Single digit symbols are used here for data processing purposes.

(3) The method(s) (by handling code(s) as specified in Table 2) and date(s) of treatment, storage, or disposal.

TABLE 2—HANDLING CODES FOR TREATMENT, STORAGE, AMD DISPOSAL METHODS

Enter the handling code(s) listed below that most closely represents the technique(s) used at the facility to treat, store, or dispose of each quantity of hazardous waste received.

1. Storage

S01 Container (barrel, drum, etc.)
S02 Tank
S03 Waste pile
S04 Surface impoundment
S05 Other (specify)

2. Treatment

(a) Thermal Treatment

T06 Liquid injection incinerator
T07 Rotary kiln incinerator
T08 Fluidized bed incinerator
T09 Multiple hearth incinerator
T10 Infrared furnace incinerator
T11 Molten salt destructor
T12 Pyrolysis
T13 Wet air oxidation
T14 Calcination
T15 Microwave discharge
T16 Cement kiln
T17 Lime kiln
T18 Other (specify)

(b) Chemical Treatment

T19 Absorption mound
T20 Absorption field
T21 Chemical fixation
T22 Chemical oxidation
T23 Chemical precipitation
T24 Chemical reduction
T25 Chlorination
T26 Chlorinolysis
T27 Cyanide destruction
T28 Degradation
T29 Detoxification
T30 Ion exchange
T31 Neutralization
T32 Ozonation
T33 Photolysis
T34 Other (specify)

(c) Physical Treatment:

(1) Separation of components

T35 Centrifugation
T36 Clarification
T37 Coagulation
T38 Decanting
T39 Encapsulation
T40 Filtration
T41 Flocculation
T42 Flotation
T43 Foaming
T44 Sedimentation
T45 Thickening
T46 Ultrafiltration
T47 Other (specify)

(2) Removal of Specific Components

T48 Absorption-molecular sieve
T49 Activated carbon
T50 Blending
T51 Catalysis
T52 Crystallization
T53 Dialysis
T54 Distillation
T55 Electrodialysis
T56 Electrolysis
T57 Evaporation
T58 High gradient magnetic separation
T59 Leaching
T60 Liquid ion exchange
T61 Liquid-liquid extraction
T62 Reverse osmosis
T63 Solvent recovery
T64 Stripping
T65 Sand filter
T66 Other (specify)

(d) Biological Treatment

T67 Activated sludge
T68 Aerobic lagoon
T69 Aerobic tank
T70 Anaerobic lagoon
T71 Composting
T72 Septic tank
T73 Spray irrigation
T74 Thickening filter
T75 Tricking filter
T76 Waste stabilization pond
T77 Other (specify)
T78-79 [Reserved]

3. Disposal

D80 Underground injection
D81 Landfill
D82 Land treatment
D83 Ocean disposal
D84 Surface impoundment (to be closed as a landfill)
D85 Other (specify)

APPENDIX II—[RESERVED]

APPENDIX III—EPA INTERIM PRIMARY DRINKING WATER STANDARDS

Parameter	Maximum level (mg/l)
Arsenic	0.05
Barium	1.0
Cadmium	0.01
Chromium	0.05
Fluoride	1.4-2.4
Lead	0.05
Mercury	0.002
Nitrate (as N)	10
Selenium	0.01
Silver	0.05
Endrin	0.0002
Lindane	0.004
Methoxychlor	0.1
Toxaphene	0.005
2,4-D	0.1
2,4,5-TP Silver	0.01
Radium	5 pCi/1
Gross Alpha	15 pCi/1
Gross Beta	4 millirem/yr
Turbidity	1/TU
Coliform Bacteria	1/100 ml

[*Comment:* Turbidity is applicable only to surface water supplies.]

APPENDIX IV—TESTS FOR SIGNIFICANCE

As required in § 265.93(b) the owner or operator must use the Student's t-test to determine statistically significant changes in the concentration or value of an indicator parameter in periodic ground-water samples when compared to the initial background concentration or value of that indicator parameter. The comparison must consider individually each of the wells in the monitoring system. For three of the indicator parameters (specific conductance, total organic carbon, and total organic halogen) a single-tailed Student's t-test must be used to test at the 0.01 level of significance for significant increases over background. The difference test for pH must be a two-tailed Student's t-test at the overall 0.01 level of significance.

The student's t-test involves calculation of the value of a t-statistic for each comparison of the mean (average) concentration or value (based on a minimum of four replicate measurements) of an indicator parameter with its initial background concentration or value. The calculated value of the t-statistic must then be compared to the value of the t-statistic found in a table for t-test of significance at the specified level of significance. A calculated value of t which exceeds the value of t found in the table indicates a statistically significant change in the concentration or value of the indicator parameter.

Formulae for calculation of the t-statistic and tables for t-test of significance can be found in most introductory statistics texts.

APPENDIX V—EXAMPLES OF POTENTIALLY INCOMPATIBLE WASTE

Many hazardous wastes, when mixed with other waste or materials at a hazardous waste facility, can produce effects which are harmful to human health and the environment, such as (1) heat or pressure, (2) fire or explosion, (3) violent reaction, (4) toxic dusts, mists, fumes, or gases, or (5) flammable fumes or gases.

Below are examples of potentially incompatible wastes, waste components, and materials, along with the harmful consequences which result from mixing materials in one group with materials in another group. The list is intended as a guide to owners or operators of treatment, storage, and disposal facilities, and to enforcement and permit granting officials, to indicate the need for special precautions when managing these potentially incompatible waste materials or components.

This list is not intended to be exhaustive. An owner or operator must, as the regulations require, adequately analyze his wastes so that he can avoid creating uncontrolled substances or reactions of the type listed below, whether they are listed below or not.

It is possible for potentially incompatible wastes to be mixed in a way that precludes a reaction (e.g., adding acid to water rather than water to acid) or that neutralizes them (e.g., a strong acid mixed with a strong base), or that controls substances produced (e.g., by generating flammable gases in a closed tank equipped so that ignition cannot occur, and burning the gases in an incinerator).

In the lists below, the mixing of a Group A material with a Group B material may have the potential consequence as noted.

Group 1-A	Group 1-B
Acetylene sludge	Acid sludge
Akaline caustic liquids	Acid and water
Alkaline cleaner	Battery acid
Alkaline corrosive liquids	Chemical cleaners
Alkaline corrosive battery fluid	Electrolyte, acid
Caustic wastewater	Etching acid liquid or solvent
Lime sludge and other corrosive alkalies	
Lime wastewater	Pickling liquor and other corrosive acids
Lime and water	Spent acid
Spent caustic	Spent mixed acid

Group 1-A	Group 1-B
	Spent sulfuric acid

Potential consequences: Heat generation; violent reaction.

Group 2-A	Group 2-B
Aluminum Beryllium Calcium Lithium Magnesium Potassium Sodium Zinc powder Other reactive metals and metal hydrides	Any waste in Group 1-A or 1-B

Potential consequences: Fire or explosion; generation of flammable hydrogen gas.

Group 3-A	Group 3-B
Alcohols Water	Any concentrated waste in Groups 1-A or 1-B Calcium Lithium Metal hydrides Potassium SO_2Cl_2, $SOCl_2$, PCl_3, CH_3SiCl_3 Other water-reactive waste

Potential consequences: Fire, explosion, or heat generation; generation of flammable or toxic gases.

Group 4-A	Group 4-B
Alcohols Aldehydes Halogenated hydrocarbons Nitrated hydrocarbons Unsaturated hydrocarbons Other reactive organic compounds and solvents	Concentrated Group 1-A or 1-B wastes Group 2-A wastes

Potential consequences: Fire, explosion, or violent reaction.

Group 5-A	Group 5-B
Spent cyanide and sulfide solutions	Group 1-B wastes

Potential consequences: Generation of toxic hydrogen cyanide or hydrogen sulfide gas.

Group 6-A	Group 6-B
Chlorates Chlorine Chlorites Chromic acid Hyphochlorites Nitrates Nitric acid, fuming Perchlorates Permanganates Peroxides Other strong oxidizers	Acetic acid and other organic acids Concentrated mineral acides Group 2-A wastes Group 4-A wastes Other flammable and combustible wastes

Potential consequences: Fire, explosion, or violent reaction.

Source: "Law, Regulations, and Guidelines for Handling of Hazardous Waste." California Department of Health, February 1975.

PART 266—STANDARDS FOR THE MANAGEMENT OF SPECIFIC HAZARDOUS WASTES AND SPECIFIC TYPES OF HAZARDOUS WASTE MANAGEMENT FACILITIES

Subparts A—B [Reserved]

Subpart C—Recyclable Materials Used in a Manner Constituting Disposal

Sec.

266.20 Applicability.
266.21 Standards applicable to generators and transporters of materials used in a manner that constitute disposal.
266.22 Standards applicable to storers of materials that are to be used in a manner that constitutes disposal who are not the ultimate users.
266.23 Standards applicable to users of materials that are used in a manner that constitutes disposal.

Subpart D—Hazardous Waste Burned for Energy Recovery

266.30 Applicability.
266.31 Prohibitions.
266.32 Standards applicable to generators of hazardous waste fuel.
266.33 Standards applicable to transporters of hazardous waste fuel.
266.34 Standards applicable to marketers of hazardous waste fuel.
266.35 Standards applicable to burners of hazardous waste fuel.

Sec.

Subpart E—Used Oil Burned for Energy Recovery

266.40 Applicability.
266.41 Prohibitions.
266.42 Standards applicable to generators of used oil burned for energy recovery.
266.43 Standards applicable to marketers of used oil burned for energy recovery.
266.44 Standards applicable to burners of used oil burned for energy recovery.

Subpart F—Recyclable Materials Utilized for Precious Metal Recovery

266.70 Applicability and requirements.

Subpart G—Spent Lead-Acid Batteries Being Reclaimed

266.80 Applicability and requirements.

AUTHORITY: Secs. 1006, 2002(a), 3004, and 3014 of the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act of 1976, as amended (42 U.S.C. 6905, 6912(a), 6924, and 6934).

SOURCE: 50 FR 666, Jan. 4, 1985, unless otherwise noted.

Subparts A—B [Reserved]

Subpart C—Recyclable Materials Used in a Manner Constituting Disposal

§ 266.20 Applicability.

(a) The regulations of this subpart apply to recyclable materials that are applied to or placed on the land:

(1) Without mixing with any other substance(s); or

(2) After mixing or conmbination with any other substance(s). These materials will be referred to throughout this subpart as "materials used in a manner that constitutes disposal."

(b) Products produced for the general public's use that are used in a manner that constitutes disposal and that contain recyclable materials are not presently subject to regulation if the recyclable materials have undergone a chemical reaction in the course of producing the products so as to become inseparable by physical means and if such products meet the applicable treatment standards in Subpart D of Part 268 (or applicable prohibition levels in § 268.32 or RCRA section 3004(d), where no treatment standards have been established) for each recyclable material (*i.e.*, hazardous waste) that they contain. Commercial fertilizers that are produced for the general public's use that contain recyclable materials also are not presently subject to regulation provided they meet these same treatment standards or prohibition levels for each recyclable material that they contain. However, zinc-containing fertilizers using hazardous waste K061 that are produced for the general public's use are not presently subject to regulation.

[50 FR 666, Jan. 4, 1985, as amended at 52 FR 21307, June 5, 1987; 54 FR 36970, Sept. 6, 1989]

§ 266.21 Standards applicable to generators and transporters of materials used in a manner that constitute disposal.

Generators and transporters of materials that are used in a manner that constitutes disposal are subject to the applicable requirements of Parts 262 and 263 of this chapter, and the notification requirement under section 3010 of RCRA.

§ 266.22 Standards applicable to storers of materials that are to be used in a manner that constitutes disposal who are not the ultimate users.

Owners or operators of facilities that store recyclable materials that are to be used in a manner that constitutes disposal, but who are not the ultimate users of the materials, are regulated under all applicable provisions of Subparts A through L of Parts 264 and 265 and Parts 270 and 124 of this chapter and the notification requirement under section 3010 of RCRA.

§ 266.23 Standards applicable to users of materials that are used in a manner that constitutes disposal.

(a) Owners or operators of facilities that use recyclable materials in a manner that constitutes disposal are regulated under all applicable provisions of Subparts A through N of Parts 264 and 265 and Parts 270 and 124 of this chapter and the notification requirement under section 3010 of RCRA. (These requirements do not apply to products which contain these

recyclable materials under the provisions of § 266.20(b) of this chapter.)

(b) The use of waste or used oil or other material, which is contaminated with dioxin or any other hazardous waste (other than a waste identified solely on the basis of ignitability), for dust suppression or road treatment is prohibited.

[50 FR 666, Jan. 4, 1985, as amended at 50 FR 28750, July 15, 1985]

Subpart D—Hazardous Waste Burned for Energy Recovery

SOURCE: 50 FR 49204, Nov. 29, 1985, unless otherwise noted.

§ 266.30 Applicability.

(a) The regulations of this subpart apply to hazardous wastes that are burned for energy recovery in any boiler or industrial furnace that is not regulated under Subpart O of Part 264 or 265 of this chapter, except as provided by paragraph (b) of this section. Such hazardous wastes burned for energy recovery are termed "hazardous waste fuel". Fuel produced from hazardous waste by processing, blending, or other treatment is also hazardous waste fuel. (These regulations do not apply, however, to gas recovered from hazardous waste management activities when such gas is burned for energy recovery.)

(b) The following hazardous wastes are not subject to regulation under this subpart:

(1) Used oil burned for energy recovery that is also a hazardous waste solely because it exhibits a characteristic of hazardous waste identified in Subpart C of Part 261 of this chapter. Such used oil is subject to regulation under Subpart E of Part 266 rather than this subpart; and

(2) Hazardous wastes that are exempt from regulation under §§ 261.4 and 261.6(a)(3)(v) through (ix) of this chapter, and hazardous wastes that are subject to the special requirements for small quantity generators under § 261.5 of this chapter.

§ 266.31 Prohibitions.

(a) A person may market hazardous waste fuel only:

(1) To persons who have notified EPA of their hazardous waste fuel activities and have a U.S. EPA Identification Number; and

(2) If the fuel is burned, to persons who burn the fuel in boilers or industrial furnaces identified in paragaraph (b) of this section.

(b) Hazardous waste fuel may be burned for energy recovery in only the following devices;

(1) Industrial furnaces identified in § 260.10 of this chapter;

(2) Boilers, as defined in § 260.10 of this chapter, that are identified as follows:

(i) Industrial boilers located on the site of a facility engaged in a manufacturing process where substances are transformed into new products, including the component parts of products, by mechanical or chemical processes; or

(ii) Utility boilers used to produce electric power, steam, or heated or cooled air or other gases or fluids for sale.

(c) No fuel which contains any hazardous waste may be burned in any cement kiln which is located within the boundaries of any incorporated municipality with a population greater than 500,000 (based on the most recent census statistics) unless such kiln fully complies with regulations under this chapter that are applicable to incinerators.

[50 FR 49204, Nov. 29, 1985, as amended at 52 FR 11821, Apr. 13, 1987]

§ 266.32 Standards applicable to generators of hazardous waste fuel.

(a) Generators of hazardous waste that is used as a fuel or used to produce a fuel are subject to Part 262 of this chapter.

(b) Generators who market hazardous waste fuel to a burner also are subject to § 266.34.

(c) Generators who are burners also are subject to § 266.35.

§ 266.33 Standards applicable to transporters of hazardous waste fuel.

Transporters of hazardous waste fuel (and hazardous waste that is used to produce a fuel) are subject to Part 263 of this chapter.

§ 266.34 Standards applicable to marketers of hazardous waste fuel.

Persons who market hazardous waste fuel are termed "marketers", and are subject to the following requirements. Marketers include generators who market hazardous waste fuel directly to a burner, persons who receive hazardous waste from generators and produce, process, or blend hazardous waste fuel from these hazardous wastes, and persons who distribute but do not process or blend hazardous waste fuel.

(a) *Prohibitions.* The prohibitions under § 266.31(a);

(b) *Notification.* Notification of hazardous waste fuel activities. Even if a marketer has previously notified EPA of his hazardous waste management activities and obtained a U.S. EPA Identification Number, he must renotify to identify his hazardous waste fuel activities.

(c) *Storage.* The applicable provisions of § 262.34, and Subparts A through L of Part 264, Subparts A through L of Part 265, and Part 270 of this chapter;

(d) *Off-site shipment.* The standards for generators in Part 262 of this chapter when a marketer initiates a shipment of hazardous waste fuel;

(e) *Required notices.* (1) Before a marketer initiates the first shipment of hazardous waste fuel to a burner or another marketer, he must obtain a one-time written and signed notice from the burner or marketer certifying that:

(i) The burner or marketer has notified EPA and identified his waste-as-fuel activities; and

(ii) If the recipient is a burner, the burner will burn the hazardous waste fuel only in an industrial furnace or boiler identified in § 266.31(b).

(2) Before a marketer accepts the first shipment of hazardous waste fuel from another marketer, he must provide the other marketer with a one-time written and signed certification that he has notified EPA under section 3010 of RCRA and identified his hazardous waste fuel activities; and

(f) *Recordkeeping.* In addition to the applicable recordkeeping requirements of Parts 262, 264, and 265 of this chapter, a marketer must keep a copy of each certification notice he receives or sends for three years from the date he last engages in a hazardous waste fuel marketing transaction with the person who sends or receives the certification notice.

(The notification requirements contained in paragraph (b) of this section were approved by the Office of Management and Budget under control number 2050-0028. The storage requirements contained in paragraph (c) of this section were approved by the Office of Management and Budget under control number 2050-0009. The manifest and invoice requirements contained in paragraph (d) of this section were approved by the Office of Management and Budget under control numbers 2050-0039 and 2050-0047, respectively. The certification requirements contained in paragraph (e) were approved by the Office of Management and Budget under control number 2050-0047. The recordkeeping requirements contained in paragraph (f) were approved by the Office of Management and Budget under control number 2050-0047.)

[50 FR 49204, Nov. 29, 1985, as amended at 52 FR 11821, Apr. 13, 1987]

§ 266.35 Standards applicable to burners of hazardous waste fuel.

Owners and operators of industrial furnaces and boilers identified in § 266.31(b) that burn hazardous waste fuel are "burners" and are subject to the following requirements:

(a) *Prohibitions.* The prohibitions under § 266.31(b);

(b) *Notification.* Notification of hazardous waste fuel activities. Even if a burner has previously notified EPA of his hazardous waste management activities and obtained a U.S. EPA Identification Number, he must renotify to identify his hazardous waste fuel activities.

(c) *Storage.* (1) For short term accumulation by generators who burn their hazardous waste fuel on site, the applicable provisions of § 262.34 of this chapter;

(2) For existing storage facilities, the applicable provisions of Subparts A through L of Part 265, and Parts 270 and 124 of this chapter; and

(3) For new storage facilities, the applicable provisions of Subparts A through L of Part 264, and Parts 270 and 124 of this chapter;

(d) *Required notices.* Before a burner accepts the first shipment of hazardous waste fuel from a marketer, he must provide the marketer a one-time written and signed notice certifying that:

(1) He has notified EPA and identified his waste-as-fuel activities; and

(2) He will burn the fuel only in a boiler or furnace identified in § 266.31(b).

(e) *Recordkeeping.* In addition to the applicable recordkeeping requirements of Parts 264 and 265 of this chapter, a burner must keep a copy of each certification notice that he sends to a marketer for three years from the date he last receives hazardous waste fuel from that marketer.

(The notification requirements contained in paragraph (b) of this section were approved by the Office of Management and Budget under control number 2050-0028. The storage requirements contained in paragraph (c) of this section were approved by the Office of Management and Budget under control number 2050-0009. The certification requirements contained in paragraph (d) of this section were approved by the Office of Management and Budget under control number 2050-0047. The recordkeeping requirements contained in paragraph (e) of this section were approved by the Office of Management and Budget under control number 2050-0047.)

[50 FR 49204, Nov. 29, 1985, as amended at 52 FR 11821, Apr. 13, 1987]

Subpart E—Used Oil Burned for Energy Recovery

SOURCE: 50 FR 49205, Nov. 29, 1985, unless otherwise noted.

§ 266.40 Applicability.

(a) The regulations of this subpart apply to used oil that is burned for energy recovery in any boiler or industrial furnace that is not regulated under Subpart O of Part 264 or 265 of this chapter, except as provided by paragraphs (c) and (e) of this section. Such used oil is termed "used oil fuel". Used oil fuel includes any fuel produced from used oil by processing, blending, or other treatment.

(b) "Used oil" means any oil that has been refined from crude oil, used, and, as a result of such use, is contaminated by physical or chemical impurities.

(c) Except as provided by paragraph (d) of this section, used oil that is mixed with hazardous waste and burned for energy recovery is subject to regulation as hazardous waste fuel under Subpart D of Part 266. Used oil containing more than 1000 ppm of total halogens is presumed to be a hazardous waste because it has been mixed with halogenated hazardous waste listed in Subpart D of Part 261 of this chapter. Persons may rebut this presumption by demonstrating that the used oil does not contain hazardous waste (for example, by showing that the used oil does not contain significant concentrations of halogenated hazardous constituents listed in Appendix VIII of Part 261 of this chapter).

(d) Used oil burned for energy recovery is subject to regulation under this subpart rather than as hazardous waste fuel under Subpart D of this part if it is a hazardous waste solely because it:

(1) Exhibits a characteristic of hazardous waste identified in Subpart C of Part 261 of this chapter, provided that it is not mixed with a hazardous waste; or

(2) Contains hazardous waste generated only by a person subject to the special requirements for small quantity generators under § 261.5 of this chapter.

(e) Except as provided by paragraph (c) of this section, used oil burned for energy recovery, and any fuel produced from used oil by processing, blending, or other treatment, is subject to regulation under this subpart unless it is shown not to exceed any of the allowable levels of the constituents and properties in the specification shown in the following table. Used oil fuel that meets the specification is subject only to the analysis and recordkeeping requirements under § 266.43(b) (1) and (6). Used oil fuel that exceeds any specification level is termed "off-specification used oil fuel".

USED OIL EXCEEDING ANY SPECIFICATION LEVEL IS SUBJECT TO THIS SUBPART WHEN BURNED FOR ENERGY RECOVERY [a]

Constituent/property	Allowable level
Arsenic	5 ppm maximum.
Cadmium	2 ppm maximum.
Chromium	10 ppm maximum.
Lead	100 ppm maximum.
Flash Point	100 °F minimum.
Total Halogens	4,000 ppm maximum.[b]

[a] The specification does not apply to used oil fuel mixed with a hazardous waste other than small quantity generator hazardous waste.

[b] Used oil containing more than 1,000 ppm total halogens is presumed to be a hazardous waste under the rebuttable presumption provided under § 266.40(c). Such used oil is subject to Subpart D of this part rather than this subpart when burned for energy recovery unless the presumption of mixing can be successfully rebutted.

§ 266.41 Prohibitions.

(a) A person may market off-specification used oil for energy recovery only:

(1) To burners or other marketers who have notified EPA of their used oil management activities stating the location and general description of such activities, and who have an EPA identification number; and

(2) To burners who burn the used oil in an industrial furnace or boiler identified in paragraph (b) of this section.

(b) Off-specification used oil may be burned for energy recovery in only the following devices:

(1) Industrial furnaces identified in § 260.10 of this chapter; or

(2) Boilers, as defined in § 260.10 of this chapter, that are identified as follows:

(i) Industrial boilers located on the site of a facility engaged in a manufacturing process where substances are transformed into new products, including the component parts of products, by mechanical or chemical processes;

(ii) Utility boilers used to produce electric power, steam, or heated or cooled air or other gases or fluids for sale; or

(iii) Used oil-fired space heaters provided that:

(A) The heater burns only used oil that the owner or operator generates or used oil received from do-it-yourself oil changers who generate used oil as household waste;

(B) The heater is designed to have a maximum capacity of not more than 0.5 million Btu per hour; and

(C) The combustion gases from the heater are vented to the ambient air.

§ 266.42 Standards applicable to generators of used oil burned for energy recovery.

(a) Except as provided in paragraphs (b) and (c) of this section, generators of used oil are not subject to this subpart.

(b) Generators who market used oil directly to a burner are subject to § 266.43.

(c) Generators who burn used oil are subject to § 266.44.

§ 266.43 Standards applicable to marketers of used oil burned for energy recovery.

(a) Persons who market used oil fuel are termed "marketers". Except as provided below, marketers include generators who market used oil fuel directly to a burner, persons who receive used oil from generators and produce, process, or blend used oil fuel from these used oils (including persons sending blended or processed used oil to brokers or other intermediaries), and persons who distribute but do not process or blend used oil fuel. The following persons are not marketers subject to this subpart:

(1) Used oil generators, and collectors who transport used oil received only from generators, unless the generator or collector markets the used oil directly to a person who burns it for energy recovery. However, persons who burn some used oil fuel for purposes of processing or other treatment to produce used oil fuel for marketing are considered to be burning incidentally to processing. Thus, generators and collectors who market to such incidental burners are not marketers subject to this subpart;

(2) Persons who market only used oil fuel that meets the specification under § 266.40(e) and who are not the first person to claim the oil meets the specification (i.e., marketers who do not receive used oil from generators or initial transporters and marketers who

neither receive nor market off-specification used oil fuel).

(b) Marketers are subject to the following requirements:

(1) *Analysis of used oil fuel.* Used oil fuel is subject to regulation under this subpart unless the marketer obtains analyses or other information documenting that the used oil fuel meets the specification provided under § 266.40(e).

(2) *Prohibitions.* The prohibitions under § 266.41(a);

(3) *Notification.* Notification to EPA stating the location and general description of used oil management activities. Even if a marketer has previously notified EPA of his hazardous waste management activities under section 3010 of RCRA and obtained a U.S. EPA Identification Number, he must renotify to identify his used oil management activities.

(4) *Invoice system.* When a marketer initiates a shipment of off-specification used oil, he must prepare and send the receiving facility an invoice containing the following information:

(i) An invoice number;

(ii) His own EPA identification number and the EPA identification number of the receiving facility;

(iii) The names and addresses of the shipping and receiving facilities;

(iv) The quantity of off-specification used oil to be delivered;

(v) The date(s) of shipment or delivery; and

(vi) The following statement: "This used oil is subject to EPA regulation under 40 CFR Part 266";

NOTE: Used oil that meets the definition of combustible liquid (flash point below 200 °F but at or greater than 100 °F) or flammable liquid (flash point below 100 °F) is subject to Department of Transportation Hazardous Materials Regulations at 49 CFR Parts 100 through 177.

(5) *Required notices.* (i) Before a marketer initiates the first shipment of off-specification used oil to a burner or other marketer, he must obtain a one-time written and signed notice from the burner or marketer certifying that:

(A) The burner or marketer has notified EPA stating the location and general description of his used oil management activities; and

(B) If the recipient is a burner, the burner will burn the off-specification used oil only in an industrial furnace or boiler identified in § 266.41(b); and

(ii) Before a marketer accepts the first shipment of off-specification used oil from another marketer subject to the requirements of this section, he must provide the marketer with a one-time written and signed notice certifying that he has notified EPA of his used oil management activities; and

(6) *Recordkeeping*—(i) *Used oil fuel that meets the specification.* A marketer who first claims under paragraph (b)(1) of this section that used oil fuel meets the specification must keep copies of analysis (or other information used to make the determination) of used oil for three years. Such marketers must also record in an operating log and keep for three years the following information on each shipment of used oil fuel that meets the specification. Such used oil fuel is not subject to further regulation, unless it is subsequently mixed with hazardous waste or unless it is mixed with used oil so that it no longer meets the specification.

(A) The name and address of the facility receiving the shipment;

(B) The quantity of used oil fuel delivered;

(C) The date of shipment or delivery; and

(D) A cross-reference to the record of used oil analysis (or other information used to make the determination that the oil meets the specification) required under paragraph (b)(6)(i) of this section.

(ii) *Off-specification used oil fuel.* A marketer who receives or initiates an invoice under the requirements of this section must keep a copy of each invoice for three years from the date the invoice is received or prepared. In addition, a marketer must keep a copy of each certification notice that he receives or sends for three years from the date he last engages in an off-specification used oil fuel marketing transaction with the person who sends or receives the certification notice.

(The analysis requirements contained in paragraph (b)(1) of this section were approved by OMB under control number 2050-

0047. The notification requirements contained in paragraph (b)(3) of this section were approved by OMB under control number 2050-0028. The invoice requirements contained in paragraph (b)(4) of this section were approved by OMB under control number 2050-0047. The certification requirements contained in paragraph (b)(5) of this section were approved by OMB under control number 2050-0047. The recordkeeping requirements contained in paragraph (b)(6) of this section were approved by OMB under control number 2050-0047.)

[50 FR 49205, Nov. 29, 1985, as amended at 52 FR 11822, Apr. 13, 1987]

§ 266.44 Standards applicable to burners of used oil burned for energy recovery.

Owners and operators of facilities that burn used oil fuel are "burners" and are subject to the following requirements:

(a) *Prohibition.* The prohibition under § 266.41(b);

(b) *Notification.* Burners of off-specification used oil fuel, and burners of used oil fuel who are the first to claim that the oil meets the specification provided under § 266.40(e), except burners who burn specification oil that they generate, must notify EPA stating the location and general description of used oil management activities. Burners of used oil fuel that meets the specification who receive such oil from a marketer that previously notified EPA are not required to notify. Owners and operators of used oil-fired space heaters that burn used oil fuel under the provisions of § 266.41(b)(2) are exempt from this notification requirement. Even if a burner has previously notified EPA of his hazardous waste management activities under section 3010 of RCRA and obtained an identification number, he must renotify to identify his used oil management activities.

(c) *Required notices.* Before a burner accepts the first shipment of off-specification used oil fuel from a marketer, he must provide the marketer a one-time written and signed notice certifying that:

(1) He has notified EPA stating the location and general description of his used oil management activities; and

(2) He will burn the used oil only in an industrial furnace or boiler identified in § 266.41(b); and

(d) *Used oil fuel analysis.* (1) Used oil fuel burned by the generator is subject to regulation under this subpart unless the burner obtains analysis (or other information) documenting that the used oil meets the specification provided under § 266.40(e).

(2) Burners who treat off-specification used oil fuel by processing, blending, or other treatment to meet the specification provided under § 266.40(e) must obtain analyses (or other information) documenting that the used oil meets the specification.

(e) *Recordkeeping.* A burner who receives an invoice under the requirements of this section must keep a copy of each invoice for three years from the date the invoice is received. Burners must also keep for three years copies of analyses of used oil fuel as may be required by paragraph (d) of this section. In addition, he must keep a copy of each certification notice that he sends to a marketer for three years from the date he last receives off-specification used oil from that marketer.

(The notification requirements contained in paragraph (b) of this section were approved by OMB under control number 2050-0028. The certification requirements contained in paragraph (c) of this section were approved by OMB under control number 2050-0047. The analysis requirements contained in paragraph (d) of this section were approved by OMB under control number 2050-0047. The recordkeeping requirements contained in paragraph (e) of this section were approved by OMB under control number 2050-0047.)

[50 FR 49205, Nov. 29, 1985, as amended at 52 FR 11822, Apr. 13, 1987]

Subpart F—Recyclable Materials Utilized for Precious Metal Recovery

§ 266.70 Applicability and requirements.

(a) The regulations of this subpart apply to recyclable materials that are reclaimed to recover economically significant amounts of gold, silver, platinum, paladium, irridium, osmium, rhodium, ruthenium, or any combination of these.

(b) Persons who generate, transport, or store recyclable materials that are regulated under this subpart are subject to the following requirements:

(1) Notification requirements under section 3010 of RCRA;

(2) Subpart B of Part 262 (for generators), §§ 263.20 and 263.21 (for transporters), and §§ 265.71 and 265.72 (for persons who store) of this chapter;

(c) Persons who store recycled materials that are regulated under this subpart must keep the following records to document that they are not accumulating these materials speculatively (as defined in § 261.1(c) of this chapter);

(1) Records showing the volume of these materials stored at the beginning of the calendar year;

(2) The amount of these materials generated or received during the calendar year; and

(3) The amount of materials remaining at the end of the calendar year.

(d) Recyclable materials that are regulated under this subpart that are accumulated speculatively (as defined in § 261.1(c) of this chapter) are subject to all applicable provisions of Parts 262 through 265, 270 and 124 of this chapter.

Subpart G—Spent Lead-Acid Batteries Being Reclaimed

§ 266.80 Applicability and requirements.

(a) The regulations of this subpart apply to persons who reclaim spent lead-acid batteries that are recyclable materials ("spent batteries"). Persons who generate, transport, or collect spent batteries, or who store spent batteries but do not reclaim them are not subject to regulation under Parts 262 through 266 or Part 270 or 124 of this chapter, and also are not subject to the requirements of section 3010 of RCRA.

(b) Owners or operators of facilities that store spent batteries before reclaiming them are subject to the following requirements.

(1) Notification requirements under section 3010 of RCRA;

(2) All applicable provisions in Subparts A, B (but not § 264.13 (waste analysis)), C, D, E (but not § 264.71 or § 264.72 (dealing with the use of the manifest and manifest discrepancies)), and F through L of Part 264 of this chapter;

[50 FR 666, Jan. 4, 1985, as amended at 50 FR 33543, Aug. 20, 1985]

PART 267—INTERIM STANDARDS FOR OWNERS AND OPERATORS OF NEW HAZARDOUS WASTE LAND DISPOSAL FACILITIES

Subpart A—General

Sec.
267.1 Purpose, scope and applicability.
267.2 Applicability of Part 264 standards.
267.3 Duration of Part 267 standards and their relationship to permits.
267.4 Imminent hazard action.
267.5 Additional permit procedures applicable to Part 267.
267.6 Definitions.

Subpart B—Environmental Performance Standard

267.10 Environmental performance standard.

Subpart C—Landfills

267.20 Applicability.
267.21 General design requirements.
267.22 General operating requirements.
267.23 Closure and post-closure.
267.24 Treatment of waste.
267.25 Additional requirements.

Subpart D—Surface Impoundments

267.30 Applicability.
267.31 General design requirements.
267.32 General operating requirements.
267.33 Closure and post-closure.
267.34 Treatment of waste.
267.35 Additional requirements.

Subpart E—Land Treatment

267.40 Applicability.
267.41 General design requirements.
267.42 General operating requirements.
267.43 Unsaturated zone monitoring.
267.44 Closure and post-closure.
267.45 Treatment of waste.
267.46 Additional requirements.

Subpart F—Ground-Water Monitoring

267.50 Applicability.
267.51 Ground-water monitoring system.
267.52 Ground-water monitoring procedures.
267.53 Additional requirements.

Subpart G—Underground Injection

267.60 Applicability.

Sec.
267.61 General design requirements.
267.62 General operating requirements.
267.63 Closure.
267.64 Additional requirements.

AUTHORITY: Secs. 1006, 2202(a), 3004 and 3005 of the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act of 1976, as amended, 42 U.S.C. 6905, 6912(a), 6924 and 6925.

SOURCE: 46 FR 12429, Feb. 13, 1981, unless otherwise noted.

Subpart A—General

§ 267.1 Purpose, scope and applicability.

(a) The purpose of this part is to establish minimum national standards that define the acceptable management of hazardous waste for new land disposal facilities.

(b) The regulations in this part apply to owners and operators of new hazardous waste landfills, surface impoundments, land treatment facilities and Class I underground injection wells (as defined in § 122.32(g) of this chapter) that require individual RCRA permits under 40 CFR Part 122.

(c) The requirements of this part do not apply to:

(1) A person disposing of hazardous waste by means of ocean disposal subject to a RCRA permit by rule issued under § 122.26(a) of this chapter.

(2) A person disposing of hazardous waste by means of underground injection subject to a RCRA permit by rule under § 122.26(b) of this chapter.

(3) An owner or operator of a POTW subject to a RCRA permit by rule under § 122.26(c) of this chapter.

(4) The owner or operator of a facility permitted, licensed, or registered by a State to manage municipal or industrial solid waste, if the only hazardous waste the facility treats, stores, or disposes of is excluded from regulation under Parts 262 through 265 and Parts 122 and 124 of this chapter by § 261.5 of this chapter;

(5) The owner or operator of a facility which treats or stores hazardous waste, which treatment or storage meets the criteria in § 261.6(A) of this chapter, except to the extent that § 261.6(b) of this chapter provides otherwise;

(6) A generator accumulating waste on-site in compliance with § 262.34 of this chapter;

(7) A farmer disposing of waste pesticides from his own use in compliance with § 262.51 of this chapter;

(8) The owner or operator of a totally enclosed treatment facility, as defined in § 260.10;

(9) The owner or operator of an elementary neutralization unit or a wastewater treatment unit as defined in § 260.10 of this chapter.

(10) Persons with respect to those activities that are carried out to immediately contain or treat a spill of hazardous waste or material which, when spilled, becomes a hazardous waste.

§ 267.2 Applicability of Part 264 standards.

In addition to the standards contained in this part, owners and operators of new hazardous waste landfills, surface impoundments, land treatment facilities and underground injection wells must comply with § 264.18 and Subparts B, C, D, E, G and H of Part 264.

§ 267.3 Duration of Part 267 standards and their relationship to permits.

(a) The regulations in this subpart are applicable, and will serve as a basis for issuing permits, to owners or operators of new hazardous waste landfills, surface impoundments, land treatment facilities, or underground injection facilities until final Part 264 regulations for such facilities become effective or until February 13, 1983, whichever is earlier.

(b) Only those owners and operators of new hazardous waste landfills, surface impoundments, land treatment facilities or underground injection wells who have applied for a permit and for whom public notice of the preparation of a draft permit has been issued under § 124.10 of this chapter by the date final Part 264 regulations for these facilities become effective or [2 years after date of publication], whichever is earlier, may be issued permits under the regulations in this part.

§ 267.4 Imminent hazard action.

Notwithstanding any other provisions of these regulations, enforcement actions may be brought pursuant to section 7003 of RCRA.

§ 267.5 Additional permit procedures applicable to Part 267.

(a) The procedures for issuance, modification, revocation and reissuance, and termination of permits under this part are set forth in Part 124 of this chapter. In addition, the following procedures apply to permits under Part 267:

(1) Any facility for which a draft permit is prepared pursuant to this Part is a major hazardous waste management facility. A fact sheet shall be prepared for each such facility in accordance with § 124.8. Instead of the "brief summary of the basis for the draft permit conditions" required by § 124.8(b)(4), the fact sheet shall include a detailed discussion of basis for the draft permit conditions. This shall include a demonstration that relevant factors listed in Subparts C through G of this part were considered and a showing of how the draft permit reflects these considerations.

(2) The Administrator shall accept any petition under § 124.19 of this chapter and any appeal under § 124.125 of this chapter to review a permit issued under this part.

(b) The provisions of Subparts A and B in Part 122 of this chapter apply to permits under Part 267. In addition to the information required by § 122.4 and § 122.25 of this chapter, the applications for permits under this part must include the following information:

(1) For a landfill, sufficient information to demonstrate compliance with Subparts C and F of this part.

(2) For a surface impoundment, sufficient information to demonstrate compliance with Subparts D and F of this part.

(3) For a land treatment facility, sufficient information to demonstrate compliance with Subparts E and F of this part.

(4) For an underground injection well, sufficient information to demonstrate compliance with Subpart G of this part.

§ 267.6 Definitions.

Unless otherwise specified in this part, terms used in this regulation are defined in §§ 260.10 and 122.3 of this chapter.

Subpart B—Environmental Performance Standard

§ 267.10 Environmental performance standard.

All new landfills, surface impoundments, land treatment facilities and underground injection wells shall be located, designed, constructed, operated, maintained and closed in a manner that will assure protection of human health and the environment. Protection of human health and the environment shall include, but not be limited to:

(a) Prevention of adverse effects on ground-water quality considering:

(1) The volume and physical and chemical characteristics of the waste in the facility, including its potential for migration through soil or through synthetic liner materials;

(2) The hydrogeological characteristics of the facility and surrounding land;

(3) The quantity, quality and directions of ground-water flow;

(4) The proximity and withdrawal rates of ground-water users;

(5) The existing quality of groundwater, including other sources of contamination and their cumulative impact on the ground-water;

(6) The potential for health risks caused by human exposure to waste constituents;

(7) The potential damage to wildlife, crops, vegetation and physical structures caused by exposure to waste constituents;

(8) The persistence and permanence of the potential adverse effects; and

(b) Prevention of adverse effects on surface water quality considering:

(1) The volume and physical and chemical characteristics of the waste in the facility;

(2) The hydrogeological characteristics of the facility and surrounding land, including the topography of the area around the facility;

(3) The quantity, quality and directions of groundwater flow;

(4) The patterns of rainfall in the region;

(5) The proximity of the facility to surface waters;

(6) The uses of nearby surface waters and any water quality standards established for those surface waters;

(7) The existing quality of surface water, including other sources of contamination and their cumulative impact on surface water;

(8) The potential for health risks caused by human exposure to waste constituents;

(9) The potential damage to wildlife, crops, vegetation and physical structures caused by exposure to waste constitutents;

(10) The persistence and permanence of the potential adverse effects; and

(c) Prevention of adverse effects on air quality, considering:

(1) The volume and physical and chemical characteristics of the waste in the facility, including its potential for volatilization and wind dispersal;

(2) The existing quality of the air, including other sources of contamination and their cumulative impact on the air;

(3) The potential for health risks caused by human exposure to waste constitutents;

(4) The potential damage to wildlife, crops, vegetation and physical structures caused by exposure to waste constituents;

(5) The persistence and permanence of the potential adverse effects; and

(d) Prevention of adverse effects due to migration of waste constituents in the subsurface environment, considering:

(1) The volume and physical and chemical characteristics of the waste in the facility, including its potential for migration through soil;

(2) The geologic characteristics of the facility and surrounding land;

(3) The patterns of land use in the region;

(4) The potential for migration of waste constituents into sub-surface physical structures;

(5) The potential for migration of waste constituents into the root zone of food-chain crops and other vegetation;

(6) The potential for health risks caused by human exposure to waste constituents;

(7) The potential damage to wildlife, crops, vegetation and physical structures caused by exposure to waste constituents; and

(8) The persistence and permanence of the potential adverse effects.

Subpart C—Landfills

§ 267.20 Applicability.

The regulations in this subpart apply to owners and operators of new facilities that dispose of hazardous waste in landfills.

§ 267.21 General design requirements.

(a) Each landfill must include a liner designed to comply with § 267.10 of this part. The design of the facility liner must reflect a consideration of:

(1) The physical and chemical characteristics of the waste in the facility;

(2) The pressure head of leachate on the liner;

(3) Climatic conditions in the area;

(4) The permeability of the liner material, including compaction density and moisture content where earthen materials are present;

(5) The physical and chemical properties of the soil underlying the facility that supports any emplaced liner; and

(6) The potential for damage to the liner system that could occur during installation of any emplaced liner.

(b) Each landfill must include a leachate and runoff control system designed to comply with § 267.10 of this part. The design of the facility leachate and runoff control system must reflect a consideration of:

(1) The physical and chemical characteristics of the waste in the facility;

(2) Climatic conditions in the area;

(3) The volume of leachate or contaminated runoff that could be produced at the facility; and

(4) The available options for managing any leachate or contaminated runoff that is collected at the facility.

§ 267.22 General operating requirements.

(a) Incompatible wastes, or incompatible waste and materials, must not be placed in the same landfill, unless § 264.17(b) is complied with. The waste analysis plan required by § 264.13 must include the analysis needed to comply with this paragraph.

(b) Any emplaced liner material must be installed in a manner that will protect the function and physical integrity of the liner.

(c) The leachate and runoff control system must be operated and maintained in a manner that will comply with § 267.10 of this part. The procedures for operating the leachate and runoff control system must reflect a consideration of:

(1) The volume of leachate or contaminated runoff produced at the facility;

(2) The capacity of any leachate or runoff collection device at the facility;

(3) Climatic conditions in the area; and

(4) The quality of the leachate or runoff produced and the available alternatives for managing any leachate or contaminated runoff produced at the facility.

(d) The landfill must be inspected at a sufficient frequency to assure compliance with § 267.10 of this part.

§ 267.23 Closure and post-closure.

(a) A landfill must be closed in a manner that will comply with § 267.10 of this part. Closure must include placement of a final cover over the landfill, and the closure plan under § 264.112 of this chapter must specify the function and design of the cover. Proper closure of a landfill must reflect a consideration of:

(1) The type and amount of waste in the facility;

(2) The mobility and expected rate of migration of waste;

(3) Site location, topography and surrounding land use;

(4) Climatic conditions in the area;

(5) Characteristics of the cover including material, final surface contours, thickness, porosity and permeability, slope, length of run of slope, and type of vegetation on the cover; and

(6) Geological and soil profiles and surface and subsurface hydrology of the site.

(b) A landfill must be maintained in a manner that complies with § 267.10 of this part during the post-closure period. The post-closure plan under § 264.118 of this chapter must specify the procedures that will be used to satisfy this paragraph. Proper maintenance of a landfill during the post-closure period must reflect a consideration of:

(1) The type and amount of waste in the facility;

(2) The mobility and expected rate of migration of the waste;

(3) Site location, topography and surrounding land use;

(4) Climatic conditions in the area;

(5) Characteristics of the cover including material, final surface contours, thickness, porosity and permeability, slope, length of run of slope, and type of vegetation on the cover;

(6) Geological and soil profiles and surface and subsurface hydrology of the site; and

(7) The maintenance of any groundwater monitoring system or leachate and runoff control system at the facility.

§ 267.24 Treatment of waste.

The Regional Administrator may waive any of the requirements in §§ 267.21, 267.22 or 267.23 of this subpart where necessary to achieve treatment of hazardous waste in a landfill, provided that the waiver does not result in noncompliance with § 267.10.

§ 267.25 Additional requirements.

The Regional Administrator may place additional requirements on owners and operators of new landfills, besides those otherwise required by this subpart, where necessary to comply with § 267.10 of this part.

Subpart D—Surface Impoundments

§ 267.30 Applicability.

The regulations in this subpart apply to owners and operators of new facilities that dispose of hazardous waste in surface impoundments.

§ 267.31 General design requirements.

(a) Each surface impoundment must include a liner designed to comply with § 267.10 of this part. The design of the facility liner must reflect a consideration of:

(1) The physical and chemical characteristics of the waste in the facility;

(2) The pressure head on the liner;

(3) Climatic conditions in the area;

(4) The permeability of the liner material, including compaction density and moisture content where earthen materials are present;

(5) The physical and chemical properties of the soil underlying the facility that supports any emplaced liner; and

(6) The potential for damage to the liner system that could occur during installation of any emplaced liner.

(b) Each surface impoundment must be designed so as to prevent overtopping due to wind and wave action, overfilling, precipitation or any combination thereof.

(c) Where dikes are part of the surface impoundment, the dikes must be designed to comply with § 267.10 of this part. The design of any facility dikes must reflect a consideration of:

(1) The structural integrity of the dike, including the effects of plants and burrowing animals on earthern dikes;

(2) The potential for water erosion of the dike; and

(3) The potential for wind erosion of the dike.

§ 267.32 General operating requirements.

(a) Incompatible wastes, or incompatible wastes and materials, must not be placed in the same surface impoundment, unless § 264.17(b) is complied with. The waste analysis plan required by § 264.13 must include the analyses needed to comply with this paragraph.

(b) Any emplaced liner material must ber installed in a manner that will protect the function and physical integrity of the liner.

(c) The surface impoundment must be operated so as to prevent overtopping due to wind and wave action, overfilling, precipitation or any combination thereof.

(d) The surface impoundment must be inspected at a sufficient frequency to assure compliance with § 267.10 of this part.

§ 267.33 Closure and post-closure.

(a) A surface impoundment must be closed in a manner that will comply with § 267.10 of this part. Closure must include placement of a final cover over the surface impoundment, and the closure plan under § 264.112 of this chapter must specify the function and design of the cover. Proper closure of a surface impoundment must reflect a consideration of:

(1) The type and amount of waste in the facility, including the amount of free liquids;

(2) The mobility and expected rate of migration of the waste;

(3) Site location, topography and surrounding land use;

(4) Climatic conditions in the area;

(5) Characteristics of the cover including material, final surface contours, thickness, porosity and permeability, slope, length of run of slope and type of vegetation on the cover;

(6) Geological and soil profiles and surface and subsurface hydrology of the site; and

(7) The potential for eliminating free liquids from the facility.

(b) A surface impoundment must be maintained in a manner that complies with § 267.10 of this part during the post-closure period. The post-closure plan under § 264.118 of this chapter must specify the procedures that will be used to satisfy this paragraph. Proper maintenance of a surface impoundment during the post-closure period must reflect a consideration of:

(1) The type and amount of waste in the facility;

(2) The mobility and expected rate of migration of the waste;

(3) Site location, topography and surrounding land use;

(4) Climatic conditions in the area;

(5) Characteristics of the cover including material, final surface contours, thickness, porosity and permeability, slope, length of run of slope, and type of vegetation on the cover;

(6) Geological and soil profiles and surface and subsurface hydrology of the site; and

(7) The maintenance of any ground-water monitoring system at the facility.

§ 267.34 Treatment of waste.

The Regional Administrator may waive any of the requirements in §§ 267.31, 267.32 or 267.33 of this subpart where necessary to achieve treatment of hazardous waste in a surface impoundment, provided that the waiver does not result in noncompliance.

§ 267.35 Additional requirements.

The Regional Administrator may place additional requirements on owners and operators of new surface impoundments, besides those otherwise required by this subpart, where necessary to comply with § 267.10 of this part.

Subpart E—Land Treatment

§ 267.40 Applicability.

The regulations in this subpart apply to owners and operators of new facilities that dispose of hazardous waste in land treatment facilities.

§ 267.41 General design requirements.

Each land treatment facility must include a runoff control system designed to comply with § 267.10 of this part. The design of the facility runoff control system must reflect a consideration of:

(a) The physical, biological and chemical characteristics of the waste in the facility;

(b) Climatic conditions in the area;

(c) The volume of runoff that could be produced at the facility; and

(d) The available options for managing any contaminated runoff that is collected at the facility.

§ 267.42 General operating requirements.

(a) Incompatible wastes, or incompatible wastes and materials, must not be placed in the same land treatment facility, unless § 264.17(b) is complied with. The waste analysis plan required by § 264.13 must include the analyses needed to comply with this paragraph.

(b) The runoff control system must be operated and maintained in a manner that will comply with § 267.10 of this part. The procedures for operating the runoff control system must reflect a consideration of:

(1) The volume of contaminated runoff produced at the facility;

(2) The capacity of any runoff collection device at the facility;

(3) Climatic conditions in the area; and

(4) The quality of the runoff produced and the available options for managing any contaminated runoff from the facility.

(c) The land treatment facility must be operated to treat the waste in the facility to the extent necessary to comply with § 267.10 of this part.

(d) If food-chain crops are grown at the facility, the facility must be operated in a manner designed to protect the quality of those crops to the extent necessary to comply with § 267.10 of this part. Proper operation of a land treatment facility on which food-chain crops are grown must reflect a consideration of:

(1) The characteristics of the soil, including the pH;

(2) The volume and chemical, biological and physical characteristics of the waste in the facility;

(3) The type of crop to be grown;

(4) The manner in which such crop marketed (e.g. direct sale to consumers, use as an animal feed grain);

(5) The potential future uses of the facility;

(6) The potential for crop uptake of waste constituents; and

(7) The potential exposure of workers who handle the crop to waste constituents.

(e) The treatment facility must be inspected at a sufficient frequency to assure compliance with § 267.10 of this part.

§ 267.43 Unsaturated zone monitoring.

In addition to the ground-water monitoring program required in Subpart F of this part, a land treatment facility must have an unsaturated zone monitoring program which will

assure compliance with § 267.10. An unsaturated zone monitoring program must include an unsaturated zone monitoring system at the facility or at a representative test plot, as well as procedures for sampling, analysis and evaluation of data. The unsaturated zone monitoring program required by this paragraph must reflect a consideration of:

(a) The placement and depth of monitoring wells that is necessary to obtain a representative sample of the success of waste treatment in the facility;

(b) Soil characteristics, including its pH, its permeability and the level of microbial activity in the soil;

(c) Climatic conditions in the area;

(d) The potential for rapid migration of waste constituents through the soil; and

(e) The accessibility of the monitoring system devices for maintenance and repair.

§ 267.44 Closure and post-closure.

(a) A land treatment facility must be closed in a manner that will comply with § 267.10 of this part. The closure plan under § 264.112 of this chapter must specify the measures which will be used to satisfy this paragraph. Proper closure of a land treatment facility must reflect a consideration of:

(1) The type and amount of waste applied to the facility;

(2) The mobility and expected rate of migration of the waste;

(3) Site location, topography and surrounding land use;

(4) Climatic conditions in the area, including the amount, frequency and pH of precipitation;

(5) Geologic and soil profiles and surface and subsurface hydrology of the site, including cation exchange capacity, total organic carbon and pH of the soil; and

(6) Unsaturated zone monitoring information obtained under § 267.43.

(b) A land treatment facility must be maintained in a manner that complies with § 267.10 of this part during the post-closure period. The post-closure plan under § 264.118 of this chapter must specify the procedures that will be used to satisfy this paragraph. Proper maintenance of a land treatment facility during the post-closure period must reflect a consideration of:

(1) The type and amount of waste applied to the facility;

(2) The mobility and expected rate of migration of the waste;

(3) Site location, topography and surrounding land use;

(4) Climatic conditions in the area, including the amount, frequency and pH of precipitation;

(5) Geologic and soil profiles and surface and subsurface hydrology of the site, including cation exchange capacity, total organic carbon and pH of the soil;

(6) Unsaturated zone monitoring information obtained under § 267.43; and

(7) The maintenance of any ground-water monitoring system at the facility.

§ 267.45 Treatment of waste.

The Regional Administrator may waive any of the requirements in § 267.21, § 267.22 or § 267.23 of this subpart where necessary to achieve treatment of hazardous waste in a land treatment facility, provided that the waiver does not result in non-compliance with § 267.10.

§ 267.46 Additional requirements.

The Regional Administrator may place additional requirements on owners or operators of new land treatment facilities, besides those otherwise required by this subpart, where necessary to comply with § 267.10 of this part.

Subpart F—Ground-Water Monitoring

§ 267.50 Applicability.

Each new hazardous waste landfill, surface impoundment, or land treatment facility must have a ground-water monitoring program, which includes a ground-water monitoring system, procedures for sampling, analysis and evaluation of ground-water data, and appropriate response procedures.

§ 267.51 Ground-water monitoring system.

The ground-water system required by this subpart must be capable of de-

termining the facility's impact on ground-water in the uppermost aquifer so as to assure compliance with § 267.10 of this part. The design of the ground-water monitoring system must reflect a consideration of:

(a) The placement and depth of monitoring wells that is necessary to obtain a representative sample of constituents in the uppermost aquifer, including those present in the ground-water upgradient from the facility;

(b) Measures such as casing which maintain the integrity of the monitoring well bore hole; and

(c) Measures which prevent contamination of ground-water samples.

§ 267.52 Ground-water monitoring procedures.

(a) The ground-water monitoring procedures required by this subpart must be capable of assuring compliance with § 267.10 of this part. The procedures must reflect a consideration of:

(1) Sample collection procedures;

(2) Sample preservation and shipment procedures;

(3) Analytical methods;

(4) Chain of custody control; and

(5) Evaluation procedures, including methods for determining the extent and rate of migration of waste constituents.

(b) The ground-water monitoring procedures required by this subpart must include appropriate procedures for when the ground-water monitoring program indicates that the facility is not in compliance with § 267.10 of this part. Such response procedures must be contained in the contingency plan required by Subpart D of Part 264.

§ 267.53 Additional requirements.

The Regional Administrator may place additional ground-water monitoring requirements on owners or operators of facilities subject to this part, besides those otherwise required by this subpart, where necessary to comply with § 267.10 of this part.

Subpart G—Underground Injection

§ 267.60 Applicability.

The regulations in this subpart apply to owners and operators of new facilities that dispose of hazard waste in underground injection wells which are classified as Class I under § 122.32(a) of this chapter.

§ 267.61 General design requirements.

An injection well must be designed to comply with § 267.10 of this part. The facility design must include measures (*e.g.* casing, tubing and packer set) to prevent the escape of injected fluids to the area above the zone of injection.

§ 267.62 General operating requirements.

An injection well must be operated in a manner that will comply with § 267.10 of this part. The methods for operating the injection well must reflect a consideration of:

(a) The volume and physical and chemical characteristics of the waste injected in the well;

(b) The injection pressure; and

(c) Monitoring measures to assure that the mechanical integrity of the well is maintained.

§ 267.63 Closure.

An injection well must be plugged and sealed at closure to prevent the escape of injected fluids to the area above the zone of injection.

§ 267.64 Additional requirements.

The Regional Administrator may place additional requirements on owners and operators of new injection wells, besides those otherwise required by this subpart, where necessary to comply with § 267.10 of this part.

PART 268—LAND DISPOSAL RESTRICTIONS

Subpart A—General

Sec.

268.1 Purpose, scope, and applicability.
268.2 Definitions applicable in this part.
268.3 Dilution prohibited as a substitute for treatment.
268.4 Treatment surface impoundment exemption.
268.5 Procedures for case-by-case extensions to an effective date.

Sec.
268.6 Petitions to allow land disposal of a waste prohibited under Subpart C of Part 268.
268.7 Waste analysis.
268.8 Landfill and surface impoundment disposal restrictions.
268.9 Special rules regarding wastes that exhibit a characteristic.

Subpart B—Schedule for Land Disposal Prohibition and Establishment of Treatment Standards

268.10 Identification of wastes to be evaluated by August 8, 1988.
268.11 Identification of wastes to be evaluated by June 8, 1989.
268.12 Identification of wastes to be evaluated by May 8, 1990.
268.13 Schedule for wastes identified or listed after November 8, 1984.

Subpart C—Prohibitions on Land Disposal

268.30 Waste specific prohibitions—Solvent wastes.
268.31 Waste specific prohibitions—Dioxin-containing wastes.
268.32 Waste specific prohibitions—California list wastes.
268.33 Waste specific prohibitions—First third wastes.
268.34 Waste specific prohibitions—second third wastes.
268.35 Waste specific prohibitions—Third Third wastes.

Subpart D—Treatment Standards

268.40 Applicability of treatment standards.
268.41 Treatment standards expressed as concentrations in waste extract.
268.42 Treatment standards expressed as specified technologies.
268.43 Treatment standards expressed as waste concentrations. [Reserved]
268.44 Variance from a treatment standard.

Subpart E—Prohibitions on Storage

268.50 Prohibitions on storage of restricted wastes.

APPENDIX I—TOXICITY CHARACTERISTIC LEACHING PROCEDURE (TCLP) [NOTE]
APPENDIX II—TREATMENT STANDARDS (AS CONCENTRATIONS IN THE TREATMENT RESIDUAL EXTRACT)
APPENDIX III—LIST OF HALOGENATED ORGANIC COMPOUNDS REGULATED UNDER § 268.32
APPENDIX IV—ORGANOMETALLIC LAB PACKS
APPENDIX V—ORGANIC LAB PACKS
APPENDIX VI—RECOMMENDED TECHNOLOGIES TO ACHIEVE DEACTIVATION OF CHARACTERISTICS IN SECTION 268.42
APPENDIX VII—EFFECTIVE DATES OF SURFACE DISPOSED WASTES REGULATED IN THE LDRS
APPENDIX VIII—NATIONAL CAPACITY LDR VARIANCES FOR UIC WASTES COMPREHENSIVE LIST

AUTHORITY: 42 U.S.C. 6905, 6912(a), 6921, and 6924.

Subpart A—General

§ 268.1 Purpose, scope and applicability.

(a) This part identifies hazardous wastes that are restricted from land disposal and defines those limited circumstances under which an otherwise prohibited waste may continue to be land disposed.

(b) Except as specifically provided otherwise in this part or Part 261 of this chapter, the requirements of this part apply to persons who generate or transport hazardous waste and owners and operators of hazardous waste treatment, storage, and disposal facilities.

(c) Restricted wastes may continue to be land disposed as follows:

(1) Where persons have been granted an extension to the effective date of a prohibition under Subpart C of this part or pursuant to § 268.5, with respect to those wastes covered by the extension;

(2) Where persons have been granted an exemption from a prohibition pursuant to a petition under § 268.6, with respect to those wastes and units covered by the petition;

(3) Wastes that are hazardous only because they exhibit a hazardous characteristic, and which are otherwise prohibited from land disposal under this part, are not prohibited from land disposal if the wastes:

(i) Are disposed into a nonhazardous or hazardous injection well as defined in 40 CFR 144.6(a); and

(ii) Do not exhibit any prohibited characteristic of hazardous waste at the point of injection.

(d) The requirements of this part shall not affect the availability of a waiver under section 121(d)(4) of the Comprehensive Environmental Re-

sponse, Compensation, and Liability Act of 1980 (CERCLA).

(e) The following hazardous wastes are not subject to any provision of part 268:

(1) Waste generated by small quantity generators of less than 100 kilograms of non-acute hazardous waste or less than 1 kilogram of acute hazardous waste per month, as defined in § 261.5 of this chapter;

(2) Waste pesticides that a farmer disposes of pursuant to § 262.70;

(3) Wastes identified or listed as hazardous after November 8, 1984 for which EPA has not promulgated land disposal prohibitions or treatment standards.

[51 FR 40638, Nov. 7, 1986; 52 FR 21016, June 4, 1987, as amended at 53 FR 27165, July 19, 1988; 53 FR 31212, Aug. 17, 1988; 54 FR 36970, Sept. 6, 1989; 55 FR 22686, June 1, 1990]

§ 268.2 Definitions applicable in this part.

When used in this part the following terms have the meanings given below:

(a) *Halogenated organic compounds* or *HOCs* means those compounds having a carbon-halogen bond which are listed under appendix III to this part.

(b) *Hazardous constituent or constituents* means those constituents listed in appendix VIII to part 261 of this chapter.

(c) *Land disposal* means placement in or on the land and includes, but is not limited to, placement in a landfill, surface impoundment, waste pile, injection well, land treatment facility, salt dome formation, salt bed formation, underground mine or cave, or placement in a concrete vault or bunker intended for disposal purposes.

(d) *Nonwastewaters* are wastes that do not meet the criteria for wastewaters in paragraph (g)(6) of this section.

(e) *Polychlorinated biphenyls* or *PCBs* are halogenated organic compounds defined in accordance with 40 CFR 761.3.

(f) *Wastewaters* are wastes that contain less than 1% by weight total organic carbon (TOC) *and* less than 1% by weight total suspended solids (TSS), with the following exceptions:

(1) *F001, F002, F003, F004, F005 solvent-water mixtures* that contain less than 1% by weight TOC or less than 1% by weight total F001, F002, F003, F004, F005 solvent constituents listed in § 268.41, Table CCWE.

(2) *K011, K013, K014 wastewaters* (as generated) that contain less than 5% by weight TOC and less than 1% by weight TSS.

(3) *K103 and K104 wastewaters* contain less than 4% by weight TOC and less than 1% by weight TSS.

(g) *Inorganic Solid Debris* are nonfriable inorganic solids that are incapable of passing through a 9.5 mm standard sieve that require cutting, or crushing and grinding in mechanical sizing equipment prior to stabilization, limited to the following inorganic or metal materials:

(1) Metal slags (either dross or scoria).

(2) Glassified slag.

(3) Glass.

(4) Concrete (excluding cementitious or pozzolanic stabilized hazardous wastes).

(5) Masonry and refractory bricks.

(6) Metal cans, containers, drums, or tanks.

(7) Metal nuts, bolts, pipes, pumps, valves, appliances, or industrial equipment.

(8) Scrap metal as defined in 40 CFR 261.1(c)(6).

[55 FR 22686, June 1, 1990]

§ 268.3 Dilution prohibited as a substitute for treatment.

(a) Except as provided in paragraph (b) of this section, no generator, transporter, handler, or owner or operator of a treatment, storage, or disposal facility shall in any way dilute a restricted waste or the residual from treatment of a restricted waste as a substitute for adequate treatment to achieve compliance with subpart D of this part, to circumvent the effective date of a prohibition in subpart C of this part, to otherwise avoid a prohibition in subpart C of this part, or to circumvent a land disposal prohibition imposed by RCRA section 3004.

(b) Dilution of wastes that are hazardous only because they exhibit a characteristic in a treatment system

which treats wastes subsequently discharged to a water of the United States pursuant to a permit issued under section 402 of the Clean Water Act (CWA) or which treats wastes for purposes of pretreatment requirements under section 307 of the CWA is not impermissible dilution for purposes of this section unless a method has been specified as the treatment standard in § 268.42.

[55 FR 22686, June 1, 1990]

§ 268.4 Treatment surface impoundment exemption.

(a) Wastes which are otherwise prohibited from land disposal under this part may be treated in a surface impoundment or series of impoundments provided that:

(1) Treatment of such wastes occurs in the impoundments;

(2) The following conditions are met:

(i) *Sampling and testing.* For wastes with treatment standards in Subpart D of this part and/or prohibition levels in Subpart C of this part or RCRA section 3004(d), the residues from treatment are analyzed, as specified in § 268.7 or § 268.32, to determine if they meet the applicable treatment standards or where no treatment standards have been established for the waste, the applicable prohibition levels. The sampling method, specified in the waste analysis plan under § 264.13 or § 265.13, must be designed such that representative samples of the sludge and the supernatant are tested separately rather than mixed to form homogeneous samples.

(ii) *Removal.* The following treatment residues (including any liquid waste) must be removed at least annually: residues which do not meet the treatment standards promulgated under Subpart D of this part; residues which do not meet the prohibition levels established under Subpart C of this part or imposed by statute (where no treatment standards have been established); residues which are from the treatment of wastes prohibited from land disposal under Subpart C of this part (where no treatment standards have been established and no prohibition levels apply); or residues from managing listed wastes which are not delisted under § 260.22 of this chapter. However, residues which are the subject of a valid certification under § 268.8 made no later than a year after placement of the wastes in an impoundment are not required to be removed annually. If the volume of liquid flowing through the impoundment or series of impoundments annually is greater than the volume of the impoundment or impoundments, this flow-through constitutes removal of the supernatant for the purpose of this requirement.

(iii) *Subsequent management.* Treatment residues may not be placed in any other surface impoundment for subsequent management unless the residues are the subject of a valid certification under § 268.8 which allows disposal in surface impoundments meeting the requirements of section 268.8(a).

(iv) *Recordkeeping.* The procedures and schedule for the sampling of impoundment contents, the analysis of test data, and the annual removal of residues which do not meet the treatment standards, or prohibition levels (where no treatment standards have been established), or which are from the treatment of wastes prohibited from land disposal under Subpart C (where no treatment standards have been established and no prohibition levels apply), must be specified in the facility's waste analysis plan as required under § 264.13 or § 265.13 of this chapter.

(3) The impoundment meets the design requirements of § 264.221(c) or § 265.221(a) of this chapter, regardless that the unit may not be new, expanded, or a replacement, and be in compliance with applicable ground water monitoring requirements of Subpart F of Part 264 or Part 264 of this chapter unless:

(i) Exempted pursuant to § 264.221 (d) or (e) of this chapter, or to § 265.221 (c) or (d) of this chapter; or,

(ii) Upon application by the owner or operator, the Administrator, after notice and an opportunity to comment, has granted a waiver of the requirements on the basis that the surface impoundment:

(A) Has at least one liner, for which there is no evidence that such liner is leaking;

(B) Is located more than one-quarter mile from an underground source of drinking water; and

(C) Is in compliance with generally applicable ground water monitoring requirements for facilities with permits; or,

(iii) Upon application by the owner or operator, the Administrator, after notice and an opportunity to comment, has granted a modification to the requirements on the basis of a demonstration that the surface impoundment is located, designed, and operated so as to assure that there will be no migration of any hazardous constituent into ground water or surface water at any future time.

(4) The owner or operator submits to the Regional Administrator a written certification that the requirements of § 268.4(a)(3) have been met and submits a copy of the waste analysis plan required under § 268.4(a)(2). The following certification is required:

I certify under penalty of law that the requirements of 40 CFR 268.4(a)(3) have been met for all surface impoundments being used to treat restricted wastes. I believe that the submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

(b) Evaporation of hazardous constituents as the principal means of treatment is not considered to be treatment for purposes of an exemption under this section.

[51 FR 40638, Nov. 7, 1986; 52 FR 21016, June 4, 1987, as amended at 52 FR 25788, July 8, 1987; 53 FR 31212, Aug. 17, 1988]

§ 268.5 Procedures for case-by-case extensions to an effective date.

(a) Any person who generates, treats, stores, or disposes of a hazardous waste may submit an application to the Administrator for an extension to the effective date of any applicable restriction established under Subpart C of this part. The applicant must demonstrate the following:

(1) He has made a good-faith effort to locate and contract with treatment, recovery, or disposal facilities nationwide to manage his waste in accordance with the effective date of the applicable restriction established under Subpart C of this Part;

(2) He has entered into a binding contractual commitment to construct or otherwise provide alternative treatment, recovery (e.g., recycling), or disposal capacity that meets the treatment standards specified in Subpart D or, where treatment standards have not been specified, such treatment, recovery, or disposal capacity is protective of human health and the environment.

(3) Due to circumstances beyond the applicant's control, such alternative capacity cannot reasonably be made available by the applicable effective date. This demonstration may include a showing that the technical and practical difficulties associated with providing the alternative capacity will result in the capacity not being available by the applicable effective date;

(4) The capacity being constructed or otherwise provided by the applicant will be sufficient to manage the entire quantity of waste that is the subject of the application;

(5) He provides a detailed schedule for obtaining required operating and construction permits or an outline of how and when alternative capacity will be available;

(6) He has arranged for adequate capacity to manage his waste during an extension and has documented in the application the location of all sites at which the waste will be managed; and

(7) Any waste managed in a surface impoundment or landfill during the extension period will meet the requirements of paragraph (h)(2) of this section.

(b) An authorized representative signing an application described under paragraph (a) of this section shall make the following certification:

I certify under penalty of law that I have personally examined and am familiar with the information submitted in this document and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

(c) After receiving an application for an extension, the Administrator may request any additional information which he deems as necessary to evaluate the application.

(d) An extension will apply only to the waste generated at the individual facility covered by the application and will not apply to restricted waste from any other facility.

(e) On the basis of the information referred to in paragraph (a) of this section, after notice and opportunity for comment, and after consultation with appropriate State agencies in all affected States, the Administrator may grant an extension of up to 1 year from the effective date. The Administrator may renew this extension for up to 1 additional year upon the request of the applicant if the demonstration required in paragraph (a) of this section can still be made. In no event will an extension extend beyond 24 months from the applicable effective date specified in Subpart C of Part 268. The length of any extension authorized will be determined by the Administrator based on the time required to construct or obtain the type of capacity needed by the applicant as described in the completion schedule discussed in paragraph (a)(5) of this section. The Administrator will give public notice of the intent to approve or deny a petition and provide an opportunity for public comment. The final decision on a petition will be published in the FEDERAL REGISTER.

(f) Any person granted an extension under this section must immediately notify the Administrator as soon as he has knowledge of any change in the conditions certified to in the application.

(g) Any person granted an extension under this section shall submit written progress reports at intervals designated by the Administrator. Such reports must describe the overall progress made toward constructing or otherwise providing alternative treatment, recovery or disposal capacity; must identify any event which may cause or has caused a delay in the development of the capacity; and must summarize the steps taken to mitigate the delay. The Administrator can revoke the extension at any time if the applicant does not demonstrate a good-faith effort to meet the schedule for completion, if the Agency denies or revokes any required permit, if conditions certified in the application change, or for any violation of this chapter.

(h) Whenever the Administrator establishes an extension to an effective date under this section, during the period for which such extension is in effect:

(1) The storage restrictions under § 268.50(a) do not apply; and

(2) Such hazardous waste may be disposed in a landfill or surface impoundment only if such unit is in compliance with the technical requirements of the following provisions regardless of whether such unit is existing, new, or a replacement or lateral expansion.

(i) The landfill, if in interim status, is in compliance with the requirements of Subpart F of Part 265 and § 265.301 (a), (c), and (d) of this chapter; or,

(ii) The landfill, if permitted, is in compliance with the requirements of Subpart F of Part 264 and § 264.301 (c), (d) and (e) of this chapter;

(iii) The surface impoundment, if in interim status, is in compliance with the requirements of Subpart F of Part 265, § 265.221 (a), (c), and (d) of this chapter, and RCRA section 3005(j)(1); or

(iv) The surface impoundment, if permitted, is in compliance with the requirements of Subpart F of Part 264 and § 264.221 (c), (d) and (e) of this chapter.

(v) The landfill, if disposing of containerized liquid hazardous wastes containing PCBs at concentrations greater than or equal to 50 ppm but less than 500 ppm, is also in compliance with the requirements of 40 CFR 761.75 and Parts 264 and 265.

(i) Pending a decision on the application the applicant is required to comply with all restrictions on land disposal under this part once the effective date for the waste has been reached.

(Approved by the Office of Management and Budget under control number 2050-0062)

[51 FR 40638, Nov. 7, 1986; 52 FR 21016, June 4, 1987, as amended at 52 FR 25788, July 8, 1987; 54 FR 36971, Sept. 6, 1989; 55 FR 23935, June 13, 1990]

§ 268.6 Petitions to allow land disposal of a waste prohibited under Subpart C of Part 268.

(a) Any person seeking an exemption from a prohibition under Subpart C of this part for the disposal of a restricted hazardous waste in a particular unit or units must submit a petition to the Administrator demonstrating, to a reasonable degree of certainty, that there will be no migration of hazardous constituents from the disposal unit or injection zone for as long as the wastes remain hazardous. The demonstration must include the following components:

(1) An identification of the specific waste and the specific unit for which the demonstration will be made;

(2) A waste analysis to describe fully the chemical and physical characteristics of the subject waste;

(3) A comprehensive characterization of the disposal unit site including an analysis of background air, soil, and water quality.

(4) A monitoring plan that detects migration at the earliest practicable time;

(5) Sufficient information to assure the Administrator that the owner or operator of a land disposal unit receiving restricted waste(s) will comply with other applicable Federal, State, and local laws.

(b) The demonstration referred to in paragraph (a) of this section must meet the following criteria:

(1) All waste and environmental sampling, test, and analysis data must be accurate and reproducible to the extent that state-of-the-art techniques allow;

(2) All sampling, testing, and estimation techniques for chemical and physical properties of the waste and all environmental parameters must have been approved by the Administrator;

(3) Simulation models must be calibrated for the specific waste and site conditions, and verified for accuracy by comparison with actual measurements;

(4) A quality assurance and quality control plan that addresses all aspects of the demonstration must be approved by the Administrator; and,

(5) An analysis must be performed to identify and quantify any aspects of the demonstration that contribute significantly to uncertainty. This analysis must include an evaluation of the consequences of predictable future events, including, but not limited to, earthquakes, floods, severe storm events, droughts, or other natural phenomena.

(c) Each petition referred to in paragraph (a) of this section must include the following:

(1) A monitoring plan that describes the monitoring program installed at and/or around the unit to verify continued compliance with the conditions of the variance. This monitoring plan must provide information on the monitoring of the unit and/or the environment around the unit. The following specific information must be included in the plan:

(i) The media monitored in the cases where monitoring of the environment around the unit is required;

(ii) The type of monitoring conducted at the unit, in the cases where monitoring of the unit is required;

(iii) The location of the monitoring stations;

(iv) The monitoring interval (frequency of monitoring at each station);

(v) The specific hazardous constituents to be monitored;

(vi) The implementation schedule for the monitoring program;

(vii) The equipment used at the monitoring stations;

(viii) The sampling and analytical techniques employed; and

(ix) The data recording/reporting procedures.

(2) Where applicable, the monitoring program described in paragraph (c)(1) of this section must be in place for a period of time specified by the Administrator, as part of his approval of the petition, prior to receipt of prohibited waste at the unit.

(3) The monitoring data collected according to the monitoring plan specified under paragraph (c)(1) of this section must be sent to the Administrator according to a format and schedule

specified and approved in the monitoring plan, and

(4) A copy of the monitoring data collected under the monitoring plan specified under paragraph (c)(1) of this section must be kept on-site at the facility in the operating record.

(5) The monitoring program specified under paragraph (c)(1) of this section meet the following criteria:

(i) All sampling, testing, and analytical data must be approved by the Administrator and must provide data that is accurate and reproducible.

(ii) All estimation and monitoring techniques must be approved by the Administrator.

(iii) A quality assurance and quality control plan addressing all aspects of the monitoring program must be provided to and approved by the Administrator.

(d) Each petition must be submitted to the Administrator.

(e) After a petition has been approved, the owner or operator must report any changes in conditions at the unit and/or the environment around the unit that significantly depart from the conditions described in the variance and affect the potential for migration of hazardous constituents from the units as follows:

(1) If the owner or operator plans to make changes to the unit design, construction, or operation, such a change must be proposed, in writing, and the owner or operator must submit a demonstration to the Administrator at least 30 days prior to making the change. The Administrator will determine whether the proposed change invalidates the terms of the petition and will determine the appropriate response. Any change must be approved by the Administrator prior to being made.

(2) If the owner or operator discovers that a condition at the site which was modeled or predicted in the petition does not occur as predicted, this change must be reported, in writing, to the Administrator within 10 days of discovering the change. The Administrator will determine whether the reported change from the terms of the petition requires further action, which may include termination of waste acceptance and revocation of the petition, petition modifications, or other responses.

(f) If the owner or operator determines that there is migration of hazardous constituent(s) from the unit, the owner or operator must:

(1) Immediately suspend receipt of prohibited waste at the unit, and

(2) Notify the Administrator, in writing, within 10 days of the determination that a release has occurred.

(3) Following receipt of the notification the Administrator will determine, within 60 days of receiving notification, whether the owner or operator can continue to receive prohibited waste in the unit and whether the variance is to be revoked. The Administrator shall also determine whether further examination of any migration is warranted under applicable provisions of Part 264 or Part 265.

(g) Each petition must include the following statement signed by the petitioner or an authorized representative:

I certify under penalty of law that I have personally examined and am familiar with the information submitted in this petition and all attached documents, and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

(h) After receiving a petition, the Administrator may request any additional information that reasonably may be required to evaluate the demonstration.

(i) If approved, the petition will apply to land disposal of the specific restricted waste at the individual disposal unit described in the demonstration and will not apply to any other restricted waste at that disposal unit, or to that specific restricted waste at any other disposal unit.

(j) The Administrator will give public notice in the FEDERAL REGISTER of the intent to approve or deny a petition and provide an opportunity for public comment. The final decision on a petition will be published in the FEDERAL REGISTER.

(k) The term of a petition granted under this section shall be no longer

than the term of the RCRA permit if the disposal unit is operating under a RCRA permit, or up to a maximum of 10 years from the date of approval provided under paragraph (g) of this section if the unit is operating under interim status. In either case, the term of the granted petition shall expire upon the termination or denial of a RCRA permit, or upon the termination of interim status or when the volume limit of waste to be land disposed during the term of petition is reached.

(l) Prior to the Administrator's decision, the applicant is required to comply with all restrictions on land disposal under this part once the effective date for the waste has been reached.

(m) The petition granted by the Administrator does not relieve the petitioner of his responsibilities in the management of hazardous waste under 40 CFR Part 260 through Part 271.

(n) Liquid hazardous wastes containing polychlorinated biphenyls at concentrations greater than or equal to 500 ppm are not eligible for an exemption under this section.

(Approved by the Office of Management and Budget under control number 2050-0062)

[51 FR 40638, Nov. 7, 1986; 52 FR 21016, June 4, 1987, as amended at 52 FR 25789, July 8, 1987; 53 FR 31212, Aug. 17, 1988; 54 FR 36971, Sept. 6, 1989]

§ 268.7 Waste analysis.

(a) Except as specified in § 268.32 or section 268.43 of the part, the generator must test his waste, or test an extract developed using the test method described in Appendix I of this part, or use knowledge of the waste, to determine if the waste is restricted from land disposal under this part.

(1) If a generator determines that he is managing a restricted waste under this part and the waste does not meet the applicable treatment standards set forth in Subpart D of this part or exceeds the applicable prohibition levels set forth in § 268.32 or RCRA § 3004(d), with each shipment of waste the generator must notify the treatment or storage facility in writing of the appropriate treatment standards set forth in Subpart D of this part and any applicable prohibition levels set forth in § 268.32 or RCRA § 3004(d). The notice must include the following information:

(i) EPA Hazardous Waste Number;

(ii) The corresponding treatment standards for wastes F001-F005, F039, and wastes prohibited pursuant to § 268.32 or RCRA Section 3004(d). Treatment standards for all other restricted wastes may be referenced by including on the notification the subcategory of the waste, the treatability group(s) of the waste(s), and the CFR section(s) and paragraphs where the treatment standards appear. Where the applicable treatment standards are expressed as specified technologies in § 268.42, the applicable five-letter treatment code found in Table 1 of § 268.42 (*e.g.*, INCIN, WETOX) also must be listed on the notification.

(iii) The manifest number associated with the shipment of waste; and

(iv) Waste analysis data, where available.

(2) If a generator determines that he is managing a restricted waste under this part, and determines that the waste can be land disposed without further treatment, with each shipment of waste he must submit, to the treatment, storage, or land disposal facility, a notice and a certification stating that the waste meets the applicable treatment standards set forth in Subpart D of this part and the applicable prohibition levels set forth in § 268.32 or RCRA § 3004(d).

(i) The notice must include the following information:

(A) EPA Hazardous Waste Number;

(B) The corresponding treatment standards for wastes F001-F005, F039, and wastes prohibited pursuant to § 268.32 or RCRA Section 3004(d). Treatment standards for all other restricted wastes may be referenced by including on the notification the subcategory of the waste, the treatability group(s) of the waste(s), and the CFR section(s) and paragraphs where the treatment standards appear. Where the applicable treatment standards are expressed as specified technologies in § 268.42, the applicable five-letter treatment code found in Table 1

§ 268.42 (*e.g.*, INCIN, WETOX) also must be listed on the notification.

(C) The manifest number associated with the shipment of waste;

(D) Waste analysis data, where available.

(ii) The certification must be signed by an authorized representative and must state the following:

I certify under penalty of law that I personally have examined and am familiar with the waste through analysis and testing or through knowledge of the waste to support this certification that the waste complies with the treatment standards specified in 40 CFR Part 268 Subpart D and all applicable prohibitions set forth in 40 CFR 268.32 or RCRA section 3004(d). I believe that the information I submitted is true, accurate and complete. I am aware that there are significant penalties for submitting a false certification, including the possiblity of a fine and imprisonment.

(3) If a generator's waste is subject to an exemption from a prohibition on the type of land disposal method utilized for the waste (such as, but not limited to, a case-by-case extension under § 268.5, an exemption under § 268.6, or a nationwide capacity variance under subpart C), with each shipment of waste he must submit a notice to the facility receiving his waste stating that the waste is not prohibited from land disposal. The notice must include the following information:

(i) EPA Hazardous Waste Number;

(ii) The corresponding treatment standards for wastes F001-F005, F039, and wastes prohibited pursuant to § 268.32 or RCRA section 3004(d). Treatment standards for all other restricted wastes may be referenced by including on the notification the subcategory of the waste, the treatability group(s) of the waste(s), and the CFR section(s) and paragraphs where the treatment standards appear. Where the applicable treatment standards are expressed as specified technologies in § 268.42, the applicable five-letter treatment code found in Table 1 of § 268.42 (*e.g.*, INCIN, WETOX) also must be listed on the notification.

(iii) The manifest number associated with the shipment of waste;

(iv) Waste analysis data, where available; and

(v) The date the waste is subject to the prohibitions.

(4) If a generator is managing a prohibited waste in tanks or containers regulated under 40 CFR 262.34, and is treating such waste in such tanks or containers to meet applicable treatment standards under Subpart D of this part, the generator must develop and follow a written waste analysis plan which describes the procedures the generator will carry out to comply with the treatment standards. The plan must be kept on-site in the generator's records, and the following requirements must be met:

(i) The waste analysis plan must be based on a detailed chemical and physical analysis of a representative sample of the prohibited waste(s) being treated, and contain all information necessary to treat the waste(s) in accordance with the requirements of this Part, including the selected testing frequency.

(ii) Such plan must be filed with the EPA Regional Administrator (or his designated representative) or State authorized to implement Part 268 requirements a minimum of 30 days prior to the treatment activity, with delivery verified.

(iii) Wastes shipped off-site pursuant to this paragraph must comply with the notification requirements of § 268.7(a)(2).

(5) If a generator determines whether the waste is restricted based solely on his knowledge of the waste, all supporting data used to make this determination must be retained on-site in the generator's files. If a generator determines whether the waste is restricted based on testing this waste or an extract developed using the test method described in Appendix I of this part, all waste analysis data must be retained on-site in the generator's files.

(6) Generators must retain on-site a copy of all notices, certifications, demonstrations, waste analysis data, and other documentation produced pursuant to this section for at least five years from the date that the waste that is the subject of such documentation was last sent to on-site or off-site treatment, storage, or disposal. The five year record retention period is automatically extended during the course of any unresolved enforcement

action regarding the regulated activity or as requested by the Administrator.

(7) If a generator is managing a lab pack that contains wastes identified in Appendix IV of this part and wishes to use the alternative treatment standard under § 268.42, with each shipment of waste the generator must submit a notice to the treatment facility in accordance with paragraph (a)(1) of this section. The generator must also comply with the requirements in paragraphs (a)(5) and (a)(6) of this section, and must submit the following certification, which must be signed by an authorized representative:

I certify under penalty of law that I personally have examined and am familiar with the waste and that the lab pack contains only the wastes specified in appendix IV to part 268 or solid wastes not subject to regulation under 40 CFR part 261. I am aware that there are significant penalties for submitting a false certification, including the possibility of fine or imprisonment.

(8) If a generator is managing a lab pack that contains organic wastes specified in Appendix V of this Part and wishes to use the alternate treatment standards under § 268.42, with each shipment of waste the generator must submit a notice to the treatment facility in accordance with paragraph (a)(1) of this section. The generator also must comply with the requirements in paragraphs (a)(5) and (a)(6) of this section, and must submit the following certification which must be signed by an authorized representative:

I certify under penalty of law that I personally have examined and am familiar with the waste through analysis and testing or through knowledge of the waste and that the lab pack contains only organic waste specified in Appendix V to Part 268 or solid wastes not subject to regulation under 40 CFR Part 261. I am aware that there are significant penalties for submitting a false certification, including the possibility of fine or imprisonment.

(9) Small quantity generators with tolling agreements pursuant to 40 CFR 262.20(e) must comply with the applicable notification and certification requirements of paragraph (a) of this section for the initial shipment of the waste subject to the agreement. Such generators must retain on-site a copy of the notification and certification, together with the tolling agreement, for at least three years after termination or expiration of the agreement. The three-year record retention period is automatically extended during the course of any unresolved enforcement action regarding the regulated activity or as requested by the Administrator.

(b) Treatment facilities must test their wastes according to the frequency specified in their waste analysis plans as required by § 264.13 or § 265.13. Such testing must be performed as provided in paragraphs (b)(1), (b)(2) and (b)(3) of this section.

(1) For wastes with treatment standards expressed as concentrations in the waste extract (§ 268.41), the owner or operator of the treatment facility must test the treatment residues, or an extract of such residues developed using the test method described in Appendix I of this part, to assure that the treatment residues or extract meet the applicable treatment standards.

(2) For wastes that are prohibited under § 268.32 of this part or RCRA section 3004(d) but not subject to any treatment standards under Subpart D of this part, the owner or operator of the treatment facility must test the treatment residues according to the generator testing requirements specified in § 268.32 to assure that the treatment residues comply with the applicable prohibitions.

(3) For wastes with treatment standards expressed as concentrations in the waste (§ 268.43), the owner or operator of the treatment facility must test the treatment residues (not an extract of such residues) to assure that the treatment residues meet the applicable treatment standards.

(4) A notice must be sent with each waste shipment to the land disposal facility which includes the following information:

(i) EPA Hazardous Waste Number;

(ii) The corresponding treatment standards for wastes F001-F005, F039, and wastes prohibited pursuant to § 268.32 or RCRA Section 3004(d). Treatment standards for all other restricted wastes may be referenced by including on the notification the subcategory of the waste, the treatability

group(s) of the waste(s), and the CFR section(s) and paragraphs where the treatment standards appear. Where the applicable treatment standards are expressed as specified technologies in § 268.42, the applicable five-letter treatment code found in Table 1 of § 268.42 (*e.g.*, INCIN, WETOX) also must be listed on the notification.

(iii) The manifest number associated with the shipment of waste; and

(iv) Waste analysis data, where available.

(5) The treatment facility must submit a certification with each shipment of waste or treatment residue of a restricted waste to the land disposal facility stating that the waste or treatment residue has been treated in compliance with the applicable performance standards specified in Subpart D of this part and the applicable prohibitions set forth in § 268.32 or RCRA section 3004(d).

(i) For wastes with treatment standards expressed as concentrations in the waste extract or in the waste (§ 268.41 or § 268.43), or for wastes prohibited under § 268.32 of this part or RCRA section 3004(d) which are not subject to any treatment standards under Subpart D of this part, the certification must be signed by an authorized representative and must state the following:

I certify under penalty of law that I have personally examined and am familiar with the treatment technology and operation of the treatment process used to support this certification and that, based on my inquiry of those individuals immediately responsible for obtaining this information. I believe that the treatment process has been operated and maintained properly so as to comply with the performance levels specified in 40 CFR part 268, subpart D, and all applicable prohibitions set forth in 40 CFR 268.32 or RCRA section 3004(d) without impermissible dilution of the prohibited waste. I am aware that there are significant penalties for submitting a false certification, including the possibility of fine and imprisonment.

(ii) For wastes with treatment standards expressed as technologies (§ 268.42), the certification must be signed by an authorized representative and must state the following:

I certify under penalty of law that the waste has been treated in accordance with the requirements of 40 CFR 268.42. I am aware that there are significant penalties for submitting a false certification, including the possibility of fine and imprisonment.

(iii) For wastes with treatment standards expressed as concentrations in the waste pursuant to § 268.43, if compliance with the treatment standards in subpart D of this part is based in part or in whole on the analytical detection limit alternative specified in § 268.43(c), the certification also must state the following:

I certify under penalty of law that I have personally examined and am familiar with the treatment technology and operation of the treatment process used to support this certification and that, based on my inquiry of those individuals immediately responsible for obtaining this information, I believe that the nonwastewater organic constituents have been treated by incineration in units operated in accordance with 40 CFR part 264, subpart O) or 40 CFR part 265, subpart O, or by combustion in fuel substitution units operating in accordance with applicable technical requirements, and I have been unable to detect the nonwastewater organic constituents despite having used best good faith efforts to analyze for such constituents. I am aware that there are significant penalties for submitting a false certification, including the possibility of fine and imprisonment.

(6) If the waste or treatment residue will be further managed at a different treatment or storage facility, the treatment, storage or disposal facility sending the waste or treatment residue off-site must comply with the notice and certification requirements applicable to generators under this section.

(7) Where the wastes are recyclable materials used in a manner constituting disposal subject to the provisions of § 266.20(b) regarding treatment standards and prohibition levels, the owner or operator of a treatment facility (*i.e.*, the recycler) is not required to notify the receiving facility, pursuant to paragraph (b)(4) of this section. With each shipment of such wastes the owner or operator of the recycling facility must submit a certification described in paragraph (b)(5) of this section, and a notice which includes the information listed in paragraph (b)(4) of this section (except the manifest number) to the Regional Administrator, or his delegated representative.

The recycling facility also must keep records of the name and location of each entity receiving the hazardous waste-derived product.

(c) Except where the owner or operator is disposing of any waste that is a recyclable material used in a manner constituting disposal pursuant to 40 CFR 266.20(b), the owner or operator of any land disposal facility disposing any waste subject to restrictions under this part must:

(1) Have copies of the notice and certifications specified in paragraph (a) or (b) of this section, and the certification specified in § 268.8 if applicable.

(2) Test the waste, or an extract of the waste or treatment residue developed using the test method described in Appendix I of this part or using any methods required by generators under § 268.32 of this part, to assure that the wastes or treatment residues are in compliance with the applicable treatment standards set forth in Subpart D of this part and all applicable prohibitions set forth in § 268.32 of this part or in RCRA section 3004(d). Such testing must be performed according to the frequency specified in the facility's waste analysis plan as required by § 264.13 or § 265.13.

(Approved by the Office of Management and Budget under control number 2050-0062 and 2040-0042)

[51 FR 40638, Nov. 7, 1986; 52 FR 21016, June 4, 1987, as amended at 52 FR 25789, July 8, 1987; 53 FR 31213, Aug. 17, 1988; 54 FR 26648, June 23, 1989; 54 FR 36971, Sept. 6, 1989; 55 FR 22687, June 1, 1990; 55 FR 23935, June 13, 1990]

§ 268.8 Landfill and surface impoundment disposal restrictions.

(a) Prior to May 8, 1990, wastes which are otherwise prohibited from land disposal under § 268.33(f) of this part may be disposed in a landfill or surface impoundment which is in compliance with the requirements of § 268.5(h)(2) provided that the requirements of this section are met. As of May 8, 1990, this section is no longer in effect.

(1) Prior to such disposal, the generator has made a good faith effort to locate and contract with treatment and recovery facilities practically available which provide the greatest environmental benefit.

(2) If a generator determines that there is no practically available treatment for his waste, he must fulfill the following specific requirements:

(i) Prior to the initial shipment of waste, the generator must submit a demonstration to the Regional Administrator that includes: a list of facilities and facility officials contacted, addresses, telephone numbers, and contact dates, as well as a written discussion of why he was not able to obtain treatment or recovery for that waste. The generator must also provide to the Regional Administrator the following certification:

> I certify under penalty of law that the requirements of 40 CFR 268.8(a)(1) have been met and that disposal in a landfill or surface impoundment is the only practical alternative to treatment currently available. I believe that the information submitted is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

The generator does not need to wait for Regional Administrator approval of the demonstration/certification before shipment of the waste. However, if the Regional Administrator invalidates the demonstration/certification for the reasons outlined in § 268.8(b)(2), the generator must immediately cease further shipments of the waste, and immediately inform all facilities that received the waste of such invalidation, and keep records of such communication on-site in his files.

(ii) With the initial shipment of waste, the generator must submit a copy of the demonstration and the certification discussed above in § 268.8(a)(2)(i) to the receiving facility. With each subsequent waste shipment, only the certification is required to be submitted provided that the conditions being certified remain unchanged. Such a generator must retain on-site a copy of the demonstration (if applicable) and certification required for each waste shipment for at least five years from the date that the waste that is the subject of such documentation was last sent to on-site or off-site disposal. The five-year record retention requirement is automatically extended during the course of any un-

resolved enforcement action regarding the regulated activity or as requested by the Administrator.

(3) If a generator determines that there are practically available treatments for his waste, he must contract to use the practically available technology that yields the greatest environmental benefit. He must also fulfill the following specific requirements:

(i) The generator must submit to the Regional Administrator, prior to the initial shipment of waste, a demonstration that includes: a list of facilities and facility officials contacted, addresses, telephone numbers, and contact dates, as well as a written discussion explaining why the treatment or recovery technology chosen provides the greatest environmental benefit. The generator must also provide to the Regional Administrator the following certification:

I certify under penalty of law that the requirements of 40 CFR 268.8(a)(1) have been met and that I have contracted to treat my waste (or otherwise provide treatment) by the practically available technology which yields the greatest environmental benefit, as indicated in my demonstration. I believe that the information submitted is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

The generator does not need to wait for Regional Administrator approval of the demonstration/certification before shipment of the waste.

(ii) With the initial shipment of waste, the generator must submit to the receiving facility a copy of the demonstration and the certification discussed above in § 268.8(a)(3)(i). With each subsequent waste shipment, only the certification is required to be submitted provided that the conditions being certified remain unchanged. Such a generator must retain on-site a copy of the demonstration (if applicable) and certification required for each waste shipment for at least five years from the date that the waste that is the subject of such documentation was last sent to on-site or off-site disposal. The five-year record retention requirement is automatically extended during the course of any unresolved enforcement action regarding the regulated activity or as requested by the Administrator.

(4) Where the generator has determined that there is practically available treatment for his waste prior to disposal, with the initial shipment of waste, such generator must submit a copy of the demonstration and the certification required in paragraph (a)(2)(B) of this section to the receiving facility. With each subsequent waste shipment, only the certification is required to be submitted provided that the conditions being certified remain unchanged. Such a generator must retain on-site a copy of the demonstration (if applicable) and certification required for each waste shipment for at least five years from the date that the waste that is the subject of such documentation was last sent to on-site or off-site disposal. The five-year record retention requirement is automatically extended during the course of any unresolved enforcement action regarding the regulated activity or as requested by the Administrator.

(b) After receiving the demonstration and certification, the Regional Administrator may request any additional information which he deems necessary to evaluate the certification, and submit a new demonstration and certification as provided in § 268.8(a) to the receiving facility.

(1) A generator who has submitted a certification under this section must immediately notify the Regional Administrator when he has knowledge of any change in the conditions which formed the basis of his certification.

(2) If, after review of the certification, the Regional Administrator determines that practically available treatment exists where the generator has certified otherwise, or that there exists some other method of practically available treatment yielding greater environmental benefit than that which the generator has certified, the Regional Administrator may invalidate the certification.

(3) If the Regional Administrator invalidates a certification, the generator must immediately cease further shipments of the waste, and inform all facilities that received the waste of such invalidation and keep records of such communication on-site in his files.

(c) A treatment, recovery or storage facility receiving wastes subject to a valid certification must keep copies of the generator's demonstration (if applicable) and certification in his operating record.

(f) The owner or operator of a treatment or recovery facility must certify that he has treated the waste in accordance with the generator's demonstration. The following certification is required:

I certify under penalty of law that I have personally examined and am familiar with the treatment technology and operation of the treatment process used to support this certification and that, based on my inquiry of those individuals immediately responsible for obtaining this information, I believe that the treatment process has been operated and maintained properly so as to comply with treatment as specified in the generator's demonstration. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

(2) The owner or operator of a treatment, recovery or storage facility must, for each initial shipment of waste, send a copy of the generator's demonstration (if applicable) and certification under § 268.8(a)(2)(i) or § 268.8(a)(3)(i) and certification under § 268.8(c)(1) (if applicable) to the facility receiving the waste or treatment residues. With each subsequent waste shipment, only the certification is required to be submitted provided that the conditions being certified remain unchanged.

(d) The owner or operator of a disposal facility must ensure that those wastes prohibited under § 268.33(f) are subject to a certification according to the requirements of this section prior to disposal in a landfill or surface impoundment, and that the units receiving such wastes must meet the minimum technological requirements of § 268.5(h)(2).

(e) Once the certification is received by the Regional Administrator, and provided that the wastes have been treated by the treatment (if any), determined by the generator to yield the greatest environmental benefit practically available, the wastes or treatment residuals may be disposed in a landfill or surface impoundment unit meeting the requirements of § 268.5(h)(2), unless otherwise prohibited by the Regional Administrator.

(Approved by the Office of Management and Budget under control number 2050-0085)

[53 FR 31214, Aug. 17, 1988, as amended at 54 FR 36971, Sept. 6, 1989; 55 FR 22688, June 1, 1990; 55 FR 23935, June 13, 1990]

§268.9 Special rules regarding wastes that exhibit a characteristic.

(a) The initial generator of a solid waste must determine each waste code applicable to the waste in order to determine the applicable treatment standards under subpart D of this part. For purposes of part 268, the waste will carry a waste code designation for any applicable listing under 40 CFR part 261, subpart D, and also one or more waste code designations under 40 CFR part 261, subpart C where the waste exhibits the relevant characteristic.

(b) Where a prohibited waste is both listed under 40 CFR part 261, subpart D and exhibits a characteristic under 40 CFR part 261, subpart C, the treatment standard for the waste code listed in 40 CFR part 261, subpart D will operate in lieu of the standard for the waste code under 40 CFR part 261, subpart C, provided that the treatment standard for the listed waste includes a treatment standard for the constituent that causes the waste to exhibit the characteristic. Otherwise, the waste must meet the treatment standards for all applicable listed and characteristic waste codes.

(c) In addition to any applicable standards determined from the initial point of generation, no prohibited waste which exhibits a characteristic under 40 CFR part 261, subpart C may be land disposed unless the waste complies with the treatment standards under subpart D of this part.

(d) Wastes that exhibit a characteristic are also subject to § 268.7 requirements, except that once the waste is no longer hazardous, for each shipment of such wastes to a subtitle D facility the initial generator or the treatment facility need not send a § 268.7 notification to such facility. In such circumstances, a notification and certification must be sent to the appropri-

ate EPA Regional Administrator (or his delegated representative) or State authorized to implement part 268 requirements.

(1) The notification must include the following information:

(i) The name and address of the subtitle D facility receiving the waste shipment;

(ii) A description of the waste as initially generated, including the applicable EPA Hazardous Waste Number(s) and treatability group(s);

(iii) The treatment standards applicable to the waste at the initial point of generation.

(2) The certification must be signed by an authorized representative and must state the language found in § 268.7(b)(5)(i).

[55 FR 22688, June 1, 1990]

Subpart B—Schedule for Land Disposal Prohibition and Establishment of Treatment Standards

SOURCE: 51 FR 19305, May 28, 1986, unless otherwise noted.

§ 268.10 Identification of wastes to be evaluated by August 8, 1988.

EPA will take action under sections 3004(g)(5) and 3004(m), of the Resource Conservation and Recovery Act, by August 8, 1988, for the following wastes (for ease of understanding the wastes have been listed by the section of 40 CFR Part 261 under which they were listed):

§ 261.31 Wastes

F006—Wastewater treatment sludges from electroplating operations except from the following processes: (1) Sulfuric acid anodizing of aluminum; (2) tin plating on carbon steel; (3) zinc plating (segregated basis) on carbon steel; (4) aluminum or zinc-aluminum plating on carbon steel; (5) cleaning/stripping associated with tin, zinc and aluminum plating on carbon steel; and (6) chemical etching and milling of aluminum.

F007—Spent cyanide plating bath solutions from electroplating operations.

F008—Plating bath sludges from the bottom of plating baths from electroplating operations where cyanides are used in the process.

F009—Spent stripping and cleaning bath solutions from electroplating operations where cyanides are used in the process.

F019—Wastewater treatment sludges from the chemical conversion coating of aluminum.

§ 261.32 Wastes

K001—Bottom sediment sludge from the treatment of wastewaters from wood preserving processes that use creosote and/or pentachlorophenol.

K004—Wastewater treatment sludge from the production of zinc yellow pigments.

K008—Over residue from the production of chrome oxide green pigments.

K011—Bottom stream from the wastewater stripper in the production of acrylonitrile.

K013—Bottom stream from the acetonitrile column in the production of acrylonitrile.

K014—Bottoms from the acetonitrile purification column in the production of acrylonitrile.

K015—Still bottoms from the distillation of benzyl chloride.

K016—Heavy ends or distillation residues from the production of carbon tetrachloride.

K017—Heavy ends (still bottoms) from the purification column in the production of epichlorohydrin.

K018—Heavy ends from the fractionation column in ethyl chloride production.

K020—Heavy ends from the distillation of vinyl chloride in vinyl chloride monomer production.

K021—Aqueous spent antimony catalyst waste from fluoromethanes production.

K022—Distillation bottom tars from the production of phenol/acetone from cumane.

K024—Distillation bottoms from the production of phthalic anhydride from naphthalene.

K030—Column bottom or heavy ends from the combined production of trichloroethylene and perchloroethylene.

K031—By-products salts generated in the production of MSMA and cacodylic acid.

K035—Wastewater treatment sludges generated in the production of creosote.

K036—Still bottoms from toluene reclamation distillation in the production of disulfoton.

K037—Wastewater treatment sludge from the production of disulfoton.

K044—Wastewater treatment sludges from the manufacturing and processing of explosives.

K045—Spent carbon from the treatment of wastewater containing explosives.

K046—Wastewater treatment sludges from the manufacturing, formulation and loading of lead-based initiating compounds.

K047—Pink/red water from TNT operations.

K048—Dissolved air flotation (DAF) float from the petroleum refining industry.

K049—Stop oil emulsion solids from the petroleum refining industry.
K050—Heat exchange bundle cleaning sludge from the petroleum refining industry.
K051—API separator sludge from the petroleum refining industry.
K052—Tank bottoms (leaded) from the petroleum refining industry.
K060—Ammonia still lime sludge from coking operations.
K061—Emission control dust/sludge from the primary production of steel in electric furnaces.
K062—Spent pickle liquor from steel finishing operations in chlorine production.
K069—Emission control dust/sludge from secondary lead smelting.
K071—Brine purification muds from the mercury cells process in chlorine production, where separately prepurified brine is not used.
K073—Chlorinated hydrocarbon waste from the purification step of the diaphragm cell process using graphite anodes
K083—Distillation bottoms from aniline production.
K084—Wastewater treatment sludges generated during the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.
K085—Distillation of fractionation column bottoms from the production of chlorobenzenes.
K086—Solvent washes and sludges; caustic washes and sludges, or water washes and sludges from cleaning tubs and equipment used in the formulation of ink from pigments, driers, soaps, and stabilizers containing chromium and lead.
K087—Decanter tank tar sludge from coking operations.
K099—Untreated wastewater from the production of 2,4-D.
K101—Distillation tar residues from the distillation of aniline-based compounds in the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.
K102—Residue from the use of activated carbon for decolorization in the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.
K103—Process residues from aniline extraction from the production of aniline.
K104—Combined wastewater streams generated from nitrobenzene/aniline production.
K106—Waste water treatment sludge from the mercury cell process in chlorine production.

§ 261.33(e) Wastes

P001—Warfarin, when present at concentration greater than 0.3%
P004—Aldrin
P005—Allyl alcohol
P010—Arsenic acid
P011—Arsenic (V) oxide
P012—Arsenic (III) oxide
P015—Beryllium dust
P016—Bis-(chloromethyl) ether
P018—Brucine
P020—Dinoseb
P030—Soluble cyanide salts not elsewhere specified
P036—Dichlorophenylarsine
P037—Dieldrin
P039—Disulfoton
P041—Diethyl-p-nitrophenyl phosphate
P048—2,4-Dinitrophenol
P050—Endosulfan
P058—Fluoracetic acid, sodium salt
P059—Heptachlor
P063—Hydrogen cyanide
P068—Methyl Hydrazine
P069—Methyllactonitrile
P070—Aldicarb
P071—Methyl parathion
P081—Nitroglycerine
P082—N-Nitrosodimethylamine
P084—N-Nitrosomethylvinylamine
P087—Osmium tetraoxide
P089—Parathion
P092—Phenylmercuric acetate
P094—Phorate
P097—Famphur
P102—Propargyl alcohol
P105—Sodium azide
P108—Strychnine and salts
P110—Tetraethyl lead
P115—Thallium (I) sulfate
P120—Vanadium pentoxide
P122—Zinc phosphide, when present at concentrations greater than 10%
P123—Toxaphene

§ 261.33(f) Wastes

U007—Acrylamide
U009—Acrylonitrile
U010—Mitomycin C
U012—Aniline
U016—Benz(c)acridine
U018—Benz(a)anthracene
U019—Benzene
U022—Benzo(a)pyrene
U029—Methyl bromide
U031—n-Butanol
U036—Chlordane, technical
U037—Chlorobenzene
U041—n-Chloro-2,3-epoxypropane
U043—Vinyl chloride
U044—Chloroform
U046—Chloromethyl methyl ether
U050—Chrysene
U051—Creosote
U053—Crotonaldehyde
U061—DDT
U063—Dibenz o (a, h) anthracene
U064—1,2:7,8 Dibenzopyrene
U066—Dibromo-3-chloropropane 1,2-
U067—Ethylene dibromide
U074—1,4-Dichloro-2-butene

U077—Ethane, 1,2-dichloro-
U078—Dichloroethylene, 1,1-
U086—N Diethylhydrazine
U089—thylstilbestrol
U103—nethyl sulfate
U105—2,4-Dinitrotoluene
U108—Dioxane, 1,4-
U115—Ethylene oxide
U122—Formaldehyde
U124—Furan
U129—Lindane
U130—Hexachlorocyclopentadiene
U133—Hydrazine
U134—Hydrofluoric acid
U137—Indeno(1,2,3-cd)pyrene
U151—Mecury
U154—Methanol
U155—Methapyrilene
U157—3-Methylcholanthrene
U158—4,4-Methylene-bis-(2-chloroaniline)
U159—Methyl ethyl ketone
U171—Nitropropane, 2-
U177—N-Nitroso-N-methylurea
U180—N-Nitrosopyrrolidine
U185—Pentachloronitrobenzene
U188—Phenol
U192—Pronamide
U200—Reserpine
U209—Tetrachloroethane, 1,1,2,2-
U210—Tetrachloroethylene
U211—Carbon tetrachloride
U219—Thiourea
U220—Toluene
U221—Toluenediamine
U223—Toluene diisocyanate
U226—Methylchloroform
U227—Trichloroethane, 1,1,2-
U228—Trichloroethylene
U237—Uracil mustard
U238—Ethyl carbamate
U248—Warfarin, when present at concentrations of 0.3% or less
U249—Zinc phosphide, when present at concentrations of 10% or less

§ 268.11 Identification of wastes to be evaluated by June 8, 1989.

EPA will take action under sections 3004(g)(5) and 3004(m) of the Resource Conservation and Recovery Act, by June 8, 1989, for the following wastes (for ease of understanding the wastes have been listed by the section of 40 CFR Part 261 under which they were listed):

§ 261.31 Wastes

F010—Quenching bath sludge from oil baths from metal heat treating operations where cyanides are used in the process.
F011—Spent cyanide solutions from salt bath pot cleaning from metal heat treating operations.
F012—Quenching wastewater treatment sludges from metal heat operations where cyanides are used in the process.
F024—Wastes including but not limited to, distillation residues, heavy ends, tars and reactor clean-out wastes from the production of chlorinated aliphatic hydrocarbons, having carbon content from one to five, utilizing free radical catalyzed processes. [This listing does not include light ends, spent filters and filter aids, spend desiccants, wastewater, wastewater treatment sludges, spent catalysts, and wastes listed in § 261.32.].

§ 261.32 Wastes

K009—Distillation bottoms from the production of acetaldehyde from ethylene.
K010—Distillation side cuts from the productions of acetaldehyde from ethylene.
K019—Heavy ends from the distillation of ethylene dichloride in ethylene dichloride production.
K025—Distillation bottoms from the production of nitrobenzene by the nitration of benzene.
K027—Centrifuge and distillation residues from toluene diisocyanate production.
K028—Spent catalyst from the hydrochlorinator reactor in the production of 1,1,1-trichloroethane.
K029—Waste from the product steam stripper in the production of 1,1,1-trichloroethane.
K038—Wastewater from the washing and stripping of phorate production.
K039—Filter cake from the filtration of diethylphosphoro-dithioic acid in the production of phorate.
K040—Wastewater treatment sludge from the production of phorate.
K041—Wastewater treatment sludge from the production of toxaphene.
K042—Heavy ends or distillation residues from the distillation of tetrachlorobenzene in the production of 2,4,5-T.
K043—2,6-Dichlorophenol waste from the production of 2,4-D.
K095—Distillation bottoms from the production of 1,1,1-trichloroethane.
K096—Heavy ends from the heavy ends column from the production of 1,1,1-trichloroethane.
K097—Vacuum stripper discharge from the chlordane chlorinator in the production of chlordane.
K098—Untreated process wastewater from the production of toxaphene.
K105—Separated aqueous stream from the reactor product washing step in the production of chlorobenzenes.

§ 261.33(e) Wastes

P002—1-Acetyl-2-thiourea
P003—Acrolein

P007—5-(Aminoethyl)-3-isoxazolol
P008—4-Aminopyridine
P014—Thiophenol
P026—1-(o-Chlorophenyl)thiourea
P027—Propanenitrile, 3-chloro
P029—Copper cyanides
P040—O,O-Diethyl o-pyrazinyl phosphorothioate
P043—Diisopropyl fluorophosphate
P044—Dimethoate
P049—2,4-Dithiobiuret
P054—Aziridine
P057—Fluoracetamide
P060—Isodrin
P062—Hexaethyltetraphosphate
P066—Methomyl
P067—2-Methylaziridine
P072—Alpha-naphthylthiourea (ANTU)
P074—Nickel cyanide
P085—Octamethylpyrophosphoramide
P098—Potassium cyanide
P104—Silver cyanide
P106—Sodium cyanide
P107—Strontium sulfide
P111—Tetraethylpyrophosphate
P112—Tetranitromethane
P113—Thallic oxide
P114—Thallium (I) selenite

§ 261.33(f) Wastes

U002—Acetone
U003—Acetonitrile
U005—o-Acetylaminofluorene
U008—Acrylic acid
U011—Amitrole
U014—Auramine
U015—Azaserine
U020—Benzenesulfonyl chloride
U021—Benzidine
U023—Benzotrichloride
U025—Dichloroethyl ether
U026—Chlornaphazine
U028—Bis-(2-ethylhexyl)phthalate
U032—Calcium chromate
U035—Chlorambucil
U047—Beta-chloronaphthalene
U049—4-Chloro-o-toluidine, hydrochloride
U057—Cyclohexanone
U058—Cyclophosphamide
U059—Daunomycin
U060—DDD
U062—Diallate
U070—o-Dichlorobenzene
U073—Dichlorobenzidene, 3,3-
U080—Methylene chloride
U083—Dichloropropane, 1,2-
U092—Dimethylamine
U093—Dimethylaminoazobenzene
U094—Dimethylbenz(a)anthracene,7,12-
U095—Dimethylbenzidine,3,3'-
U097—Dimethylcarbamoyl chloride
U098—Dimethylhydrazine, 1,1-
U099—Dimethylhydrazine, 1,2-
U101—Dimethylphenol, 2,4-
U106—Dinitrotoluene, 2,6-
U107—Di-n-octyl phthalate
U109—1,2,-Diphenylhydrazine
U110—Dipropylamine
U111—Di-N-Propylnitrosamine
U114—Ethylenebis-(dithiocarbamic acid)
U116—Ethylene thiourea
U119—Ethyl methanesulfonate
U127—Hexachlorobenzene
U128—Hexachlorobutadiene
U131—Hexachloroethane
U135—Hydrogen sulfide
U138—Methyl iodide
U140—Isobutyl alcohol
U142—Kepone
U143—Lasiocarpine
U144—Lead acetate
U146—Lead subacetate
U147—Maleic anhydride
U149—Malononitrile
U150—Melphalan
U161—Methyl isobutyl ketone
U162—Methyl methacrylate
U163—N-Methyl-N-nitro-N-nitrosoguanidine
U164—Methylthiouracil
U165—Naphthalene
U168—Napthylamine, 2-
U169—Nitrobenzene
U170—p-Nitrophenol
U172—N-Nitroso-di-n-butylamine
U173—N-Nitroso-diethanolamine
U174—N-Nitroso-diethylamine
U176—N-Nitroso-N-ethylurea
U178—N-Nitroso-N-methylurethane
U179—N-Nitrosopiperidine
U189—Phosphorus sulfide
U193—1,3-Propane sultone
U196—Pyridine
U203—Safrole
U205—Selenium disulfide
U206—Streptozotocin
U208—Terachloroethane, 1,1,1,2-
U213—Tetrahydrofuran
U214—Thallium (I) acetate
U215—Thallium (I) carbonate
U216—Thallium (I) chloride
U217—Thallium (I) nitrate
U218—Thioacetamide
U235—Tris (2,3-Dibromopropyl) phosphate
U239—Xylene
U244—Thiram

§ 268.12 Identification of wastes to be evaluated by May 8, 1990.

(a) EPA will take action under sections 3004(g)(5) and 3004(m) of the Resource Conservation and Recovery Act, by May 8, 1990, for the following wastes (for ease of understanding, the wastes have been listed by the section of 40 CFR Part 261 under which they were listed):

§ 261.32 Wastes

K002—Wastewater treatment sludge from the production of chrome yellow and orange pigments.

K003—Wastewater treatment sludge from the production of molybdate orange pigments.
K005—Wastewater treatment sludge from the production of chrome green pigments.
K006—Wastewater treatment sludge from the production of chrome oxide green pigments (anhydrous and hydrated).
K007—Wastewater treatment sludge from the production of iron blue pigments.
K023—Distillation light ends from the production of phthalic anhydride from naphthalene.
K026—Stripping still tails from the production of methyl ethyl pyridines.
K032—Wastewater treatment sludge from the production of chlordane.
K033—Wastewater and scrub water from the chlorination of cyclopentadiene in the production of chlordane.
K034—Filter solids from the hexachlorocyclopentadiene in the production of chlordane.
K093—Distillation light ends from the production of phthalic anhydride from orthoxylene.
K094—Distillation bottoms from the production of phthalic anhydride from orthoxylene.
K100—Waste leaching solution from acid leaching of emission control dust/sludge from secondary lead smelting.

§ 261.33(e) Wastes

P006—Aluminum phosphide
P009—Ammonium picrate
P013—Barium cyanide
P017—Bromoacetone
P021—Calcium cyanide
P022—Carbon disulfide
P023—Chloroacetaldehyde
P024—p-Chloroaniline
P028—Benzyl chloride
P031—Cyanogen
P033—Cyanogen chloride
P034—4,6-Dinitro-o-cyclohexylphenol
P038—Diethylarsine
P042—Epinephrine
P045—Thiofanox
P046—Alpha, alpha-Dimethylphenethylamine
P047—4,6-Dinitro-o-cresol and salts
P051—Endrin
P056—Fluorine
P064—Methyl isocyanate
P065—Mercury fulminate
P073—Nickel carbonyl
P075—Nicotine and salts
P076—Nitric oxide
P077—p-Nitroaniline
P078—Nitrogen dioxide
P088—Endothall
P093—N-Phenylthiourea
P095—Phosgene
P096—Phosphine
P099—Potassium silver cyanide
P101—Propanenitrile
P103—Selenourea
P109—Tetraethyldithiopyrophosphate
P116—Thiosemicarbazide
P118—Trichloromethanethiol
P119—Ammonium vanadate
P121—Zinc cyanide

§ 261.33(f) Wastes

U001—Acetaldehyde
U004—Acetophenone
U006—Acetyl chloride
U017—Benzal chloride
U024—Bis(2-chloroethoxy)methane
U027—Bis(2-chloroisopropyl)ether
U030—Benzene, 1-bromo-4-phenoxy
U033—Carbonyl fluoride
U034—Chloral
U038—Ethyl-4-4'-dichlorobenzilate
U039—4-Chloro-m-cresol
U042—Vinyl ether, 2-chloroethyl
U045—Methyl chloride
U048—o-Chlorophenol
U052—-Cresols
U055—Cumene
U056—Cyclohexane
U068—Methane, dibromo
U069—Dibutyl phthalate
U071—m-Dichlorobenzene
U072—p-Dichlorobenzene
U075—Dichlorodifluoromethane
U076—Ethane, 1,1-dichloro-
U079—1,2-Dichlorethylene
U081—2,4-Dichlorophenol
U082—2,6-Dichlorophenol
U084—1,3-Dichloropropene
U085—2,2'-Bioxirane
U087—0,0,-Diethyl-S-methyl-dithiophosphate
U088—Diethyl phthalate
U090—Dihydrosafrole
U091—3,3'-Dimethoxybenzidine
U096—alpha,alpha-Dimethylbenzylhydroxyperoxide
U102—Dimethyl phthalate
U112—Ethyl acetate
U113—Ethyl acrylate
U117—Ethyl ether
U118—Ethylmethacrylate
U120—Fluoranthene
U121—Trichloromonofluoromethane
U123—Formic acid
U125—Furfural
U126—Glycidylaldehyde
U132—Hexachlorophene
U136—Cacodylic acid
U139—Iron dextran
U141—Isosafrole
U145—Lead phosphate
U148—Maleic hydrazide
U152—Methacrylonitrile
U153—Methanethiol
U156—Methyl chlorocarbonate
U160—Methyl ethyl ketone peroxide
U166—1,4-Naphthaquinone
U167—1-Naphthylamine
U181—5-Nitro-o-toluidine

U182—Paraldehyde
U183—Pentachlorobenzene
U184—Pentachloroethane
U186—1,3-Pentadiene
U187—Phenacetin
U190—Phthalic anhydride
U191—2-Picoline
U194—1-Propanamine
U197—p-Benzoquinone
U201—Resorcinol
U202—Saccharin and salts
U204—Selenious acid
U207—1,2,4,5-tetrachlorobenzene
U222—o-Toluidine hydrochloride
U225—Bromoform
U234—Sym-Trinitrobenzene
U236—Trypan blue
U240—2,4-D, salts and esters
U243—Hexachloropropene
U246—Cyanogen bromide
U247—Methoxychlor

Wastes identified as hazardous based on a characteristic alone (i.e., corrosivity, reactivity, ignitability and EP toxicity).

(b) Wastewater residues (less than 1% total organic carbon and less than 1% total suspended solids) resulting from the following well-designed and well-operated treatment methods for wastes listed in §§ 268.10 and 268.11 for which EPA has not promulgated wastewater treatment standards: metals recovery, metals precipitation, cyanide destruction, carbon adsorption, chemical oxidation, steam stripping, biodegradation, and incineration or other direct thermal destruction.

(c) Hazardous wastes listed in §§ 268.10 and 268.11 that are mixed hazardous/radioactive wastes.

(d) Multi-source leachate that is derived from disposal of any listed waste, except from Hazardous Wastes F020, F021, F022, F023, F026, F027, or F028.

(e) Nonwastewater forms of wastes listed in § 268.10 that were originally disposed before August 17, 1988 and for which EPA has promulgated "no land disposal" as the treatment standard (§ 268.43, Table CCW, No Land Disposal Subtable). This provision does not apply to waste codes K044, K045, K047, and K061 (high zinc subcategory).

(f) Nonwastewater forms of wastes listed in § 268.10 for which EPA has promulgated "no land disposal" as the treatment standard (§ 268.43, Table CCW, No Land Disposal Subtable) that are generated in the course of treating wastewater forms of the wastes. This provision does not apply to waste codes K044, K045, K047, and K061 (high zinc subcategory).

(g) Nonwastewater forms of waste codes K015 and K083.

[51 FR 19305, May 28, 1986, as amended at 53 FR 31215, Aug. 17, 1988; 54 FR 8266, Feb. 27, 1989; 54 FR 18837, May 2, 1989; 54 FR 26648, June 23, 1989]

§ 268.13 Schedule for wastes identified or listed after November 8, 1984.

In the case of any hazardous waste identified or listed under section 3001 after November 8, 1984, the Administrator shall make a land disposal prohibition determination within 6 months after the date of identification or listing.

Subpart C—Prohibitions on Land Disposal

§ 268.30 Waste specific prohibitions—Solvent wastes.

(a) Effective November 8, 1986, the spent solvent wastes specified in 40 CFR 261.31 as EPA Hazardous Waste Nos. F001, F002, F003, F004, and F005, are prohibited under this part from land disposal (except in an injection well) unless one or more of the following conditions apply:

(1) The generator of the solvent waste is a small quantity generator of 100-1000 kilograms of hazardous waste per month; or

(2) The solvent waste is generated from any response action taken under the Comprehensive Environmental Response, Compensation and Liability Act of 1980 (CERCLA) or any corrective action taken under the Resource Conservation and Recovery Act (RCRA), except where the waste is contaminated soil or debris; or

(3) The initial generator's solvent waste is a solventwater mixture, solvent-containing sludge or solid, or solventcontaminated soil (non-CERCLA or RCRA corrective action) containing less than 1 percent total F001-F005 solvent constituents listed in Table CCWE of § 268.41 of this part; or

(4) The solvent waste is a residue from treating a waste described in

paragraphs (a)(1), (a)(2), or (a)(3) of this section; or the solvent waste is a residue from treating a waste not described in paragraphs (a)(1), (a)(2), or (a)(3) of this section provided such residue belongs to a different treatability group than the waste as initially generated and wastes belonging to such a treatability group are described in paragraph (a)(3) of this section.

(b) Effective November 8, 1988, the F001-F005 solvent wastes listed in paragraphs (a) (1), (2), (3), or (4) of this section are prohibited from land disposal.

(c) Effective November 8, 1990, the F001-F005 solvent wastes which are contaminated soil and debris resulting from a response action taken under section 104 or 106 of the Comprehensive Environmental Response, Compensation, and Liability Act of 1980 (CERCLA) or a corrective action required under subtitle C of the Resource Conservation and Recovery Act (RCRA) and the residues from treating these wastes are prohibited from land disposal. Between November 8, 1988, and November 8, 1990, these wastes may be disposed in a landfill or surface impoundment only if such unit is in compliance with the requirements specified in § 268.5(h)(2).

(d) The requirements of paragraphs (a), (b), and (c) of this section do not apply if:

(1) The wastes meet the standards of Subpart D of this part; or

(2) Persons have been granted an exemption from a prohibition pursuant to a petition under § 268.6, with respect to those wastes and units covered by the petition; or

(3) Persons have been granted an extension to the effective date of a prohibition pursuant to § 268.5, with respect to those wastes and units covered by the extension.

[53 FR 31216, Aug. 17, 1988]

§ 268.31 Waste specific prohibitions—Dioxin-containing wastes.

(a) Effective November 8, 1988, the dioxin-containing wastes specified in 40 CFR 261.31 as EPA Hazardous Waste Nos. F020, F021, F022, F023, F026, F027, and F028, are prohibited from land disposal unless the following condition applies:

(1) The F020-F023 and F026-F028 dioxin-containing waste is contaminated soil and debris resulting from a response action taken under section 104 or 106 of the Comprehensive Environmental Response, Compensation, and Liability Act of 1980 (CERCLA) or a corrective action taken under subtitle C of the Resource Conservation and Recovery Act (RCRA).

(b) Effective November 8, 1990, the F020-F023 and F026-F028 dioxin-containing wastes listed in paragraph (a)(1) of this section are prohibited from land disposal.

(c) Between November 8, 1988, and November 8, 1990, wastes included in paragraph (a)(1) of this section may be disposed in a landfill or surface impoundment only if such unit is in compliance with the requirements specified in § 268.5(h)(2) and all other applicable requirements of Parts 264 and 265 of this chapter.

(d) The requirements of paragraphs (a) and (b) of this section do not apply if:

(1) The wastes meet the standards of Subpart D of this part; or

(2) Persons have been granted an exemption from a prohibition pursuant to a petition under § 268.6, with respect to those wastes and units covered by the petition; or

(3) Persons have been granted an extension to the effective date of a prohibition pursuant to § 268.5, with respect to those wastes covered by the extension.

[53 FR 31216, Aug. 17, 1988]

§ 268.32 Waste specific prohibitions—California list wastes.

(a) Effective July 8, 1987, the following hazardous wastes are prohibited from land disposal (except in injection wells):

(1) Liquid hazardous wastes having a pH less than or equal to two (2.0);

(2) Liquid hazardous wastes containing polychlorinated biphenyls (PCBs) at concentrations greater than or equal to 50 ppm;

(3) Liquid hazardous wastes that are primarily water and contain halogenated organic compounds (HOCs) in total concentration greater than or

equal to 1,000 mg/l and less than 10,000 mg/l HOCs.

(b)—(c) [Reserved]

(d) The requirements of paragraphs (a) and (e) of this section do not apply until:

(1) July 8, 1989 where the wastes are contaminated soil or debris not resulting from a response action taken under section 104 or 106 of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) or a corrective action taken under Subtitle C of the Resource Conservation and Recovery Act (RCRA). Between July 8, 1987 and July 8, 1989, the wastes may be disposed in a landfill or surface impoundment only if such disposal is in compliance with the requirements specified in § 268.5(h)(2).

(2) November 8, 1990 where the wastes are contaminated soil or debris resulting from a response action taken under section 104 or 106 of CERCLA or a corrective action taken under Subtitle C of RCRA. Between November 8, 1988, and November 8, 1990, the wastes may be disposed in a landfill or surface impoundment only if such unit is in compliance with the requirements specified in § 268.5(h)(2).

(e) Effective November 8, 1988, the following hazardous wastes are prohibited from land disposal (subject to any regulations that may be promulgated with respect to disposal in injection wells):

(1) Liquid hazardous wastes that contain HOCs in total concentration greater than or equal to 1,000 mg/l and are not prohibited under paragraph (a)(3) of this section; and

(2) Nonliquid hazardous wastes containing HOCs in total concentration greater than or equal to 1,000 mg/kg and are not wastes described in paragraph (d) of this section.

(f) Between July 8, 1987 and November 8, 1988, the wastes included in paragraphs (e)(1) and (e)(2) of this section may be disposed in a landfill or surface impoundment only if such unit is in compliance with the requirements specified in § 268.5(h)(2).

(g) The requirements of paragraphs (a), (d), and (e) of this section do not apply if:

(1) Persons have been granted an exemption from a prohibition pursuant to a petition under § 268.6, with respect to those wastes and units covered by the petition (except for liquid hazardous wastes containing polychlorinated biphenyls at concentrations greater than or equal to 500 ppm which are not eligible for such exemptions); or

(2) Persons have been granted an extension to the effective date of a prohibition pursuant to § 268.5, with respect to those wastes covered by the extension; or

(3) The wastes meet the applicable standards specified in Subpart D of this part or, where treatment standards are not specified, the wastes are in compliance with the applicable prohibitions set forth in this section or RCRA section 3004(d).

(h) The prohibitions and effective dates specified in paragraphs (a)(3), (d), and (e) of this section do not apply where the waste is subject to a Part 268 Subpart C prohibition and effective date for a specified HOC (such as a hazardous waste chlorinated solvent, see e.g., § 268.30(a)).

(i) To determine whether or not a waste is a liquid under paragraphs (a) and (e) of this section and under RCRA section 3004(d), the following test must be used: Method 9095 (Paint Filter Liquids Test) as described in "Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods," EPA Publication No. SW-846. (Incorporated by reference, see § 260.11(a) of this chapter.)

(j) Except as otherwise provided in this paragraph, the waste analysis and recordkeeping requirements of § 268.7 are applicable to wastes prohibited under this part or RCRA section 3004(d):

(1) The initial generator of a liquid hazardous waste must test his waste (not an extract or filtrate) in accordance with the procedures specified in § 261.22(a)(1), or use knowledge of the waste, to determine if the waste has a pH less than or equal to two (2.0). If the liquid waste has a pH less than or equal to two (2.0), it is restricted from land disposal and all requirements of Part 268 are applicable, except as otherwise specified in this section.

(2) The initial generator of either a liquid hazardous waste containing pol-

ychlorinated biphenyls (PCBs) or a liquid or nonliquid hazardous waste containing halogenated organic compounds (HOCs) must test his waste (not an extract or filtrate), or use knowledge of the waste, to determine whether the concentration levels in the waste equal or exceed the prohibition levels specified in this section. If the concentration of PCBs or HOCs in the waste is greater than or equal to the prohibition levels specified in this section, the waste is restricted from land disposal and all requirements of Part 268 are applicable, except as otherwise specified in this section.

[52 FR 25790, July 8, 1987, as amended at 52 FR 41296, Oct. 27, 1987; 53 FR 31216, Aug. 17, 1988; 54 FR 36972, Sept. 6, 1989]

§ 268.33 Waste specific prohibitions—First Third Wastes

(a) Effective August 8, 1988, the wastes specified in 40 CFR 261.32 as EPA Hazardous Waste Nos. F006 (nonwastewater), K001, K004 wastes specified in § 268.43(a), K008 wastes specified in § 268.43(a), K016, K018, K019, K020, K021 wastes specified in § 268.43(a), K022 (nonwastewater), K024, K025 nonwastewaters specified in § 268.43(a), K030, K036 (nonwastewater), K037, K044, K045, nonexplosive K046 (nonwastewater), K047, K060 (nonwastewater), K061 (nonwastewaters containing less than 15% zinc), K062, non $CaSO_4$ K069 (nonwastewaters), K086 (solvent washes), K087, K099, K100 nonwastewaters specified in § 268.43(a), K101 (wastewater), K101 (nonwastewater, low arsenic subcategory—less than 1% total arsenic), K102 (wastewater), K102 (nonwastewater, low arsenic subcategory—less than 1% total arsenic), K103, and K104 are prohibited from land disposal (except in an injection well).

(1) Effective August 8, 1988 and continuing until August 7, 1990, K061 wastes containing 15% zinc or greater are prohibited from land disposal pursuant to the treatment standards specified in § 268.41 applicable to K061 wastes that contain less than 15% zinc.

(b) Effective August 8, 1990, the wastes specified in 40 CFR 261.32 as EPA Hazardous Waste Nos. K048, K049, K050, K051, K052, K061 (containing 15% zinc or greater), and K071 are prohibited from land disposal.

(c) Effective August 8, 1990, the wastes specified in 40 CFR 268.10 having a treatment standard in Subpart D of this part based on incineration and which are contaminated soil and debris are prohibited from land disposal.

(d) Between November 8, 1988 and August 8, 1990, wastes included in paragraphs (b) and (c) of this section may be disposed of in a landfill or surface impoundment only if such unit is in compliance with the requirements specified in § 268.5(h)(2).

(e) The requirements of paragraphs (a), (b), (c), and (d) of this section do not apply if:

(1) The wastes meet the applicable standards specified in Subpart D of this Part; or

(2) Persons have been granted an exemption from a prohibition pursuant to a petition under § 268.6, with respect to those wastes and units covered by the petition; or

(3) Persons have been granted an extension to the effective date of a prohibition pursuant to § 268.5, with respect to those wastes covered by the extension.

(f) Between August 8, 1988, and May 8, 1990, the wastes specified in § 268.10 for which treatment standards under Subpart D of this Part have not been promulgated, including those wastes which are subject to the statutory prohibitions of RCRA section 3004(d) or codified prohibitions under § 268.32 of this Part, but not including wastes subject to a treatment standard under § 268.42 of this Part, are prohibited from disposal in a landfill or surface impoundment unless a demonstration and certification have been submitted to § 268.8.

(g) To determine whether a hazardous waste listed in § 268.10 exceeds the applicable treatment standards specified in § 268.41 and § 268.43, the initial generator must test a representative sample of the waste extract or the entire waste depending on whether the treatment standards are expressed as concentrations in the waste extract or the waste, or the generator may use knowledge of the waste. If the waste contains constituents in excess of the

applicable Subpart D levels, the waste is prohibited from land disposal and all requirements of Part 268 are applicable, except as otherwise specified.

[53 FR 31217, Aug. 17, 1988, as amended at 54 FR 36972, Sept. 6, 1989; 55 FR 23935, June 13, 1990]

§ 268.34 Waste specific prohibitions—second third wastes.

(a) Effective June 8, 1989, the following wastes specified in 40 CFR 261.31 as EPA Hazardous Waste Nos. F010; F024; the wastes specified in 40 CFR 261.32 as EPA Hazardous Waste Nos. K005, K007; K009 (nonwastewaters), K010; K023; K027; K028; K029 (nonwastewaters); K036 (wastewaters); K038; K039; K040; K043; K093; K094; K095 (nonwastewaters); K096 (nonwastewaters); K113; K114; K115; K116; and the wastes specified in 40 CFR 261.33 as EPA Hazardous Waste Nos. P013; P021; P029; P030; P039; P040; P041; P043; P044; P062; P063; P071; P074; P085; P089; P094: P097; P098; P099; P104; P106; P109; P111; P121; U028; U058; U069; U087; U088; U102; U107; U221; U223; and U235 are prohibited from land disposal.

(b) Effective June 8, 1989, the following wastes specified in 40 CFR 261.32 as EPA Hazardous Waste Nos. K009 (wastewaters), K011 (nonwastewaters), K013 (nonwastewaters), and K014 (nonwastewaters) are prohibited from land disposal except when they are underground injected pursuant to 40 CFR 148.14(f) and 148.15(d).

(c) Effective July 8, 1989, the wastes specified in 40 CFR 261.31 as EPA Hazardous Waste Nos. F006—cyanide (nonwastewater); F008; F009; F011 (wastewaters) and F012 (wastewaters) are prohibited from land disposal.

(1) Effective July 8, 1989, the following waste specified in 40 CFR 261.31 as EPA Hazardous Waste No. F007 is prohibited from land disposal except when it is underground injected pursuant to 40 CFR 148.14(f).

(2) Effective July 8, 1989 and continuing until December 8, 1989, F011 (nowastewaters) and F012 (nonwastewaters) are prohibited from land disposal pursuant to the treatment standards specified in §§ 268.41 and 268.43 applicable to F007, F008, and F009 nonwastewaters. Effective December 8, 1989 F011 (nowastewaters) and F012 (nonwastewaters) are prohibited from land disposal pursuant to the treatment standards specified in §§ 268.41 and 268.43 applicable to F011 (nonwastewaters) and F012 (nonwastewaters).

(d) Effective June 8, 1991, the wastes specified in this section having a treatment standard in Subpart D of this part based on incineration, and which are contaminated soil and debris are prohibited from land disposal.

(e) Between June 8, 1989 and June 8, 1991, (for wastes F007, F008, F009, F011, and F012 between June 8, 1989 and July 8, 1989) wastes included in paragraphs (c) and (d) of this section may be disposed in a landfill or surface impoundment, regardless whether such unit is a new, replacement, or lateral expansion unit, only if such unit is in compliance with the technical requirements specified in § 268.5(h)(2).

(f) The requirements of paragraphs (a), (b), (c), and (d) of this section do not apply if:

(1) The wastes meet the applicable standards specified in Subpart D of this Part; or

(2) Persons have been granted an exemption from a prohibition pursuant to a petition under § 268.6, with respect to those wastes and units covered by the petition.

(g) The requirements of paragraphs (a), (b), and (c) of this section do not apply if persons have been granted an extension to the effective date of a prohibition pursuant to § 268.5, with respect to those wastes covered by the extension.

(h) Between June 8, 1989 and May 8, 1990, the wastes specified in § 268.11 for which treatment standards under Subpart D of this Part are not applicable, including California list wastes subject to the statutory prohibitions of RCRA section 3004(d) or codified prohibitions under § 268.32, are prohibited from disposal in a landfill or surface impoundment unless the wastes are the subject of a valid demonstration and certification pursuant to § 268.8.

(i) To determine whether a hazardous waste listed in §§ 268.10, 268.11,

and 268.12 exceeds the applicable treatment standards specified in §§ 268.41 and 268.43, the initial generator must test a representative sample of the waste extract or the entire waste, depending on whether the treatment standards are expressed as concentrations in the waste extract or the waste, or the generator may use knowledge of the waste. If the waste contains constituents in excess of the applicable Subpart D levels, the waste is prohibited from land disposal and all requirements of Part 268 are applicable, except as otherwise specified.

[54 FR 26648, June 23, 1989]

§ 268.35 Waste specific prohibitions—Third Third wastes.

(a) Effective August 8, 1990, the following wastes specified in 40 CFR 261.31 as EPA Hazardous Waste Numbers F006 (wastewaters), F019, and F039 (wastewaters); the wastes specified in 40 CFR 261.32 as EPA Hazardous Waste Numbers K002; K003; K004 (wastewaters); K005 (wastewaters); K006; K008 (wastewaters); K011 (wastewaters); K013 (wastewaters), K014 (wastewaters); K017; K021 (wastewaters); K022 (wastewaters); K025 (wastewaters); K026; K029 (wastewaters); K031 (wastewaters); K032; K033; K034; K035; K041; K042; K046 (wastewaters); K048 (wastewaters); K049 (wastewaters); K050 (wastewaters); K051 (wastewaters); K052 (wastewaters); K060 (wastewaters); K061 (wastewaters); K069 (wastewaters); K073; K083 (wastewaters); K084 (wastewaters); K085; K095 (wastewaters); K096 (wastewaters); K097; K098; K100 (wastewaters); K101 (wastewaters); K102 (wastewaters); K105; and K106 (wastewaters); the wastes specified in 40 CFR 261.33(e) as EPA Hazardous Waste Numbers P001; P002; P003; P004; P005; P006; P007; P008; P009; P010 (wastewaters); P011 (wastewaters); P012 (wastewaters); P014; P015; P016; P017; P018 (wastewaters); P020; P022; P023; P024; P027; P028; P031; P033; P034; P036 (wastewaters); P037; P038 (wastewaters); P042; P045; P046; P047; P048; P049; P050; P051; P054; P056; P057; P058; P059; P060; P064; P065 (wastewaters); P066; P067; P068; P069; P070; P072; P073; P075; P076; P077; P078; P081; P082; P084; P088; P092 (wastewaters); P093; P095; P096; P101; P102; P103; P105; P108; P109; P110; P112; P113; P114; P115; P116; P118; P119; P120; P122; and P123; and the wastes specified in 40 CFR 261.33(f) as EPA Hazardous Waste Numbers U001; U002; U003; U004; U005; U006; U007; U008; U009; U010; U011; U012; U014; U015; U016; U017; U018; U019; U020; U021; U022; U023; U024; U025; U026; U027; U029; U030; U031; U032; U033; U034; U035; U036; U037; U038; U039; U041; U042; U043; U044; U045; U046; U047; U048; U049; U050; U051; U052; U053; U055; U056; U057; U059; U060; U061; U062; U063; U064; U066; U067; U068; U070; U071; U072; U073; U074; U075; U076; U077; U078; U079; U080; U081; U082; U083; U084; U085; U086; U089; U090; U091; U092; U093; U094; U095; U096; U097; U098; U099; U101; U103; U105; U106; U108; U109; U110; U111; U112; U113; U114; U115; U116; U117; U118; U119; U120 (wastewaters); U121; U122; U123; U124; U125; U126; U127; U128; U129; U130; U131; U132; U133; U134; U135; U136 (wastewaters); U137; U138; U140; U141; U142; U143; U144; U145; U146; U147; U148; U149; U150; U151 (wastewaters); U152; U153; U154; U155; U156; U157; U158; U159; U160; U161; U162; U163; U164; U165; U166; U167; U168; U169; U170; U171; U172; U173; U174; U176; U177; U178; U179; U180; U181; U182; U183; U184; U185; U186; U187; U188; U189; U191; U192; U193; U194; U196; U197; U200; U201; U202; U203; U204; U205; U206; U207; U208; U209; U210; U211; U213; U214; U215; U216; U217; U218; U219; U220; U222; U225; U226; U227; U228; U234; U236; U237; U238; U239; U240; U243; U244; U246; U247; U248; U249; and the following wastes identified as hazardous based on a characteristic alone: D001; D002, D003, D004 (wastewaters), D005, D006; D007; D008 (except for lead materials stored before secondary smelting), D009 (wastewaters), D010, D011, D012, D013, D014, D015, D016, and D017 are prohibited from land disposal.

(b) Effective November 8, 1990, the following wastes specified in 40 CFR 261.32 as EPA Hazardous Waste Numbers K048 (nonwastewaters), K049 (nonwastewaters), K050 (non-

wastewaters), K051 (nonwastewaters), and K052 (nonwastewaters) are prohibited from land disposal.

(c) Effective May 8, 1992, the following waste specified in 40 CFR 261.31 as EPA Hazardous Waste Numbers F039 (nonwastewaters); the wastes specified in 40 CFR 261.32 as EPA Hazardous Waste Numbers K031 (nonwastewaters); K084 (nonwastewaters); K101 (nonwastewaters); K102 (nonwastewaters); K106 (nonwastewaters); the wastes specified in 40 CFR 261.33(e) as EPA Hazardous Waste Numbers P010 (nonwastewaters); P011 (nonwastewaters); P012 (nonwastewaters); P036 (nonwastewaters); P038 (nonwastewaters); P065 (nonwastewaters); P087 (nonwastewaters); and P092 (nonwastewaters); the wastes specified in 40 CFR 261.33(f) as EPA Hazardous Waste Numbers U136 (nonwastewaters); and U151 (nonwastewaters); and the following wastes identified as hazardous based on a characteristic alone: D004 (nonwastewaters); D008 (lead materials stored before secondary smelting); and D009 (nonwastewaters); inorganic solids debris as defined in 40 CFR 268.2(a)(7) (which also applies to chromium refractory bricks carrying the EPA Hazardous Waste Numbers K048-K052); and RCRA hazardous wastes that contain naturally occurring radioactive materials are prohibited from land disposal.

(d) Effective May 8, 1992, hazardous wastes listed in 40 CFR 268.12 that are mixed radioactive/hazardous wastes are prohibited from land disposal.

(e) Effective May 8, 1992, the wastes specified in this section having a treatment standard in subpart D of this part based on incineration, mercury retorting, or vitrification, and which are contaminated soil or debris, are prohibited from land disposal.

(f) Between May 8, 1990 and August 8, 1990, the wastes included in paragraph (a) may be disposed of in a landfill or surface impoundment only if such unit is in compliance with the requirements specified in § 268.5(h)(2).

(g) Between May 8, 1990 and November 8, 1990, wastes included in paragraph (b) of this section may be disposed of in a landfill or surface impoundment only if such unit is in compliance with the requirements specified in § 268.5(h)(2).

(h) Between May 8, 1990, and May 8, 1992, wastes included in paragraphs (c), (d), and (e) of this section may be disposed of in a landfill or surface impoundment only if such unit is in compliance with the requirements specified in § 268.5(h)(2).

(i) The requirements of paragraphs (a), (b), (c), (d), and (e) of this section do not apply if:

(1) The wastes meet the applicable standards specified in subpart D of this part;

(2) Persons have been granted an exemption from a prohibition pursuant to a petition under § 268.6, with respect to those wastes and units covered by the petition;

(3) The wastes meet the applicable alternate standards established pursuant to a petition granted under § 268.44;

(4) Persons have been granted an extension to the effective date of a prohibition pursuant to § 268.5, with respect to these wastes covered by the extension.

(j) To determine whether a hazardous waste listed in § 268.10, 268.11, and 268.12 exceeds the applicable treatment standards specified in §§ 268.41 and 268.43, the initial generator must test a representative sample of the waste extract or the entire waste, depending on whether the treatment standards are expressed as concentrations in the waste extract or the waste, or the generator may use knowledge of the waste. If the waste contains constituents in excess of the applicable subpart D levels, the waste is prohibited from land disposal, and all requirements of part 268 are applicable, except as otherwise specified.

[55 FR 22688, June 1, 1990]

Subpart D—Treatment Standards

§ 268.40 Applicability of treatment standards.

(a) A restricted waste identified in § 268.41 may be land disposed only if an extract of the waste or of the treatment residue of the waste developed using the test method in appendix I of this part does not exceed the value

shown in Table CCWE of § 268.41 for any hazardous constituent listed in Table CCWE for that waste, with the following exceptions: D004, D008, K031, K084, K101, K102, P010, P011, P012, P036, P038, and U136. Wastes D004, D008, K031, K084, K101, K102, P010, P011, P012, P036, P038, and U136 may be land disposed only if an extract of the waste or of the treatment residue of the waste developed using either the test method in Appendix I of this part or the test method in appendix II of part 261 does not exceed the value shown in Table CCW of § 268.41 for any hazardous constituent listed in Table CCWE for that waste.

(b) A restricted waste for which a treatment technology is specified under § 268.42(a) may be land disposed after it is treated using that specified technology or an equivalent treatment method approved by the Administrator under the procedures set forth in § 268.42(b).

(c) Except as otherwise specified in § 268.43(c), a restricted waste identified in § 268.43 may be land disposed only if the constituent concentrations in the waste or treatment residue of the waste do not exceed the value shown in Table CCW of § 268.43 for any hazardous constituents listed in Table CCW for that waste.

[52 FR 25790, July 8, 1987, as amended at 55 FR 22689, June 1, 1990]

§ 268.41 Treatment standards expressed as concentrations in waste extract.

(a) Table CCWE identifies the restricted wastes and the concentrations of their associated constituents which may not be exceeded by the extract of a waste or waste treatment residual developed using the test method in Appendix I of this part for the allowable land disposal of such wastes, with the exception of wastes D004, D008, K031, K084, K101, K102, P010, P011, P012, P036, P038, and U136. Table CCWE identifies the restricted wastes D004, D008, K031, K084, K101, K102, P010, P011, P012, P036, P038, and U136 and the concentrations of their associated constituents which may not be exceeded by the extract of a waste or waste treatment residual developed using the test method in Appendix I of this part or appendix II of 40 CFR part 261 for the allowable land disposal of such wastes. (Appendix II of this part provides Agency guidance on treatment methods that have been shown to achieve the Table CCWE levels for the respective wastes. Appendix II of this part is not a regulatory requirement but is provided to assist generators and owners/operators in their selection of appropriate treatment methods.) Compliance with these concentrations is required based upon grab samples.

TABLE CCWE.—CONSTITUENT CONCENTRATIONS IN WASTE EXTRACT

Waste code	See also	Regulated hazardous constituent	CAS number for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/l)
D004	Table CCW in 268.43	Arsenic	7440-38-2	NA	5.0#
D005	Table CCW in 268.43	Barium	7440-39-3	NA	100
D006	Table CCW in 268.43	Cadmium	7440-43-9	NA	1.0
D007	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	5.0
D008	Table CCW in 268.43	Lead	7439-92-1	NA	5.0
D009 (Low Mercury Subcategory—less than 260 mg/kg Mercury).	Table 2 in 268.42 and Table CCW in 268.43.	Mercury	7439-97-6	NA	0.20
D010	Table CCW in 268.43	Selenium	7782-49-2	NA	5.7
D011	Table CCW in 268.43	Silver	7440-22-4	NA	5.0
F001-F005 spent solvents.	Table 2 in 268.42 and Table CCW in 268.43.	Acetone	67-64-1	0.05	0.59
		n-Butyl alcohol	71-36-3	5.0	5.0
		Carbon disulfide	75-15-0	1.05	4.81
		Carbon tetrachloride	56-23-5	0.05	0.96
		Chlorobenzene	108-90-7	0.15	0.05

TABLE CCWE.—CONSTITUENT CONCENTRATIONS IN WASTE EXTRACT—Continued

Waste code	See also	Regulated hazardous constituent	CAS number for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/l)
		Cresols (and cresylic acid).		2.82	0.75
		Cyclohexanone	108-94-1	0.125	0.75
		1,2-Dichlorobenzene	95-50-1	0.65	0.125
		Ethyl acetate	141-78-6	0.05	0.75
		Ethylbenzene	100-41-4	0.05	0.053
		Ethyl ether	60-29-7	0.05	0.75
		Isobutanol	78-83-1	5.0	5.0
		Methanol	67-56-1	0.25	0.75
		Methylene chloride	75-9-2	0.20	0.96
		Methyl ethyl ketone	78-93-3	0.05	0.75
		Methyl isobutyl ketone	108-10-1	0.05	0.33
		Nitrobenzene	98-95-3	0.66	0.125
		Pyridine	110-86-1	1.12	0.33
		Tetrachloroethylene	127-18-4	0.079	0.05
		Toluene	108-88-3	1.12	0.33
		1,1,1-Trichloroethane	71-55-6	1.05	0.41
		1,1,2-Trichloro-1,2,2-Tetrifluorethane.	76-13-1	1.05	0.96
		Trichloroethylene	79-01-6	0.062	0.091
		Trichlorofluoromethane	75-69-4	0.05	0.96
		Xylene		0.05	0.15
F006	Table CCW in 268.43	Cadmium	7440-43-9	NA	0.066
		Chromium (Total)	7440-47-32	NA	5.2
		Lead	7439-92-1	NA	0.51
		Nickel	7440-02-0	NA	0.32
		Silver	7440-22-4	NA	0.072
F007	Table CCW in 268.43	Cadmium	7440-43-9	NA	0.066
		Chromium (Total)	7440-47-32	NA	5.2
		Lead	7439-92-1	NA	0.51
		Nickel	7440-02-0	NA	0.32
		Silver	7440-22-4	NA	0.072
F008	Table CCW in 268.43	Cadmium	7440-43-9	NA	0.066
		Chromium (Total)	7440-47-32	NA	5.2
		Lead	7439-92-1	NA	0.51
		Nickel	7440-02-0	NA	0.32
		Silver	7440-22-4	NA	0.072
F009	Table CCW in 268.43	Cadmium	7440-43-9	NA	0.066
		Chromium (Total)	7440-47-32	NA	5.2
		Lead	7439-92-1	NA	0.51
		Nickel	7440-02-0	NA	0.32
		Silver	7440-22-4	NA	0.072
F011	Table CCW in 268.43	Cadmium	7440-43-9	NA	0.066
		Chromium (Total)	7440-47-32	NA	5.2
		Lead	7439-92-1	NA	0.51
		Nickel	7440-02-0	NA	0.32
		Silver	7440-22-4	NA	0.072
F012	Table CCW in 268.43	Cadmium	7440-43-9	NA	0.066
		Chromium (Total)	7440-47-32	NA	5.2
		Lead	7439-92-1	NA	0.51
		Nickel	7440-02-0	NA	0.32
		Silver	7440-22-4	NA	0.072
F019	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	5.2
F020-F023 and F026-F028 dioxin containing wastes.*.		HxCDD-All Hexachlorodibenzo-p-dioxins.		<1 ppb	<1 ppb
		HxCDF-All Hexachlorodibenzo-furans.		<1 ppb	<1 ppb
		PeCDD-All Pentachlorodibenzo-p-dioxins.		<1 ppb	<1 ppb
		PeCDF-All Pentachlorodibenzo-furans.		<1 ppb	<1 ppb
		TCDD-All Tetrachlorodibenzo-p-dioxins.		<1 ppb	<1 ppb

TABLE CCWE.—CONSTITUENT CONCENTRATIONS IN WASTE EXTRACT—Continued

Waste code	See also	Regulated hazardous constituent	CAS number for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/l)
		TCDF-All Tetrachlorodibenzo-furans.	.....	<1 ppb	<1 ppb
		2,4,5-Trichlorophenol	95-95-4	<0.05 ppm	<0.05 ppm
		2,4,6-Trichlorophenol	88-06-2	<0.05 ppm	<0.05 ppm
		2,3,4,6-Tetrachlorophenol.	58-90-2	<0.05 ppm	<0.05 ppm
		Pentachlorophenol	87-86-5	<0.01 ppm	<0.01 ppm
F024	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	0.073
		Lead	7439-92-1	NA	0.021
		Nickel	7440-02-0	NA	0.088
F039	Table CCW in 268.43	Antimony	7440-36-0	NA	0.23
		Arsenic	7440-38-2	NA	5.0
		Barium	7440-39-3	NA	52
		Cadmium	7440-43-9	NA	0.066
		Chromium (Total)	7440-47-32	NA	5.2
		Lead	7439-92-1	NA	0.51
		Mercury	7439-97-6	NA	0.025
		Nickel	7440-02-0	NA	0.32
		Selenium	7782-49-2	NA	5.7
		Silver	7440-22-4	NA	0.072
K001	Table CCW in 268.43	Lead	7439-92-1	NA	0.51
K002	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	0.094
		Lead	7439-92-1	NA	0.37
K003	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	0.094
		Lead	7439-92-1	NA	0.37
K004	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	0.094
		Lead	7439-92-1	NA	0.37
K005	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	0.094
		Lead	7439-92-1	NA	0.37
K006 (anhydrous)	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	0.094
		Lead	7439-92-1	NA	0.37
K006 (hydrated)	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	5.2
K007	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	0.094
		Lead	7439-92-1	NA	0.37
K008	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	0.094
		Lead	7439-92-1	NA	0.37
K015	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	1.7
		Lead	7439-92-1	NA	0.2
K021	Table CCW in 268.43	Antimony	7440-36-0	NA	0.23#
K022	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	5.2
		Nickel	7440-02-2	NA	0.32
K028	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	0.073
		Lead	7439-92-1	NA	0.021
		Nicke	7440-02-0	NA	0.088
K031	Table CCW in 268.43	Arsenic	7440-38-2	NA	5.6#
K046	Table CCW in 268.43	Lead	7439-92-1	NA	0.18
K048	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	1.7
		Nickel	7440-02-0	NA	0.20
K049	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	1.7
		Nickel	7440-02-0	NA	0.20
K050	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	1.7
		Nickel	7440-02-0	NA	0.20
K051	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	1.7
		Nickel	7440-02-0	NA	0.20
K052	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	1.7
		Nickel	7440-02-0	NA	0.20
K061 (Low Zinc Subcategory—less than 15% Total Zinc).	Table CCW in 268.43	Cadmium	7440-43-9	NA	0.14
		Chromium (Total)	7440-47-32	NA	5.2
		Lead	7439-92-1	NA	0.24
		Nickel	7440-02-0	NA	0.32
K062	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	0.094
		Lead	7439-92-1	NA	0.37
K069 (Calcium Sulfate Subcategory).	Table 2 in 268.42 and Table CCW in 268.43.	Cadmium	7440-43-9	NA	0.14
		Lead	7439-92-1	NA	0.24

TABLE CCWE.—CONSTITUENT CONCENTRATIONS IN WASTE EXTRACT—Continued

Waste code	See also	Regulated hazardous constituent	CAS number for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/l)
K071 (Low Mercury Subcategory—less than 16 mg/kg Mercury).	Table CCW in 268.43	Mercury	7439-97-6	NA	0.025
K083	Table CCW in 268.43	Nickel	7440-02-0	NA	0.088
K084	Table CCW in 268.43	Arsenic	7440-38-2	NA	5.6#
K086	Table CCW in 268.43	Chromium (Total)	7440-47-32	NA	0.094
		Lead	7439-92-1	NA	0.37
K087	Table CCW in 268.43	Lead	7439-92-1	NA	0.51
K100	Table CCW in 268.43	Cadmium	7440-43-9	NA	0.066
		Chromium (Total)	7440-47-32	NA	5.2
		Lead	7439-92-1	NA	0.51
K101	Table CCW in 268.43	Arsenic	7440-38-2	NA	5.6#
K102	Table CCW in 268.43	Arsenic	7440-38-2	NA	5.6#
K106 (Low Mercury Subcategory—less than 260 mg/kg Mercury—residues from RMERC).	Table 2 in 268.42 and Table CCW in 268.43.	Mercury	7439-97-6	NA	0.20
K106 (Low Mercury Subcategory—less than 260 mg/kg Mercury—that are not residues from RMERC).	Table 2 in 268.42 and Table CCW in 268.43.	Mercury	7439-97-6	NA	0.025
K115	Table CCW	Nickel	7440-02-0	NA	0.32

#—These treatment standards have been based on EP Leacnate analysis but this does not preclude the use of TCLP analysis.

*—These waste codes are not subcategorized into wastewaters and nonwastewaters.

NA—Not Applicable.

TABLE CCWE.—CONSTITUENT CONCENTRATIONS FOR WASTE EXTRACTS

Waste code	See also	Commercial chemical name	Regulated hazardous constituent	CAS number for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/l)
P010	Table CCW in 268.43	Arsenic acid	Arsenic	7440-38-2	NA	5.6
P011	Table CCW in 268.43	Arsenic pentoxide	Arsenic	7440-38-2	NA	5.6
P012	Table CCW in 268.43	Arsenic trioxide	Arsenic	7440-38-2	NA	5.6
P013	Table CCW in 268.43	Barium cyanide	Barium	7440-39-3	NA	52
P036	Table CCW in 268.43	Dichlorophenylarsine	Arsenic	7440-38-2	NA	5.6
P038	Table CCW in 268.43	Diethylarsine	Arsenic	7440-38-2	NA	5.6
P065 (Low Mercury Subcategory—less than 260 mg/kg Mercury-residues from RMERC).	Table 2 in 268.42 and Table CCW in 268.43.	Mercury fulminate	Mercury	7439-97-6	NA	0.20
P065 (Low Mercury Subcategory—less than 260 mg/kg Mercury-incinerator residues (and are not residues from RMERC)).	Table 2 in 268.42 and Table CCW in 268.43.	Mercury fulminate	Mercury	7439-97-6	NA	0.025
P073	Table CCW in 268.43	Nickel carbonyl	Nickel	7440-02-0	NA	0.32
P074	Table CCW in 268.43	Nickel cyanide	Nickel	7440-02-0	NA	0.32
P092 (Low Mercury Subcategory—less than 260 mg/kg Mercury residues from RMERC).	Table 2 in 268.42 and Table CCW in 268.43.	Phenyl mercury acetate	Mercury	7439-97-6	NA	0.20
P092 (Low Mercury Subcategory—less than 260 mg/kg Mercury-incinerator residues (and are not residues from RMERC)).	Table 2 in 268.42 and Table CCW in 268.43.	Phenyl mercury acetate	Mercury	7439-97-6	NA	0.025
P099	Table CCW in 268.43	Potassium silver cyanide	Silver	7440-22-4	NA	0.072
P103	Table CCW in 268.43	Selenourea	Selenium	7782-49-2	NA	5.7
P104	Table CCW in 268.43	Silver cyanide	Silver	7440-22-4	NA	0.072
P110	Table CCW in 268.43	Tetraethyl lead	Lead	7439-92-1	NA	0.51
P114	Table CCW in 268.43	Thallium selenite	Selenium	7782-49-2	NA	5.7
U032	Table CCW in 268.43	Calcium chromate	Chromium (Total)	7440-47-32	NA	0.094
U051	Table CCW in 268.43	Creosote	Lead	7439-92-1	NA	0.51
U136	Table CCW in 268.43	Cacodylic acid	Arsenic	7440-38-2	NA	5.6
U144	Table CCW in 268.43	Lead acetate	Lead	7439-92-1	NA	0.51
U145	Table CCW in 268.43	Lead phosphate	Lead	7439-92-1	NA	0.51
U146	Table CCW in 268.43	Lead subacetate	Lead	7439-92-1	NA	0.51
U151 (Low Mercury Subcategory—less than 260 mg/kg Mercury—residues from RMERC).	Table CCW in 268.43 and in Table 2 in 268.42.	Mercury	Mercury	7439-97-6	NA	0.20
U151 (Low Mercury Subcategory—less than 260 mg/kg Mercury—that are not residues from RMERC).	Table CCW in 268.43 and Table 2 in 268.42.	Mercury	Mercury	7439-97-6	NA	0.025

U204	Table CCW in 268.43	Selenium dioxide	Selenium	7782-49-2	NA	5.7
U205	Table CCW in 268.43	Selenium sulfide	Selenium	7782-49-2	NA	5.7

—These treatment standards have been based on EP Leachate analysis but this does not preclude the use of TCLP analysis.
*—These waste codes are not subcategorized into wastewaters and nonwastewaters.
NA—Not Applicable.

(b) When wastes with differing treatment standards for a constituent of concern are combined for purposes of treatment, the treatment residue must meet the lowest treatment standard for the constituent of concern.

[51 FR 40642, Nov. 7, 1986; 52 FR 21017, June 4, 1987, as amended at 55 FR 22689 June 1, 1990]

§ 268.42 Treatment standards expressed as specified technologies.

(a) The following wastes in paragraphs (a)(1) and (a)(2) of this section and in Table 2 and Table 3 of this section must be treated using the technology or technologies specified in paragraphs (a)(1) and (a)(2) and Table 1 of this section.

(1) Liquid hazardous wastes containing polychlorinated biphenyls (PCBs) at concentrations greater than or equal to 50 ppm but less than 500 ppm must be incinerated in accordance with the technical requirements of 40 CFR 761.70 or burned in high efficiency boilers in accordance with the technical requirements of 40 CFR 761.60. Liquid hazardous wastes containing polychlorinated biphenyls (PCBs) at concentrations greater than or equal to 500 ppm must be incinerated in accordance with the technical requirements of 40 CFR 761.70. Thermal treatment under this section must also be in compliance with applicable regulations in Parts 264, 265, and 266.

(2) Nonliquid hazardous wastes containing halogenated organic compounds (HOCs) in total concentration greater than or equal to 1,000 mg/kg and liquid HOC-containing wastes that are prohibited under § 268.32(e)(1) of this part must be incinerated in accordance with the requirements of 40 CFR part 264, subpart O or 40 CFR part 265, subpart O. These treatment standards do not apply where the waste is subject to a part 268, subpart C treatment standard for specific HOC (such as a hazardous waste chlorinated solvent for which a treatment standard is established under § 268.41(a)).

TABLE 1.—TECHNOLOGY CODES AND DESCRIPTION OF TECHNOLOGY-BASED STANDARDS

Technology code	Description of technology-based standard
ADGAS	Venting of compressed gases into an absorbing or reacting media (i.e., solid or liquid)—venting can be accomplished through physical release utilizing values/piping; physical penetration of the container; and/or penetration through detonation.
AMLGM	Amalgamation of liquid, elemental mercury contaminated with radioactive materials utilizing inorganic reagents such as copper, zinc, nickel, gold, and sulfur that result in a nonliquid, semi-solid amalgam and thereby reducing potential emissions of elemental mercury vapors to the air.
BIODG	Biodegradation of organics or non-metallic inorganics (i.e., degradable inorganics that contain the elements of phosphorus, nitrogen, and sulfur) in units operated under either aerobic or anaerobic conditions such that a surrogate compound or indicator parameter has been substantially reduced in concentration in the residuals (e.g., Total Organic Carbon can often be used as an indicator parameter for the biodegradation of many organic constituents that cannot be directly analyzed in wastewater residues).
CARBN	Carbon adsorption (granulated or powdered) of non-metallic inorganics, organo-metallics, and/or organic constituents, operated such that a surrogate compound or indicator parameter has not undergone breakthrough (e.g., Total Organic Carbon can often be used as an indicator parameter for the adsorption of many organic constituents that cannot be directly analyzed in wastewater residues). Breakthrough occurs when the carbon has become saturated with the constituent (or indicator parameter) and substantial change in adsorption rate associated with that constituent occurs.
CHOXD	Chemical or electrolytic oxidation utilizing the following oxidation reagents (or waste reagents) or combinations or reagents: (1) Hypochlorite (e.g. bleach); (2) chlorine; (3) chlorine dioxide; (4) ozone or UV (ultraviolet light) assisted ozone; (5) peroxides; (6) persulfates; (7) perchlorates; (8) permangantes; and/or (9) other oxidizing reagents of equivalent efficiency, performed in units operated such that a surrogate compound or indicator parameter has been substantially reduced in concentration in the residuals (e.g., Total Organic Carbon can often be used as an indicator parameter for the oxidation of many organic constituents that cannot be directly analyzed in wastewater residues). Chemical oxidation specifically includes what is commonly referred to as alkaline chlorination.

TABLE 1.—TECHNOLOGY CODES AND DESCRIPTION OF TECHNOLOGY-BASED STANDARDS—Continued

Technology code	Description of technology-based standard
CHRED	Chemical reduction utilizing the following reducing reagents (or waste reagents) or combinations of reagents: (1) Sulfur dioxide; (2) sodium, potassium, or alkali salts of sulfites, bisulfites, metabisulfites, and polyethylene glycols (e.g., NaPEG and KPEG); (3) sodium hydrosulfide; (4) ferrous salts; and/or (5) other reducing reagents of equivalent efficiency, performed in units operated such that a surrogate compound or indicator parameter has been substantially reduced in concentration in the residuals (e.g., Total Organic Halogens can often be used as an indicator parameter for the reduction of many halogenated organic constituents that cannot be directly analyzed in wastewater residues). Chemical reduction is commonly used for the reduction of hexavalent chromium to the trivalent state.
DEACT	Deactivation to remove the hazardous characteristics of a waste due to its ignitability, corrosivity, and/or reactivity.
FSUBS	Fuel substitution in units operated in accordance with applicable technical operating requirements.
HLVIT	Vitrification of high level mixed radioactive wastes in units in compliance with all applicable radioactive protection requirements under control of the Nuclear Regulatory Commission.
IMERC:	Incineration of wastes containing organics and mercury in units operated in accordance with the technical operating requirements of 40 CFR part 264, subpart O and 40 CFR part 265, subpart O. All wastewater and nonwastewater residues derived from this process must then comply with the corresponding treatment standards per waste code with consideration of any applicable subcategories (e.g., High or Low Mercury Subcategories).
INCIN	Incineration in units operated in accordance with the technical operating requirements of 40 CFR part 264, subpart O and 40 CFR part 265, subpart O.
LLEXT	Liquid-liquid extraction (often referred to as solvent extraction) of organics from liquid wastes into an immiscible solvent for which the hazardous constituents have a greater solvent affinity, resulting in an extract high in organics that must undergo either incineration, reuse as a fuel, or other recovery/reuse and a raffinate (extracted liquid waste) proportionately low in organics that must undergo further treatment as specified in the standard.
MACRO	Macroencapsulation with surface coating materials such as polymeric organics (e.g. resins and plastics) or with a jacket of inert inorganic materials to substantially reduce surface exposure to potential leaching media. Macroencapsulation specifically does not include any material that would be classified as a tank or container according to 40 CFR 260.10.
NEUTR	Neutralization with the following reagents (or waste reagents) or combinations of reagents: (1) Acids; (2) bases; or (3) water (including wastewaters) resulting in a pH greater than 2 but less than 12.5 as measured in the aqueous residuals.
NLDBR	No land disposal based on recycling.
PRECP	Chemical precipitation of metals and other inorganics as insoluble precipitates of oxides, hydroxides, carbonates, sulfides, sulfates, chlorides, flourides, or phosphates. The following reagents (or waste reagents) are typically used alone or in combination: (1) Lime (i.e., containing oxides and/or hydroxides of calcium and/or magnesium; (2) caustic (i.e., sodium and/or potassium hydroxides; (3) soda ash (i.e., sodium carbonate); (4) sodium sulfide; (5) ferric sulfate or ferric chloride; (6) alum; or (7) sodium sulfate. Additional floculating, coagulation, or similar reagents/processes that enhance sludge dewatering characteristics are not precluded from use.
RBERY	Thermal recovery of Beryllium.
RCGAS	Recovery/reuse of compressed gases including techniques such as reprocessing of the gases for reuse/resale; filtering/adsorption of impurities; remixing for direct reuse of resale; and use of the gas as a fuel source.
RCORR	Recovery of acids or bases utilizing one or more of the following recovery technologies: (1) Distillation (i.e., thermal concentration); (2) ion exchange; (3) resin or solid adsorption; (4) reverse osmosis; and/or (5) incineration for the recovery of acid—Note: this does not preclude the use of other physical phase separation or concentration techniques such as decantation, filtration (including ultrafiltration), and centrifugation, when used in conjunction with the above listed recovery technologies.
RLEAD	Thermal recovery of lead in secondary lead smelters.
RMERC	Retorting or roasting in a thermal processing unit capable of volatilizing mercury and subsequently condensing the volatilized mercury for recovery. The retorting or roasting unit (or facility) must be subject to one or more of the following: (a) A National Emissions Standard for Hazardous Air Pollutants (NESHAP) for mercury; (b) a Best Available Control Technology (BACT) or a Lowest Achievable Emission Rate (LAER) standard for mercury imposed pursuant to a Prevention of Significant Detenoration (PSD) permit; or (c) a state permit that establishes emission limitations (within meaning of Section 302 of the Clean Air Act) for mercury. All wastewater and nonwastewater residues derived from this process must then comply with the corresponding treatment standards per waste code with consideration of any applicable subcategories (e.g., High or Low Mercury Subcategories).
RMETL	Recovery of metals or inorganics utilizing one or more of the following direct physical/removal technologies: (1) Ion exchange; (2) resin or solid (i.e., zeolites) adsorption; (3) reverse osmosis; (4) chelation/solvent extraction; (5) freeze crystalization; (6) ultrafiltration; and/or 6 simple precipitation (i.e., crystalization)—Note: this does not preclude the use of other physical phase separation or concentration techniques such as decantation, filtration (including ultrafiltration), and centrifugation, when used in conjunction with the above listed recovery technologies.

TABLE 1.—TECHNOLOGY CODES AND DESCRIPTION OF TECHNOLOGY-BASED STANDARDS—Continued

Technology code	Description of technology-based standard
RORGS	Recovery of organics utilizing one or more of the following technologies: (1) Distillation; (2) thin film evaporation; (3) steam stripping; (4) carbon adsorption; (5) critical fluid extraction; (6) liquid-liquid extraction; (7) precipitation/crystallization (including freeze crystallization); or (8) chemical phase separation techniques (i.e., addition of acids, bases, demulsifiers, or similar chemicals); Note: This does not preclude the use of other physical phase separation techniques such as decantation, filtration (including ultrafiltration), and centrifugation, when used in conjunction with the above listed recovery technologies.
RTHRM	Thermal recovery of metals or inorganics from nonwastewaters in units defined in 40 CFR 260.10, paragraphs (1), (6), (7), (11), and (12), under the definition of "industrial furnaces".
RZINC	Resmelting in for the purpose of recovery of zinc high temperature metal recovery units.
STABL	Stabilization with the following reagents (or waste reagents) or combinations of reagents: (1) Portland cement; or (2) lime/pozzolans (e.g., fly ash and cement kiln dust)—this does not preclude the addition of reagents (e.g., iron salts, silicates, and clays) designed to enhance the set/cure time and/or compressive strength, or to overall reduce the leachability of the metal or inorganic.
SSTRP	Steam stripping of organics from liquid wastes utilizing direct application of steam to the wastes operated such that liquid and vapor flow rates, as well as, temperature and pressure ranges have been optimized, monitored, and maintained. These operating parameters are dependent upon the design parameters of the unit such as, the number of separation stages and the internal column design. Thus, resulting in a condensed extract high in organics that must undergo either incineration, reuse as a fuel, or other recovery/reuse and an extracted wastewater that must undergo further treatment as specified in the standard.
WETOX	Wet air oxidation performed in units operated such that a surrogate compound or indicator parameter has been substantially reduced in concentration in the residuals (e.g., Total Organic Carbon can often be used as an indicator parameter for the oxidation of many organic constituents that cannot be directly analyzed in wastewater residues).
WTRRX	Controlled reaction with water for highly reactive inorganic or organic chemicals with precautionary controls for protection of workers from potential violent reactions as well as precautionary controls for potential emissions of toxic/ignitable levels of gases released during the reaction.

NOTE 1: When a combination of these technologies (i.e., a treatment train) is specified as a single treatment standard, the order of application is specified in § 268.42, Table 2 by indicating the five letter technology code that must be applied first, then the designation "fb." (an abbreviation for "followed by"), then the five letter technology code for the technology that must be applied next, and so on.

NOTE 2: When more than one technology (or treatment train) are specified as *alternative* treatment standards, the five letter technology codes (or the treatment trains) are separated by a semicolon (;) with the last technology preceded by the word "OR". This indicates that any one of these BDAT technologies or treatment trains can be used for compliance with the standard.

TABLE 2.—TECHNOLOGY-BASED STANDARDS BY RCRA WASTE CODE

Waste code	See also	Waste descriptions and/or treatment subcategory	CAS No. for regulated hazardous constituents	Technology code	
				Wastewaters	Nonwastewaters
D001		Ignitable Liquids based on 261.21(a)(1)—Wastewaters	NA	DEACT	NA.
D001		Ignitable Liquids based on 261.21(a)(1)—Low TOC Ignitable Liquids Subcategory—Less than 10% total organic carbon.	NA	NA	DEACT.
D001		Ignitable Liquids based on 261.21(a)(1)—High TOC Ignitable Liquids Subcategory—Greater than or equal to 10% total organic carbon.	NA	NA	FSUBS; RORGS; or INCIN.
D001		Ignitable compressed gases based on 261.21(a)(3)	NA	NA	DEACT**.
D001		Ignitable reactives 261.21(a)(2)	NA	NA	DEACT.
D001		Oxidizers based on 261.21(a)(4)	NA	DEACT	DEACT.
D002		Acid subcategory based on 261.22(a)(1)	NA	DEACT	DEACT.
D002		Alkaline subcategory based on 261.22(a)(1)	NA	DEACT	DEACT.
D002		Other corrosives based on 261.22(a)(2)	NA	DEACT	DEACT.
D003		Reactive sulfides based on 261.23(a)(5)	NA	DEACT	DEACT.
D003		Explosives based on 261.23(a) (6), (7), and (8)	NA	DEACT	DEACT.
D003		Water reactives based on 261.23(a) (2), (3), and (4)	NA	NA	DEACT.
D003		Other reactives based on 261.23(a)(1)	NA	DEACT	DEACT.
D006		Cadmium containing batteries	7440-43-9	NA	RTHRM.
D008		Lead acid batteries (Note: This standard only applies to lead acid batteries that are identified as RCRA hazardous wastes and that are not excluded elsewhere from regulation under the land disposal restrictions of 40 CFR 268 or exempted under other EPA regulations (see 40 CFR 266.80).).	7439-92-1	NA	RLEAD.
D009	Table CCWE in 268.41 and Table CCW in 268.43.	Mercury: (High Mercury Subcategory—greater than or equal to 260 mg/kg total Mercury—contains mercury and organics (and are not incinerator residues)).	7439-97-6	NA	IMERC; or RMERC.
D009	Table CCWE in 268.41 and Table CCW in 268.43.	Mercury: (High Mercury Subcategory—greater than or equal to 260 mg/kg total Mercury—inorganics (including incinerator residues and residues from RMERC)).	7439-97-6	NA	RMERC.
D012	Table CCW in 268.43	Endrin	72-20-8	BIODG; or INCIN	NA.
D013	Table CCW in 268.43	Lindane	58-89-9	CARBN; or INCIN	NA.
D014	Table CCW in 268.43	Methoxychlor	72-43-5	WETOX; or INCIN	NA.
D015	Table CCW in 268.43	Toxaphene	8001-35-1	BIODG; or INCIN	NA.
D016	Table CCW in 268.43	2,4-D	94-75-7	CHOXD; BIODG; or INCIN	NA.
D017	Table CCW in 268.43	2,4,5-TP	93-72-1	CHOXD; or INCIN	NA.
F005	Table CCWE in 268.41 and Table CCW in 268.43.	2-Nitropropane	79-46-9	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
F005	Table CCWE in 268.41 and Table CCW in 268.43.	2-Ethoxyethanol	110-80-5	BIODG: or INCIN	INCIN.

TABLE 2.—TECHNOLOGY-BASED STANDARDS BY RCRA WASTE CODE—Continued

Waste code	See also	Waste descriptions and/or treatment subcategory	CAS No. for regulated hazardous constituents	Technology code	
				Wastewaters	Nonwastewaters
F024	Table CCWE in 268.41 and Table CCW in 268.43.		NA	INCIN	INCIN.
K025		Distillation bottoms from the production of nitrobenzene by the nitration of benzene.	NA	LLEXT fb SSTRP fb CARBN; or INCIN	INCIN.
K026		Stripping still tails from the production of methyl ethyl pyridines.	NA	INCIN	INCIN.
K027		Centrifuge and distillation residues from toluene diisocyanate production.	NA	CARBN; or INCIN	FSUBS; or INCIN.
K039		Filter cake from the filtration of diethylphosphorodithioc acid in the production of phorate.	NA	CARBN; or INCIN	FSUBS; or INCIN.
K044		Wastewater treatment sludges from the manufacturing and processing of explosives.	NA	DEACT	DEACT.
K045		Spent carbon from the treatment of wastewater containing explosives.	NA	DEACT	DEACT.
K047		Pink/red water from TNT operations	NA	DEACT	DEACT.
K061	Table CCW in 268.43	Emission control dust/sludge from the primary production of steel in electric furnaces (High Zinc Subcategory—greater than or equal to 15% total Zinc).	NA	NA	NLDBR.
K069	Table CCWE in 268.41 and Table CCW in 268.43.	Emission control dust/sludge from secondary lead smelting: Non-Calcium Sulfate Subcategory.	NA	NA	RLEAD.
K106	Table CCWE in 268.41 and Table CCW in 268.43.	Wastewater treatment sludge from the mercury cell process in chlorine production: (High Mercury Subcategory-greater than or equal to 260 mg/kg total mercury).	NA	NA	RMERC.
K113		Condensed liquid light ends from the purification of toluenediamine in the production of toluenediamine via hydrogenation of dinitrotoluene.	NA	CARBN; or INCIN	FSUBS; or INCIN.
K114		Vicinals from the purification of toluenediame in the production of toluenediamine via hydrogenation of dinitrotoluene.	NA	CARBN; or INCIN	FSUBS; or INCIN.
K115		Heavy ends from the purification of toluenediame in the production of toluenediamine via hydrogenation of dinitrotoluene.	NA	CARBN; or INCIN	FSUBS; or INCIN.
K116		Organic condensate from the solvent recovery column in the production of toluene diisocyanate via phosgenation of toluenediamine.	NA	CARBN; or INCIN	FSUBS; or INCIN.
P001		Warfarin (>0.3%)	81-81-2	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
P002		1-Acetyl-2-thiourea	591-08-2	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.

P003		Acrolein	107-02-8	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
P005		Allyl alcohol	107-18-6	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
P006		Aluminum phosphide	20859-73-8	CHOXD; CHRED; or INCIN	CHOXD; CHRED; or INCIN.
P007		5-Aminoethyl 3-isoxazolol	2763-96-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P008		4-Aminopyridine	504-24-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P009		Ammonium picrate	131-74-8	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
P014		Thiophenol (Benzene thiol)	108-98-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P015		Beryllium dust	7440-41-7	NA	RMETL; or RTHRM.
P016		Bis(chloromethyl)ether	542-88-1	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P017		Bromoacetone	598-31-2	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P018		Brucine	357-57-3	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P022	Table CCW in 268.43	Carbon disulfide	75-15-0	NA	INCIN.
P023		Chloroacetaldehyde	107-20-0	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P026		1-(o-Chlorophenyl) thiourea	5344-82-1	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P027		3-Chloropropionitrile	542-76-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P028		Bensyl chloride	100-44-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P031		Cyanogen	460-19-5	CHOXD; WETOX; or INCIN	CHOXD; WETOX; or INCIN.
P033		Cyanogen chloride	506-77-4	CHOXD; WETOX; or INCIN	CHOXD; WETOX; or INCIN.
P034		2-Cyclohexyl-4,6-dinitrophenol	131-89-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P040		0,0-Diethyl 0-pyrazinyl phosphorothioate	297-97-2	CARBN; or INCIN	FSUBS; or INCIN.
P041		Diethyl-p-nitrophenyl phosphate	311-45-5	CARBN; or INCIN	FSUBS; or INCIN.
P042		Epinephrine	51-43-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P043		Diisopropylfluorophosphate (DFP)	55-91-4	CARBN, or INCIN	FSUBS; or INCIN.
P044		Dimethoate	60-51-5	CARBN; or INCIN	FSUBS; or INCIN.
P045		Thiofanox	39196-18-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P046		alpha, alpha-Dimethylphenethylamine	122-09-8	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P047		4,6-Dinitro-o-cresol salts	534-52-1	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P049		2,4-Dithiobiuret	541-53-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.

TABLE 2.—TECHNOLOGY-BASED STANDARDS BY RCRA WASTE CODE—Continued

Waste code	See also	Waste descriptions and/or treatment subcategory	CAS No. for regulated hazardous constituents	Technology code	
				Wastewaters	Nonwastewaters
P054		Aziridine	151-56-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P056	Table CCW in 268.43	Fluorine	7782-41-4	NA	ADGAS fb NEUTR.
P057		Fluoroacetamide	640-19-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P058		Fluoroacetic acid, sodium salt	62-74-8	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P062		Hexaethyltetraphosphate	757-58-4	CARBN; or INCIN	FSUBS; or INCIN.
P064		Isocyanic acid, ethyl ester	624-83-9	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P065	Table CCWE in 268.41 and Table CCW in 268.43.	Mercury fulminate: (High Mercury Subcategory—greater than or equal to 260 mg/kg total Mercury—either incinerator residues or residues from RMERC).	628-86-4	NA	RMERC.
P065	Table CCWE in 268.41 and Table CCW in 268.43.	Mercury fulminate. (All nonwastewaters that are not incinerator residues from RMERC; regardless of Mercury Content).	628-86-4	NA	IMERC.
P066		Methomyl	16752-77-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P067		2-Methylaziridine	75-55-8	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P068		Methyl hydrazine	60-34-4	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
P069		Methyllactonitrile	75-86-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P070		Aldicarb	116-06-3	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P072		1-Naphthyl-2-thiourea	86-88-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P075		Nicotine and salts	54-11-5*	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P076		Nitric oxide	10102-43-9	ADGAS	ADGAS.
P078		Nitrogen dioxide	10102-44-0	ADGAS	ADGAS.
P081		Nitroglycerin	55-63-0	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED or INCIN.
P082	Table CCW in 268.43	N-Nitrosodimethylamine	62-75-9	NA	INCIN.
P084		N-Nitrosomethylvinylamine	4549-40-0	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P085		Octamethylpyrophosphoramide	152-16-9	CARBN; or INCIN	FSUBS; or INCIN.
P087		Osmium tetroxide	20816-12-0	NA	RMETL; or RTHRM.

P088		Endothall	145-73-3	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
P092	Table CCWE in 268.41 and Table CCW in 268.43.	Phenyl mercury acetate: (High Mercury Subcategory—greater than or equal to 260 mg/kg total Mercury—either incinerator residues or residues from RMERC).	62-38-4	NA	RMERC.
P092	Table CCWE in 268.41 and Table CCW in 268.43.	Phenyl mercury acetate: (All nonwastewaters that are not incinerator residues and are not residues from RMERC: regardless of Mercury Content).	62-38-4	NA	IMERC; or RMERC.
P093		N-Phenylthiouea	103-85-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P095		Phosgene	75-44-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P096		Phosphine	7803-51-2	CHOXD; CHRED; or INCIN	CHOXD; CHRED; or INCIN.
P102		Propargyl alcohol	107-19-7	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
P105		Sodium azide	26628-22-8	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
P108		Strychnine and salts	57-24-9*	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P109		Tetraethyldithiopyrophosphate	3689-24-5	CARBN; or INCIN	FSUBS; or INCIN.
P112		Tetranitromethane	509-14-8	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
P113	Table CCW in 268.43	Thallic oxide	1314-32-5	NA	RTHRM; or STABL.
P115	Table CCW in 268.43	Thallium (I) sulfate	7446-18-6	NA	RTHRM; or STABL.
P116		Thiosemicarbazide	79-19-6	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P118		Trichloromethanethiol	75-70-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
P119	Table CCW in 268.43	Ammonium vanadate	7803-55-6	NA	STABL.
P120	Table CCW in 268.43	Vanadium pentoxide	1314-62-1	NA	STABL.
P122		Zinc Phosphide (<10%)	1314-84-7	CHOXD; CHRED; or INCIN	CHOXD; CHRED; or INCIN.
U001		Acetaldehyde	75-07-0	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U003	Table CCW in 268.43	Acetonitrile	75-05-8	NA	INCIN.
U006		Acetyl Chloride	75-36-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U007		Acrylamide	79-06-1	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U008		Acrylic acid	79-10-7	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U010		Mitomycin C	50-07-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U011		Amitrole	61-82-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U014		Auramine	492-80-8	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U015		Azaserine	115-02-6	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.

TABLE 2.—TECHNOLOGY-BASED STANDARDS BY RCRA WASTE CODE—Continued

Waste code	See also	Waste descriptions and/or treatment subcategory	CAS No. for regulated hazardous constituents	Technology code	
				Wastewaters	Nonwastewaters
U016		Benz(c)acridine	225-51-4	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U017		Benzal chloride	98-87-3	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U020		Benzenesulfonyl chloride	98-09-9	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U021		Benzidine	92-87-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U023		Benzotrichloride	98-07-7	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
U026		Chlornaphazin	494-03-1	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U033		Carbonyl fluoride	353-50-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U034		Trichloroacetaldehyde (Chloral)	75-87-6	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U035		Chlorambucil	305-03-3	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U038	Table CCW in 268.43	Chlorobenzilate	510-15-6	NA	INCIN.
U041		1-Chloro-2,3-epoxypropane (Epichlorohydrin)	106-89-8	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U042	Table CCW in 268.43	2-Chloroethyl vinyl ether	110-75-8	NA	INCIN.
U046		Chloromethyl methyl ether	107-30-2	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U049		4-Chloro-o-toluidine hydrochloride	3165-93-3	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U053		Crotonaldehyde	4170-30-3	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U055		Cumene	98-82-8	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U056		Cyclohexane	110-82-7	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U057	Table CCW in 268.43	Cyclohexanone	108-94-1	NA	FSUBS; or INCIN.
U058		Cyclophosphamide	50-18-0	CARBN; or INCIN	FSUBS; or INCIN.
U059		Daunomycin	20830-81-3	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U062		Diallate	2303-16-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U064		1,2,7,8-Dibenzopyrene	189-55-9	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.

U073		3,3'-Dichlorobenzidine	91-94-1	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U074		cis-1,4-Dichloro-2-butene	1476-11-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN
		trans-1,4-Dichloro-2-butene		(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U085		1,2:3,4-Diepoxybutane	1464-53-5	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U086		N,N-Diethylhydrazine	1615-80-1	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
U087		0,0-Diethyl S-methyldithiophosphate	3288-58-2	CARBN; or INCIN	FSUBS; or INCIN.
U089		Diethyl stilbestrol	56-53-1	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U090		Dihydrosafrole	94-58-6	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U091		3,3'-Dimethoxybenzidine	119-90-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U092		Dimethylamine	124-40-3	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U093	Table CCW in 268.43	p-Dimethylaminoazobenzene	621-90-9	NA	INCIN.
U094		7,12-Dimethyl benz(a)anthracene	57-97-6	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U095		3,3'-Dimethylbenzidine	119-93-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U096		a,a-Dimethyl benzyl hydroperoxide	80-15-9	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
U097		Dimethylcarbomyl chloride	79-44-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U098		1,1-Dimethylhydrazine	57-14-7	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
U099		1,2-Dimethylhydrazine	540-73-8	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
U103		Dimethyl sulfate	77-78-1	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
U109		1,2-Diphenylhydrazine	122-66-7	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
U110		Dipropylamine	142-84-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U113		Ethyl acrylate	140-88-5	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U114		Ethylene bis-dithiocarbamic acid	111-54-6	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U115		Ethylene oxide	75-21-8	(WETOX or CHOXD) fb CARBN; or INCIN	CHOXD; or INCIN.
U116		Ethylene thiourea	96-45-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U119		Ethyl methane sulfonate	62-50-0	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.

TABLE 2.—TECHNOLOGY-BASED STANDARDS BY RCRA WASTE CODE—Continued

Waste code	See also	Waste descriptions and/or treatment subcategory	CAS No. for regulated hazardous constituents	Technology code	
				Wastewaters	Nonwastewaters
U122		Formaldehyde	50-00-0	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U123		Formic acid	64-18-6	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U124		Furan	110-00-9	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U125		Furfural	98-01-1	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U126		Glycidaldehyde	765-34-4	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U132		Hexachlorophenene	70-30-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U133		Hydrazine	302-01-2	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
U134	Table CCW in 268.43	Hydrogen Flouride	7664-39-3	NA	ADGAS fb NEUTR; or NEUTR.
U135		Hydrogen Sulfide	7783-06-4	CHOXD; CHRED, or INCIN	CHOXD; CHRED; or INCIN.
U143		Lasiocarpine	303-34-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U147		Maleic anhydride	108-31-6	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U148		Maleic hydrazide	123-33-1	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U149		Malononitrile	109-77-3	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U150		Melphalan	148-82-3	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U151	Table CCWE in 268.41 and Table CCW in 268.43.	Mercury: (High Mercury Subcategory—greater than or equal to 260 mg/kg total Mercury).	7439-97-6	NA	RMERC.
U153		Methane thiol	74-93-1	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U154		Methanol	67-56-1	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U156		Methyl chlorocarbonate	79-22-1	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U160		Methyl ethyl ketone peroxide	1338-23-4	CHOXD; CHRED; CARBN; BIODG; or INCIN	FSUBS; CHOXD; CHRED; or INCIN.
U163		N-Methyl N'-nitro N-Nitrosoguanidine	70-25-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.

U164		Methylthiouracil	56-04-2	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U166		1,4-Naphthoquinone	130-15-4	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U167		1-Napnthlyamine	134-32-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U168	Table CCW in 268.43	2-Naphthlyamine	91-59-8	NA	INCIN.
U171		2-Nitropropane	79-46-9	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U173		N-Nitroso-di-n-ethanolamine	1116-54-7	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U176		N-Nitroso-N-ethylurea	759-73-9	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U177		N-Nitroso-N-methylurea	684-93-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U178		N-Nitroso-N-methylurethane	615-53-2	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U182		Paraldehyde	123-63-7	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U184		Pentachloroethane	76-01-7	(WETOX or CHOXD) fb CARBN, or INCIN	INCIN.
U186		1,3-Pentadiene	504-60-9	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U189		Phosphorus sulfide	1314-80-3	CHOXD; CHRED; or INCIN	CHOXD; CHRED; or INCIN.
U191		2-Picoline	109-06-8	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U193		1,3-Propane sultone	1120-71-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U194		n-Propylamine	107-10-8	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U197		p-Benzoquinone	106-51-4	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U200		Reserpine	50-55-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U201		Resorcinol	108-46-3	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U202		Saccharin and salts	81-07-2*	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U206		Streptozatocin	18883-66-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U213		Tetrahydrofuran	109-99-9	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U214	Table CCW in 268.43	Thallium (I) acetate	563-68-8	NA	RTHRM; or STABL.
U215	Table CCW in 268.43	Thallium (I) carbonate	6533-73-9	NA	RTHRM; or STABL.
U216	Table CCW in 268.43	Thallium (I) chloride	7791-12-0	NA	RTHRM; or STABL.
U217	Table CCW in 268.43	Thallium (I) nitrate	10102-45-1	NA	RTHRM; or STABL.
U218		Thioacetamide	62-55-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.

TABLE 2.—TECHNOLOGY-BASED STANDARDS BY RCRA WASTE CODE—Continued

Waste code	See also	Waste descriptions and/or treatment subcategory	CAS No. for regulated hazardous constituents	Technology code	
				Wastewaters	Nonwastewaters
U219		Thiourea	62-56-6	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U221		Toluenediamine	25376-45-8	CARBN; or INCIN	FSUBS; or INCIN.
U222		o-Toluidine hydrochloride	636-21-5	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U223		Toluene diisocyanate	26471-62-5	CARBN; or INCIN	FSUBS; or INCIN.
U234		sym-Trinitrobenzene	99-35-4	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U236		Trypan Blue	72-57-1	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U237		Uracil mustard	66-75-1	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U238		Ethyl carbamate	51-79-6	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U240		2,4-Dichlorophenoxyacetic (salts and esters)	94-75-7*	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U244		Thiram	137-26-8	(WETOX or CHOXD) fb CARBN; or INCIN	INCIN.
U246		Cyanogen bromide	506-68-3	CHOXD; WETOX; or INCIN	CHOXD; WETOX; or INCIN.
U248		Warfarin (greater than or equal to 3%)	81-81-2	(WETOX or CHOXD) fb CARBN; or INCIN	FSUBS; or INCIN.
U249		Zinc Phosphide (<10%)	1314-84-7	CHOXD; CHRED; or INCIN	CHOXD; CHRED; or INCIN.

* CAS Number given for parent compound only.
** This waste code exists in gaseous form and is not categorized as wastewater or nonwastewater forms.
NA—Not Applicable.

TABLE 3.—TECHNOLOGY-BASED STANDARDS FOR SPECIFIC RADIOACTIVE HAZARDOUS MIXED WASTE

Waste code	Waste descriptions and/or treatment subcategory	CAS Number	Technology code	
			Wastewaters	Nonwastewaters
D002	Radioactive High Level Wastes Generated During the Reprocessing of Fuel Rods Subcategory	NA	NA	HLVIT
D004	Radioactive High Level Wastes Generated During the Reprocessing of Fuel Rods Subcategory	NA	NA	HLVIT
D005	Radioactive High Level Wastes Generated During the Reprocessing of Fuel Rods Subcategory	NA	NA	HLVIT
D006	Radioactive High Level Wastes Generated During the Reprocessing of Fuel Rods Subcategory	NA	NA	HLVIT
D007	Radioactive High Level Wastes Generated During the Reprocessing of Fuel Rods Subcategory	NA	NA	HLVIT

D008	Radioactive Lead Solids Subcategory (Note: these lead solids include, but are not limited to, all forms of lead shielding, and other elemental forms of lead. These lead solids do not include treatment residuals such as hydroxide sludges, other wastewater treatment residuals, or incinerator ashes that can undergo conventional pozzolanic stabilization, nor do they include organo-lead materials that can be incinerated and stabilized as ash.)	7439-92-1	NA	MACRO
D008	Radioactive High Level Wastes Generated During the Reprocessing of Fuel Rods Subcategory	NA	NA	HLVIT
D009	Elemental mercury contaminated with radioactive materials	7439-97-6	NA	AMLGM
D009	Hydraulic oil contaminated with Mercury Radioactive Materials Subcategory	7439-97-6	NA	INCIN
D009	Radioactive High Level Wastes Generated During the Reprocessing of Fuel Rods Subcategory	NA	NA	HLVIT
D010	Radioactive High Level Wastes Generated During the Reprocessing of Fuel Rods Subcategory	NA	NA	HLVIT
D011	Radioactive High Level Wastes Generated During the Reprocessing of Fuel Rods Subcategory	NA	NA	HLVIT
U151	Mercury: Elemental mercury contaminated with radioactive materials	7439-97-6	NA	AMLGM

NA—Not Applicable.

(b) Any person may submit an application to the Administrator demonstrating that an alternative treatment method can achieve a measure of performance equivalent to that achievable by methods specified in paragraphs (a), (c), and (d) of this section. The applicant must submit information demonstrating that his treatment method is in compliance with federal, state, and local requirements and is protective of human health and the environment. On the basis of such information and any other available information, the Administrator may approve the use of the alternative treatment method if he finds that the alternative treatment method provides a measure of performance equivalent to that achieved by methods specified in paragraphs (a), (c) and (d) of this section. Any approval must be stated in writing and may contain such provisions and conditions as the Administrator deems appropriate. The person to whom such approval is issued must comply with all limitations contained in such a determination.

(c) As an alternative to the otherwise applicable subpart D treatment standards, lab packs are eligible for land disposal provided the following requirements are met:

(1) The lab packs comply with the applicable provisions of 40 CFR 264.316 and 40 CFR 265.316;

(2) All hazardous wastes contained in such lab packs are specified in appendix IV or appendix V to part 268;

(3) The lab packs are incinerated in accordance with the requirements of 40 CFR part 264 subpart O or 40 CFR part 265, subpart O; and

(4) Any incinerator residues from lab packs containing D004, D005, D006, D007, D008, D010, and D011 are treated in compliance with the applicable treatment standards specified for such wastes in subpart D of this part.

(d) Radioactive hazardous mixed wastes with treatment standards specified in Table 3 of this section are not subject to any treatment standards specified in § 268.41, § 268.43, or Table 2 of this section. Radioactive hazardous mixed wastes not subject to treatment standards in Table 3 of this section remain subject to all applicable treatment standards specified in § 268.41, § 268.43, and Table 2 of this section.

[51 FR 40642, Nov. 7, 1986, as amended at 52 FR 25790, July 8, 1987; 55 FR 22692, June 1, 1990]

§ 268.43 Treatment standards expressed as waste concentrations.

(a) Table CCW identifies the restricted wastes and the concentrations of their associated hazardous constituents which may not be exceeded by the waste or treatment residual (not an extract of such waste or residual) for the allowable land disposal of such waste or residual. Compliance with these concentrations is required based upon grab samples, unless otherwise noted in the following Table CCW.

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
D003 (Reactive cyanides subcategory—based on 261.23(a)(5)).		Cyanides (Total)	57-12-5	Reserved	# 590
		Cyanides (Amenable)	57-12-5	0.86	30
D004	Table CCWE in 268.41	Arsenic	7440-38-2	5.0	NA
D005	Table CCWE in 268.41	Barium	7440-39-3	100	NA
D006	Table CCWE in 268.41	Cadmium	7440-43-9	1.0	NA
D007	Table CCWE in 268.41	Chromium (Total)	7440-47-32	5.0	NA
D008	Table CCWE in 268.41	Lead	7439-92-1	5.0	NA
D009	Table CCWE in 268.41	Mercury	7439-97-6	0.20	NA
D010	Table CCWE in 268.41	Selenium	7782-49-2	1.0	NA
D011	Table CCWE in 268.41	Silver	7440-22-4	5.0	NA
D012	Table 2 in 268.42	Endrin	720-20-8	NA	0.13
D013	Table 2 in 268.42	Lindane	58-89-9	NA	0.066
D014	Table 2 in 268.42	Methoxychlor	72.43-5	NA	0.18

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
D015	Table 2 in 268.42	Toxaphene	8001-35-1	NA	1.3
D016	Table 2 in 268.42	2,4-D	94-75-7	NA	10.0
D017	Table 2 in 268.42	2,4,5-TP Silvex	93-76-5	NA	7.9
F001-F005 spent solvents.	Table CCWE in 268.41 and Table 2 in 268.42.	1,1,2-Trichloroethane	71-55-6	0.030	* 7.6
		Benzene	71-43-2	0.070	* 3.7
F001-F005 spent solvents (Pharmaceutical industry wastewater subcategory).		Methylene chloride	75-09-2	0.44	NA
F006	Table CCWE in 268.41	Cyanides (Total)	57-12-5	1.2	590
		Cyanides (Amenable)	57-12-5	0.86	30
		Cadmium	7440-43-9	1.6	NA
		Chromium	7440-47-32	0.32	NA
		Lead	7439-92-1	0.040	NA
		Nickel	7440-02-0	0.44	NA
F007	Table CCWE in 268.41	Cyanides (Total)	57-12-5	1.9	590
		Cyanides (Amenable)	57-12-5	0.1	30
		Chromium (Total)	7440-47-32	0.32	NA
		Lead	7439-92-1	0.04	NA
		Nickel	7440-02-0	0.44	NA
F008	Table CCWE in 268.41	Cyanides (Total)	57-12-5	1.9	590
		Cyanides (Amenable)	57-12-5	0.1	30
		Chromium	7440-47-32	0.32	NA
		Lead	7439-92-1	0.04	NA
		Nickel	7440-02-0	0.44	NA
F009	Table CCWE in 268.41	Cyanides (Total)	57-12-5	1.9	590
		Cyanides (Amenable)	57-12-5	0.1	30
		Chromium	7440-47-32	0.32	NA
		Lead	7439-92-1	0.04	NA
		Nickel	7440-02-0	0.44	NA
F010		Cyanides (Total)	57-12-5	1.9	1.5
		Cyanides (Amenable)	57-12-5	0.1	NA
F011	Table CCWE in 268.41	Cyanides (Total)	57-12-5	1.9	110
		Cyanides (Amenable)	57-12-5	0.1	9.1
		Chromium (Total)	7440-47-32	0.32	NA
		Lead	7439-92-1	0.04	NA
		Nickel	7440-02-0	0.44	NA
F012	Table CCWE in 268.41	Cyanides (Total)	57-12-5	1.9	110
		Cyanides (Amenable)	57-12-5	0.1	9.1
		Chromium (Total)	7440-47-32	0.32	NA
		Lead	7439-92-1	0.04	NA
		Nickel	7440-02-0	0.44	NA
F019	Table CCWE in 268.41	Cyanides (Total)	57-12-5	1.2	* 590
		Cyanides (Amenable)	57-12-5	0.86	* 30
		Chromium (Total)	7440-47-32	0.32	NA
F024	Table CCWE in 268.41 and Table 2 in 268.42 (Note: F024 organic standards must be treated via incineration (INCIN)).	2-Chloro-1,3-butadiene	126-99-8	* 0.28	* 0.28
		3-Chloropropene	107-05-1	* 0.28	* 0.28
		1,1-Dichloroethane	75-34-3	* 0.014	* 0.014
		1,2-Dichloroethane	107-06-2	* 0.014	* 0.014
		1,2-Dichloropropane	78-87-5	* 0.014	* 0.014
		cis-1,3-Dichloropropene	10061-01-5	* 0.014	* 0.014
		trans-1,3-Dichloropropene.	10061-02-6	* 0.014	* 0.014
		Bis(2-ethylhexyl)phthalate.	117-81-7	* 0.036	* 1.8
		Hexachloroethane	67-72-1	* 0.036	* 1.8
		Chromium (Total	7440-47-32	0.35	NA
		Nickel	7440-02-0	0.47	NA
F025 (Light ends subcategory).		Chloroform	67-66-3	* 0.046	* 6.2
		1,2-Dichloroethane	107-06-2	* 0.21	* 6.2

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
		1,1-Dichloroethylene	75-35-4	* 0.025	* 6.2
		Methylene chloride	75-9-2	* 0.089	* 31
		Carbon tetrachloride	56-23-5	* 0.057	* 6.2
		1,1,2-Trichloroethane	79-00-5	* 0.054	* 6.2
		Trichloroethylene	79-01-6	* 0.054	* 5.6
		Vinyl chloride	75-01-4	* 0.27	* 33
F025 (Spent filters/aids and desiccants subcategory).		Chloroform	67-66-3	* 0.046	* 6.2
		Methylene chloride	75-9-2	* 0.089	* 31
		Carbon tetrachloride	56-23-5	* 0.057	* 6.2
		1,1,2-Trichloroethane	79-00-5	* 0.054	* 6.2
		Trichloroethylene	79-01-6	* 0.054	* 5.6
		Vinyl chloride	75-01-4	* 0.27	* 33
		Hexachlorobenzene	118-74-1	* 0.055	* 37
		Hexachlorobutadiene	87-68-3	* 0.055	* 28
		Hexachloroethane	67-72-1	* 0.055	* 30
F039	Table CCWE in 268.41	Acetone	67-64-1	* 0.28	* 160
		Acenaphtalene	208-96-8	* 0.059	* 3.4
		Acenaphthene	83-32-9	* 0.059	* 4.0
		Acetonitrile	75-05-8	* 0.17	NA
		Acetophenone	96-86-2	* 0.010	* 9.7
		2-Acetylaminofluorene	53-96-3	* 0.059	* 140
		Acrylonitrile	107-13-1	* 0.24	* 84
		Aldrin	309-00-2	* 0.021	* 0.066
		4-Aminobiphenyl	92-67-1	* 0.13	NA
		Aniline	62-53-3	* 0.81	* 14
		Anthracene	120-12-7	* 0.059	* 4.0
		Aroclor 1016	12674-11-2	* 0.013	* 0.92
		Aroclor 1221	11104-28-2	* 0.014	* 0.92
		Aroclor 1232	11141-16-5	* 0.013	* 0.92
		Aroclor 1242	53469-21-9	* 0.017	* 0.92
		Aroclor 1248	12672-29-6	* 0.013	* 0.92
		Aroclor 1254	11097-69-1	* 0.014	* 1.8
		Aroclor 1260	11096-82-5	* 0.014	* 1.8
		alpha-BHC	319-84-6	* 0.00014	* 0.066
		beta-BHC	319-85-7	* 0.00014	* 0.066
		delta-BHC	319-86-8	* 0.023	* 0.066
		gamma-BHC	58-89-9	* 0.0017	* 0.066
		Benzene	71-43-2	* 0.14	* 36
		Benzo(a)anthracene	56-55-3	* 0.059	* 8.2
		Benzo(b)fluoranthene	205-99-2	* 0.055	* 3.4
		Benzo(k)fluoranthene	207-08-9	* 0.059	* 3.4
		Benzo(g,h,i)perylene	191-24-2	* 0.0055	* 1.5
		Benzo(a)pyrene	50-32-8	* 0.061	* 8.2
		Bromodichloromethane	75-27-4	* 0.35	* 15
		Bromoform	75-25-2	* 0.63	* 15
		Bromomethane (methyl bromide).	74-83-9	* 0.11	* 15
		4-Bromophenyl phenyl ether.	101-55-3	* 0.055	* 15
		n-Butyl alcohol	71-36-3	* 5.6	* 2.6
		Butyl benzyl phthalate	85-68-7	* 0.017	* 7.9
		2-sec-Butyl-4,6-dinitrophenol.	88-85-7	* 0.066	* 2.5
		Carbon tetrachloride	56-23-5	* 0.057	* 5.6
		Carbon disulfide	75-15-0	* 0.014	NA
		Chlordane	57-74-9	* 0.0033	* 0.13
		p-Chloroaniline	106-47-8	* 0.46	* 16
		Chlorobenzene	108-90-7	* 0.057	* 5.7
		Chlorobenzilate	510-15-6	* 0.10	* NA
		Chlorodibromomethane	124-48-1	* 0.057	* 16
		Chloroethane	75-00-3	* 0.27	* 6.0
		bis(2-Chloroethoxy) methane.	111-91-1	* 0.036	* 7.2
		bis(2-Chloroethyl) ether	111-44-4	* 0.033	* 7.2
		2-Chloroethyl vinyl ether		* 0.057	NA
		Chloroform	67-66-3	* 0.046	* 5.6

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
		bis(2-Chloroisopropyl) ether.	39638-32-9	* 0.055	● 7.2
		p-Chloro-m-cresol	59-50-7	* 0.018	● 14
		Chloromethane (Methyl chloride).	74-87-3	* 0.19	● 33
		2-Chloronaphthalene	91-8-7	* 0.055	● 5.6
		2-Chlorophenol	95-57-8	* 0.044	● 5.7
		3-Chloropropene	107-05-1	* 0.036	● 28
		Chrysene	218-01-9	* 0.059	● 8.2
		o-Cresol	95-48-7	* 0.11	● 5.6
		Cresol (m- and p-isomers).		* 0.77	● 3.2
		Cyclohexanone	108-94-1	* 0.36	NA
		1,2-Dibromo-3-chloropropane.	96-12-8	* 0.11	● 15
		1,2-Dibromoethane (Ethylene dibromide).	106-93-4	* 0.028	● 15
		Dibromomethane	74-95-3	* 0.11	● 15
		2,4-Dichlorophenoxyacetic acid (2,4-D).	94-75-7	* 0.72	● 10
		o,p'-DDD	53-19-0	* 0.023	● 0.087
		p,p'-DDD	72-54-8	* 0.023	● 0.087
		o,p'-DDE	3424-82-6	* 0.031	● 0.087
		p,p'-DDE	72-55-9	* 0.031	● 0.087
		o,p'-DDT	789-02-6	* 0.0039	● 0.087
		p,p'-DDT	50-29-3	* 0.0039	● 0.087
		Dibenzo(a,h)anthracene	53-70-3	* 0.055	● 8.2
		m-Dichlorobenzene	541-73-1	* 0.036	● 6.2
		o-Dichlorobenzene	95-50-1	* 0.088	● 6.2
		p-Dichlorobenzene	106-46-7	* 0.090	● 6.2
		Dichlorodifluoromethane	75-71-8	* 0.23	● 7.2
		1,1-Dichloroethane	75-34-3	* 0.059	● 7.2
		1,2-Dichloroethane	107-06-2	* 0.21	● 7.2
		1,1-Dichloroethylene	75-35-4	* 0.025	● 33
		trans-1,2-Dichloroethene.		* 0.054	● 33
		2,4-Dichlorophenol	120-83-2	* 0.044	● 14
		2,6-Dichlorophenol	87-65-0	* 0.044	● 14
		1,2-Dichloropropane	78-87-5	* 0.85	● 18
		cis-1,3-Dichloropropene	10061-01-5	* 0.036	● 18
		trans-1,3-Dichloropropene.	10061-02-6	* 0.036	● 18
		Dieldrin	60-57-1	* 0.017	● 0.13
		Diethyl phthalate	84-66-2	* 0.20	● 28
		p-Dimethylaminoazobenzene.	60-11-3	* 0.13	NA
		2,4-Dimethyl phenol	105-67-9	* 0.036	● 14
		Dimethyl phthalate	131-11-3	* 0.047	● 28
		Di-n-butyl phthalate	84-74-2	* 0.057	● 28
		1,4-Dinitrobenzene	100-25-4	* 0.32	● 2.3
		4,6-Dinitro-o-cresol	534-52-1	* 0.28	● 160
		2,4-Dinitrophenol	51-28-5	* 0.12	● 160
		2,4-Dinitrotoluene	121-14-2	* 0.32	● 140
		2,6-Dinitrotoluene	606-20-2	* 0.55	● 28
		Di-n-octyl phthalate	117-84-0	* 0.017	● 28
		Di-n-propylnitrosoamine	621-64-7	* 0.40	● 14
		1,2-Diphenyl hydrazine		* 0.087	NA
		1,4-Dioxane	123-91-1	* 0.12	● 170
		Disulfoton	298-04-4	* 0.017	● 6.2
		Endosulfan I	939-98-8	* 0.023	● 0.066
		Endosulfan II	33213-6-5	* 0.029	● 0.13
		Endosulfan sulfate	1-31-07-8	* 0.029	● 0.13
		Endrin	7-20-8	* 0.0028	● 0.13
		Endrin aldehyde	7421-93-4	* 0.025	● 0.13
		Ethyl acetate	141-78-6	* 0.34	● 33
		Ethyl cyanide		* 0.24	NA

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
		Ethyl benzene	100-41-4	* 0.057	● 6.0
		Ethyl ether	60-29-7	* 0.12	● 160
		bis(2-Ethylhexyl) phthalate.	117-81-7	* 0.28	● 28
		Ethyl methacrylate	97-63-2	* 0.14	● 160
		Ethylene oxide	75-21-8	* 0.12	NA
		Famphur	52-85-7	* 0.017	● 15
		Fluoranthene	206-44-0	* 0.068	● 8.2
		Fluorene	86-73-7	* 0.059	● 4.0
		Fluorotrichloromethane	75-69-4	* 0.020	● 33
		Heptachlor	76-44-8	* 0.0012	● 0.066
		Heptachlor epoxide	1024-57-3	* 0.016	● 0.066
		Hexachlorobenzene	118-74-1	* 0.055	● 37
		Hexachlorobutadiene	87-68-3	* 0.055	● 28
		Hexachlorocyclopentadiene.	77-47-4	* 0.057	● 3.6
		Hexachlorodibenzofurans.	.....	* 0.000063	● 0.001
		Hexachlorodibenzo-p-dioxins.	.....	* 0.000063	● 0.001
		Hexachloroethane	67-72-1	* 0.055	● 28
		Hexachloropropene	1888-71-7	* 0.035	● 28
		Indeno(1,2,3,-c,d)pyrene	193-39-5	* 0.0055	● 8.2
		Iodomethane	74-88-4	* 0.019	● 65
		Isobutanol	78-83-1	* 5.6	● 170
		Isodrin	465-73-6	* 0.021	● 0.066
		Isosafrole	120-58-1	* 0.081	● 2.6
		Kepone	143-50-8	* 0.0011	● 0.13
		Methacrylonitrile	126-98-7	* 0.24	● 84
		Methapyrilene	91-80-5	* 0.081	● 1.5
		Methoxychlor	72-43-5	* .0.25	● 0.18
		3-Methylcholanthrene	56-49-5	* 0.0055	● 15
		4,4-Methylene-bis-(2-chloroaniline).	101-14-4	* 0.50	● 35
		Methylene chloride	75-09-2	* 0.089	● 33
		Methyl ethyl ketone	78-93-3	* 0.28	● 36
		Methyl isobutyl ketone	108-10-1	* 0.14	● 33
		Methyl methacrylate	80-62-6	* 0.14	● 160
		Methyl methansulfonate	.....	* 0.018	NA
		Methyl parathion	298-00-0	* 0.014	● 4.6
		Naphthalene	91-20-3	* 0.059	● 3.1
		2-Naphtylamine	91-59-8	* 0.52	NA
		p-Nitroaniline	100-01-6	* 0.028	● 28
		Nitrobenzene	98-95-3	* 0.068	● 14
		5-Nitro-o-toluidine	99-55-8	* 0.32	● 28
		4-Nitrophenol	100-02-7	* 0.12	● 29
		N-Nitrosodiethylamine	55-18-5	* 0.40	● 28
		N-Nitrosodimethylamine	62-75-9	* 0.40	NA
		N-Nitroso-di-n-butylamine.	924-16-3	* 0.40	● 17
		N-Nitrosomethylethylamine.	10595-95-6	* 0.40	● 2.3
		N-Nitrosomorpholine	59-89-2	* 0.40	● 2.3
		N-Nitrosopiperidine	100-75-4	* 0.013	● 35
		N-Nitrosopyrrolidine	930-55-2	* 0.013	● 35
		Parathion	56-38-2	* 0.017	● 4.6
		Pentachlorobenzene	608-93-5	* 0.055	● 37
		Pentachlorodibenzofurans.	.....	* 0.000035	● 0.001
		Pentachlorodibenzo-p-dioxins.	.....	* 0.000063	● 0.001
		Pentachloronitrobenzene.	82-68-8	* 0.055	● 4.8
		Pentachlorophenol	87-86-5	* 0.089	● 7.4
		Phenacetin	62-44-2	* 0.081	● 16
		Phenanthrene	85-01-8	* 0.059	● 3.1
		Phenol	108-95-2	* 0.039	● 6.2

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
		Phorate	298-02-2	[a] 0.021	[b] 4.6
		Propanenitrile (ethyl cyanide).	107-12-0	[a] 0.24	[b] 360
		Pronamide	23950-58-5	[a] 0.093	[b] 1.5
		Pyrene	129-00-0	[a] 0.067	[b] 8.2
		Pyridine	110-86-1	[a] 0.014	[b] 16
		Safrole	94-59-7	[a] 0.081	[b] 22
		Silvex (2,4,5-TP)	93-72-1	[a] 0.72	[b] 7.9
		2,4,5-T	93-76-5	[a] 0.72	[b] 7.9
		1,2,4,5,-Tetrachlorobenzene.	95-94-3	[a] 0.055	[b] 19
		Tetrachlorodibenzo-furans.		[a] 0.000063	[b] 0.001
		Tetrachlorodibenzo-p-dioxins.		[a] 0.000063	[b] 0.001
		2,3,7,8-Tetrachlorodibenzo-p-dioxin.		[a] 0.000063	NA
		1,1,1,2-Tetrachloroethane.	630-20-6	[a] 0.057	[b] 42
		1,1,2,2-Tetrachloroethane.	79-34-6	[a] 0.057	[b] 42
		Tetrachloroethene	127-18-4	[a] 0.056	[b] 5.6
		2,3,4,6-Tetrachlorophenol.	58-90-2	[a] 0.030	[b] 37
		Toluene	108-88-3	[a] 0.080	[b] 28
		Toxaphene	8001-35-1	[a] 0.0095	[b] 1.3
		1,2,4-Trichlorobenzene	120-82-1	[a] 0.055	[b] 19
		1,1,1-Trichloroethane	71-55-6	[a] 0.054	[b] 5.6
		1,1,2-Trichloroethane	79-00-5	[a] 0.054	[b] 5.6
		Trichloroethylene	79-01-6	[a] 0.054	[b] 5.6
		2,4,5-Trichlorophenol	95-95-4	[a] 0.18	[b] 37
		2,4,6-Trichlorophenol	88-06-2	[a] 0.035	[b] 37
		1,2,3-Trichloropropane	96-18-4	[a] 0.85	[b] 28
		1,1,2-Trichloro-1,2,2-trifluoro-ethane.	76-13-1	[a] 0.057	[b] 28
		Vinyl chloride	75-01-4	[a] 0.27	[b] 33
		Xylene(s)		[a] 0.32	[b] 28
		Cyanides (Total)	57-12-5	[a] 1.2	[b] 1.8
		Cyanides (Amenable)	57-12-5	[a] 0.86	NA
		Fluoride	16964-48-8	[a] 35	NA
		Sulfide	8496-25-8	[a] 14	NA
		Antimony	7440-36-0	[a] 1.9	NA
		Arsenic	7440-38-2	[a] 5.0	NA
		Barium	7440-39-3	[a] 1.2	NA
		Beryllium	7440-41-7	[a] 0.82	NA
		Cadmium	7440-43-9	[a] 0.20	NA
		Chromium (Total)	7440-47-32	[a] 0.37	NA
		Copper	7440-50-8	[a] 1.3	NA
		Lead	7439-92-1	[a] 0.28	NA
		Mercury	7439-97-6	[a] 0.15	NA
		Nickel	7440-02-0	[a] 0.55	NA
		Selenium	7782-49-2	[a] 0.82	NA
		Silver	7440-22-4	[a] 0.29	NA
		Vanadium	7440-62-2	[a] 0.042	NA
K001	Table CCWE in 268.41	Naphthalene	91-20-3	[b] 0.031	[b] 1.5
		Pentachlorophenol	87-86-5	[b] 0.031	[b] 1.5
		Phenanthrene	85-01-8	[b] 0.031	[b] 1.5
		Pyrene	129-00-0	[b] 0.028	[b] 1.5
		Toluene	108-88-3	[b] 0.028	[b] 28
		Xylenes (Total)		[b] 0.032	[b] 33
		Lead	7439-92-1	[b] 0.037	NA
K002	Table CCWE in 268.41	Chromium (Total)	7440-47-32	[a] 2.9	NA
		Lead	7439-92-1	[a] 3.4	NA
K003	Table CCWE in 268.41	Chromium (Total)	7440-47-32	[a] 2.9	NA
		Lead	7439-92-1	[a] 3.4	NA
K004	Table CCWE in 268.41	Chromium (Total)	7440-47-32	[a] 2.9	NA
		Lead	7439-92-1	[a] 3.4	NA

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
K005	Table CCWE in 268.41	Chromium (Total)	7440-47-32	* 2.9	NA
		Lead	7439-92-1	* 3.4	NA
		Cyanides (Total)	57-12-5	* 0.74	(4)
K006	Table CCWE in 268.41	Chromium (Total)	7440-47-32	* 2.9	NA
		Lead	7439-92-1	* 3.4	NA
K007	Table CCWE	Chromium (Total)	7440-47-32	* 2.9	NA
		Lead	7439-92-1	* 3.4	* NA
		Cyanides (Total)	57-12-5	* 0.74	
K008	Table CCWE in 268.41	Chromium (Total)	7440-47-32	* 2.9	NA
		Lead	7439-92-1	* 3.4	NA
K009		Chloroform	67-66-3	0.1	• 6.0
K010		Chloroform	67-66-3	0.1	6.0
K011		Acetonitrile	75-05-8	38	1.8
		Acrylonitrile	107-13-1	0.06	1.4
		Acrylamide	79-06-1	19	23
		Benzene	71-43-2	0.02	0.03
		Cyanide (Total)	57-12-5	21	57
K013		Acetonitrile	75-05-8	38	• 1.8
		Acrylonitrile	107-13-1	0.06	• 1.4
		Acrylamide	79-06-1	19	• 23
		Benzene	71-43-2	0.02	• 0.03
		Cyanide (Total)	57-12-5	21	57
K014		Acetonitrile	75-05-8	38	• 1.8
		Acrylonitrile	107-13-1	0.06	• 1.4
		Acrylamide	79-06-1	19	• 23
		Benzene	71-43-2	0.02	• 0.03
		Cyanide (Total)	57-12-5	21	57
K015	Table CCWE in 268.41	Anthracene	120-12-7	1.0	• 3.4
		Benzal chloride	98-87-3	0.28	• 6.2
		Sum of	205-99-2		
		Benzo(b)fluoranthene and Benzo(k)fluoranthene.	207-08-9	0.029	3.4
		Phenanthrene	85-01-8	0.27	• 3.4
		Toluene	108-88-3	0.15	• 6.0
		Chromium (Total)	7440-47-32	0.32	NA
		Nickel	7440-02-0	0.44	NA
K016		Hexachlorobenzene	118-74-1	• 0.033	• 28
		Hexachlorobutadiene	87-68-3	• 0.007	• 5.6
		Hexachlorocyclopentadiene.	77-47-4	• 0.007	• 5.6
		Hexachloroethane	67-72-1	• 0.033	• 28
		Tetrachloroethene	127-18-4	• 0.007	• 6.0
K017		1,2-Dichloropropane	78-87-5	*,@ 0.85	• 18
		1,2,3-Trichloropropane	96-18-[illegible]	*,@ 0.85	• 28
		Bis(2-chloroethyl)ether	111-44-4	*,@ 0.033	• 7.2
K018		Chloroethane	75-00-3	• 0.007	• 6.0
		1,1-Dichloroethane	75-34-3	• 0.007	• 6.0
		1,2-Dichloroethane	107-06-2	• 0.007	• 6.0
		Hexachloroethane	67-72-1	• 0.007	• 28
		Hexachlorobutadiene	87-68-3	• 0.033	• 5.6
		Hexachloroethane	67-72-1	• 0.007	• 28
		Pentachloroethane	76-01-7	• 0.007	• 5.6
		1,1,1-Trichloroethane	71-55-6	• 0.007	• 6.0
K019		Bis(2-chloroethyl)ether	111-44-4	• 0.007	• 5.6
		Chlorobenzene	108-90-7	• 0.006	• 6.0
		Chloroform	67-66-3	• 0.007	• 6.0
		p-Dichlorobenzene	106-46-7	• 0.008	NA
		1,2-Dichloroethane	107-06-2	• 0.007	• 6.0
		Fluorene	86-73-7	• 0.007	NA
		Hexachloroethane	67-72-1	• 0.033	• 28
		Naphthalene	91-20-3	• 0.007	• 5.6
		Phenanthrene	85-01-8	• 0.007	• 5.6
		1,2,4,5-Tetrachlorobenzene.	95-94-3	• 0.017	NA
		Tetrachloroethene	127-18-4	• 0.007	• 5.0
		1,2,4-Trichlorobenzene	120-82-1	• 0.023	• 19
		1,1,1-Trichloroethane	71-55-6	• 0.007	• 6.0

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
K020		1,2-Dichloroethane	106-93-4	● 0.007	● 6.0
		1,1,2,2-Tetrachloroethane.	79-34-6	● 0.007	● 5.6
		Tetrachloroethene	127-18-4	● 0.007	● 6.0
K021	Table CCWE in 268.41	Chloroform	67-66-3	* 0.046	● 6.2
		Carbon tetrachloride	56-23-5	* 0.057	● 6.2
		Antimony	7440-36-0	* 0.60	NA
K022	Table CCWE in 268.41	Toluene	108-88-3	* 0.080	● 0.034
		Acetophenone	96-86-2	0.010	● 19
		Diphenylamine	22-39-4	* 0.52	NA
		Diphenylnitrosamine	86-30-6	* 0.40	NA
		Sum of Diphenylamine and Diphenylnitrosamine.		NA	● 13
		Phenol	108-95-2	0.039	● 12
		Chromium (Total)	7440-47-32	0.35	NA
		Nickel	7440-02-0	0.47	NA
K023		Phthalic anhydride (measured as Phthalic acid).	85-44-9	● 0.54	● 28
K024		Phthalic anhydride (measured as Phthalic acid).	85-44-9	● 0.54	● 28
K028	Table CCWE in 268.41	1,1-Dichloroethane	75-34-3	● 0.007	● 6.0
		trans-1,2-Dichloroethane.		● 0.033	● 6.0
		Hexachlorobutadiene	87-68-3	● 0.007	● 5.6
		Hexachloroethane	67-72-1	● 0.033	● 28
		Pentachloroethane	76-01-7	● 0.033	● 5.6
		1,1,1,2-Tetrachloroethane.	630-20-6	● 0.007	● 5.6
		1,1,2,2-Tetrachloroethane.	79-34-6	● 0.007	● 5.6
		1,1,1-Trichloethane	71-55-6	● 0.007	● 6.0
		1,1,2-Trichlorethane	79-00-5	● 0.007	● 6.0
		Tetrachloroethylene	127-18-4	● 0.007	● 6.0
		Cadmium	7440-43-9	6.4	NA
		Chromium (Total)	7440-47-32	0.35	NA
		Lead	7439-92-1	0.037	NA
		Nickel	7440-02-0	0.47	NA
K029		Chloroform	67-66-3	0.46	● 6.0
		1,2-Dichloroethane	107-06-2	0.21	● 6.0
		1,1-Dichloroethylene	75-35-4	0.025	● 6.0
		1,1,1-Trichloroethane	71-55-6	0.054	● 6.0
		Vinyl chloride	75-01-4	0.27	● 6.0
K030		o-Dichlorobenzene	95-50-1	● 0.008	NA
		p-Dichlorobenzene	106-46-7	● 0.008	NA
		Hexachlorobutadiene	87-68-3	● 0.007	● 5.6
		Hexachlorobutadiene	67-72-1	● 0.033	● 28
		Hexachloropropene	1888-71-7	NA	● 19
		Pentachlorobenzene	608-93-5	NA	● 28
		Pentachloroethane	76-01-7	● 0.007	● 5.6
		1,2,4,5-Tetrachlorobenzene.	95-94-3	● 0.017	● 14
		Tetrachloroethane	127-18-4	● 0.007	● 6.0
		1,2,4-Trichlorobenzene	120-82-1	● 0.023	● 19
K031	Table CCWE in 268.41	Arsenic	7440-38-2	0.79	NA
KJ32		Hexachloropentadiene	77-47-4	* 0.057	● 2.4
		Chlordane	57-74-9	* 0.0033	● 0.26
		Heptachlor	76-44-8	* 0.012	● 0.066
		Heptachlor epoxide	1024-57-3	* 0.016	● 0.066
K033		Hexachlorocyclopentadiene.	77-47-4	* 0.057	● 2.4
K034		Hexachlorocyclopentadiene.	77-47-4	* 0.057	● 2.4
K035		Acenaphthene	83-32-9	NA	● 3.4
		Anthracene	120-12-7	NA	● 3.4
		Benz(a)anthracene	56-55-3	* 0.059	● 3.4

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
		Benzo(a)pyrene	50-32-8	NA	[e] 3.4
		Chrysene	218-01-9	[a] 0.059	[e] 3.4
		Dibenz(a,h)anthracene	53-70-3	NA	[e] 3.4
		Fluoranthene	206-44-0	[a] 0.068	[e] 3.4
		Fluorene	86-73-7	NA	[e] 3.4
		Indeno(1,2,3-cd)pyrene	193-39-5	NA	[e] 3.4
		Cresols (m- and p-isomers).		[a] 0.77	NA
		Naphthalene	91-20-3	[a] 0.059	[e] 3.4
		o-cresol	95-48-7	[a] 0.11	NA
		Phenanthrene	85-01-8	[a] 0.059	[e] 3.4
		Phenol	108-95-2	0.039	NA
		Pyrene	129-00-0	[a] 0.067	[e] 8.2
K036		Disulfoton	298-04-4	[a] 0.025	[e] 0.1
K037		Disulfoton	298-04-4	[a] 0.025	[e] 0.1
		Toluene	108-88-3	[a] 0.080	[e] 28
K038		Phorate	298-02-2	0.025	[e] 0.1
K040		Phorate	298-02-2	0.025	[e] 0.1
K041		Toxaphene	8001-35-1	[a] 0.0095	[e] 2.6
K042		1,2,4,5-Tetrachlorobenzene.	95-94-3	[a] 0.055	[e] 4.4
		o-Dichlorobenzene	95-50-1	[a] 0.088	[e] 4.4
		p-Dichlorobenzene	106-46-7	[a] 0.090	[e] 4.4
		Pentachlorobenzene	608-93-5	[a] 0.055	[e] 4.4
		1,2,4-Trichlorobenzene	120-82-1	[a] 0.055	[e] 4.4
K043		2,4-Dichlorophenol	120-83-2	[e] 0.049	[e] 0.38
		2,6-Dichlorophenol	87-65-0	[e] 0.013	[e] 0.34
		2,4,5-Trichlorophenol	95-95-4	[e] 0.016	[e] 8.2
		2,4,6-Trichlorophenol	88-06-2	[e] 0.039	[e] 7.6
		Tetrachlorophenols (Total).		[e] 0.018	[e] 0.68
		Pentachlorophenol	87-86-5	[e] 0.22	[e] 1.9
		Tetrachloroethene	79-01-6	[e] 0.006	[e] 1.7
		Hexachlorodibenzo-p-dioxins.		[e] 0.001	[e] 0.001
		Hexachlorodibenzo-furans.		[e] 0.001	[e] 0.001
		Pentachlorodibenzo-p-dioxins.		[e] 0.001	[e] 0.001
		Pentachlorodibenzo-furans.		[e] 0.001	[e] 0.001
		Tetrachlorodibenzo-p-dioxins.		[e] 0.001	[e] 0.001
		Tetrachlorodibenzo-furans.		[e] 0.001	[e] 0.001
K046	Table CCWE in 268.41	Lead	7439-92-1	0.037	NA
K048	Table CCWE in 268.41	Benzene	71-43-2	[e] 0.011	[e] 14
		Benzo(a)pyrene	50-32-8	[e] 0.047	[e] 12
		Bis(2-ethylhexyl)phthalate.	117-81-7	[e] 0.043	[e] 7.3
		Chrysene	218-01-9	[e] 0.043	[e] 15
		Di-n-butyl phthalate	84-74-2	[e] 0.06	[e] 3.6
		Ethylbenzene	100-41-4	[e] 0.011	[e] 14
		Fluorene	86-73-7	[e] 0.05	NA
		Naphthalene	91-20-3	[e] 0.033	[e] 42
		Phenanthrene	85-01-8	[e] 0.039	[e] 34
		Phenol	108-95-2	[e] 0.047	[e] 3.6
		Pyrene	129-00-0	[e] 0.045	[e] 36
		Toluene	108-88-3	[e] 0.011	[e] 14
		Xylene(s)		[e] 0.011	[e] 22
		Cyanides (Total)	57-12-5	[e] 0.028	[e] 1.8
		Chromium (Total)	7440-47-32	0.2	NA
		Lead	7439-92-1	0.037	NA
K049	Table CCWE in 268.41	Anthracene	120-12-7	[e] 0.039	[e] 28
		Benzene	71-43-2	[e] 0.011	[e] 14
		Benzo(a)pyrene	50-32-8	[e] 0.047	[e] 12
		Bis(2-ethylhexyl)phthalate.	117-81-7	[e] 0.043	[e] 7.3

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
		Carbon disulfide	75-15-0	[e] 0.011	NA
		Chrysene	2218-01-9	[e] 0.043	[e] 15
		2,4-Dimethylphenol	105-67-9	[e] 0.033	NA
		Ethylbenzene	100-41-4	[e] 0.011	[e] 14
		Naphthalene	91-20-3	[e] 0.033	[e] 42
		Phenanthrene	85-01-8	[e] 0.039	[e] 34
		Phenol	108-95-2	[e] 0.047	[e] 3.6
		Pyrene	129-00-0	[e] 0.045	[e] 36
		Toluene	108-88-3	[e] 0.011	[e] 14
		Xylene(s)		[e] 0.011	[e] 22
		Cyanides (Total)	57-12-5	[e] 0.028	[e] 1.8
		Chromium (Total)	7440-47-32	0.2	NA
		Lead	7439-92-1	0.037	NA
K050	Table CCWE in 268.41	Benzo(a)pyrene	50-32-8	[e] 0.047	[e] 12
		Phenol	108-95-2	[e] 0.047	[e] 3.6
		Cyanides (Total)	57-12-5	[e] 0.028	[e] 1.8
		Chromium (Total)	7440-47-32	0.2	NA
		Lead	7439-92-1	0.037	NA
K051	Table CCWE in 268.41	Acenaphthene	208-96-8	[e] 0.05	NA
		Anthracene	120-12-7	[e] 0.039	[e] 28
		Benzene	71-43-2	[e] 0.011	[e] 14
		Benzo(a)anthracene	50-32-8	[e] 0.043	[e] 20
		Benzo(a)pyrene	117-81-7	[e] 0.047	[e] 12
		Bis(2-ethylhexyl)phthalate.	75-15-0	[e] 0.043	[e] 7.3
		Chrysene	2218-01-9	[e] 0.043	[e] 15
		Di-n-butyl phthalate	105-67-9	[e] 0.06	[e] 3.6
		Ethylbenzene	100-41-4	[e] 0.011	[e] 14
		Fluorene	86-73-7	[e] 0.05	[e] NA
		Naphthalene	91-20-3	[e] 0.033	[e] 42
		Phenanthrene	85-01-8	[e] 0.039	[e] 34
		Phenol	108-95-2	[e] 0.047	[e] 3.6
		Pyrene	129-00-0	[e] 0.045	[e] 36
		Toluene	108-88-3	[e] 0.011	[e] 14
		Xylene(s)		[e] 0.011	[e] 22
		Cyanides (Total)	57-12-5	[e] 0.028	[e] 1.8
		Chromium (Total)	7440-47-32	0.2	NA
		Lead	7439-92-1	0.037	NA
K052	Table CCWE in 268.41	Benzene	71-43-2	[e] 0.011	[e] 14
		Benzo(a)pyrene	50-32-8	[e] 0.047	[e] 12
		o-Cresol	95-48-7	[e] 0.011	[e] 6.2
		p-Cresol	106-44-5	[e] 0.011	[e] 6.2
		2,4-Dimethylphenol	105-67-9	[e] 0.033	[e] NA
		Ethylbenzene	100-41-4	[e] 0.011	[e] 14
		Naphthalene	91-20-3	[e] 0.033	[e] 42
		Phenanthrene	85-01-8	[e] 0.039	[e] 34
		Phenol	108-95-2	[e] 0.047	[e] 3.6
		Toluene	108-88-3	[e] 0.011	[e] 14
		Xylenes		[e] 0.011	[e] 22
		Cyanides (Total)	57-12-5	[e] 0.028	[e] 1.8
		Chromium (Total)	7440-47-32	0.2	NA
		Lead	7439-92-1	0.037	NA
K060		Benzene	71-43-2	[e] 0.17	[e] 0.071
		Benzo(a)pyrene	50-32-8	[e] 0.035	[e] 3.6
		Naphthalene	91-20-3	[e] 0.028	[e] 3.4
		Phenol	108-95-2	[e] 0.042	[e] 3.4
		Cyanides (Total)	57-12-5	1.9	1.2
K061	Table CCWE in 268.41 and Table 2 in 268.42.	Cadmium	7440-43-9	1.61	NA
		Chromium (Total)	7440-47-32	0.32	NA
		Lead	7439-92-1	0.51	NA
		Nickel	7440-02-0	0.44	NA
K062	Table CCWE in 268.41	Chromium (Total)	7440-47-32	0.32	NA
		Lead	7439-92-1	0.04	NA
		Nickel	7440-02-0	0.44	NA

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
K069	Table CCWE in 268.41 and Table 2 in 268.42.	Cadmium	7440-43-9	1.6	NA
		Lead	7439-92-1	0.51	NA
K071	Table CCWE in 268.41	Mercury	7439-97-6	0.030	NA
K073		Carbon tetrachloride	56-23-5	[a] 0.057	[b] 6.2
		Chloroform	67-66-3	[a] 0.046	[b] 6.2
		Hexachloroethane	67-72-1	[a] 0.055	[b] 30
		Tetrachloroethene	127-18-4	[a] 0.056	[b] 6.2
		1,1,1-Trichloroethane	71-55-6	[a] 0.054	[b] 6.2
K083	Table CCWE in 268.41	Benzene	71-43-2	[a] 0.14	[b] 6.6
		Aniline	62-53-3	[a] 0.81	[b] 14
		Diphenylamine	22-39-4	[a] 0.52	NA
		Diphenylnitrosamine	86-30-6	[a] 0.40	NA
		Sum of Diphenylamine and Diphenylnitrosamine.		NA	[b] 14
		Nitrobenzene	98-95-3	[a] 0.068	[b] 14
		Phenol	108-95-2	0.039	[b] 5.6
		Cyclohexanone	108-94-1	0.36	[b] 30
		Nickel	7440-02-0	0.47	NA
K084		Arsenic	7440-38-2	0.79	NA
K085		Benzene	71-43-2	[a] 0.14	[b] 4.4
		Chlorobenzene	108-90-7	[a] 0.057	[b] 4.4
		o-Dichlorobenzene	95-50-1	[a] 0.088	[b] 4.4
		m-Dichlorobenzene	541-73-1	[a] 0.036	[b] 4.4
		p-Dichlorobenzene	106-46-7	[a] 0.090	[b] 4.4
		1,2,4-Trichlorobenzene	120-82-1	[a] 0.055	[b] 4.4
		1,2,4,5-Tetrachlorobenzene.	95-94-3	[a] 0.055	[b] 4.4
		Pentachlorobenzene	608-93-5	0.055	[b] 4.4
		Hexachlorobenzene	118-74-1	[a] 0.055	[b] 4.4
		Aroclor 1016	12674-1, 2	[a] 0.013	[b] 0.92
		Aroclor 1221	11104-28-2	[a] 0.014	[b] 0.92
		Aroclor 1232	11141-16-5	[a] 0.013	[b] 0.92
		Aroclor 1242	53469-21-9	[a] 0.017	[b] 0.92
		Aroclor 1248	12672-29-6	[a] 0.013	[b] 0.92
		Aroclor 1254	11097-69-1	[a] 0.014	[b] 1.8
		Aroclor 1260	11096-82-5	[a] 0.014	[b] 1.8
K086	Table CCWE in 268.41	Acetone	67-64-1	0.28	[b] 160
		Acetophenone	96-86-2	0.010	[b] 9.7
		Bis(2-ethylhexyl)phthalate.	117-81-7	[a] 0.28	[b] 28
		n-Butyl alcohol	71-36-3	5.6	[b] 2.6
		Butylbenzylphthalate	85-68-7	[a] 0.017	[b] 7.9
		cyclohexanone	108-94-1	0.36	NA
		1,2-Dichlorobenzene	95-50-1	0.088	[b] 6.2
		Diethyl phthalate	84-66-2	[a] 0.20	[b] 28
		Dimethyl phthalate	131-11-3	[a] 0.047	[b] 28
		Di-n-butyl phthalate	84-74-2	[a] 0.057	[b] 28
		Di-n-octyl phthalate	117-84-0	[a] 0.017	[b] 28
		Ethyl acetate	141-78-6	[a] 0.34	[b] 33
		Ethylbenzene	100-41-4	[a] 0.057	[b] 6.0
		Methanol	67-56-1	[a] 5.6	NA
		Methyl isobutyl ketone	108-10-1	0.14	[b] 33
		Methyl ethyl ketone	78-93-3	0.28	[b] 36
		Methylene chloride	75-09-2	[a] 0.089	[b] 33
		Naphthalene	91-20-3	[a] 0.059	[b] 3.1
		Nitrobenzene	98-95-3	[a] 0.068	[b] 14
		Toluene	108-88-3	[a] 0.080	[b] 28
		1,1,1-Trichloroethane	71-55-6	[a] 0.054	[b] 5.6
		Trichloroethylene	79-01-6	[a] 0.054	[b] 5.6
		Xylenes (Total)		[a] 0.32	[b] 28
		Cyanides (Total)	57-12-5	1.9	1.5
		Chromium (Total)	7440-47-32	0.32	NA
		Lead	7439-92-1	0.037	NA
K087	Table CCWE in 268.41	Acenaphthalene	208-96-8	[a] 0.028	3.4
		Benzene	71-43-2	[a] 0.014	[b] 0.071

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
		Chrysene	218-01-9	[e] 0.028	[e] 3.4
		Fluoranthene	206-44-0	[e] 0.028	[e] 3.4
		Indeno(1,2,3-cd)pyrene	193-39-5	[e] 0.028	[e] 3.4
		Naphthalene	91-20-3	[e] 0.028	[e] 3.4
		Phenanthrene	85-01-8	[e] 0.028	[e] 3.4
		Toluene	108-88-3	[e] 0.008	[e] 0.65
		Xylenes		[e] 0.014	[e] 0.07
		Lead	7439-92-1	0.037	NA
K093		Phthalic anhydride (measured as Phthalic acid).	85-44-9	[e] 0.54	[e] 28
K094		Phthalic anhydride (measured as Phthalic acid).	85-44-9	[e] 0.54	[e] 28
K095		1,1,1,2-Tetrachloroethane.	630-20-6	0.057	[e] 5.6
		1,1,2,2-Tetrachloroethane.	79-34-6	0.057	[e] 5.6
		Tetrachloroethene	127-18-4	0.056	[e] 6.0
		1,1,2-Trichloroethane	79-00-5	0.054	[e] 6.0
		Trichloroethylene	79-01-6	0.054	[e] 5.6
		Hexachloroethane	67-72-1	0.055	[e] 28
		Pentachloroethane	76-01-7	0.055	[e] 5.6
K096		1,1,1,2-Tetrachloroethane.	630-20-6	0.057	[e] 5.6
		1,1,2,2-Tetrachloroethane.	79-34-6	0.057	[e] 5.6
		Tetrachloroethene	127-18-4	0.056	[e] 6.0
		1,1,2-Trichloroethane	79-00-5	0.054	[e] 6.0
		Trichloroethene	79-01-6	0.054	[e] 5.6
		1,3-Dichlorobenzene	541-73-1	0.036	[e] 5.6
		Pentachloroethane	76-01-7	0.055	[e] 5.6
		1,2,4-Trichlorobenzene	120-82-1	0.055	[e] 19
K097		Hexachlorocyclopentadiene.	77-47-4	[f] 0.057	2.4
		Chlordane	57-74-9	[f] 0.0033	[e] 0.26
		Heptachlor	76-44-8	[f] 0.0012	[e] 0.066
		Heptachlor epoxide	1024-57-3	[f] 0.016	[e] 0.066
K098		Toxaphene	8001-35-1	[f] 0.0095	[e] 2.8
K099		2,4-Dichlorophenoxyacetic acid.	94-75-7	[e] 1	[e] 1
		Hexachlorodibenzo-p-dioxins.		[e] 0.001	[e] 0.001
		Hexachlorodibenzofurans.		[e] 0.001	[e] 0.001
		Pentachlorodibenzo-p-dioxins.		[e] 0.001	[e] 0.001
		Pentachlorodibenzofurans.		[e] 0.001	[e] 0.001
		Tetrachlorodibenzo-p-dioxins.		[e] 0.001	[e] 0.001
		Tetrachlorodibenzofurans.		[e] 0.001	[e] 0.001
K100	Table CCWE in 268.41	Cadmium	7440-43-9	1.6	NA
		Chromium (Total)	7440-47-32	0.32	NA
		Lead	7439-92-1	0.51	NA
K101		o-Nitroaniline		[e] 0.27	[e] 14
		Arsenic	7440-38-2	0.79	NA
		Cadmium	7440-43-9	0.24	NA
		Lead	7439-92-1	0.17	NA
		Mercury	7439-97-6	0.082	NA
K102	Table CCWE in 268.41	o-Nitrophenol		[e] 0.028	[e] 13
		Arsenic	7440-38-2	0.79	NA
		Cadmium	7440-43-9	0.24	NA
		Lead	7439-92-1	0.17	NA
		Mercury	7439-97-6	0.082	NA
K103		Aniline	62-53-3	[e] 4.5	5.6

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewater concentration (mg/kg)
		Benzene	71-43-2	[e] 0.15	[e] 6.0
		2,4-Dinitrophenol	51-28-5	[e] 0.61	[e] 5.6
		Nitrobenzene	98-95-3	[e] 0.073	[e] 5.6
		Phenol	108-95-2	[e] 1.4	[e] 5.6
K104		Aniline	62-53-3	[e] 4.5	[e] 5.6
		Benzene	71-43-2	[e] 0.15	[e] 6
		2,4-Dinitrophenol	51-28-5	[e] 0.61	[e] 5.6
		Nitrobenzene	98-95-3	[e] 0.073	[e] 5.6
		Phenol	108-95-2	[e] 1.4	[e] 5.6
		Cyanides (Total)	57-12-5	2.7	[e] 1.8
K105		Benzene	71-43-2	0.14	[e] 4.4
		Chlorobenzene	108-90-7	0.057	[e] 4.4
		o-Dichlorobenzene	95-50-1	0.088	[e] 4.4
		p-Dichlorobenzene	106-46-7	0.090	[e] 4.4
		2,4,5-Trichlorophenol	95-95-4	0.18	[e] 4.4
		2,4,6-Trichlorophenol	88-06-2	0.035	[e] 4.4
		2-Chlorophenol	95-57-8	0.044	[e] 4.4
		Phenol	108-95-2	0.039	[e] 4.4
K106	Table CCWE in 268.41 and Table 2 in 268.42.	Mercury	7439-97-6	0.030	NA
K115	Table CCWE in 268.41	Nickel	7440-02-0	0.47	NA

[e] Treatment standards for this organic constituent were established based upon incineration in units operated in accordance with the technical requirements of 40 CFR Part 264 Subpart O or Part 265 Subpart O, or based upon combustion in fuel substitution units operating in accordance with applicable technical requirements. A facility may certify compliance with these treatment standards according to provisions in 40 CFR Section 268.7.

[*] Based on analysis of composite samples.

[#] As analyzed using SW-846 Method 9010; sample size: 0.5–10; distillation time: one hour to one hour and fifteen minutes.

NA—Not Applicable.

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES

Waste code	Commercial chemical name	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
P004	Aldrin		Aldrin	309-00-2	*0.21	0.066
P010	Arsenic acid	Table CCWE in 268.41	Arsenic	7440-38-2	0.79	NA
P011	Arsenic pentoxide	Table CCWE in 268.41	Arsenic	7440-38-2	0.79	NA
P012	Arsenic trioxide	Table CCWE in 268.41	Arsenic	7440-38-2	0.79	NA
P013	Barium cyanide	Table CCWE in 268.41	Cyanides (Total)	57-12-5	1.9	110
			Cyanides (Amenable)	57-12-5	0.1	9.1
P020	2-sec-Butyl-4,6-dinitrophenol (Dinoseb)		2-sec-Butyl-4,6-dinitrophenol (Dinoseb)	88-85-7	0.066	*2.5
P021	Calcium cyanide		Cyanides (Total)	57-12-5	1.9	110
			Cyanides (Amenable)	57-12-5	0.1	9.1
P022	Carbon disulfide	Table 2 in 268.42	Carbon disulfide	75-15-0	0.014	NA
P024	p-Chloroaniline		p-Chloroaniline	106-47-8	0.46	*16
P029	Copper cyanide		Cyanides (Total)	57-12-5	1.9	110
			Cyanides (Amenable)	57-12-5	0.1	9.1
P030	Cyanides (soluble salts and complexes)		Cyanides (Total)	57-12-5	1.9	110
			Cyanides (Amenable)	57-12-5	0.1	9.1
P036	Dichlorophenylarsine	Table CCWE in 268.41	Arsenic	7440-38-2	0.79	NA
P037	Dieldrin		Dieldrin	60-57-1	*0.017	*0.13
P038	Diethylarsine	Table CCWE in 268.41	Arsenic	7740-38-2	0.79	NA
P039	Disulfoton		Disulfoton	298-04-4	0.017	*0.1
P047	4,6-Dinitro-o-cresol		4,6-Dinitro-o-cresol	534-52-1	*0.28	*160
P048	2,4-Dinitrophenol		2,4-Dinitrophenol	51-28-5	*0.12	*160
P050	Endosulfan		Endosulfan I	939-98-8	*0.023	*0.066
			Endosulfan II	33213-6-5	*0.029	*0.13
			Endosulfan sulfate	1031-07-8	*0.029	*0.13
P051	Endrin		Endrin	72-20-8	*0.0028	*0.13
			Endrin aldehyde	7421-93-4	*0.025	*0.13
P056	Fluoride	Table 2 in 268.42	Fluoride	16964-48-8	35	NA
P059	Heptachlor		Heptachlor	76-44-8	*0.0012	*0.066
			Heptachlor epoxide	1024-57-3	*0.016	*0.066
P060	Isodrin		Isodrin	465-73-6	*0.021	*0.066
P063	Hydrogen cyanide		Cyanides (Total)	57-12-5	1.9	110
			Cyanides (Amenable)	57-12-5	0.10	9.1
P065	Mercury fulminate	Table CCWE in 268.41 and Table 2 in 268.42.	Mercury	7439-97-6	0.030	NA
P071	Methyl parathion		Methyl parathion	298-00-0	0.025	*0.1
P073	Nickel carbonyl	Table CCWE in 268.41	Nickel	7440-02-0	0.44	NA
P074	Nickel cyanide	Table CCWE in 268.41	Cyanides (Table)	57-12-5	1.9	110
			Cyanides (Amenable)	57-12-5	0.10	9.1
			Nickel	7440-02-0	0.44	NA
P077	p-Nitroaniline		p-Nitroaniline	100-01-6	*0.028	*28

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	Commercial chemical name	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
P082	N-Nitrosodimethylamine	Table 2 in 268.42	N-Nitrosodimethylamine	62-75-9	* 0.40	NA
P089	Parathion		Parathion	56-38-2	0.025	● 0.1
P092	Phenylmercury acetate	Table CCWE in 268.41 and Table 2 in 268.42.	Mercury	7439-97-6	0.030	NA
P094	Phorate		Phorate	298-02-2	0.025	● 0.1
P097	Famphur		Famphur	52-85-7	0.025	● 0.1
P098	Potassium cyanide		Cyanides (Total)	57-12-5	1.9	110
			Cyanides (Amenable)	57-12-5	0.10	9.1
P099	Potassium silver cyanide	Table CCWE in 268.41	Cyanides (Total)	57-12-5	1.9	110
			Cyanides (Amenable)	57-12-5	0.1	9.1
			Silver	7440-22-4	0.29	NA
P101	Ethyl cyanide (Propanenitrile)		Ethyl cyanide (Propanenitrile)	107-12-0	* 0.24	● 360
P103	Selenourea	Table CCWE in 268.41	Selenium	7782-49-2	* 1.0	NA
P104	Silver cyanide	Table CCWE in 268.41	Cyanides (Total)	57-12-5	1.9	110
			Cyanides (Amenable)	57-12-5	0.10	9.1
			Silver	7440-22-4	0.29	NA
P106	Sodium cyanide		Cyanides (Total)	57-12-5	1.9	110
			Cyanides (Amenable)	57-12-5	0.10	9.1
P110	Tetraethyl lead	Table CCWE in 268.41 and Table 2 in 268.42.	Lead	7439-92-1	0.040	NA
P113	Thallic oxide	Table 2 in 268.42	Thallium	7440-28-0	* 0.14	NA
P114	Thallium selenite	Table CCWE in 268.41	Selenium	7782-49-2	1.0	NA
P115	Thallium(I)sulfate	Table 2 in 268.42	Thallium	7440-28-0	* 0.14	NA
P119	Ammonia vanadate	Table 2 in 268.42	Vanadium	7440-62-2	* 28	NA
P120	Vanadium pentoxide	Table 2 in 268.42	Vanadium	7440-62-2	* 28	NA
P121	Zinc cyanide		Cyanides (Total)	57-12-5	1.9	110
			Cyanides (Amenable)	57-12-5	0.10	9.1
P123	Toxaphene		Toxaphene	8001-35-1	* 0.0095	● 1.3
U002	Acetone		Acetone	67-64-1	0.28	● 160
U003	Acetonitrile	Table 2 in 268.42	Acetonitrile	75-05-8	017	NA
U004	Acetophenone		Acetophenone	98-86-2	● 0.010	● 9.7
U005	2-Acetylaminofluorene		2-Acetylaminofluorene	53-96-3	* 0.059	● 140
U009	Acrylonitrile		Acrylonitrile	107-13-1	* 0.24	● 84
U012	Aniline		Aniline	62-53-3	0.81	● 14
U018	Benz(a)anthracene		Benz(a)anthracene	56-55-3	* 0.059	● 8.2
U019	Benzene		Benzene	71-43-2	* 0.14	● 36
U022	Benzo(a)pyrene		Benzo(a)pyrene	50-32-8	* 0.061	● 8.2
U024	Bis(2-chloroethoxy)methane		Bis(2-chloroethoxy)methane	111-91-1	0.036	● 7.2
U025	Bis(2-chloroethyl)ether		Bis(2-chloroethyl)ether	111-44-4	0.033	● 7.2
U027	Bis(2-chloroisopropyl) ether		Bis(2-chloroisopropyl) ether	39638-32-9	* 0.055	● 7.2
U028	Bis(2-ethylhexyl) pthalate		Bis(2-ethylhexyl) pthalate	117-81-7	● 0.54	● 28

U029	Bromomethane (Methyl bromide)		Bromomethane (Methyl bromide)	74-83-9	[a] 0.11	[b] 15
U030	4-Bromophenyl phenyl ether		4-Bromophenyl phenyl ether	101-55-3	[a] 0.055	[b] 15
U031	n-Butyl alcohol		n-Butyl alcohol	71-36-3	5.6	[b] 2.6
U032	Calcium chromate	Table CCWE in 268.41	Chromium (Total)	7440-47-32	0.32	NA
U036	Chlordane (alpha and gamma)		Chlordane (alpha and gamma)	57-74-9	[a] 0.0033	[b] 0.13
U037	Chlorobenzene		Chlorobenzene	108-90-7	[a] 0.057	[b] 5.7
U038	Chlorobenzilate	Table 2 in 268.42	Chlorobenzilate	510-15-6	[a] 0.10	NA
U039	p-Chloro-m-cresol		p-Chloro-m-cresol	59-50-7	[a] 0.018	[b] 14
U042	2-Chloroethyl vinyl	Table 2 in 268.42	2-Chloroethyl vinyl	110-75-8	0.057	NA
U043	Vinyl chloride		Vinyl chloride	75-01-4	[a] 0.27	[b] 33
U044	Chloroform		Chloroform	67-66-3	[a] 0.046	[b] 5.6
U045	Chloromethane (Methyl chloride)		Chloromethane (Methyl chloride)	74-87-3	[a] 0.19	[b] 33
U047	2-Chloronaphthalene		2-Chloronaphthalene	91-58-7	[a] 0.055	[b] 5.6
U048	2-Chlorophenol		2-Chlorophenol	95-57-8	[a] 0.044	[b] 5.7
U050	Chrysene		Chrysene	218-01-9	[a] 0.059	[b] 8.2
U051	Creosote	Table CCWE in 268.41	Naphthalene	91-20-3	[b] 0.031	[b] 1.5
			Pentachlorophenol	87-86-5	[b] 0.18	[b] 7.4
			Phenanthrene	85-01-8	[b] 0.031	[b] 1.5
			Pyrene	129-00-0	[b] 0.028	[b] 28
			Toluene	108-88-3	[b] 0.028	[b] 33
			Xylenes (Total)	7439-92-1	[b] 0.032	NA
			Lead		[b] 0.037	
U052	Cresols (Cresylic acid)		o-Cresol	95-48-7	[a] 0.11	[b] 5.6
			Cresols (m- and p- isomers)		[a] 0.77	[b] 3.2
U057	Cyclohexanone	Table 2 in 268.42	Cyclohexanone	108-94-1	0.36	NA
U060	DDD		o,p'-DDD	53-19-0	0.023	[b] 0.087
			p,p'-DDD	72-54-8	0.023	[b] 0.087
U061	DDT		o,p'-DDT	789-02-6	[a] 0.0039	[b] 0.087
			p,p'-DDT	50-29-3	[a] 0.0039	[b] 0.087
			o,p'-DDD	53-19-0	[a] 0.023	[b] 0.087
			p,p'-DDD	72-54-8	[a] 0.023	[b] 0.087
			o,p'-DDE	3424-82-6	[a] 0.031	[b] 0.087
			p,p'-DDE	72-55-9	[a] 0.031	[b] 0.087
U063	Dibenzo(a,h)anthracene		Dibenzo(a,h)anthracene	53-70-3	[a] 0.055	[b] 8.2
U066	1,2-Dibromo-3-chloropropane		1,2-Dibromo-3-chloropropane	96-12-8	[a] 0.11	[b] 15
U067	1,2-Dibromoethane (Ethylenedibromide)		1,2-Dibromoethane (Ethylene dibromide)	106-93-4	[a] 0.028	15
U068	Dibromonethane		Dibromonethane	74-95-3	[a] 0.11	15
U069	Di-n-butyl phthalate		Di-n-butyl phthalate	84-74-2	[b] 0.54	[b] 28
U070	o-Dichlorobenzene		o-Dichlorobenzene	95-50-1	[a] 0.088	[b] 6.2
U071	m-Dichlorobenzene		m-Dichlorobenzene	541-73-1	0.036	6.2
U072	p-Dichlorobenzene		p-Dichlorobenzene	104-46-7	[a] 0.090	[b] 6.2
U075	Dichlorodifluoromethane		Dichlorodifluoromethane	75-71-8	[a] 0.23	[b] 7.2
U076	1,1-Dichloroethane		1,1-Dichloroethane	75-34-3	[a] 0.059	7.2
U077	1,2-Dichloroethane		1,2-Dichloroethane	107-06-2	[a] 0.21	[b] 7.2
U078	1,1-Dichloroethylene		1,1-Dichloroethylene	75-35-4	[a] 0.025	[b] 33
U079	1,2-Dichloroethylene		trans-1,2-Dichloroethylene	156-60-5	[a] 0.054	[1] 33
U080	Methylene chloride		Methylene chloride	75-09-2	[2] 0.089	[1] 33
U081	2,4-Dichlorophenol		2,4-Dichlorophenol	120-83-2	[2] 0.044	[1] 14

TABLE CCW.—CONSTITUENT CONCENTRATIONS IN WASTES—Continued

Waste code	Commercial chemical name	See also	Regulated hazardous constituent	CAS No. for regulated hazardous constituent	Wastewaters concentration (mg/l)	Non-wastewaters concentration (mg/kg)
U082	2,6-Dichlorophenol		2,6-Dichlorophenol	87-65-0	[2] 0.044	[1] 14
U083	1,2-Dichloropropane		1,2-Dichloropropane	78-87-5	[2] 0.85	[1] 18
U084	1,3-Dichloropropene		cis-1,3-Dichloropropylene	10061-01-5	[2] 0.036	[1] 18
			trans-1,3-Dichloropropylene	10061-02-6	[2] 0.036	[1] 18
U088	Diethyl phthalate		Diethyl phthalate	84-66-2	[1] 0.54	[1] 28
U093	p-Dimethylaminoazobenzene	Table 2 in 268.42	p-Dimethylaminoazobenzene	60-11-7	[2] 0.13	NA
U101	2,4-Dimethylphenol		2,4-Dimethylphenol	105-67-9	[2] 0.036	[1] 14
U102	Dimethyl phthalate		Dimethyl phthalate	131-11-3	[1] 0.54	[1] 28
U105	2,4-Dinitrotoluene		2,4-Dinitrotoluene	121-14-2	[2] 0.32	[1] 140
U106	2,6-Dinitrotoluene		2,6-Dinitrotoluene	606-20-2	[2] 0.55	[1] 28
U107	Di-n-octyl phthalate		Di-n-octyl phthalate	117-84-0	[1] 0.54	[1] 28
U108	1,4-Dioxane		1,4-Dioxane	123-91-1	[2] 0.12	[1] 170
U111	Di-n-propylnitrosoamine		Di-n-propylnitrosoamine	621-64-7	[2] 0.40	[1] 14
U112	Ethyl acetate		Ethyl acetate	141-78-6	[2] 0.34	[1] 33
U117	Ethyl ether		Ethyl ether	60-29-7	[2] 0.12	[1] 160
U118	Ethyl methacrylate		Ethyl methacrylate	97-63-2	[2] 0.14	[1] 160
U120	Fluoranthene		Fluoranthene	206-44-0	[2] 0.068	[1] 8.2
U121	Trichloromonofluoromethane		Trichloromonofluoromethane	75-69-4	[2] 0.020	[1] 33
U127	Hexachlorobenzene		Hexachlorobenzene	118-74-1	[2] 0.055	[1] 37
U128	Hexachlorobutadiene		Hexachlorobutadiene	87-68-3	[2] 0.055	[1] 28
U129	Lindane		alpha-BHC	319-84-6 319-	[2] 0.00014	[1] 0.066
			beta-BHC	85-7 319-	0.00014	[1] 0.066
			Delta-BHC	86-8 58-89-	0.023	[1] 0.066
			gamma-BHC (Lindane)	9	0.0017	[1] 0.066
U130	Hexachlorocyclopentadiene		Hexachlorocyclopentadiene	77-47-7	[2] 0.057	[1] 3.6
U131	Hexachloroethane		Hexachloroethane	67-72-1	[2] 0.055	[1] 28
U134	Hydrogen fluoride	Table 2 in 268.42	Fluoride	16964-48-8	35	NA
U136	Cacodylic acid	Table CCWE in 268.41	Arsenic	7440-38-2	0.79	NA
U137	Indeno(1,2,3-c,d)pyrene		Indeno(1,2,3-c,d)pyrene	193-39-5	[2] 0.0055	[1] 8.2
U138	Iodomethane		Iodomethane	74-88-4	[2] 0.19	[1] 65
U140	Isobutyl alcohol		Isobutyl alcohol	78-83-1	5.6	[1] 170
U141	Isosafrole		Isosafrole	120-58-1	0.081	[1] 2.6
U142	Kepone		Kepone	143-50-8	0.0011	[1] 0.13
U144	Lead acetate	Table CCWE in 268.41	Lead	7439-92-1	0.040	NA
U145	Lead phosphate	Table CCWE in 268.41	Lead	7439-92-1	0.040	NA
U146	Lead subacetate	Table CCWE in 268.41	Lead	7439-92-1	0.040	NA
U151	Mercury	Table CCWE in 268.41 and Table 2 in 268.42.	Mercury	7439-97-6	0.030	NA
U152	Methacrylonitrile		Methacrylonitrile	126-98-7	[2] 0.24	[1] 84
U155	Methapyrilene		Methapyrilene	91-80-5	0.081	[1] 1.5
U157	3-Methylchloanthrene		3-Methylcholanthrene	56-49-5	[2] 0.0055	[1] 15

U158	4,4'-Methylenebis(2-chloroaniline)		4,4'-Methylenebis(2-chloroaniline)	101-14-4	[2] 0.50	[1] 35
U159	Methyl ethyl ketone		Methyl ethyl ketone	78-93-3	0.28	[1] 36
U161	Methyl isobutyl ketone		Methyl isobutyl ketone	108-10-1	0.14	[1] 33
U162	Methyl methacrylate		Methyl methacrylate	80-62-6	0.14	[1] 160
U165	Naphthalene		Naphthalene	91-20-3	[2] 0.059	[1] 3.1
U168	2-Naphthylamine	Table 2 in 268.42	2-Naphthylamine	91-59-8	[2] 0.52	NA
U169	Nitrobenzene		Nitrobenzene	98-95-3	[2] 0.068	[1] 14
U170	4-Nitrophenol		4-Nitrophenol	100-02-7	[2] 0.12	[1] 29
U172	n-Nitrosodi-n-butylamine		n-Nitrosodi-n-butylamine	924-16-3	[2] 0.40	[1] 17
U174	N-Nitrosodiethylamine		n-Nitrosodiethylamine	55-18-5	[2] 0.40	[1] 28
U179	N-Nitrosopiperidine		n-Nitrosopiperidine	100-75-4	[2] 0.013	[1] 35
U180	N-Nitrosopyrrolidine		n-Nitrosopyrrolidine	930-55-2	[2] 0.013	[1] 35
U181	5-Nitro-o-toluidine		5-Nitro-o-toluidine	99-55-8	[2] 0.32	[1] 28
U183	Pentachlorobenzene		Pentachlorobenzene	608-93-5	[2] 0.055	[1] 37
U185	Pentachloronitrobenzene		Pentachloronitrobenzene	82-68-8	[2] 0.055	[1] 4.8
U187	Phenacetin		Phenacetin	62-44-2	0.081	[1] 16
U188	Phenol		Phenol	108-95-2	0.039	[1] 6.2
U190	Phthalic anhydride (measured as Phthalic acid)		Phthalic anhydride (measured as Phthalic acid)	85-44-9	[1] 0.54	[1] 28
U192	Pronamide		Pronamide	23950-58-5	0.093	[1] 1.5
U196	Pyridine		Pyridine	110-86-1	[2] 0.014	[1] 16
U203	Safrole		Safrole	94-59-7	0.081	[1] 22
U204	Selenium dioxide	Table CCWE in 268.41	Selenium	7782-49-2	1.0	NA
U205	Selenium sulfide	Table CCWE in 268.41	Selenium	7782-49-2	1.0	NA
U207	1,2,4,5-Tetrachlorobenzene		1,2,4,5-Tetrachlorobenzene	95-94-3	[2] 0.055	[1] 19
U208	1,1,1,2-Tetrachloroethane		1,1,1,2-Tetrachloroethane	630-20-6	0.057	[1] 42
U209	1,1,2,2-Tetrachloroethane		1,1,2,2-Tetrachloroethane	79-34-5	[2] 0.057	[1] 42
U210	Tetrachloroethylene		Tetrachloroethylene	127-18-4	[2] 0.056	[1] 5.6
U211	Carbon tetrachloride		Carbon tetrachloride	56-23-5	[2] 0.057	[1] 5.6
U214	Tallium(I)acetate	Table 2 in 268.42	Thallium	7440-28-0	[3] 0.14	NA
U215	Thallium(I)carbonate	Table 2 in 268.42	Thallium	7440-28-0	[2] 0.14	NA
U216	Thallium(I)chloride	Table 2 in 268.42	Thallium	7440-28-0	[2] 0.14	NA
U217	Thallium(I)nitrate	Table 2 in 268.42	Thallium	7440-28-0	[2] 0.14	NA
U220	Toluene		Toluene	108-88-3	[2] 0.080	[1] 28
U225	Tribromomethane (Bromoform)		Tribromomethane (Bromoform)	75-25-2	[2] 0.63	[1] 15
U226	1,1,1-Trichloroethane		1,1,1-Trichloroethane	71-55-6	[2] 0.054	[1] 5.6
U227	1,1,2-Trichloroethane		1,1,2-Trichloroethane	79-00-5	[2] 0.054	[1] 5.6
U228	Trichloroethylene		Trichloroethylene	79-01-6	[2] 0.054	[1] 5.6
U235	tris-(2,3-Dibromopropyl)-phosphate		tris-(2,3-Dibromopropyl)-phosphate	126-72-7	0.025	[1] 0.10
U239	Xylenes		Xylenes		[2] 0.32	[1] 28
U240	2,4-Dichlorophenoxyacetic acid		2,4-Dichlorophenoxyacetic acid	94-75-7	0.72	[1] 10
U243	Hexachloropropene		Hexachloropropene	1888-71-7	[2] 0.035	28
U247	Methoxychlor		Methoxychlor	72-43-5	[2] 0.25	[1] 0.18

[1] Treatment standards for this organic constituent were established based upon incineration in units operated in accordance with the technical requirements of 40 CFR Part 264 Subpart O or Part 265 Subpart O, or based upon combustion in fuel substitution units operating in accordance with applicable technical requirements. A facility may certify compliance with these treatment standards according to provisions in 40 CFR Section 268.7.

[2] Based on analysis of composite samples.

[3] As analyzed using SW-846 Method 9010; sample size: 0.5-10; distillation time: one hour to one hour fifteen minutes.

NA—Not Applicable.

No Land Disposal for:

K005 Nonwastewaters generated by the process described in the waste listing description, and disposed after June 8, 1989, and not generated in the course of treating wastewater forms of these wastes. (Based on No Generation)

K007 Nonwastewaters generated by the process described in the waste listing description, and disposed after June 8, 1989, and not generated in the course of treating wastewater forms of these wastes. (Based on No Generation)

K021 Nonwastewater forms of these wastes generated by the process described in the waste listing description and disposed after August 17, 1988, and not generated in the course of treating wastewater forms of these wastes (Based on No Generation)

K025 Nonwastewater forms of these wastes generated by the process described in the waste listing description and disposed after August 17, 1988, and not generated in the course of treating wastewater forms of these wastes (Based on No Generation)

K036 Nonwastewater forms of these wastes generated by the process described in the waste listing description and disposed after August 17, 1988, and not generated in the course of treating wastewater forms of these wastes (Based on No Generation)

K044 (Based on Reactivity)

K045 (Based on Reactivity)

K047 (Based on Reactivity)

K060 Nonwastewater forms of these wastes generated by the process described in the waste listing description and disposed after August 17, 1988, and not generated in the course of treating wastewater forms of these wastes (Based on No Generation)

K061 Nonwastewaters—High Zinc Subcategory (greater than or equal to 15% total zinc) (Based on Recycling): effective 8/8/90

K069 Non-Calcium Sulfate Subcategory—Nonwastewater forms of these wastes generated by the process described in the waste listing description and disposed after August 17, 1988, and not generated in the course of treating wastewater forms of these wastes (Based on Recycling)

K100 Nonwastewater forms of those wastes generated by the process described in the waste listing description and disposed after August 17, 1988, and not generated in the course of treating wastewater forms of these wastes (Based on No Generation)

(b) When wastes with differing treatment standards for a constituent of concern are combined for purposes of treatment, the treatment residue must meet the lowest treatment standard for the constituent of concern.

(c) Notwithstanding the prohibitions specified in paragraph (a) of this section, treatment and disposal facilities may demonstrate (and certify pursuant to § 268.7(b)(5)) compliance with the treatment standards for organic constituents specified in this section provided the following conditions are satisified:

(1) The treatment for the organic constituents were established based on incineration in units operated in accordance with the technical requirements of 40 CFR part 264, subpart O or 40 CFR part 265, subpart O, or based on combustion in fuel substitution units operating in accordance with applicable technical requirements;

(2) The organic constituents have been treated using the methods referenced in paragraph (c)(1) of this section; and

(3) The treatment or disposal facility has been unable to detect the organic constituents despite using its best good-faith efforts as defined by applicable Agency guidance or standards. Until such guidance or standards are developed, such good-faith efforts may be demonstrated where the treatment or disposal facility has detected the organic constituents at levels within an order of magnitude of the treatment standard specified in this section.

[53 FR 31218, Aug. 17, 1988, as amended at 54 FR 26649 June 23, 1989; 55 FR 22701, June 1, 1990]

§ 268.44 Variance from a treatment standard.

(a) Where the treatment standard is expressed as a concentration in a waste or waste extract and a waste cannot be treated to the specified level, or where the treatment technology is not appropriate to the waste, the generator or treatment facility may petition the Administrator for a variance from the treatment standard. The petitioner must demonstrate that because the physical or chemical properties of the waste differs significantly from wastes analyzed in developing the treatment standard, the waste

cannot be treated to specified levels or by the specified methods.

(b) Each petition must be submitted in accordance with the procedures in § 260.20.

(c) Each petition must include the following statement signed by the petitioner or an authorized representative:

I certify under penalty of law that I have personally examined and am familiar with the information submitted in this petition and all attached documents, and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the submitted information is true, accurate, and complete. I am aware that these are significant penalties for submitting false information, including the possibility of fine and imprisonment.

(d) After receiving a petition for variance from a treatment standard, the Administrator may request any additional information or samples which he may require to evaluate the petition. Additional copies of the complete petition may be requested as needed to send to affected states and Regional Offices.

(e) The Administrator will give public notice in the FEDERAL REGISTER of the intent to approve or deny a petition and provide an opportunity for public comment. The final decision on a variance from a treatment standard will be published in the FEDERAL REGISTER.

(f) A generator, treatment facility, or disposal facility that is managing a waste covered by a variance from the treatment standards must comply with the waste analysis requirements for restricted wastes found under § 268.7.

(g) During the petition review process, the applicant is required to comply with all restrictions on land disposal under this part once the effective date for the waste has been reached.

(h) Where the treatment standard is expressed as a concentration in a waste or waste extract and a waste generated under conditions specific to only one site cannot be treated to the specified level, or where the treatment technology is not appropriate to the waste, the generator or treatment facility may apply to the Administrator, or his delegated representative, for a site-specific variance from a treatment standard. The applicant for a site-specific variance must demonstrate that because the physical or chemical properties of the waste differs significantly from the waste analyzed in developing the treatment standard, the waste cannot be treated to specified levels or by the specified methods.

(i) Each application for a site-specific variance from a treatment standard must include the information in § 260.20(b)(1)-(4);

(j) After receiving an application for a site-specific variance from a treatment standard, the Assistant Administrator, or his delegated representative, may request any additional information or samples which may be required to evaluate the application.

(k) A generator, treatment facility, or disposal facility that is managing a waste covered by a site-specific variance from a treatment standard must comply with the waste analysis requirements for restricted wastes found under § 268.7.

(l) During the application review process, the applicant for a site-specific variance must comply with all restrictions on land disposal under this part once the effective date for the waste has been reached.

[51 FR 40642, Nov. 7, 1986; 52 FR 21017, June 4, 1987, as amended at 53 FR 31221, Aug. 17, 1988; 54 FR 36972, Sept. 6, 1989]

Subpart E—Prohibitions on Storage

§ 268.50 Prohibitions on storage of restricted wastes.

(a) Except as provided in this section, the storage of hazardous wastes restricted from land disposal under Subpart C of this part of RCRA section 3004 is prohibited, unless the following conditions are met:

(1) A generator stores such wastes in tanks or containers on-site solely for the purpose of the accumulation of such quantities of hazardous waste as necessary to facilitate proper recovery, treatment, or disposal and the generator complies with the requirements in § 262.34 of this chapter. (A generator who is in existence on the effective date of a regulation under this part and who must store hazardous wastes

for longer than 90 days due to the regulations under this Part becomes an owner/operator of a storage facility and must obtain a RCRA permit. Such a facility may qualify for interim status upon compliance with the regulations governing interim status under 40 CFR 270.70).

(2) An owner/operator of a hazardous waste treatment, storage, or disposal facility stores such wastes in tanks or containers solely for the purpose of the accumulation of such quantities of hazardous waste as necessary to facilitate proper recovery, treatment, or disposal and:

(i) Each container is clearly marked to identify its contents and the date each period of accumulation begins;

(ii) Each tank is clearly marked with a description of its contents, the quantity of each hazardous waste received, and the date each period of accumulation begins, or such information for each tank is recorded and maintained in the operating record at that facility. Regardless of whether the tank itself is marked, an owner/operator must comply with the operating record requirements specified in § 264.73 or § 265.73.

(3) A transporter stores manifested shipments of such wastes at a transfer facility for 10 days or less.

(b) An owner/operator of a treatment, storage or disposal facility may store such wastes for up to one year unless the Agency can demonstrate that such storage was not solely for the purpose of accumulation of such quantities of hazardous waste as are necessary to facilitate proper recovery, treatment, or disposal.

(c) A owner/operator of a treatment, storage or disposal facility may store such wastes beyond one year; however, the owner/operator bears the burden of proving that such storage was solely for the purpose of accumulation of such quantities of hazardous waste as are necessary to facilitate proper recovery, treatment, or disposal.

(d) If a generator's waste is exempt from a prohibition on the type of land disposal utilized for the waste (for example, because of an approved case-by-case extension under § 268.5, an approved § 268.6 petition, or a national capacity variance under subpart C), the prohibition in paragraph (a) of this section does not apply during the period of such exemption.

(e) The prohibition in paragraph (a) of this section does not apply to hazardous wastes that meet the treatment standards specified under §§ 268.41, 268.42, and 268.43 or the treatment standards specified under the variance in § 268.44, or, where treatment standards have not been specified, is in compliance with the applicable prohibitions specified in § 268.32 or RCRA section 3004.

(f) Liquid hazardous wastes containing polychlorinated biphenyls (PCBs) at concentrations greater than or equal to 50 ppm must be stored at a facility that meets the requirements of 40 CFR 761.65(b) and must be removed from storage and treated or disposed as required by this part within one year of the date when such wastes are first placed into storage. The provisions of paragraph (c) of this section do not apply to such PCB wastes prohibited under § 268.32 of this part.

[51 FR 40642, Nov. 7, 1986; 52 FR 21017, June 4, 1987, as amended at 52 FR 25791, July 8, 1987; 54 FR 36972, Sept. 6, 1989]

APPENDIX I—TOXICITY CHARACTERISTIC LEACHING PROCEDURE (TCLP)

NOTE: The TCLP is published in Appendix II of part 261.

[55 FR 11876, Mar. 29, 1990]

EFFECTIVE DATE NOTE: At 55 FR 11876, Mar. 29, 1990, Appendix I of Part 261 was revised, effective September 25, 1990. For the convenience of the user, the superseded text is set forth below:

APPENDIX I—TOXICITY CHARACTERISTIC LEACHING PROCEDURE (TCLP)

1.0 SCOPE AND APPLICATION

1.1 The TCLP is designed to determine the mobility of both organic and inorganic contaminants present in liquid, solid, and multiphasic wastes.

1.2 If a total analysis of the waste demonstrates that individual contaminants are not present in the waste, or that they are present but at such low concentrations that the appropriate regulatory thresholds could not possibly be exceeded, the TCLP need not be run.

2.0 SUMMARY OF METHOD

(See Figure 1)

2.1 For liquid wastes (i.e., those containing insignificant solid material), the waste, after filtration through a 0.6- to 0.8-um glass fiber filter, is defined as the TCLP extract.

2.2 For wastes comprised of solids or for wastes containing significant amounts of solid material, the particle-size of the waste is reduced (if necessary), the liquid phase, if any, is separated from the solid phase and stored for later analysis. The solid phase is extracted with an amount of extraction fluid equal to 20 times the weight of the solid phase. The extraction fluid employed is a function of the alkalinity of the solid phase of the waste. A special extractor vessel is used when testing for volatiles (See Table 1). Following extraction, the liquid extract is separated from the solid phase by 0.6- to 0.8-um glass fiber filter filtration.

2.3 If compatible (i.e., multiple phases will not form on combination), the initial liquid phase of the waste is added to the liquid extract, and these liquids are analyzed together. If incompatible, the liquids are analyzed separately and the results are mathematically combined to yield a volume-weighted average concentration.

3.0 INTERFERENCES

3.1. Potential interferences that may be encountered during analysis are discussed in the individual analytical methods.

4.0 APPARATUS AND MATERIALS

4.1 *Agitation apparatus:* An acceptable agitation apparatus is one which is capable of rotating the extraction vessel in an end-over-end fashion (See Figure 2) at 30 ± 2 rpm. Suitable devices known to EPA are identified in Table 2.

4.2 *Extraction Vessel:*

4.2.1 Zero-Headspace Extraction Vessel (ZHE). This device is for use *only* when the waste is being tested for the mobility of volatile constituents (see Table 1). The ZHE is an extraction vessel that allows for liquid/solid separation within the device, and which effectively precludes headspace (as depicted in Figure 3). This type of vessel allows for initial liquid/solid separation, extraction, and final extract filtration without having to open the vessel (see Step 4.3.1). These vessels shall have an internal volume of 500 to 600 mL and be equipped to accommodate a 90-mm filter. Suitable ZHE devices known to EPA are identified in Table 3. These devices contain viton O-rings which should be replaced frequently.

For the ZHE to be acceptable for use, the piston within the ZHE should be able to be moved with approximately 15 psi or less. If it takes more pressure to move the piston, the O-rings in the device should be replaced. If this does not solve the problem, the ZHE is unacceptable for TCLP analyses and the manufacturer should be contacted.

The ZHE should be checked after every extraction. If the device contains a built-in pressure gauge, pressurize the device to 50 psi, allow it to stand unattended for 1 hour, and recheck the pressure. If the device does not have a built-in pressure gauge, pressurize the device to 50 psi, submerge it in water, and check for the presence of air bubbles escaping from any of the fittings. If pressure is lost, check all fittings and inspect and replace O-rings, if necessary. Retest the device. If leakage problems cannot be solved, the manufacturer should be contacted.

4.2.2 When the waste is being evaluated for other than volatile contaminants, an extraction vessel that does not preclude headspace (e.g., a 2-liter bottle) is used. Suitable extraction vessels include bottles made from various materials, depending on the contaminants to be analyzed and the nature of the waste (see Step 4.3.3). It is recommended that borosilicate glass bottles be used over other types of glass, especially when inorganics are of concern. Plastic bottles may be used only if inorganics are to be investigated. Bottles are available from a number of laboratory suppliers. When this type of extraction vessel is used, the filtration device discussed in Step 4.3.2 is used for initial liquid/solid separation and final extract filtration.

4.2.3 Some ZHEs use gas pressure to actuate the ZHE piston, while others use mechanical pressure (see Table 3). Whereas the volatiles procedure (see Section 9.0) refers to pounds-per-square inch (psi), for the mechanically actuated piston, the pressure applied is measured in torque-inch-pounds. Refer to the manufacturer's instructions as to the proper conversion.

4.3 *Filtration Devices:* It is recommended that all filtrations be performed in a hood.

4.3.1 Zero-Headspace Extractor Vessel (see Figure 3): When the waste is being evaluated for volatiles, the zero-headspace extraction vessel is used for filtration. The device shall be capable of supporting and keeping in place the glass fiber filter, and be able to withstand the pressure needed to accomplish separation (50 psi).

NOTE: When it is suspected that the glass fiber filter has been ruptured, an in-line glass fiber filter may be used to filter the material within the ZHE.

4.3.2 Filter Holder: When the waste is being evaluated for other than volatile compounds, a filter holder capable of supporting a glass fiber filter and able to withstand the pressure needed to accomplish separation is used. Suitable filter holders range

from simple vacuum units to relatively complex systems capable of exerting pressures of up to 50 psi or more. The type of filter holder used depends on the property of the material to be filtered (see Step 4.3). These devices shall have a minimum internal volume of 300 mL and be equipped to accommodate a minimum filter size of 47 mm (Filter holders having an internal capacity of 1.5 L or greater and equipped to accommodate a 142 mm diameter filter are recommended). Vaccum filtration is only recommended for wastes with low solids content (<10%) and for highly granular (liquid-containing) wastes. All other types of wastes should be filtered using positive pressure filtration. Filter holders known to EPA to be suitable for use are shown in Table 4.

4.3.3 Materials of Construction: Extraction vessels and filtration devices shall be made of inert materials which will not leach or absorb waste components. Glass, polytetrafluoroethylene (PTFE), or type 316 stainless steel equipment may be used when evaluating the mobility of both organic and inorganic components. Devices made of high-density polyethylene (HDPE), polypropylene, or polyvinyl chloride may be used only when evaluating the mobility of metals. Borosilicate glass bottles are recommended for use over other types of glass bottles, especially when inorganics are constituents of concern.

4.4 *Filters:* Filters shall be made of borosilicate glass fiber, shall contain no binder materials, and shall have an effective pore size of 0.6- to 0.8-um, or equivalent. Filters known to EPA to meet these specifications are identified in Table 5. Pre-filters must not be used. When evaluating the mobility of metals, filters shall be acid-washed prior to use by rinsing with 1.0 N nitric acid followed by three consecutive rinses with deionized distilled water (a minimum of 1-L per rinse is recommended). Glass fiber filters are fragile and should be handled with care.

4.5 *pH meters:* Any of the commonly available pH meters are acceptable.

4.6 *ZHE extract collection devices:* TEDLAR® bags or glass, stainless steel or PTFE gas tight syringes are used to collect the initial liquid phase and the final extract of the waste when using the ZHE device. The devices listed are recommended for use under the following conditions.

4.6.1 If a waste contains an aqueous liquid phase or if a waste does not contain a significant amount of non-aqueous liquid (i.e., <1% of total waste), the TEDLAR® bag should be used to collect and combine the initial liquid and solid extract. The syringe is not recommended in these cases.

4.6.2 If a waste contains a significant amount of non-aqueous initial liquid phase (i.e., >1% of total waste), the syringe or the TEDLAR® bag may be used for both the initial solid/liquid separation and the final extract filtration. However, analysts should use one or the other, not both.

4.6.3 If the waste contains no initial liquid phase (is 100% solid) or has no significant solid phase (is 100% liquid), either the TEDLAR® bag or the syringe may be used. If the syringe is used, discard the first 5 mL of liquid expressed from the device. The remaining aliquots are used for analysis.

4.7 *ZHE extraction fluid transfer devices:* Any device capable of transferring the extraction fluid into the ZHE without changing the nature of the extraction fluid is acceptable (e.g., a constant displacement pump, a gas tight syringe, pressure filtration unit (See Step 4.3.2), or another ZHE device).

4.8 *Laboratory balance:* Any laboratory balance accurate to within ±0.01 grams may be used (all weight measurements are to be within ±0.1 grams).

5.0 REAGENTS

5.1 *Reagent water:* Reagent water is defined as water in which an interferent is not observed at or above the method detection limit of the analyte(s) of interest. For non-volatile extractions, ASTM Type II water, or equivalent meets the definition of reagent water. For volatile extractions, it is recommended that reagent water be generated by any of the following methods. Reagent water should be monitored periodically for impurities.

5.1.1 Reagent water for volatile extractions may be generated by passing tap water through a carbon filter bed containing about 500 grams of activated carbon (Calgon Corp., Filtrasorb-300 or equivalent).

5.1.2 A water purification system (Millipore Super-Q or equivalent) may also be used to generate reagent water for volatile extractions.

5.1.3 Reagent water for volatile extractions may also be prepared by boiling water for 15 minutes. Subsequently, while maintaining the water temperature at 90± 5°C, bubble a contaminant-free inert gas (e.g., nitrogen) through the water for 1 hour. While still hot, transfer the water to a narrow-mouth screw-cap bottle under zero-headspace and seal with a Teflon-lined septum and cap.

5.2 1.0 N Hydrochloric acid (HCl) made from ACS reagent grade.

5.3 1.0 N Nitric acid (HNO_3) made from ACS reagent grade.

5.4 1.0 N Sodium hydroxide (NaOH) made from ACS reagent grade.

5.5 Glacial acetic acid (HOAc) ACS reagent grade.

5.6 *Extraction fluid:*

5.6.1 Extraction fluid #1: This fluid is made by adding 5.7 mL glacial HOAc to 500 mL of the appropriate water (see Step 5.1),

adding 64.3 mL of 1.0 N NaOH, and diluting to a volume of 1 liter. When correctly prepared, the pH of this fluid will be 4.93 ± 0.05.

5.6.2 Extraction fluid #2: This fluid is made by diluting 5.7 mL glacial HOAc with ASTM Type II water (see Step 5.1) to a volume of 1 liter. When correctly prepared, the pH of this fluid will be 2.88 ± 0.05.

NOTE: It is suggested that these extraction fluids be monitored frequently for impurities. The pH should be checked prior to use to ensure that these fluids are made up accurately.

5.7 Analytical standards shall be prepared according to the appropriate analytical method.

6.0 SAMPLE COLLECTION, PRESERVATION, AND HANDLING

6.1 All samples shall be collected using an appropriate sampling plan.

6.2 At least two separate representative samples of a waste should be collected. If volatile organics are of concern, a third sample should be collected. The first sample is used in several preliminary TCLP evaluations (e.g., to determine the percent solids of the waste; to determine if the waste contains insignificant solids (i.e., the waste is its own extract after filtration); to determine if the solid portion of the waste requires particle-size reduction; and to determine which of the two extraction fluids are to be used for the non-volatile TCLP extraction of the waste). These preliminary evaluations are identified in Section 7.0. The second and, if required, third samples are extracted using the TCLP non-volatile procedure (Section 8.0) and volatile procedure (Section 9.0), respectively.

6.3 Preservatives shall not be added to samples.

6.4 Samples can be refrigerated unless refrigeration results in irreversible physical change to the waste (e.g., precipitation).

6.5 When the waste is to be evaluated for volatile contaminants, care should be taken to minimize the loss of volatiles. Samples shall be taken and stored in a manner to prevent the loss of volatile contaminants. If possible, it is recommended that any necessary particle-size reduction should be conducted as the sample is being taken (See Step 8.5).

6.6 TCLP extracts should be prepared for analysis and analyzed as soon as possible following extraction. If they need to be stored, even for a short period of time, storage shall be a 4° C, and samples for volatiles analysis shall not be allowed to come into contact with the atmosphere (i.e., no headspace). See Section 10.0 (QA requirements) for acceptable sample and extract holding times.

7.0 PRELIMINARY TCLP EVALUATIONS

The preliminary TCLP evaluations are performed on a minimum 100 gram representative sample of waste that will not actually undergo TCLP extraction (designated as the first sample in Step 6.2). These evaluations include preliminary determination of the percent solids of the waste; determination of whether the waste contains insignificant solids, and is therefore, its own extract after filtration; determination of whether the solid portion of the waste requires particle-size reduction; and determination of which of the two extraction fluids are to be used for the non-volatile TCLP extraction of the waste.

7.1 *Preliminary determination of percent solids:* Percent solids is defined as that fraction of a waste sample (as a percentage of the total sample) from which no liquid may be forced out by an applied pressure, as described below.

7.1.1 If the waste will obviously yield no free liquid when subjected to pressure filtration (i.e., is 100% solids) proceed to Step 7.4.

7.1.2 If the sample is liquid or multiphasic, liquid/solid separation to make a preliminary determination of percent solids is required. This involves the filtration device described in Step 4.3.2 and is outlined in Steps 7.1.3 through 7.1.9.

7.1.3 Pre-weigh the filter and the container that will receive the filtrate.

7.1.4 Assemble the filter holder and filter following the manufacturer's instructions. Place the filter on the support screen and secure.

7.1.5 Weigh out a representative subsample of the waste (100 gram minimum) and record the weight.

7.1.6 Allow slurries to stand to permit the solid phase to settle. Wastes that settle slowly may be centrifuged prior to filtration. Centrifugation is to be used only as an aid to filtration. If used, the liquid should be decanted and filtered followed by filtration of the solid portion of the waste through the same filtration system.

7.1.7 Quantitatively transfer the waste sample to the filter holder (liquid and solid phases). If filtration of the waste at 4° C reduces the amount of expressed liquid over what would be expressed at room temperature then allow the sample to warm up to room temperature in the device before filtering.

NOTE: If waste material (>1% of original sample weight) has obviously adhered to the container used to transfer the sample to the filtration apparatus, determine the weight of this residue and subtract it from the sample weight determined in Step 7.1.5 to determine the weight of the waste sample that will be filtered.

Gradually apply vacuum or gentle pressure of 1-10 psi, until air or pressurizing gas moves through the filter. If this point is not reached under 10 psi, and if no additional liquid has passed through the filter in any 2-minute interval, slowly increase the pressure in 10-psi increments to a maximum of 50 psi. After each incremental increase of 10-psi, if the pressurizing gas has not moved through the filter, and if no additional liquid has passed through the filter in any 2-minute interval, proceed to the next 10-psi increment. When the pressurizing gas begins to move through the filter, or when liquid flow has ceased at 50 psi (i.e., filtration does not result in any additional filtrate within any 2-minute period), filtration is stopped.

NOTE: Instantaneous application of high pressure can degrade the glass fiber filter and may cause premature plugging.

7.1.8 The material in the filter holder is defined as the solid phase of the waste, and the filtrate is defined as the liquid phase.

NOTE: Some wastes, such as oily wastes and some paint wastes, will obviously contain some material that appears to be a liquid. But even after applying vacuum or pressure filtration, as outlined in Step 7.1.7, this material may not filter. If this is the case, the material within the filtration device is defined as a solid. The original filter is *not* to be replaced with a fresh filter under any circumstances. Only one filter is used.

7.1.9 Determine the weight of the liquid phase by subtracting the weight of the filtrate container (See Step 7.1.3) from the total weight of the filtrate-filled container. The weight of the solid phase of the waste sample is determined by subtracting the weight of the liquid phase from the weight of the total waste sample, as determined in Step 7.1.5 or 7.1.7. Record the weight of the liquid and solid phases. Calculate the percent solids as follows:

$$\text{Percent solids} = \frac{\text{Weight of solid (Step 7.1.9)}}{\text{Total weight of waste (Step 7.1.5 or 7.1.7)}} \times 100$$

7.2 *Determination of whether waste is liquid or has insignificant amounts of solid material:* If the sample obviously has a significant amount of solid material, the solid phase must be subjected to extraction; proceed to Step 7.3 to determine if the waste requires particle-size reduction (and to reduce particle-size, if necessary). Determine whether the waste is liquid or has insignificant amounts of solid material (which need not undergo extraction) as follows:

7.2.1 Remove the solid phase and filter from the filtration apparatus.

7.2.2 Dry the filter and solid phase at 100±20° C until two successive weighings yield the same value within ±1%. Record final weight.

NOTE: Caution should be taken to insure that the subject solid will not flash upon heating. It is recommended that the drying oven be vented to a hood or appropriate device.

7.2.3 Calculate the percent dry solids as follows:

$$\text{Percent dry solids} = \frac{\text{Weight of dry waste and filter} - \text{tared weight of filter}}{\text{Initial weight of waste (Step 7.1.5 or 7.1.1)}} \times 100$$

7.2.4 If the percent dry solids is less than 0.5%, consult Step 6.2 and proceed to Section 8.0 if non-volatiles in the waste are of concern, and to Section 9.0 if volatiles are of interest. In this case, the waste, after filtration is defined as the TCLP extract. If the percent dry solids is greater than or equal to 0.5%, and if the non-volatile TCLP is to be performed, return to the beginning of this Section (7.0) with a new representative waste sample, so that it can be determined if particle-size reduction is necessary (Step 7.3), and so that the appropriate extraction fluid may be determined (Step 7.4) on a fresh portion of the solid phase of the waste. If only the volatile TCLP is to be performed, see the Note in Step 7.4.

7.3 *Determination of whether the wastes requires particle-size reduction (particle-size is reduced during this Step):* Using the solid

portion of the waste, evaluate the solid for particle-size. If the solid has a surface area per gram of material equal to or greater than 3.1 cm^2, or is smaller than 1 cm in its narrowest dimension (e.g., is capable of passing through a 9.5-mm (0.375-inch) standard sieve), particle-size reduction is not required (proceed to Step 7.4). If the surface area is smaller or the particle-size larger than described above, the solid portion of the waste is prepared for extraction by crushing, cutting, or grinding the waste to a surface area or particle-size as described above.

NOTE: Surface area requirements are meant for filamentous (e.g., paper, cloth) and similar waste materials. Actual measurement of surface area is not required; nor is it recommended.

7.4 *Determination of appropriate extraction fluid:* If the solid content is greater than or equal to 0.5% of the waste and if TCLP extraction for non-volatile constituents will take place (Section 8.0), determination of the appropriate fluid (Step 5.6) to use for the non-volatiles extraction is performed as follows.

NOTE: TCLP extraction for volatile constituents entails using only extraction fluid #1 (Step 5.6.1). Therefore, if TCLP extraction for non-volatiles extraction is not required, proceed to section 9.0.

7.4.1 Weigh out a small subsample of the solid phase of the waste, reduce the solid (if necessary) to a particle-size of approximately 1mm in diameter or less, and transfer 5.0 grams of the solid phase of the waste to a 500-mL beaker or Erlenmeyer flask.

7.4.2 Add 96.5 mL of reagent water (ASTM Type II) to the beaker, cover with a watchglass, and stir vigorously for 5 minutes using a magnetic stirrer. Measure and record the pH. If the pH is <5.0, extraction fluid #1 is used. Proceed to Section 8.0.

7.4.3 If the pH from Step 7.4.2 is >5.0, add 3.5 mL 1.0 N HCl, slurry briefly, cover with a watchglass, heat to 50 °C, and hold at 50 °C for 10 minutes.

7.4.4 Let the solution cool to room temperature and record the pH. If the pH is <5.0, use extraction fluid #1. If the pH is >5.0, use extraction fluid #2. Proceed to Section 8.0.

7.5 The sample of waste used for performance of this Section shall *not* be used any further. Other samples of the waste (see Step 6.2) should be employed for the Section 8.0 and 9.0 extractions.

8.0 PROCEDURE WHEN VOLATILES ARE NOT INVOLVED

Although a minimum sample size of 100 grams (solid and liquid phases) is required, a larger sample size may be more appropriate, depending on the solids content of the waste sample (percent solids, see Step 7.1), whether the initial liquid phase of the waste will be miscible with the aqueous extract of the solid, and whether inorganics, semivolatile organics, pesticides, and herbicides are all analytes of concern. Enough solids should be generated for extraction such that the volume of TCLP extract will be sufficient to support all of the analyses required. If the amount of extract generated by the performance of a single TCLP extraction will not be sufficient to perform all of the analyses to be conducted, it is recommended that more than one extraction be performed and that the extracts from each extraction be combined and then aliquoted for analysis.

8.1 If the waste will obviously yield no liquid when subjected to pressure filtration (i.e., is 100% solid, see Step 7.1), weigh out a representative subsample of the waste (100 gram minimum) and proceed to Step 8.9.

8.2 If the sample is liquid or multiphasic, liquid/solid separation is required. This involves the filtration device described in Step 4.3.2 and is outlined in Steps 8.3 to 8.8.

8.3 Pre-weigh the container that will receive the filtrate.

8.4 Assemble the filter holder and filter following the manufacturer's instructions. Place the filter on the support screen and secure. Acid wash the filter if evaluating the mobility of metals (See Step 4.4).

NOTE: Acid washed filters may be used for all non-volatile extractions even when metals are not of concern.

8.5 Weigh out a representative subsample of the waste (100 gram minimum) and record the weight. If the waste was shown to contain <0.5% dry solids (Step 7.2), the waste, after filtration is defined as the TCLP extract. Therefore, enough of the sample should be filtered so that the amount of filtered liquid will support all of the analyses required of the TCLP extract. For wastes containing >0.5% dry solids (Steps 7.1 or 7.2), use the percent solids information obtained in Step 7.1 to determine the optimum sample size (100 gram minimum) for filtration. Enough solids should be generated after filtration to support the analyses to be performed on the TCLP extract.

8.6 Allow slurries to stand to permit the solid phase to settle. Wastes that settle slowly may be centrifuged prior to filtration. Centrifugation is to be used only as an aid to filtration. If used, the liquid should be decanted and filtered followed by filtration of the solid portion of the waste through the same filtration system.

8.7 Quantitatively transfer the waste sample (liquid and solid phases) to the filter holder (see Step 4.3.2). If filtration of the waste at 4° C reduces the amount of expressed liquid over what would be expressed at room temperature, then allow the sample

to warm up to room temperature in the device before filtering.

NOTE: If waste material (> [illegible] of the original sample weight) has obvio[illegible] adhered to the container used to transfer [illegible]e sample to the filtration apparatus, determine the weight of this residue and subtract it from the sample weight determined in Step 8.5, to determine the weight of the waste sample that will be filtered.

Gradually apply vacuum or gentle pressure of 1-10 psi, until air or pressurizing gas moves through the filter. If this point is not reached under 10 psi, and if no additional liquid has passed through the filter in any 2-minute interval, slowly increase the pressure in 10-psi increments to maximum of 50 psi. After each incremental increase of 10 psi, if the pressurizing gas has not moved through the filter, and if no additional liquid has passed through the filter in any 2-minute interval, proceed to the next 10-psi increment. When the pressurizing gas begins to move through the filter, or when the liquid flow has ceased at 50 psi (i.e., filtration does not result in any additional filtrate within a 2-minute period), filtration is stopped.

NOTE: Instantaneous application of high pressure can degrade the glass fiber filter and may cause premature plugging.

8.8 The material in the filter holder is defined as the solid phase of the waste, and the filtrate is defined as the liquid phase. Weigh the filtrate. The liquid phase may now be either analyzed (see Step 8.13) or stored at 4 °C until time of analysis.

NOTE: Some wastes, such as oily wastes and some paint wastes, will obviously contain some material that appears to be a liquid. But even after applying vacuum or pressure filtration, as outlined in Step 8.7, this material may not filter. If this is the ca[illegible]e, the material within the filtration d[illegible]ce is defined as a solid and is carried th[illegible]ugh the extraction as a solid. The original filter is *not* to be replaced with a fresh filter under any circumstances. Only one the filter is used.

8.9 If the waste contains <0.5% dry solids (see Step 7.2), proceed to Step 8.13. If the waste contains >0.5% dry solids (see Step 7.1 or 7.2), and if particle-size reduction of the solid was needed in Step 7.3, proceed to Step 8.10. If particle-size reduction was not required in Step 7.3, quantitatively transfer the solid material into the extractor vessel, including the filter used to separate the initial liquid from the solid phase. Proceed to Step 8.11.

8.10 The solid portion of the waste is prepared for extraction by crushing, cutting, or grinding the waste to a surface area of particle-size as described in Step 7.3. When the surface area of particle-size has been appropriately altered, quantitatively transfer the solid material into the extractor vessel, including the filter used to separate the initial liquid from the solid phase.

NOTE: Sieving of the waste through a sieve that is not Teflon coated should not be done due to avoid possible contamination of the sample. Surface area requirements are meant for filamentous (e.g., paper, cloth) and similar waste materials. Actual measurement of surface area is not recommended.

8.11 Determine the amount of extraction fluid to add to the extractor vessel as follows:

$$\text{Weight of extraction fluid} = \frac{20 \times \%\ \text{solids (Step 7.1)} \times \text{weight of waste filtered (Step 8.5 or 8.7)}}{100}$$

Slowly add this amount of appropriate extraction fluid (see Step 7.4) to the extractor vessel. Close the extractor bottle tightly (it is recommended that Teflon tape be used to ensure a tight seal), secure in rotary extractor device, and rotate at 30±2 rpm for 18±2 hours. Ambient temperature (i.e., temperature of room in which extraction is to take place) shall be maintained at 22±3 °C during the extraction period.

NOTE: As agitation continues, pressure may build up within the extractor bottle for some types of wastes (e.g., limed or calcium carbonate containing waste may evolve gases such as carbon dioxide). To relieve excess pressure, the extractor bottle may be periodically opened (e.g., after 15 minutes, 30 minutes, and 1 hour) and vented into a hood.

8.12 Following the 18±2 hour extraction, the material in the extractor vessel is separated into its component liquid and solid phases by filtering through a new glass fiber filter, as outlined in Step 8.7. For final filtration of the TCLP extract, the glass fiber filter may be changed, if necessary, to facilitate filtration. Filter(s) shall be acid-washed (see Step 4.4) if evaluating the mobility of metals.

8.13 The TCLP extract is now prepared as follows:

8.13.1 If the waste contained no initial liquid phase, the filtered liquid material ob-

tained from Step 8.12 is defined as the TCLP extract. Proceed to Step 8.14.

8.13.2 If compatible (e.g., multiple phases will not result on combination), the filtered liquid resulting from Step 8.12 is combined with the initial liquid phase of the waste as obtained in Step 8.7. This combined liquid is defined as the TCLP extract. Proceed to Step 8.14.

8.13.3 If the initial liquid phase of the waste, as obtained from Step 8.7, is not or may not be compatible with the filtered liquid resulting from Step 8.12, these liquids are not combined. These liquids, collectively defined as the TCLP extract, are analyzed separately, and the results are combined mathematically. Proceed to Step 8.14.

8.14 Following collection of the TCLP extract, it is recommended that the pH of the extract be recorded. The extract should be immediately aliquoted for analysis and properly preserved (metals aliquots must be acidified with nitric acid to pH <2; all other aliquots must be stored under refrigeration (4 °C) until analyzed). The TCLP extract shall be prepared and analyzed according to appropriate analytical methods. TCLP extracts to be analyzed for metals, other than mercury, shall be acid digested. If the individual phases are to be analyzed separately, determine the volume of the individual phases (to $\pm 0.5\%$), conduct the appropriate analyses, and combine the results mathematically by using a simple volume-weighted average:

$$\text{Final Analyte Concentration} = \frac{(V_1)(C_1)+(V_2)(C_2)}{V_1+V_2}$$

where:

V_1 = The volume of the first phase (L).

C_1 = The concentration of the contaminant of concern in the first phase (mg/L).

V_2 = The volume of the second phase (L).

C_2 = The concentration of the contaminant of concern in the second phase (mg/L).

8.15 The contaminant concentrations in the TCLP extract are compared with the thresholds identified in the appropriate regulations. Refer to Section 10.0 for quality assurance requirements.

9.0 PROCEDURE WHEN VOLATILES ARE INVOLVED

The ZHE device is used to obtain TCLP extracts for volatile analysis only. Extract resulting from the use of the ZHE shall not be used to evaluate the mobility of non-volatile analytes (e.g., metals, pesticides, etc.).

The ZHE device has approximately a 500-mL internal capacity. Although a minimum sample size of 100 grams was required in the Section 8.0 procedure, the ZHE can only accommodate a *maximum* of 25 grams of solid (defined as that fraction of a sample from which no liquid (additional) may be forced out by an applied pressure of 50 psi), due to the need to add an amount of extraction fluid equal to 20 times the weight of the solid phase.

The ZHE is charged with sample only once and the device is not opened until the final extract (of the solid) has been collected. Repeated filling of the ZHE of obtain 25 grams of solid is not permitted. The initial filtrate should be weighed and then stored at 4 °C until either analyzed or recombined with the final extract of the solid.

Although the following procedure allows for particle-size reduction during the conduct of the procedure, this could result in the loss of volatile compounds. If possible (e.g., particle-size may be reduced easily by crumbling), particle-size reduction (See Step 9.2) should be conducted on the sample as it is being taken. If necessary, particle-size reduction may be conducted during the procedure.

In carrying out the following steps, do not allow the waste, the initial liquid phase, or the extract to be exposed to the atmosphere for any more time than is absolutely necessary. Any manipulation of these materials should be done when cold (4° C) to minimize loss of volatiles.

9.1 Pre-weigh the (evacuated) container which will receive the filtrate (See Step 4.6), and set aside. If using a TEDLAR® bag, all liquid must be expressed from the device, whether it be for the initial or final liquid/solid separation, and an aliquot taken from the liquid in the bag, for analysis. The containers listed in Step 4.6 are recommended for use under the following conditions.

9.1.1 If a waste contains an aqueous liquid phase or if the waste does not contain a significant amount of non-aqueous liquid (i.e., $<1\%$ of total waste), the TEDLAR® bag should be used to collect and combine the initial liquid and solid extract. The syringe is not recommended in these cases.

9.1.2 If a waste contains a significant amount of non-aqueous initial liquid phase (i.e., $>1\%$ of total waste), the syringe or the TEDLAR® bag may be used for both the initial solid/liquid separation and the final ex-

tract filtration. However, analysts should use one or the other, not both.

9.1.3 If the waste contains no initial liquid phase (is 100% solid) or has no significant solid phase (is 100% liquid), either the TEDLAR® bag or the syringe may be used. If the syringe is used, discard the first 5 mL liquid expressed from the device. The remaining aliquots are used for analysis.

9.2 Place the ZHE piston within the body of the ZHE (it may be helpful first to moisten the piston O-rings slightly with extraction fluid). Adjust the piston within the ZHE body to a height that will minimize the distance the piston will have to move once the ZHE is charged with sample (based upon sample size requirements determined from Section 9.0, Step 7.1 and/or 7.2). Secure the gas inlet/outlet flange (bottom flange) onto the ZHE body in accordance with the manufacturer's instructions. Secure the glass fiber filter between the support screens and set aside. Set liquid inlet/outlet flange (top flange) aside.

9.3 If the waste is 100% solid (see Step 7.1), weigh out a representative subsample (25 gram maximum) of the waste, record weight, and proceed to Step 9.5.

9.4 If the waste was shown to contain <0.5% dry solids (Step 7.2), the waste, after filtration is defined as the TCLP extract. Enough of the sample should be filtered so that the amount of filtered liquid will support all of the volatile analyses required. For wastes containing ≥0.5% dry solids (Steps 7.1 and/or 7.2), use the percent solids information obtained in Step 7.1 to determine the optimum sample size to charge into the ZHE. The appropriate sample size recommended is as follows:

9.4.1 For wastes containing ≥5% solids (see Step 7.1), weigh out a representative 500 gram sample or waste and record the weight.

9.4.2 For wastes containing >5% solids (see Step 7.1), the amount of waste to charge into the ZHE is determined as follows:

$$\text{Weight of waste to charge ZHE} = \frac{25}{\%\ \text{solids (Step 7.1)}} \cdot 100$$

Weigh out a representative subsample of the waste of the appropriate size and record the weight.

9.5 If particle-size reduction of the solid portion of the waste was required in Step 7.3, proceed to Step 9.6. If particle-size reduction was not required in Step 7.3, proceed to Step 9.7.

9.6 The waste is prepared for extraction by crushing, cutting, or grinding the solid portion of the waste to a surface area or particle-size as described in Step 7.3. Wastes and appropriate reduction equipment should be refrigerated, if possible, to 4 °C prior to particle-size reduction. The means used to effect particle-size reduction must not generate heat in and of itself. If reduction of the solid phase of the waste is necessary, exposure of the waste to the atmosphere should be avoided to the extent possible.

NOTE: Sieving of the waste is not recommended due to the possibility that volatiles may be lost. The use of an appropriately graduated ruler is recommended as an acceptable alternative. Surface area requirements are meant for filamentous (e.g., paper, cloth) and similar waste materials. Actual measurement of surface area is not recommended.

When the surface area or particle-size has been appropriately altered, proceed to Step 9.7.

9.7 Waste slurries need not be allowed to stand to permit the solid phase to settle. Wastes that settle slowly shall not be centrifuged prior to filtration.

9.8 Quantitatively transfer the entire sample (liquid and solid phases) quickly to the ZHE. Secure the filter and support screens into the top flange of the device and secure the top flange to the ZHE body in accordance with the manufacturer's instructions. Tighten all ZHE fittings and place the device in the vertical position (gas inlet/outlet flange on the bottom). *Do not* attach the extraction collection device to the top plate.

NOTE: If waste material (>1% of original sample weight) has obviously adhered to the container used to transfer the sample to the ZHE, determine the weight of this residue and subtract it from the sample weight determined in Step 9.4, to determine the weight of the waste sample that will be filtered.

Attach a gas line to the gas inlet/outlet valve (bottom flange) and, with the liquid inlet/outlet valve (top flange) open, begin applying gentle pressure of 1-10 psi (or more if necessary) to force all headspace (into a hood) slowly out of the ZHE device. At the first appearance of liquid from the liquid inlet/outlet valve, quickly close the valve and discontinue pressure. If filtration of the waste at 4°C reduces the amount of expressed liquid over what would be expressed at room temperature, then allow the sample to warm up to room temperature in the device before filtering. If the waste is 100% solid (see Step 7.1), slowly increase the pressure to a maximum of 50 psi to force most of the headspace out of the device and proceed to Step 9.12.

9.9 Attach the evacuated pre-weighed filtrate collection container to the liquid inlet/outlet valve and open the valve. Begin applying gentle pressure of 1-10 psi to force

the liquid phase into the filtrate collection container. If no additional liquid has passed through the filter in any 2-minute interval, slowly increase the pressure in 10-psi increments to a maximum of 50 psi. After each incremental increase of 10 psi, if no additional liquid has passed through the filter in any 2-minute interval, proceed to the next 10-psi increment. When liquid flow has ceased such that continued pressure filtration at 50 psi does not result in any additional filtrate within any 2-minute period, filtration is stopped. Close the liquid inlet/outlet valve, discontinue pressure to the piston, and disconnect the filtrate collection container.

NOTE: Instantaneous application of high pressure can degrade the glass fiber filter and may cause premature plugging.

9.10 The material in the ZHE is defined as the solid phase of the waste and the filtrate is defined as the liquid phase.

NOTE: Some wastes, such as oily wastes and some paint wastes, will obviously contain some material that appears to be a liquid. But even after applying pressure filtration, this material will not filter. If this is the case, the material within the filtration device is defined as a solid and is carried through the TCLP extraction as a solid.

If the original waste contained <0.5% dry solids (see Step 7.2), this filtrate is defined as the TCLP extract and is analyzed directly. Proceed to Step 9.15.

9.11 The liquid phase may now be either analyzed immediately (see Steps 9.13 through 9.15) or stored at 4 °C under minimal headspace conditions until time of analysis. The weight of extraction fluid #1 to add to the ZHE is determined as follows:

$$\text{Weight of extraction fluid} = \frac{20 \times \%\ \text{solids (Step 7.1)} \times \text{weight of waste filtered (Step 9.4 or 9.8)}}{100}$$

9.12 The following steps detail how to add the appropriate amount of extraction fluid to the solid material within the ZHE and agitation of the ZHE vessel. Extraction fluid #1 is used in all cases (see Step 5.6).

9.12.1 With the ZHE in the vertical position, attach a line from the extraction fluid reservior to the liquid inlet/outlet valve. The line used shall contain fresh extraction fluid and should be preflushed with fluid to eliminate any air pockets in the line. Release gas pressure on the ZHE piston (from the gas inlet/outlet valve), open the liquid inlet/outlet valve, and begin transferring extraction fluid (by pumping or similar means) into the ZHE. Continue pumping extraction fluid into the ZHE until the appropriate amount of fluid has been introduced into the device.

9.12.2 After the extraction fluid has been added, immediately close the liquid inlet/outlet valve and disconnect the extraction fluid line. Check the ZHE to ensure that all valves are in their closed positions. Physically rotate the device in an end-over-end fashion 2 or 3 times. Reposition the ZHE in the vertical position with the liquid inlet/outlet valve on top. Put 5-10 psi behind the piston (if necessary) and slowly open the liquid inlet/outlet valve to bleed out any headspace (into a hood) that may have been introduced due to the addition of extraction fluid. This bleeding shall be done quickly and shall be stopped at the first appearance of liquid from the valve. Re-pressurize the ZHE with 5-10 psi and check all ZHE fittings to ensure that they are closed.

9.12.3 Place the ZHE in the rotary extractor apparatus (if it is not already there) and rotate the ZHE at 30±2 rpm for 18±2 hours. Ambient temperature (i.e., temperature of room in which extraction is to occur) shall be maintained at 22±3 °C during agitation.

9.13 Following the 18±2 hour agitation period, check the pressure behind the ZHE piston by quickly opening and closing the gas inlet/outlet valve and noting the escape of gas. If the pressure has not been maintained (i.e., no gas release observed), the device is leaking. Check the ZHE for leaking as specified in Step 4.2.1, and redo the extraction with a new sample of waste. If the pressure within the device has been maintained, the material in the extractor vessel is once again separated into its component liquid and solid phases. If the waste contained an initial liquid phase, the liquid may be filtered directly into the same filtrate collection container (i.e., TEDLAR® bag) holding the initial liquid phase of the waste, unless doing so would create multiple phases, or unless there is not enough volume left within the filtrate collection container. A separate filtrate collection container must be used in these cases. Filter through the glass fiber filter, using the ZHE device as discussed in Step 9.9. All extract shall be filtered and collected in the TEDLAR® bag is used, if the extract is mul-

tiphasic, or if the waste contained an initial liquid phase (see Steps 4.6 and 9.1).

NOTE: An in-line glass fiber filter may be used to filter the material within the ZHE when it is suspected that the glass fiber filter has been ruptured.

9.14 If the original waste contained no initial liquid phase, the filtered liquid material obtained from Step 9.13 is defined as the TCLP extract. If the waste contained in initial liquid phase, the filtered liquid material obtained from Step 9.13 and the initial liquid phase (Step 9.9) are collectively defined as the TCLP extract.

9.15 Following collection of the TCLP extract, the extract should be immediately aliquoted for analysis and stored with minimal headspace at 4 °C until analyzed. The TCLP extract will be prepared and analyzed according to the appropriate analytical methods. If the individual phases are to be analyzed separately (i.e., are not miscible), determine the volume of the individual phases (to ±0.5%), conduct the appropriate analyses, and combine the results mathematically by using a simple volume-weighted average:

$$\text{Final Analyte Concentration} = \frac{(V_1)(C_1)+(V_2)(C_2)}{V_1+V_2}$$

where:

V_1 = The volume of the first phases (L).

C_1 = The concentration of the contaminant of concern in the first phase (mg/L).

V_2 = The volume of the second phase (L).

C_2 = The concentration of the contaminant of concern in the second phase (mg/L).

9.16 The contaminant concentrations in the TCLP extract are compared with the thresholds identified in the appropriate regulations. Refer to Section 10.0 for qualify assurance requirements.

10.0 QUALITY ASSURANCE REQUIREMENTS

10.1 All data, including quality assurance data, should be maintained and available for reference or inspection.

10.2 A minimum of one blank (extraction fluid #1) for every 10 extractions that have been conducted in an extraction vessel shall be employed as a check to determine if any memory effects from the extraction equipment are occurring.

10.3 For each analytical batch (up to twenty samples), it is recommended that a matrix spike be performed. Addition of matrix spikes should occur once the TCLP extract has been generated (i.e., should not occur prior to performance of the TCLP procedure). The purpose of the matrix spike is to monitor the adequacy of the analytical methods used on the TCLP extract and for determining if matrix interferences exist in analyte detection.

10.4 All quality control measures described in the appropriate analytical methods shall be followed.

10.5 The method of standard addition shall be employed for each analyte if: 1) recovery of the compound from the TCLP extract is not between 50 and 150%, or 2) if the concentration of the constituent measured in the extract is within 20% of the appropriate regulatory threshold. If more than one extraction is being run on samples of the same waste (up to twently samples), the method of standard addition need be applied only once and the percent recoveries applied to the remainder of the extractions.

10.6 Samples must undergo TCLP extraction within the following time period after sample receipt: Volatiles, 14 days; Semi-Volatiles, 40 days; Mercury, 28 days; and other Metals, 180 days. Extraction of the solid portion of the waste should be initiated as soon as possible following initial solid/liquid separation. TCLP extracts shall be analyzed after generation and preservation within the following periods: Volatiles, 14 days; Semi-Volatiles, 40 days; Mercury, 28 days; and other Metals, 180 days.

TABLE 1—VOLATILE CONTAMINANTS [1]

Compound	CAS No.
Acetone	67-64-1
n-Butyl alcohol	71-36-6
Carbon disulfide	75-15-0
Carbon tetrachloride	56-23-5
Chlorobenzene	108-90-7
Methylene chloride	75-09-2
Methyl ethyl ketone	78-93-3
Methyl isobutyl ketone	108-10-1
Tetrachloroethylene	127-18-4
Toluene	108-88-3
1,1,1-Trichloroethane	71-55-6
Trichloroethylene	79-01-6
Trichlorofluoromethane	75-69-4
Xylene	1330-20-7

[1] Includes compounds identified in the Land Disposal Restrictions Rule. If any or all of these compounds are of concern, the zero-headspace extractor vessel shall be used. If other (non-volatile) compounds are of concern, the conventional bottle extractor shall be used.

TABLE 2—SUITABLE ROTARY AGITATION APPARATUS [1]

Company	Location	Model
Associated Design and Manufacturing Company.	Alexandria, VA (703) 549-5999.	4-vessel device, 6-vessel device
Lars Lande Manfacturing.	Whitmore Lake, MI (313) 449-4116.	10-vessel device, 5-vessel device
IRA Machine Shop and Laboratory.	Santurce, PR (809) 752-4004.	16-vessel device
EPRI Extractor		6-vessel device [2]

TABLE 2—SUITABLE ROTARY AGITATION APPARATUS [1]—Continued

Company	Location	Model
REXNORD	Milwaukee, WI (414) 643-2850.	6-vessel device
Analytical Testing and Consulting Services, Inc.	Warrington, PA (215) 343-4490.	4-vessel device

[1] Any device that rotates the extraction vessel in an end-over-end fashion at 30±2 rpm is acceptable.
[2] Although this device is suitable, it is not commercially made. It may also require retrofitting to accommodate ZHE devices.

TABLE 3—SUITABLE ZERO-HEADSPACE EXTRACTOR VESSELS

Company	Location	Model No.
Associated Design & Manufacturing Co..	Alexandria, VA, (703) 549-5999	3740-ZHB, Gas Pressure Device.
Millipore Corp.	Bedford, MA, (800) 225-3384	SD1 P581 C5, Gas Pressure Device.
Analytical Testing & Consulting Services, Inc..	Warrington, PA, (215) 343-4490	CI02, Mechanical Pressure Device.

TABLE 4—SUITABLE FILTER HOLDERS [1]

Company	Location	Model	Size
Nuclepore Corp.	Pleasanton, CA, (800) 882-7711	425910	142 mm.
		410400	47 mm.
Micro Filtration Systems	Dublin, CA, (415) 828-6010	302400	142 mm.
Millipore Corp	Bedford, MA, (800) 225-3384	YT30142HW	142 mm.
		XX1004700	47 mm.

[1] Any device capable of separating the liquid from the solid phase of the waste is suitable, providing that it is chemically compatible with the waste and the constituents to be analyzed. Plastic devices (not listed above) may be used when only inorganic contaminants are of concern. The 142 mm size filter holder is recommended.

TABLE 5—SUITABLE FILTER MEDIA

Company	Location	Model	Pore size[1]
Whatman Laboratory Products, Inc.	Clifton, NJ, (201) 773-5800	GFF	0.7

[1] Nominal pore size.

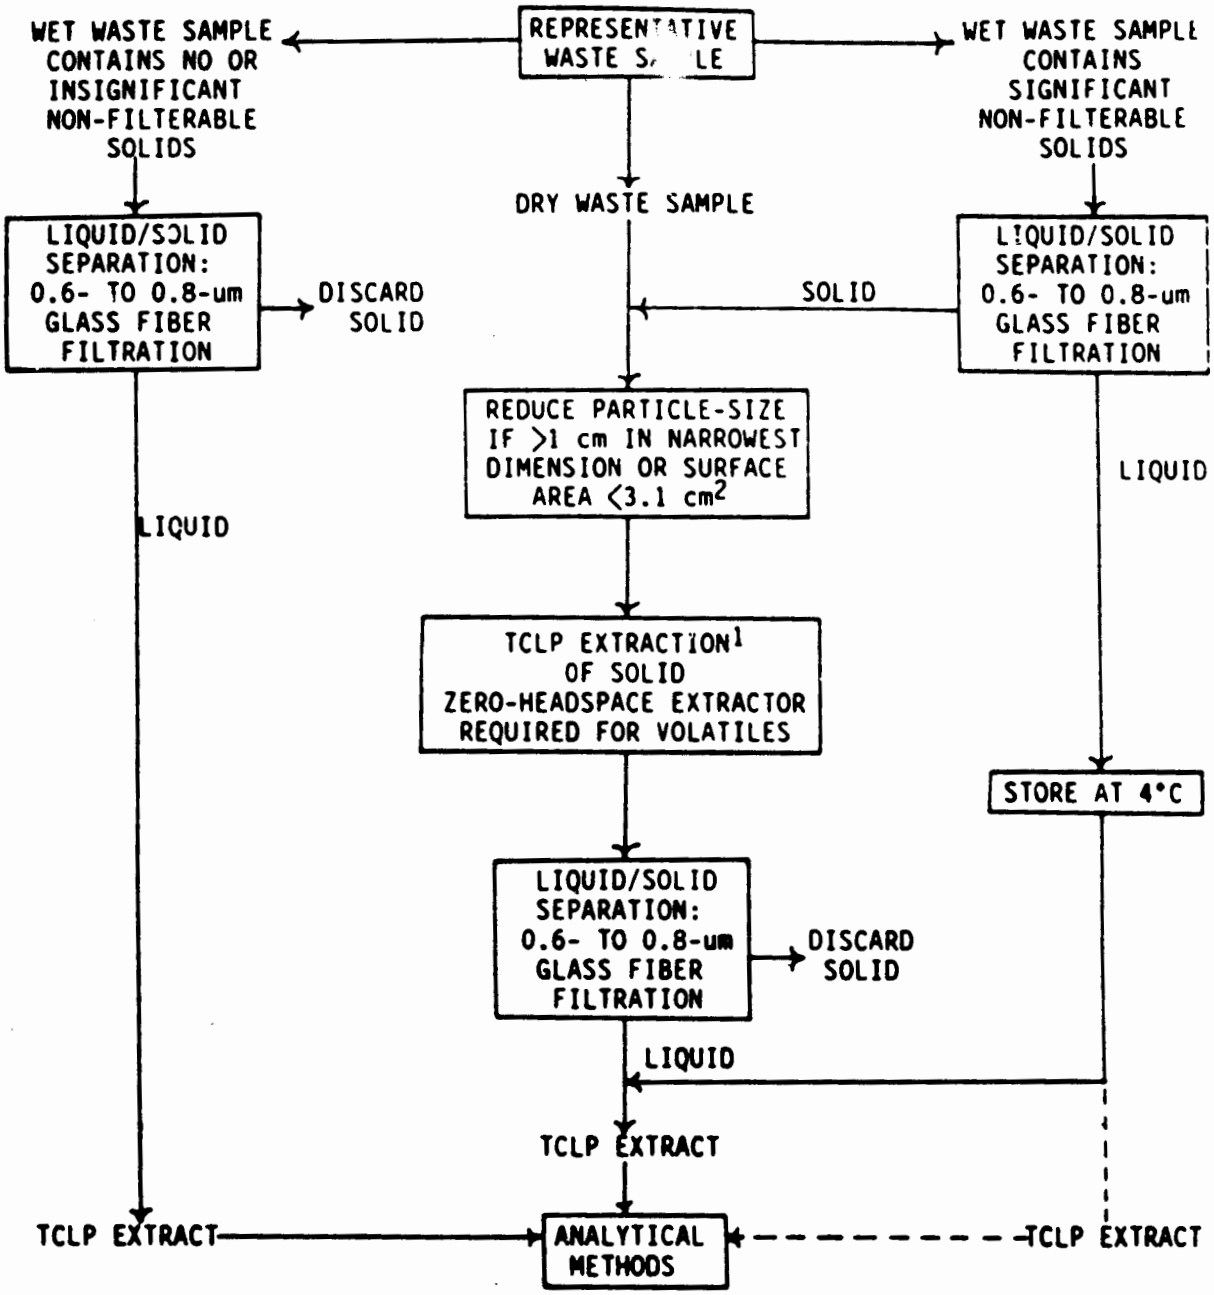

[1]The extraction fluid employed is a function of the alkalinity of the solid phase of the waste.

FIGURE 1: TCLP FLOWCHART

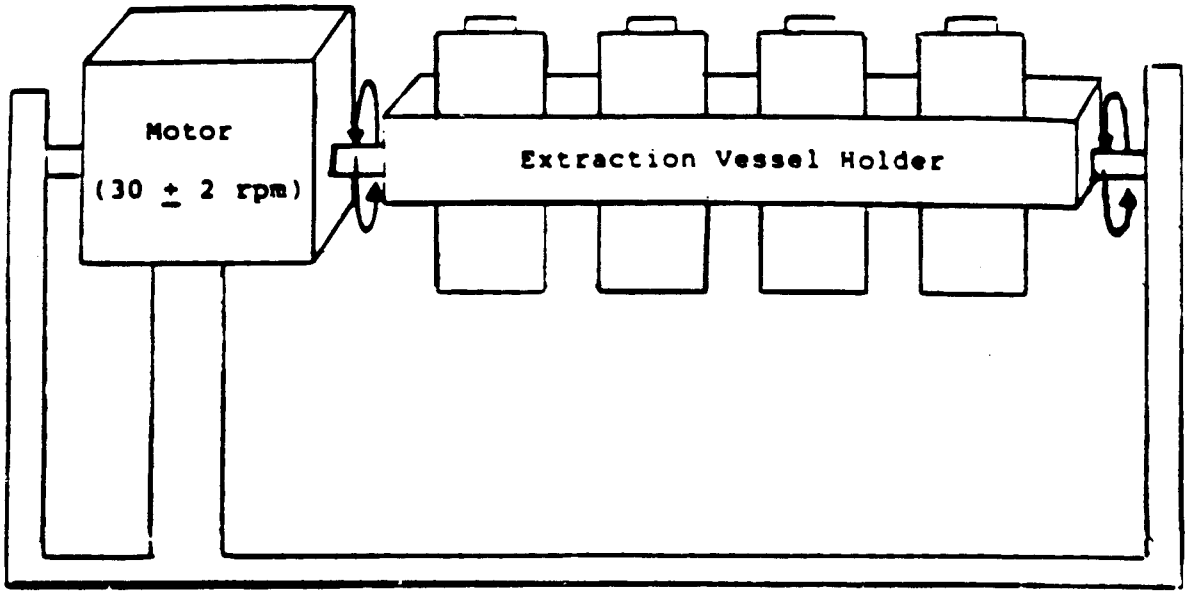

Figure 2: Rotary Agitation

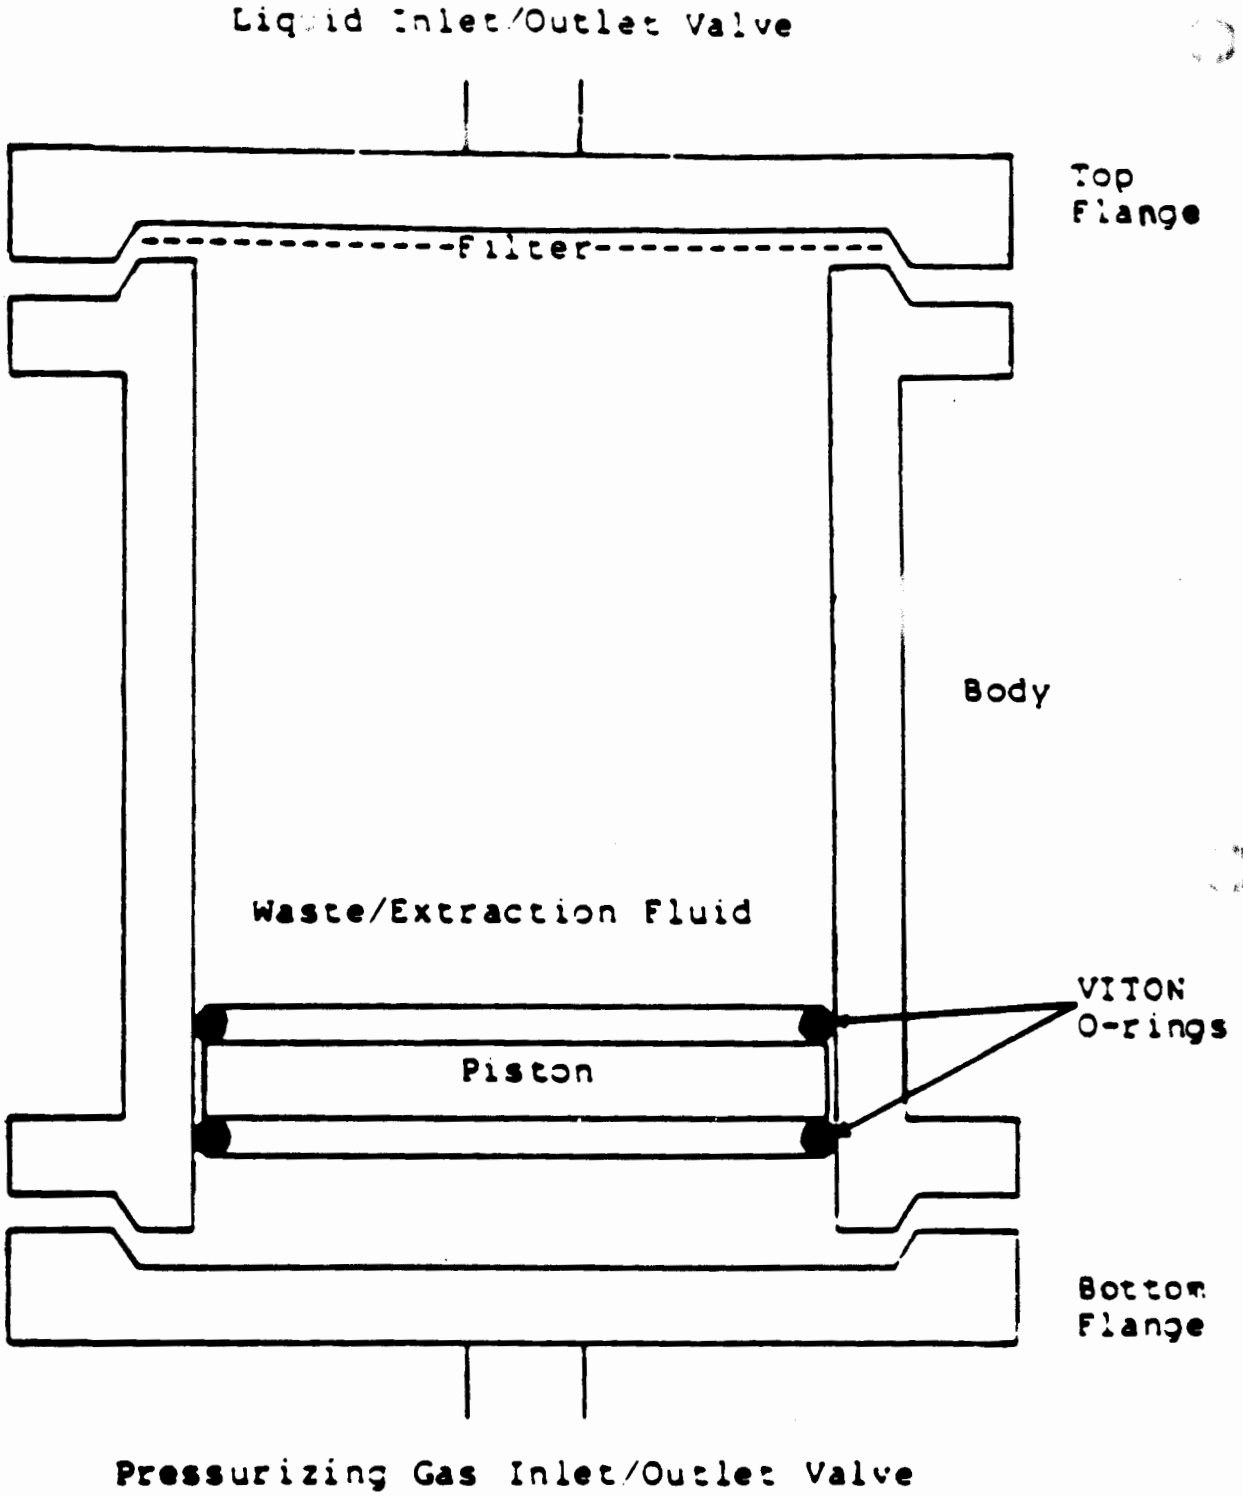

Figure 3: Zero-Headspace Extraction Vessel

[51 FR 40643, Nov. 7, 1986; 52 FR 21018, June 4, 1987]

APPENDIX II—TREATMENT STANDARDS (AS CONCENTRATIONS IN THE TREATMENT RESIDUAL EXTRACT)

[Note: The technologies shown are the basis of the treatment standards. They are not required to be used in meeting the treatment standards]

Constitutents of FOO1-FOO5 Spent Solvent Wastes	Waste Treatability Groups For FOO1-FOO5 Spent Solvent Wastes (mg/l)			
	Wastewater	Technology Basis [1]	Wastewater Generated by Pharmaceutical Plant [2]	All Other [3]
Acetone	0.05	SS		0.59
n-Butyl Alcohol	5.00	SS		5.00
Carbon disulfide	1.05	SS		4.81
Carbon tetrachloride	0.05	B		0.96
Chlorobenzene	0.15	B&AC		0.05
Cresols (cresylic acid)	2.82	AC		0.75
Cyclohexanone	0.125	SS		0.75
1,2-Dichlorobenzene	0.65	B&AC		0.125
Ethyl acetate	0.05	SS		0.75
Ethylbenzene	0.05	B		0.053
Ethyl ether	0.05	SS		0.75
Isobutanol	5.00	SS		5.00
Methanol	0.25	SS		0.75
Methylene chloride	0.20	B	12.7	0.96
Methyl ethyl ketone	0.05	SS		0.75
Methyl isobutyl ketone	0.05	SS		0.33
Nitrobenzene	0.66	SS&AC		0.125
Pyridine	1.12	B&AC		0.33
Tetrachloroethylene	0.079	B		0.05
Toluene	1.12	B&AC		0.33
1,1,1-Trichloroethane	1.05	SS		0.41
1,1,2-Trichloro-1,2,2-trifluorcethane	1.05	SS		0.96
Trichloroethylene	0.062	B&AC		0.091
Trichlorofluoromethane	0.05	B		0.96
Xylene	0.05	AC		0.15

[1] In some instances other technologies achieved somewhat lower treatment values but waste characterization data were insufficient to identify separate treatability groups. Refer to the BDAT background document for a detailed explanation of the determination of the treatment standards.
SS = steam stripping
B = biological treatment
AC = activated carbon
[2] Wastewaters generated by pharmaceutical plants must be treated to the standards given for all other wastewaters except in the case of methylene chloride.
[3] The treatment standards in this treatability group are based on incineration.

[51 FR 40653, Nov. 7, 1986]

APPENDIX III—LIST OF HALOGENATED ORGANIC COMPOUNDS REGULATED UNDER § 268.32

In determining the concentration of HOCs in a hazardous waste for purposes of the § 268.32 land disposal prohibition, EPA has defined the HOCs that must be included in the calculation as any compounds having a carbon-halogen bond which are listed in this Appendix (see § 268.2). Appendix III to Part 268 consists of the following compounds:

Volatiles

Bromodichloromethane
Bromomethane
Carbon Tetrachloride
Chlorobenzene
2-Chloro-1,3-butadiene
Chlorodibromomethane
Chloroethane
2-Chloroethyl vinyl ether
Chloroform
Chloromethane
3-Chloropropene
1,2-Dibromo-3-chloropropane
1,2-Dibromomethane
Dibromomethane
Trans-1,4-Dichloro-2-butene
Dichlorodifluoromethane
1,1-Dichloroethane
1,2-Dichloroethane
1,1-Dichloroethylene
Trans-1,2-Dichloroethene
1,2-Dichloropropane
Trans-1,3-Dichloropropene
cis-1,3-Dichloropropene
Iodomethane
Methylene chloride
1,1,1,2-Tetrachloroethane
1,1,2,2-Tetrachloroethane
Tetrachloroethene

Tribromomethane
1,1,1-Trichloroethane
1,1,2-Trichloroethane
Trichloroethene
Trichloromonofluoromethane
1,2,3-Trichloropropane
Vinyl chloride

Semivolatiles

Bis(2-chloroethoxy)ethane
Bis(2-chloroethyl)ether
Bis(2-chloroisopropyl) ether
p-Chloroaniline
Chlorobenzilate
p-Chloro-m-cresol
2-Chloronaphthalene
2-Chlorophenol
3-Chloropropionitrile
m-Dichlorobenzene
o-Dichlorobenzene
p-Dichlorobenzene
3,3'-Dichlorobenzidine
2,4-Dichlorophenol
2,6-Dichlorophenol
Hexachlorobenzene
Hexachlorobutadiene
Hexachlorocyclopentadiene
Hexachloroethane
Hexachloroprophene
Hexachloropropene
4,4'-Methylenebis(2-chloroaniline)
Pentachlorobenzene
Pentachloroethane
Pentachloronitrobenzene
Pentachlorophenol
Pronamide
1,2,4,5-Tetrachlorobenzene
2,3,4,6-Tetrachlorophenol
1,2,4-Trichlorobenzene
2,4,5-Trichlorophenol
2,4,6-Trichlorophenol
Tris(2,3-dibromopropyl)phosphate

Organochlorine Pesticides

Aldrin
alpha-BHC
beta-BHC
delta-BHC
gamma-BHC
Chlordane
DDD
DDE
DDT
Dieldrin
Endosulfan I
Endosulfan II
Endrin
Endrin aldehyde
Heptachlor
Heptachlor epoxide
Isodrin
Kepone
Methoxyclor
Toxaphene

Phenoxyacetic Acid Herbicides

2,4-Dichlorophenoxyacetic acid
Silvex
2,4,5-T

PCBs

Aroclor 1016
Aroclor 1221
Aroclor 1232
Aroclor 1242
Aroclor 1248
Aroclor 1254
Aroclor 1260
PCBs not otherwise specified

Dioxins and Furans

Hexachlorodibenzo-p-dioxins
Hexachlorodibenzofuran
Pentachlorodibenzo-p-dioxins
Pentachlorodibenzofuran
Tetrachlorodibenzo-p-dioxins
Tetrachlorodibenzofuran
2,3,7,8-Tetrachlorodibenzo-p-dioxin

[52 FR 25791, July 8, 1987]

APPENDIX IV—ORGANOMETALLIC LAB PACKS

Hazardous waste with the following EPA waste codes may be placed in an "organometallic" or "Appendix IV lab pack:"

P001, P002, P003, P004, P005, P006, P007, P008, P009, P013, P014, P015, P016, P017, P018, P020, P022, P023, P024, P025, P026, P027, P028, P031, P034, P036, P037, P038, P039, P040, P041, P042, P043, P044, P045, P047, P048, P049, P050, P051, P054, P056, P057, P058, P059, P060, P062, P063, P064, P065, P066, P067, P068, P069, P070, P071, P072, P073, P074, P075, P077, P081, P082, P084, P085, P087, P088, P089, P092, P093, P094, P095, P096, P097, P098, P099, P101, P102, P103, P104, P105, P108, P109, P110, P112, P113, P114, P115, P116, P118, P119, P120, P122, P123

U001, U002, U003, U004, U005, U006, U007, U008, U009, U010, U011, U012, U014, U015, U016, U017, U018, U019, U020, U021, U022, U023, U024, U025, U026, U027, U028, U029, U030, U031, U032, U033, U034, U035, U036, U037, U038, U039, U041, U042, U043, U044, U045, U046, U047, U048, U049, U050, U051, U052, U053, U055, U056, U057, U058, U059, U060, U061, U062, U063, U064, U066, U067, U068, U069, U070, U071, U072, U073, U074, U075, U076, U077, U078, U079, U080, U081, U082, U083, U084, U085, U086, U087, U088, U089, U090, U091, U092, U093, U094, U095, U096, U097, U098, U099, U101,

U102, U103, U105, U106, U107, U108, U109, U110, U111, U112, U113, U114, U115, U116, U117, U118, U119, U120, U121, U122, U123, U124, U125, U126, U127, U128, U129, U130, U131, U132, U133, U134, U135, U136, U137, U136, U137, U138, U139, U140, U141, U142, U143, U144, U145, U146, U147, U148, U149, U150, U152, U154, U153, U154, U155, U156, U157, U158, U159, U160, U161, U162, U164, U165, U166, U167, U168 U169, U170, U171, U172, U173, U174, U176, U177, U178, U179, U180, U181, U182, U183, U184, U185, U186 U187, U188, U189, U190, U191, U192, U193, U194, U196, U197, U200, U201, U202, U203, U204, U205, U206, U207, U208, U209, U210, U211, U213, U214, U215, U216, U217, U218, U219, U220, U221, U222, U223, U225, U226, U227, U228, U234, U235, U236, U237, U238, U239, U240, U243, U244, U246, U247, U248, U249, U328, U353, U359

F001, F002, F003, F004, F005, F006, F010, F020, F021, F023, F024, F026, F027, F028

K001, K002, K008, K009, K010, K011, K013, K014, K015, K016, K017, K018, K019, K020, K021, K022, K023, K024, K025, K026, K027, K028, K029, K030, K031, K032, K033, K034, K035, K036, K037, K038, K039, K040, K041, K042, K043, K044, K045, K046, K047, K048, K049, K050, K051, K052, K054, K060, K061, K064, K065, K066, K069, K071, K073, K083, K084, K085, K086, K087, K093, K094, K095, K096, K097, K098, K099, K101, K102, K103, K104, K105, K111, K112, K113, K114, K115, K116, K117, K118, K123, K124, K125, K126, K136

D001, D002, D003, D004, D005, D006, D007, D008, D010, D011, D012, D013, D014, D015, D016, D017

U032, U136, U144, U145, U146, U163, U214, U215, U216, U217

[55 FR 22713, June 1, 1990]

Appendix V—Organic Lab Packs

Hazardous wastes with the following EPA Hazardous Waste Code No. may be placed in an "organic" or "Appendix V:"

P001, P002, P003, P004, P005, P006, P007, P008, P009, P013, P014, P015, P016, P017, P018, P020, P022, P023, P025, P024, P026, P027, P028, P031, P034, P036, P037, P038, P039, P040, P041, P042, P043, P044, P045, P046, P047, P048, P049, P050, P051, P054, P057, P058, P059, P060, P062, P063, P064, P064, P065, P066, P067, P068, P069, P070, P071, P072, P073, P074, P075, P077, P081, P082, P084, P085, P087, P088, P089, P092, P093, P094, P095, P096, P097, P098, P099, P101, P102, P103, P104, P105, P108, P109, P110, P111, P112, P113, P114, P115, P116, P118, P119, P120, P122, P123

U001, U002, U003, U004, U005, U006, U007, U008, U009, U010, U011, U012, U014, U015, U016, U017, U018, U019, U020, U021, U022, U023, U024, U025, U026, U027, U028, U029, U030, U031, U033, U034, U035, U036, U037, U038, U039, U041, U042, U043, U044, U045, U046, U047, U048, U049, U050, U051, U052, U053, U055, U056, U057, U058, U059, U060, U061, U062, U063, U064, U066, U067, U068, U069, U070, U071, U072, U073, U074, U075, U076, U077, U078, U079, U080, U081, U082, U083, U084, U085, U086, U087, U088, U089, U090, U091, U092, U093, U094, U095, U096, U097, U098, U099, U101, U102, U103, U105, U106, U107, U108, U109, U110, U111, U112, U113, U114, U115, U116, U117, U118, U119, U120, U121, U122, U123, U124, U125, U126, U127, U128, U129, U130, U131, U132, U133, U135, U137, U138, U139, U140, U141, U142, U143, U147, U148, U149, U150, U153, U154, U155, U156, U157, U158, U159, U160, U161, U162, U163, U164, U165, U166, U167, U168 U169, U170, U171, U172, U173, U174, U176, U177, U178, U179, U180, U181, U182, U183, U184, U185, U186 U187, U188, U189, U190, U191, U192, U193, U194, U196, U197, U200, U201, U202, U203, U205, U206, U207, U208, U209, U210, U211, U213, U214, U218, U219, U220, U221, U222, U223, U225, U226, U227, U228, U234, U235, U236, U237, U238, U239, U240, U243, U244, U246, U247, U248, U249, U328, U353, U359

F001, F002, F003, F004, F005, F010, F020, F021, F023, F024, F026, F027, F028

K001, K009, K010, K011, K013, K014, K015, K016, K017, K018, K019, K020, K021, K022, K023, K024, K025, K026, K027, K029, K030, K031, K032, K033, K034, K035, K036, K037, K038, K039, K040,

K041, K042, K043, K044, K045, K046, K047, K048, K049, K050, K051, K052, K054, K060, K065, K073, K083, K084, K085, K086, K087, K093, K094, K095, K096, K097, K098, K099, K101, K102, K103, K104, K105, K111, K112, K113, K114, K115, K116, K117, K118, K123, K124, K125, K126, K136

D001, D012, D013, D014, D015, D016, D017

[55 FR 22713, June 1, 1990]

Appendix VI—Recommended Technologies to Achieve Deactivation of Characteristics in Section 268.42

The treatment standard for many subcategories of D001, D002, and D003 wastes as well as for K044, K045, and K047 wastes is listed in 268.42 simply as "Deactivation to remove the characteristics of ignitability, corrosivity, and reactivity". EPA has determined that many technologies, when used alone or in combination, can achieve this standard. The following appendix presents a partial list of these technologies, utilizing the five letter technology codes established in 40 CFR 268.42 Table 1. Use of these specific technologies is not mandatory and does not preclude direct reuse, recovery, and/or the use of other pretreatment technologies provided deactivation is achieved and these alternative methods are not performed in units designated as land disposal.

Waste code/subcategory	Nonwastewaters	Wastewaters
D001 Ignitable Liquids based on 261.21(a)(1)—Low TOC Nonwastewater Subcategory (containing 1% to <10% TOC)	RORGS	n.a.
	INCIN	
	WETOX	
	CHOXD	
	BIODG	
D001 Ignitable Liquids based on 261.21(a)(1)—Ignitable Wastewater Subcategory (containing <1% TOC)	n.a.	RORGS
		INCIN
		WETOX
		CHOXD
		BIODG
D001 Compressed Gases based on 261.21(A)(3)	RCGAS	n.a.
	INCIN	
	FSUBS	
	ADGAS fb. INCIN	
	ADGAS fb. (CHOXD; or CHRED)	
D001 Ignitable Reactives based on 261.21(a)(2)	WTRRX	n.a.
	CHOXD	
	CHRED	
	STABL	
	INCIN	
D001 Ignitable Oxidizers based on 261.21(a)(4)	CHRED	CHRED
	INCIN	INCIN
D002 Acid Subcategory based on 261.22(a)(1) with pH less than or equal to 2	RCORR	NEUTR
	NEUTR	INCIN
	INCIN	
D002 Alkaline Subcategory based on 261.22(a)(1) with pH greater than or equal to 12.5	NEUTR	NEUTR
	INCIN	INCIN
D002 Other Corrosives based on 261.22(a)(2)	CHOXD	CHOXD
	CHRED	CHRED
	INCIN	INCIN
	STABL	
D003 Water Reactives based on 261.23(a) (2), (3), and (4)	INCIN	n.a.
	WTRRX	
	CHOXD	
	CHRED	
D003 Reactive Sulfides based on 261.23(a)(5)	CHOXD	CHOXD
	CHRED	CHRED
	INCIN	BIODG
	STABL	INCIN
D003 Explosives based on 261.23(a) (6), (7), and (8)	INCIN	INCIN
	CHOXD	CHOXD
	CHRED	CHRED
		BIODG
		CARBN

Waste code/subcategory	Nonwastewaters	Wastewaters
D003 Other Reactives based on 261.23(a)(1)	INCIN	INCIN
	CHOXD	CHOXD
	CHRED	CHRED
		BIODG
		CARBN
K044 Wastewater treatment sludges from the manufacturing and processing of explosives	CHOXD	CHOXD
	CHRED	CHRED
	INCIN	BIODG
		CARBN
		INCIN
K045 Spent carbon from the treatment of wastewaters containing explosives	CHOXD	CHOXD
	CHRED	CHRED
	INCIN	BIODG
		CARBN
		INCIN
K047 Pink/red water from TNT operations	CHOXD	CHOXD
	CHRED	CHRED
	INCIN	BIODG
		CARBN
		INCIN

Note "n a " stands for "not applicable", "fb." stands for "followed by".

[55 FR 22714, June 1, 1990]

APPENDIX VII.—EFFECTIVE DATES OF SURFACE DISPOSED WASTES REGULATED IN THE LDRs [a]

[Comprehensive List]

Waste code	Waste category	Effective date
California list	Liquid hazardous wastes, including free liquids associated with solid or sludge, containing free cyanides at concentrations greater than or equal to 1,000 mg/l or certain metals or compounds of these metals greater than or equal to the prohibition levels.	July 8, 1987.
California list	Liquid (aqueous) hazardous wastes having a pH less than or equal to 2.	July 8, 1987.
California list	Dilute HOC wastewaters, defined as HOC-waste mixtures that are primarily water and that contain greater than or equal to 1,000 mg/l but less than 10,000 mg/l.	July 8, 1987.
California list	Liquid hazardous waste containing PCBs greater than or equal to 50 ppm.	July 8, 1987.
California list	Other liquid and non-liquid hazardous wastes containing HOCs in total concentration greater than or equal to 1,000 mg.	Nov. 8, 1988.
California list	Soil and debris HOCs not from CERCLA/RCRA corrective actions.	July 8, 1989.
California list	Soil and debris HOCs from CERCLA/RCRA corrective actions.	Nov. 8, 1990.
D001	All	Aug. 8, 1990.
D002	All	Aug. 8, 1990.
D003	All	Aug. 8, 1990.
D004	Inorganic solid debris.	May 8, 1992.
D004	Nonwastewater	May 8, 1992.
D004	Wastewater	Aug. 8, 1990.
D005	Inorganic solid debris.	May 8, 1992.
D005	All others	Aug. 8, 1990.

APPENDIX VII.—EFFECTIVE DATES OF SURFACE DISPOSED WASTES REGULATED IN THE LDRs [a]—Continued

[Comprehensive List]

Waste code	Waste category	Effective date
D006	Inorganic solid debris.	May 8, 1992.
D006	All others	Aug. 8, 1990.
D007	Inorganic solid debris.	May 8, 1992.
D007	All others	Aug. 8, 1990.
D008	Inorganic solid debris.	May 8, 1992.
D008	Lead acid batteries	May 8, 1992.
D008	All others	Aug. 8, 1990.
D009	Inorganic solid debris.	May 8, 1992.
D009	High mercury nonwastewater.	May 8, 1992.
D009	Low mercury nonwastewater.	May 8, 1992.
D009	All others	Aug. 8, 1990.
D010	Inorganic solid debris.	May 8, 1992.
D010	All others	Aug. 8, 1990.
D011	Inorganic solid debris.	May 8, 1992.
D011	All others	Aug. 8, 1990.
D012	All	Aug. 8, 1990.
D013	All	Aug. 8, 1990.
D0014	All	Aug. 8, 1990.
D0015	All	Aug. 8, 1990.
D0016	All	Aug. 8, 1990.
D0017	All	Aug. 8, 1990.
F001-F005	All, except:	Nov. 8, 1986.
F001-F005	Small quantity generators, CERCLA/RCRA corrective action, initial generator's solvent-water mixtures, solvent-containing sludges and solids, and non CERCLA/RCRA corrective action soils with less than 1 percent total solvent constituents.	Nov. 8, 1988.
F001-F005	Soil and debris	Nov. 8, 1990.
F002 [b]	All	Aug. 8, 1990.
F005 [c]	All	Aug. 8, 1990.
F006	Wastewater	Aug. 8, 1990.
F006	Nonwastewater	Aug. 8, 1988.
F006 (cyanides)	Nonwastewater	July 8, 1989.
F007	All	July 8, 1989.
F008	All	July 8, 1989.
F009	All	July 8, 1989.
F010	Soil and debris	June 8, 1991.
F010	All others	June 8, 1989.
F011	All	July 8, 1989.
F012	All	July 8, 1989.
F019	All	Aug. 8, 1990.
F020	Soil and debris	Nov. 8, 1990.
F020	All others	Nov. 8, 1988.
F021	Soil and debris	Nov. 8, 1990.
F021	All others	Nov. 8, 1988.
F022	Soil and debris	Nov. 8, 1990.
F022	All others	Nov. 8, 1988.

APPENDIX VII.—EFFECTIVE DATES OF SURFACE DISPOSED WASTES REGULATED IN THE LDRs [a]—Continued

[Comprehensive List]

Waste code	Waste category	Effective date
F023	Soil and debris	Nov. 8, 1990.
F023	All others	Nov. 8, 1988.
F024	Soil and debris	June 8, 1991.
F024 (metals)	Nonwastewater	Aug. 8, 1990.
F024 (dioxins/ furans).	All	Aug. 8, 1990.
F024	All others	June 8, 1989.
F025	All	Aug. 8, 1990.
F026	Soil and debris	Nov. 8, 1990.
F026	All others	Nov. 8, 1988.
F027	Soil and debris	Nov. 8, 1990.
F027	All others	Nov. 8, 1988.
F028	Soil and debris	Nov. 8, 1990.
F028	All others	Nov. 8, 1988.
F039	Wastewater	Aug. 8, 1990.
F039	Nonwastewater	May. 8, 1992.
K001	Soil and debris	Aug. 8, 1990.
K001 (lead/ organics).	All	Aug. 8, 1990.
K001	All others	Aug. 8, 1988.
K002	All	Aug. 8, 1990.
K003	All	Aug. 8, 1990.
K004	All	Aug. 8, 1990.
K005 [d]	All	Aug. 8, 1990
K006	All	Aug. 8, 1990.
K007 [d]	All	Aug. 8, 1990.
K008	All	Aug. 8, 1990.
K009	Soil and debris	June 8, 1991.
K009	All others	June 8, 1989.
K010	Soil and debris	June 8, 1991.
K010	All others	June 8, 1989.
K011	Wastewater	Aug. 8, 1990.
K011	Nonwastewater	June 8, 1989.
K011	Soil and debris	June 8, 1991.
K013	Wastewater	Aug. 8, 1990.
K013	Nonwastewater	June 8, 1989.
K013	Soil and debris	June 8, 1991.
K014	Wastewater	Aug. 8, 1990.
K014	Nonwastewater	June 8, 1989.
K014	Soil and debris	June 8, 1991.
K015	Wastewater	Aug. 8, 1988.
K015	Nonwastewater	Aug. 8, 1990.
K016	Soil and debris	Aug. 8, 1990.
K016	All others	Aug. 8, 1988.
K017	All	Aug. 8, 1990.
K018	Soil and debris	Aug. 8, 1990.
K018	All others	Aug. 8, 1988.
K019	Soil and debris	Aug. 8, 1990.
K019	All others	Aug. 8, 1988.
K020	Soil and debris	Aug. 8, 1990.
K020	All others	Aug. 8, 1988.
K021 [e]	All	Aug. 8, 1990.
K022	Wastewater	Aug. 8, 1990.
K022	Nonwastewater	Aug. 8, 1988.
K022	Soil and debris	Aug. 8, 1990.
K023	Soil and debris	June 8, 1991.
K023	All others	June 8, 1989.
K024	Soil and debris	Aug. 8, 1990.
K024	All others	Aug. 8, 1988.
K025 [e]	All	Aug. 8, 1990.
K026	All	Aug. 8, 1990.
K027	Soil and debris	June 8, 1991.
K027	All others	June 8, 1989.
K028	Soil and debris	June 8, 1991.
K028 (metals)	Nonwastewater	Aug. 8, 1990.
K028	All others	June 8, 1989.

APPENDIX VII.—EFFECTIVE DATES OF SURFACE DISPOSED WASTES REGULATED THE LDRs [a]—Continued

[Comprehensive List]

Waste code	Waste category	Effective date
K029	Wastewater	Aug. 8, 1990.
K029	Nonwastewater	June 8, 1989.
K029	Soil and debris	June 8, 1991.
K030	Soil and debris	Aug. 8, 1990.
K030	All others	Aug. 8, 1988.
K031	Wastewater	Aug. 8, 1990.
K031	Nonwastewater	May 8, 1992.
K032	All	Aug. 8, 1990.
K033	All	Aug. 8, 1990.
K034	All	Aug. 8, 1990.
K035	All	Aug. 8, 1990.
K036 [e]	All	Aug. 8, 1990.
K037	Soil and debris	Aug. 8, 1990.
K037	Wastewater	Aug. 8, 1990.
K037	All others	Aug. 8, 1988.
K038	Soil and debris	June 8, 1991.
K038	All others	June 8, 1989.
K039	Soil and debris	June 8, 1991.
K039	All others	June 8, 1989.
K040	Soil and debris	June 8, 1991.
K040	All others	June 8, 1989.
K041	All	Aug. 8, 1990.
K042	All	Aug. 8, 1990.
K043	Soil and debris	June 8, 1991.
K043	All others	June 8, 1989.
K044	All	Aug. 8, 1990.
K045	All	Aug. 8, 1990.
K046	Nonreactive nonwastewater.	Aug. 8, 1988.
K046	All others	Aug. 8, 1990.
K047	All	Aug. 8, 1990.
K048	Wastewater	Aug. 8, 1990.
K048	Nonwastewater	Nov. 8, 1990.
K049	Wastewater	Aug. 8, 1990.
K049	Nonwastewater	Nov. 8, 1990.
K050	Wastewater	Aug. 8, 1990.
K050	Nonwastewater	Nov. 8, 1990.
K051	Wastewater	Aug. 8, 1990.
K051	Nonwastewater	Nov. 8, 1990.
K052	Wastewater	Aug. 8, 1990.
K052	Nonwastewater	Nov. 8, 1990.
K060 [e]	All	Aug. 8, 1990.
K061	Wastewater	Aug. 8, 1990.
K061	Nonwastewater	Aug. 8, 1988.
K062	All	Aug. 8, 1988.
K069	All	Aug. 8, 1990.
K073	All	Aug. 8, 1990.
K083	All	Aug. 8, 1990.
K084	Wastewater	Aug. 8, 1990.
K084	Nonwastewater	May 8, 1992.
K085	All	Aug. 8, 1990.
K086	All	Aug. 8, 1990.
K087	Soil and debris	Aug. 8, 1990.
K087	All others	Aug. 8, 1988.
K093	Soil and debris	June 8, 1991.
K093	All others	June 8, 1989.
K094	Soil and debris	June 8, 1991.
K094	All others	June 8, 1989.
K095	Wastewater	Aug. 8, 1990.
K095	Nonwastewater	June 8, 1989.
K095	Soil and debris	June 8, 1991.
K096	Wastewater	Aug. 8, 1990.
K096	Nonwastewater	June 8, 1989.
K096	Soil and debris	June 8, 1991.
K097	All	Aug. 8, 1990.
K098	All	Aug. 8, 1990.

APPENDIX VII.—EFFECTIVE DATES OF SURFACE DISPOSED WASTES REGULATED IN THE LDRS [a]—Continued

[Comprehensive List]

Waste code	Waste category	Effective date
K099	All	Aug. 8, 1988.
K100 [e]	All	Aug. 8, 1990.
K101	Wastewater	Aug. 8, 1988.
K101	Nonwastewater	May 8, 1992.
K102	Wastewater	Aug. 8, 1988.
K102	Nonwastewater	May 8, 1992.
K103	Soil and debris	Aug. 8, 1990.
K103	All others	Aug. 8, 1988.
K104	Soil and debris	Aug. 8, 1990.
K104	All others	Aug. 8, 1988.
K105	All	Aug. 8, 1990.
K106	High mercury nonwastewater.	May 8, 1992.
K106	Low mercury nonwastewater.	May. 8, 1992.
K106	All others	Aug. 8, 1990.
K113	Soil and debris	June 8, 1991.
K113	All others	June 8, 1989.
K114	Soil and debris	June 8, 1991.
K114	All others	June 8, 1989.
K115	Soil and debris	June 8, 1991.
K115	All others	June 8, 1989.
K116	Soil and debris	June 8, 1991.
K116	All others	June 8, 1989.
P001	All	Aug. 8, 1990.
P002	All	Aug. 8, 1990.
P003	All	Aug. 8, 1990.
P004	All	Aug. 8, 1990.
P005	All	Aug. 8, 1990.
P006	All	Aug. 8, 1990.
P007	All	Aug. 8, 1990.
P008	All	Aug. 8, 1990.
P009	All	Aug. 8, 1990.
P010	Wastewater	Aug. 8, 1990.
P010	Nonwastewater	May 8, 1992.
P011	Wastewater	Aug. 8, 1990.
P011	Nonwastewater	May 8, 1992.
P012	Wastewater	Aug. 8, 1990.
P012	Nonwastewater	May 8, 1992.
P013	All	Aug. 8, 1990.
P014	All	Aug. 8, 1990.
P015	All	Aug. 8, 1990.
P016	All	Aug. 8, 1990.
P017	All	Aug. 8, 1990.
P018	All	Aug. 8, 1990.
P020	All	Aug. 8, 1990.
P021	All	June 8, 1989.
P022	All	Aug. 8, 1990.
P023	All	Aug. 8, 1990.
P024	All	Aug. 8, 1990.
P026	All	Aug. 8, 1990.
P027	All	Aug. 8, 1990.
P028	All	Aug. 8, 1990.
P029	All	June 8, 1989.
P030	All	June 8, 1989.
P031	All	Aug. 8, 1990.
P033	All	Aug. 8, 1990.
P034	All	Aug. 8, 1990.
P036	Wastewater	Aug. 8, 1990.
P036	Nonwastewater	May 8, 1992.
P037	All	Aug. 8, 1990.
P038	Wastewater	Aug. 8, 1990.
P038	Nonwastewater	May 8, 1992.
P039	Soil and debris	June 8, 1991.
P039	All others	June 8, 1989.
P040	Soil and debris	June 8, 1991.

APPENDIX VII.—EFFECTIVE DATES OF SURFACE DISPOSED WASTES REGULATED IN THE LDRS [a]—Continued

[Comprehensive List]

Waste code	Waste category	Effective date
P040	All others	June 8, 1989.
P041	Soil and debris	June 8, 1991.
P041	All others	June 8, 1989.
P042	All	Aug. 8, 1990.
P043	Soil and debris	June 8, 1991.
P043	All others	June 8, 1989.
P044	Soil and debris	June 8, 1991.
P044	All others	June 8, 1989.
P045	All	Aug. 8, 1990.
P046	All	Aug. 8, 1990.
P047	All	Aug. 8, 1990.
P048	All	Aug. 8, 1990.
P049	All	Aug. 8, 1990.
P050	All	Aug. 8, 1990.
P051	All	Aug. 8, 1990.
P054	All	Aug. 8, 1990.
P056	All	Aug. 8, 1990.
P057	All	Aug. 8, 1990.
P058	All	Aug. 8, 1990.
P059	All	Aug. 8, 1990.
P060	All	Aug. 8, 1990.
P062	Soil and debris	June 8, 1991.
P062	All others	June 8, 1989.
P063	All	June 8, 1989.
P064	All	Aug. 8, 1990.
P065	High mercury nonwastewater.	May 8, 1992.
P065	Low mercury nonwastewater.	May 8, 1992.
P065	All others	Aug. 8, 1990.
P066	All	Aug. 8, 1990.
P067	All	Aug. 8, 1990.
P068	All	Aug. 8, 1990.
P069	All	Aug. 8, 1990.
P070	All	Aug. 8, 1990.
P071	Soil and debris	June 8, 1991.
P071	All others	June 8, 1989.
P072	All	Aug. 8, 1990.
P073	All	Aug. 8, 1990.
P074	All	June 8, 1989.
P075	All	Aug. 8, 1990.
P076	All	Aug. 8, 1990.
P077	All	Aug. 8, 1990.
P078	All	Aug. 8, 1990.
P081	All	Aug. 8, 1990.
P082	All	Aug. 8, 1990.
P084	All	Aug. 8, 1990.
P085	Soil and debris	June 8, 1991.
P085	All others	June 8, 1989.
P087	All	May 8, 1992.
P088	All	Aug. 8, 1990.
P089	Soil and debris	June 8, 1991.
P089	All others	June 8, 1989.
P092	High mercury nonwastewater	May 3, 1992.
P092	Low mercury nonwastewater	May 8, 1992.
P092	All others	Aug. 8, 1990.
P093	Soil and debris	May 8, 1992.
P093	All others	Aug. 8, 1990.
P094	Soil and debris	June 8, 1991.
P094	All others	June 8, 1989.
P095	Soil and debris	May 8, 1992.
P095	All others	Aug. 8, 1990.
P096	All	Aug. 8, 1990.
P097	Soil and debris	June 8, 1991.

APPENDIX VII.—EFFECTIVE DATES OF SURFACE DISPOSED WASTES REGULATED IN THE LDRS [a]—Continued

[Comprehensive List]

Waste code	Waste category	Effective date
P097	All others	June 8, 1989.
P098	All	June 8, 1989.
P099 (silver)	Wastewater	Aug. 8, 1990.
P099 (cyanides).	Wastewater	June 8, 1989.
P099 (cyanides/silver).	Nonwastewater	June 8, 1989.
P101	All	Aug. 8, 1990.
P102	All	Aug. 8, 1990.
P103	All	Aug. 8, 1990.
P104 (silver)	Wastewater	Aug. 8, 1990.
P104 (cyanides).	Wastewater	June 8, 1989.
P104 (cyanides/silver).	Nonwastewater	June 8, 1989.
P105	All	Aug. 8, 1990.
P106	All	June 8, 1989.
P108	Soil and debris	May 8, 1992.
P108	All others	Aug. 8, 1990.
P109	Soil and debris	June 8, 1991.
P109	All others	June 8, 1989.
P110	All	Aug. 8, 1990.
P111	Soil and debris	June 8, 1991.
P111	All others	June 8, 1989.
P112	All	Aug. 8, 1990.
P113	All	Aug. 8, 1990.
P114	All	Aug. 8, 1990.
P115	All	Aug. 8, 1990.
P116	Soil and debris	May 8, 1992.
P116	All others	Aug. 8, 1990.
P118	Soil and debris	May 8, 1992.
P118	All others	Aug. 8, 1990.
P119	All	Aug. 8, 1990.
P120	All	Aug. 8, 1990.
P121	All	June 8, 1989.
P122	All	Aug. 8, 1990.
P123	All	Aug. 8, 1990.
U001	All	Aug. 8, 1990.
U002	All	Aug. 8, 1990.
U003	Soil and debris	May 8, 1992.
U003	All others	Aug. 8, 1990.
U004	All	Aug. 8, 1990.
U005	All	Aug. 8, 1990.
U006	Soil and debris	May 8, 1992.
U006	All others	Aug. 8, 1990.
U007	Soil and debris	May 8, 1992.
U007	All others	Aug. 8, 1990.
U008	All	Aug. 8, 1990.
U009	All	Aug. 8, 1990.
U010	Soil and debris	May 8, 1992.
U010	All others	Aug. 8, 1990.
U011	Soil and debris	May 8, 1992.
U011	All others	Aug. 8, 1990.
U012	All	Aug. 8, 1990.
U014	Soil and debris	May 8, 1992.
U014	All others	Aug. 8, 1990.
U015	Soil and debris	May 8, 1992.
U015	All others	Aug. 8, 1990.
U016	All	Aug. 8, 1990.
U017	Soil and debris	May 8, 1992.
U017	All others	Aug. 8, 1990.
U018	All	Aug. 8, 1990.
U019	All	Aug. 8, 1990.
U020	Soil and debris	May 8, 1992.
U020	All others	Aug. 8, 1990.
U021	Soil and debris	May 8, 1992.
U021	All others	Aug. 8, 1990.
U022	All	Aug. 8, 1990.
U023	All	Aug. 8, 1990.
U024	All	Aug. 8, 1990.
U025	All	Aug. 8, 1990.
U026	Soil and debris	May 8, 1992.
U026	All others	Aug. 8, 1990.
U027	All	Aug. 8, 1990.
U028	Soil and debris	June 8, 1991.
U028	All others	June 8, 1989.
U029	All	Aug. 8, 1990.
U030	All	Aug. 8, 1990.
U031	All	Aug. 8, 1990.
U032	All	Aug. 8, 1990.
U033	Soil and debris	May 8, 1992.
U033	All others	Aug. 8, 1990.
U034	Soil and debris	May 8, 1992.
U034	All others	Aug. 8, 1990.
U035	Soil and debris	May 8, 1992.
U035	All others	Aug. 8, 1990.
U036	All	Aug. 8, 1990.
U037	All	Aug. 8, 1990.
U038	Soil and debris	May 8, 1992.
U038	All others	Aug. 8, 1990.
U039	All	Aug. 8, 1990.
U041	Soil and debris	May 8, 1992.
U041	All others	Aug. 8, 1990.
U042	Soil and debris	May 8, 1992.
U042	All others	Aug. 8, 1990.
U043	All	Aug. 8, 1990.
U044	All	Aug. 8, 1990.
U045	All	Aug. 8, 1990.
U046	Soil and debris	May 8, 1992.
U046	All others	Aug. 8, 1990.
U047	All	Aug. 8, 1990.
U048	All	Aug. 8, 1990.
U049	Soil and debris	May 8, 1992.
U049	All others	Aug. 8, 1990.
U050	All	Aug. 8, 1990.
U051	All	Aug. 8, 1990.
U052	All	Aug. 8, 1990.
U053	All	Aug. 8, 1990.
U055	All	Aug. 8, 1990.
U056	All	Aug. 8, 1990.
U057	All	Aug. 8, 1990.
U058	Soil and debris	June 8, 1992.
U058	All others	June 8, 1989.
U059	Soil and debris	May 8, 1992.
U059	All others	Aug. 8, 1990.
U060	Soil and debris	May 8, 1992.
U060	All others	Aug. 8, 1990.
U061	Soil and debris	May 8, 1992.
U061	All others	Aug. 8, 1990.
U062	Soil and debris	May 8, 1992.
U062	All others	Aug. 8, 1990.
U063	All	Aug. 8, 1990.
U064	All	Aug. 8, 1990.
U066	All	Aug. 8, 1990.
U067	All	Aug. 8, 1990.
U068	All	Aug. 8, 1990.
U069	Soil and debris	June 8, 1991.
U069	All others	June 8, 1989.
U070	All	Aug. 8, 1990.
U071	All	Aug. 8, 1990.

APPENDIX VII.—EFFECTIVE DATES OF SURFACE DISPOSED WASTES REGULATED IN THE LDRs [a]—Continued

[Comprehensive List]

Waste code	Waste category	Effective date
U072	All	Aug. 8, 1990.
U073	Soil and debris	May 8, 1992.
U073	All others	Aug. 8, 1990.
U074	Soil and debris	May 8, 1992.
U074	All others	Aug. 8, 1990.
U075	All	Aug. 8, 1990.
U076	All	Aug. 8, 1990.
U077	All	Aug. 8, 1990.
U078	All	Aug. 8, 1990.
U079	All	Aug. 8, 1990.
U080	All	Aug. 8, 1990.
U081	All	Aug. 8, 1990.
U082	All	Aug. 8, 1990.
U083	All	Aug. 8, 1990.
U084	All	Aug. 8, 1990.
U085	All	Aug. 8, 1990.
U086	All	Aug. 8, 1990.
U087	Soil and debris	June 8, 1991.
U087	All others	June 8, 1989.
U088	Soil and debris	June 8, 1991.
U088	All others	June 8, 1989.
U089	All	Aug. 8, 1990.
U090	All	Aug. 8, 1990.
U091	Soil and Debris	May 8, 1992.
U091	All others	Aug. 8, 1990.
U092	Soil and debris	May 8, 1992.
U092	All others	Aug. 8, 1990.
U093	Soil and debris	May 8, 1992.
U093	All others	Aug. 8, 1990.
U094	All	Aug. 8, 1990.
U095	Soil and debris	May 8, 1992.
U095	All others	Aug. 8, 1990.
U096	All	Aug. 8, 1990.
U097	Soil and debris	May 8, 1992.
U097	All others	Aug. 8, 1990.
U098	All	Aug. 8, 1990.
U099	All	Aug. 8, 1990.
U101	All	Aug. 8, 1990.
U102	Soil and debris	June 8, 1991.
U102	All others	June 8, 1989.
U103	All	Aug. 8, 1990.
U105	All	Aug. 8, 1990.
U106	All	Aug. 8, 1990
U107	Soil and debris	June 8, 1991
U107	All others	June 8, 1989
U108	All	Aug. 8, 1990
U109	All	Aug. 8, 1990
U110	Soil and debris	May 8, 1992
U110	All others	Aug. 8, 1990
U111	All	Aug. 8, 1990
U112	All	Aug. 8, 1990
U113	All	Aug. 8, 1990
U114	Soil and debris	May 8, 1992
U114	All others	Aug. 8, 1990
U115	All	Aug. 8, 1990.
U116	Soil and debris	May 8, 1992
U116	All others	Aug. 8, 1990.
U117	All	Aug. 8, 1990
U118	All	Aug. 8, 1990
U119	Soil and debris	May 8, 1992.
U119	All others	Aug. 8, 1990.
U120	All	Aug. 8, 1990.
U121	All	Aug. 8, 1990.
U122	All	Aug. 8, 1990.
U123	All	Aug. 8, 1990.
U124	All	Aug. 8, 1990.

APPENDIX VII.—EFFECTIVE DATES OF SURFACE DISPOSED WASTES REGULATED IN THE LDRs [a]—Continued

[Comprehensive List]

Waste code	Waste category	Effective date
U125	All	Aug. 8, 1990.
U126	All	Aug. 8, 1990.
U127	All	Aug. 8, 1990.
U128	All	Aug. 8, 1990.
U129	All	Aug. 8, 1990.
U130	Soil and debris	May 8, 1992.
U130	All others	Aug. 8, 1990.
U131	All	Aug. 8, 1990.
U132	Soil and debris	May 8, 1992.
U132	All others	Aug. 8, 1990.
U133	All	Aug. 8, 1990.
U134	All	Aug. 8, 1990.
U135	All	Aug. 8, 1990.
U136	Wastewater	Aug. 8, 1990.
U136	Nonwastewater	May 8, 1992.
U137	All	Aug. 8, 1990.
U138	All	Aug. 8, 1990.
U140	All	Aug. 8, 1990.
U141	All	Aug. 8, 1990.
U142	All	Aug. 8, 1990.
U143	Soil and debris	May 8, 1992.
U143	All others	Aug. 8, 1990.
U144	All	Aug. 8, 1990.
U145	All	Aug. 8, 1990.
U146	All	Aug. 8, 1990.
U147	All	Aug. 8, 1990.
U148	Soil and debris	May 8, 1992.
U148	All others	Aug. 8, 1990.
U149	Soil and debris	May 8, 1992.
U149	All others	Aug. 8, 1990.
U150	Soil and debris	May 8, 1992.
U150	All others	Aug. 8, 1990.
U151	High mercury nonwastewater.	May 8, 1992.
U151	Low mercury nonwastewater.	May 8, 1992.
U151	Soil and debris	May 8, 1992.
U151	All others	Aug. 8, 1990.
U152	All	Aug. 8, 1990.
U153	Soil and debris	May 8, 1992.
U153	All others	Aug. 8, 1990.
U154	All	Aug. 8, 1990.
U155	All	Aug. 8, 1990.
U156	Soil and debris	May 8, 1992.
U156	All others	Aug. 8, 1990.
U157	All	Aug. 8, 1990.
U158	All	Aug. 8, 1990.
U159	All	Aug. 8, 1990.
U160	All	Aug. 8, 1990.
U161	All	Aug. 8, 1990.
U162	All	Aug. 8, 1990.
U163	Soil and debris	May 8, 1992.
U163	All others	Aug. 8, 1990.
U164	Soil and debris	May 8, 1992.
U164	All others	Aug. 8, 1990.
U165	All	Aug. 8, 1990.
U166	All	Aug. 8, 1990.
U167	Soil and debris	May 8, 1992.
U167	All others	Aug. 8, 1990.
U168	Soil and debris	May 8, 1992.
U168	All others	Aug. 8, 1990.
U169	All	Aug. 8, 1990.
U170	All	Aug. 8, 1990.
U171	Soil and debris	May 8, 1992.
U171	All others	Aug. 8, 1990.
U172	All	Aug. 8, 1990.

APPENDIX VII.—EFFECTIVE DATES OF SURFACE DISPOSED WASTES REGULATED IN THE LDRS [a]—Continued

[Comprehensive List]

Waste code	Waste category	Effective date
U173	Soil and debris	May 8, 1992.
U173	All others	Aug. 8, 1990.
U174	All	Aug. 8, 1990.
U176	Soil and debris	May 8, 1992.
U176	All others	Aug. 8, 1990.
U177	Soil and debris	May 8, 1992.
U177	All others	Aug. 8, 1990.
U178	Soil and debris	May 8, 1992.
U178	All others	Aug. 8, 1990.
U179	All	Aug. 8, 1990.
U180	All	Aug. 8, 1990.
U181	All	Aug. 8, 1990.
U182	All	Aug. 8, 1990.
U183	All	Aug. 8, 1990.
U184	Soil and debris	May 8, 1992.
U184	All others	Aug. 8, 1990.
U185	All	Aug. 8, 1990.
U186	All	Aug. 8, 1990.
U187	All	Aug. 8, 1990.
U188	All	Aug. 8, 1990.
U189	All	Aug. 8, 1990.
U190	Soil and debris	June 8, 1991.
U190	All others	June 8, 1989.
U191	Soil and debris	May 8, 1992.
U191	All others	Aug. 8, 1990.
U192	All	Aug. 8, 1990.
U193	Soil and debris	May 8, 1992.
U193	All others	Aug. 8, 1990.
U194	Soil and debris	May 8, 1992.
U194	All others	Aug. 8, 1990.
U196	All	Aug. 8, 1990.
U197	All	Aug. 8, 1990.
U200	Soil and debris	May 8, 1992.
U200	All others	Aug. 8, 1990.
U201	All	Aug. 8, 1990.
U202	Soil and debris	May 8, 1992.
U202	All others	Aug. 8, 1990.
U203	All	Aug. 8, 1990.
U204	All	Aug. 8, 1990.
U205	All	Aug. 8, 1990.
U206	Soil and debris	May 8, 1992.
U206	All others	Aug. 8, 1990.
U207	All	Aug. 8, 1990.
U208	All	Aug. 8, 1990.
U209	All	Aug. 8, 1990.
U210	All	Aug. 8, 1990.
U211	All	Aug. 8, 1990.
U213	All	Aug. 8, 1990.
U214	All	Aug. 8, 1990.
U215	All	Aug. 8, 1990.
U216	All	Aug. 8, 1990.
U217	All	Aug. 8, 1990.
U218	Soil and debris	May 8, 1992.
U218	All others	Aug. 8, 1990.
U219	Soil and debris	May 8, 1992.
U219	All others	Aug. 8, 1990.
U220	All	Aug. 8, 1990.
U221	Soil and debris	June 8, 1991.
U221	All others	June 8, 1989.
U222	Soil and debris	May 8, 1992.
U222	All others	Aug. 8, 1990.
U223	Soil and debris	June 8, 1991.
U223	All others	June 8, 1989.
U225	All	Aug. 8, 1990.
U226	All	Aug. 8, 1990.
U227	All	Aug. 8, 1990.
U228	All	Aug. 8, 1990.
U234	Soil and debris	May 8, 1992.
U234	All others	Aug. 8, 1990.
U235	Soil and debris	June 8, 1991.
U235	All others	June 8, 1989.
U236	Soil and debris	May 8, 1992.
U236	All others	Aug. 8, 1990.
U237	Soil and debris	May 8, 1992.
U237	All others	Aug. 8, 1990.
U238	Soil and debris	May 8, 1992.
U238	All others	Aug. 8, 1990.
U239	All	Aug. 8, 1990.
U240	Soil and debris	May 8, 1992.
U240	All others	Aug. 8, 1990.
U243	All	Aug. 8, 1990.
U244	Soil and debris	May 8, 1992.
U244	All others	Aug. 8, 1990.
U246	All	Aug. 8, 1990.
U247	All	Aug. 8, 1990.
U248	All	Aug. 8, 1990.
U249	All	Aug. 8, 1990.

[a] This table does not include mixed radioactive wastes (from the First, Second, and Third Third rules) which are receiving a national capacity variance until May 8, 1992 for all applicable treatment technologies.

[b] Standards are being promulgated for 1,1,2-trichloroethane and 2-nitropropane for wastewaters and nonwastewaters.

[c] Standards are being promulgated for benzene and 2-ethoxyethanol for wastewaters and nonwastewaters.

[d] Treatment standards for nonwastewaters disposed of after June 8, 1989, were promulgated June 8, 1989.

[e] Treatment standards for nonwastewaters disposed of after August 17, 1988, were promulgated May 2, 1989.

Note: This table is provided for the convenience of the reader.

[55 FR 22715, June 1, 1990]

APPENDIX VIII—NATIONAL CAPACITY LDR VARIANCES FOR UIC WASTES [a] Comprehensive List

Waste code	Waste category	Effective date
F001-F005	All spent F001-F005 solvent containing less than 1 percent total F001-F005 solvent constituents.	August 8, 1990.
California list	Liquid hazardous wastes, including free liquids associated with any solid or sludge, containing free cyanides at concentrations greater than or equal to 1,000 mg/l, or containing certain metals or compounds of these metals greater than or equal to the prohibition levels.	August 8, 1990.

APPENDIX VIII—NATIONAL CAPACITY LDR VARIANCES FOR UIC WASTES [a] Comprehensive List—Continued

Waste code	Waste category	Effective date
California list	Liquid hazardous waste having a pH less than or equal to 2.	August 8, 1990.
California list	Hazardous wastes containing HOCs in total concentrations less than 10,000 mg/l but greater than or equal to 1,000 mg/l.	August 8, 1990.
D002 [b]	All	May 8, 1992.
D003 (cyanides)	All	May 8, 1992.
D003 (sulfides)	All	May 8, 1992.
D003 (explosives, reactives)	All	May 8, 1992.
D007	All	May 8, 1992.
D009	High Mercury Nonwastewater	May 8, 1992.
D009	Low Mercury Nonwastewater	May 8, 1992.
F011	All	June 8, 1991.
F039	Wastewater	May 8, 1992.
K009	Wastewater	June 8, 1991.
K011	Nonwastewater	June 8, 1991.
K011	Wastewater	May 8, 1992.
K013	Nonwastewater	June 8, 1991.
K013	Wastewater	May 8, 1992.
K014	All	May 8, 1992.
K016 (dilute)	All	June 8, 1991.
K048	All	August 8, 1990.
K049	All	August 8, 1990.
K050	All	August 8, 1990.
K051	All	August 8, 1990.
K052	All	August 8, 1990.
K062	All	August 8, 1990.
K071	All	August 8, 1990.
K104	All	August 8, 1990.

[a] Wastes that are deep well disposed on-site receive a six-month variance, with restrictions effective in November 1990.
[b] Deepwell injected D002 liquids with a pH less than 2 must meet the California List treatment standards on August 8, 1990.
Note: This table is provided for the convenience of the reader.

[55 FR 22718, June 1, 1990]

PART 270—EPA ADMINISTERED PERMIT PROGRAMS: THE HAZARDOUS WASTE PERMIT PROGRAM

Subpart A—General Information

Sec.
270.1 Purpose and scope of these regulations.
270.2 Definitions.
270.3 Considerations under Federal law.
270.4 Effect of a permit.
270.5 Noncompliance and program reporting by the Director.
270.6 References.

Subpart B—Permit Application

270.10 General application requirements.
270.11 Signatories to permit applications and reports.
270.12 Confidentiality of information.
270.13 Contents of Part A of the permit application.
270.14 Contents of Part B: General requirements.
270.15 Specific Part B information requirements for containers.
Sec.
270.16 Specific Part B information requirements for tank systems.
270.17 Specific Part B information requirements for surface impoundments.
270.18 Specific Part B information requirements for waste piles.
270.19 Specific Part B information requirements for incinerators.
270.20 Specific Part B information requirements for land treatment facilities.
270.21 Specific Part B information requirements for landfills.
270.22 [Reserved]
270.23 Specific Part B information requirements for miscellaneous units.
270.24 Specific Part B information requirements for process vents.
270.25 Specific part B information requirements for equipment.
270.26—270.28 [Reserved]
270.29 Permit denial.

Subpart C—Permit Conditions

270.30 Conditions applicable to all permits.
270.31 Requirements for recording and reporting of monitoring results.
270.32 Establishing permit conditions.

Sec.
270.33 Schedules of compliance.

Subpart D—Changes to Permits

270.40 Transfer of permits.
270.41 Modification or revocation and reissuance of permits.
270.42 Permit modification at the request of the permittee.
270.43 Termination of permits.

Subpart E—Expiration and Continuation of Permits

270.50 Duration of permits.
270.51 Continuation of expiring permits.

Subpart F—Special Forms of Permits

270.60 Permits by rule.
270.61 Emergency permits.
270.62 Hazardous waste incinerator permits.
270.63 Permits for land treatment demonstrations using field test or laboratory analyses.
270.64 Interim permits for UIC wells.
270.65 Research, development, and demonstration permits.

Subpart G—Interim Status

270.70 Qualifying for interim status.
270.71 Operation during interim status.
270.72 Changes during interim status.
270.73 Termination of interim status.

AUTHORITY: 42 U.S.C. 6905, 6912, 6924, 6925, 6927, 6939, and 6974.

SOURCE: 48 FR 14228, Apr. 1, 1983, unless otherwise noted.

Subpart A—General Information

§ 270.1 Purpose and scope of these regulations.

(a) *Coverage.* (1) These permit regulations establish provisions for the Hazardous Waste Permit Program under Subtitle C of the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act of 1976, as amended (RCRA), (Pub. L. 94-580, as amended by Pub. L. 95-609 and by Pub. L. 96-482; 42 U.S.C. 6091 et seq.). They apply to EPA and to approved States to the extent provided in Part 271.

(2) The regulations in this part cover basic EPA permitting requirements, such as application requirements, standard permit conditions, and monitoring and reporting requirements. These regulations are part of a regulatory scheme implementing RCRA set forth in different parts of the Code of Federal Regulations. The following chart indicates where the regulations implementing RCRA appear in the Code of Federal Regulations.

Section of RCRA	Coverage	Final regulation
Subtitle C	Overview and definitions	40 CFR Part 260
3001	Indentification and listing of hazardous waste.	40 CFR Part 261
3002	Generators of hazardous waste.	40 CFR Part 262
3003	Transporters of hazardous waste.	40 CFR Part 263
3004	Standards for HWM facilities.	40 CFR Parts 264, 265, 266, and 267
3005	Permit requirements for HWM facilities.	40 CFR Parts 270 and 124
3006	Guidelines for State programs.	40 CFR Part 271
3010	Preliminary notification of HWM activity.	(public notice) 45 *FR* 12746 February 26, 1980

(3) *Technical regulations.* The RCRA permit program has separate additional Regulations that contain technical requirements. These separate regulations are used by permit issuing authorities to determine what requirements must be placed in permits if they are issued. These separate regulations are located in 40 CFR Parts 264, 266, and 267.

(b) *Overview of the RCRA Permit Program.* Not later than 90 days after the promulgation or revision of regulations in 40 CFR Part 261 (identifying and listing hazardous wastes) generators and transporters of hazardous waste, and owners or operators of hazardous waste treatment, storage, or disposal facilities may be required to file a notification of that activity under section 3010. Six months after the initial promulgation of the Part 261 regulations, treatment, storage, or disposal of hazardous waste by any person who has not applied for or received a RCRA permit is prohibited. A RCRA permit application consists of two parts, Part A (see § 270.13) and Part B (see § 270.14 and applicable sections in §§ 270.15 through 270.29). For "existing HWM facilities," the requirement to submit an application is satisfied by submitting only Part A of the

permit application until the date the Director sets for submitting Part B of the application. (Part A consists of Forms 1 and 3 of the Consolidated Permit Application Forms.) Timely submission of both notification under section 3010 and Part A qualifies owners and operators of existing HWM facilities (who are required to have a permit) for interim status under section 3005(e) of RCRA. Facility owners and operators with interim status are treated as having been issued a permit until EPA or a State with interim authorization for Phase II or final authorization under Part 271 makes a final determination on the permit application. Facility owners and operators with interim status must comply with interim status standards set forth at 40 CFR Part 265 or with the analagous provisions of a State program which has received interim or final authorization under Part 271. Facility owners and operators with interim status are not relieved from complying with other State requirements. For existing HWM facilities, the Director shall set a date, giving at least six months notice, for submission of Part B of the application. There is no form for Part B of the application; rather, Part B must be submitted in narrative form and contain the information set forth in the applicable sections of §§ 270.14 through 270.29. Owners or operators of new HWM facilities must submit Parts A and B of the permit application at least 180 days before physical construction is expected to commence.

(c) *Scope of the RCRA permit requirement.* RCRA requires a permit for the "treatment," "storage," and "disposal" of any "hazardous waste" as identified or listed in 40 CFR Part 261. The terms "treatment," "storage," "disposal," and "hazardous waste" are defined in § 270.2. Owners and operators of hazardous waste management units must have permits during the active life (including the closure period) of the unit. Owners or operators of surface impoundments, landfills, land treatment units, and waste pile units that received wastes after July 26, 1982, or that certified closure (according to § 265.115) after January 26, 1983, must have post-closure permits, unless they demonstrate closure by removal as provided under § 270.1(c) (5) and (6). If a post-closure permit is required, the permit must address applicable Part 264 Groundwater Monitoring, Unsaturated Zone Monitoring, Corrective Action, and Post-closure Care Requirements of this chapter. The denial of a permit for the active life of a hazardous waste management facility or unit does not affect the requirement to obtain a post-closure permit under this section.

(1) *Specific inclusions.* Owners and operators of certain facilities require RCRA permits as well as permits under other programs for certain aspects of the facility operation. RCRA permits are required for:

(i) Injection wells that dispose of hazardous waste, and associated surface facilities that treat, store or dispose of hazardous waste, (See § 270.64). However, the owner and operator with a UIC permit in a State with an approved or promulgated UIC program, will be deemed to have a RCRA permit for the injection well itself if they comply with the requirements of § 270.60(b) (permit-by-rule for injection wells).

(ii) Treatment, storage, or disposal of hazardous waste at facilities requiring an NPDES permit. However, the owner and operator of a publicly owned treatment works receiving hazardous waste will be deemed to have a RCRA permit for that waste if they comply with the requirements of § 270.60(c) (permit-by-rule for POTWs).

(iii) Barges or vessels that dispose of hazardous waste by ocean disposal and onshore hazardous waste treatment or storage facilities associated with an ocean disposal operation. However, the owner and operator will be deemed to have a RCRA permit for ocean disposal from the barge or vessel itself it they comply with the requirements of § 270.60(a) (permit-by-rule for ocean disposal barges and vessels).

(2) *Specific exclusions.* The following persons are among those who are not required to obtain a RCRA permit:

(i) Generators who accumulate hazardous waste on-site for less than the time periods provided in 40 CFR 262.34.

(ii) Farmers who d[illegible] of hazardous waste pesticides [illegible]m their own use as provided in § 262.70 of this chapter;

(iii) Persons who own or operate facilities solely for the treatment, storage or disposal of hazardous waste excluded from regulations under this part by 40 CFR 261.4 or 261.5 (small generator exemption).

(iv) Owners or operators of totally enclosed treatment facilities as defined in 40 CFR 260.10.

(v) Owners and operators of elementary neutralization units or wastewater treatment units as defined in 40 CFR 260.10.

(vi) Transporters storing manifested shipments of hazardous waste in containers meeting the requirements of 40 CFR 262.30 at a transfer facility for a period of ten days or less.

(vii) Persons adding absorbent material to waste in a container (as defined in § 260.10 of this chapter) and persons adding waste to absorbent material in a container, provided that these actions occur at the time waste is first placed in the container; and §§ 264.17(b), 264.171, and 264.172 of this chapter are complied with.

(3) *Further exclusions.* (i) A person is not required to obtain an RCRA permit for treatment or containment activities taken during immediate response to any of the following situations:

(A) A discharge of a hazardous waste;

(B) An imminent and substantial threat of a discharge of hazardous waste;

(C) A discharge of a material which, when discharged, becomes a hazardous waste.

(ii) Any person who continues or initiates hazardous waste treatment or containment activities after the immediate response is over is subject to all applicable requirements of this part for those activities.

(4) *Permits for less than an entire facility.* EPA may issue or deny a permit for one or more units at a facility without simultaneously issuing or denying a permit to all of the units at the facility. The interim status of any unit for which a permit has not been issued or denied is not affected by the issuance or denial of a permit to any other unit at the facility.

(5) *Closure by removal.* Owners/operators of surface impoundments, land treatment units, and waste piles closing by removal or decontamination under Part 265 standards must obtain a post-closure permit unless they can demonstrate to the Regional Administrator that the closure met the standards for closure by removal or decontamination in § 264.228, § 264.280(e), or § 264.258, respectively. The demonstration may be made in the following ways:

(i) If the owner/operator has submitted a Part B application for a post-closure permit, the owner/operator may request a determination, based on information contained in the application, that section 264 closure by removal standards were met. If the Regional Administrator believes that § 264 standards were met, he/she will notify the public of this proposed decision, allow for public comment, and reach a final determination according to the procedures in paragraph (c)(6) of this section.

(ii) If the owner/operator has not submitted a Part B application for a post-closure permit, the owner/operator may petition the Regional Administrator for a determination that a post-closure permit is not required because the closure met the applicable Part 264 closure standards.

(A) The petition must include data demonstrating that closure by removal or decontamination standards were met, or it must demonstrate that the unit closed under State requirements that met or exceeded the applicable 264 closure-by-removal standard.

(B) The Regional Administrator shall approve or deny the petition according to the procedures outlined in paragraph (c)(6) of this section.

(6) *Procedures for closure equivalency determination.* (i) If a facility owner/operator seeks an equivalency demonstration under § 270.1(c)(5), the Regional Administrator will provide the public, through a newspaper notice, the opportunity to submit written comments on the information submitted by the owner/operator within 30 days from the date of the notice. The Regional Administrator will also,

in response to a request or at his/her own discretion, hold a public hearing whenever such a hearing might clarify one or more issues concerning the equivalence of the Part 265 closure to a Part 264 closure. The Regional Administrator will give public notice of the hearing at least 30 days before it occurs. (Public notice of the hearing may be given at the same time as notice of the opportunity for the public to submit written comments, and the two notices may be combined.)

(ii) The Regional Administrator will determine whether the Part 265 closure met 264 closure by removal or decontamination requirements within 90 days of its receipt. If the Regional Administrator finds that the closure did not meet the applicable Part 264 standards, he/she will provide the owner/operator with a written statement of the reasons why the closure failed to meet Part 264 standards. The owner/operator may submit additional information in support of an equivalency demonstration within 30 days after receiving such written statement. The Regional Administrator will review any additional information submitted and make a final determination within 60 days.

(iii) If the Regional Administrator determines that the facility did not close in accordance with Part 264 closure by removal standards, the facility is subject to post-closure permitting requirements.

[48 FR 14228, Apr. 1, 1983, as amended at 48 FR 30113, June 30, 1983; 51 FR 10176, Mar. 24, 1986; 52 FR 45798, Dec. 1, 1987; 53 FR 27165, July 19, 1988; 54 FR 9607, Mar. 7, 1989]

§ 270.2 Definitions.

The following definitions apply to Parts 270, 271 and 124. Terms not defined in this section have the meaning given by RCRA.

Administrator means the Administrator of the United States Environmental Protection Agency, or an authorized representative.

Application means the EPA standard national forms for applying for a permit, including any additions, revisions or modifications to the forms; or forms approved by EPA for use in approved States, including any approved modifications or revisions. Application also includes the information required by the Director under §§ 270.14 through 270.29 (contents of Part B of the RCRA application).

Approved program or approved State means a State which has been approved or authorized by EPA under Part 271.

Aquifer means a geological formation, group of formations, or part of a formation that is capable of yielding a significant amount of water to a well or spring.

Closure means the act of securing a Hazardous Waste Management facility pursuant to the requirements of 40 CFR Part 264.

Component means any constituent part of a unit or any group of constituent parts of a unit which are assembled to perform a specific function (e.g., a pump seal, pump, kiln liner, kiln thermocouple).

CWA means the Clean Water Act (formerly referred to as the Federal Water Pollution Control Act or Federal Water Pollution Control Act amendments of 1972) Pub. L. 92-500, as amended by Pub. L. 92-217 and Pub. L. 95-576; 33 U.S.C. 1251 *et seq.*

Director means the Regional Administrator or the State Director, as the context requires, or an authorized representative. When there is no approved State program, and there is an EPA administered program, Director means the Regional Administrator. When there is an approved State program, Director normally means the State Director. In some circumstances, however, EPA retains the authority to take certain actions even when there is an approved State program. In such cases, the term Director means the Regional Administrator and not the State Director.

Disposal means the discharge, deposit, injection, dumping, spilling, leaking, or placing of any hazardous waste into or on any land or water so that such hazardous waste or any constituent thereof may enter the environment or be emitted into the air or discharged into any waters, including ground water.

Disposal facility means a facility or part of a facility at which hazardous waste is intentionally placed into or on

the land or water, and at which hazardous waste will remain after closure.

Draft permit means a document prepared under § 124.6 indicating the Director's tentative decision to issue or deny, modify, revoke and reissue, terminate, or reissue a permit. A notice of intent to terminate a permit, and a notice of intent to deny a permit, as discussed in § 124.5, are types of draft permits. A denial of a request for modification, revocation and reissuance, or termination, as discussed in § 124.5 is not a "draft permit." A proposed permit is not a draft permit.

Elementary neutralization unit means a device which:

(a) Is used for neutralizing wastes only because they exhibit the corrosivity characteristic defined in § 261.22 of this chapter, or are listed in Subpart D of Part 261 of this chapter only for this reason; and

(b) Meets the definition of tank, tank system, container, transport vehicle, or vessel in § 260.10 of this chapter.

Emergency permit means a RCRA permit issued in accordance with § 270.61.

Environmental Protection Agency (EPA) means the United States Environmental Protection Agency.

EPA means the United States Environmental Protection Agency.

Existing hazardous waste management (HWM) facility or existing facility means a facility which was in operation or for which construction commenced on or before November 19, 1980. A facility has commenced construction if:

(a) The owner or operator has obtained the Federal, State and local approvals or permits necessary to begin physical construction; and either

(b)(1) A continuous on-site, physical construction program has begun; or

(2) The owner or operator has entered into contractual obligations which cannot be cancelled or modified without substantial loss—for physical construction of the facility to be completed within a reasonable time.

Facility mailing list means the mailing list for a facility maintained by EPA in accordance with 40 CFR 124.10(c)(viii).

Facility or activity means any HWM facility or any other facility or activity (including land or appurtenances thereto) that is subject to regulation under the RCRA program.

Federal, State and local approvals or permits necessary to begin physical construction means permits and approvals required under Federal, State or local hazardous waste control statutes, regulations or ordinances.

Final authorization means approval by EPA of a State program which has met the requirements of section 3006(b) of RCRA and the applicable requirements of Part 271, Subpart A.

Functionally equivalent component means a component which performs the same function or measurement and which meets or exceeds the performance specifications of another component.

Generator means any person, by site location, whose act, or process produces "hazardous waste" identified or listed in 40 CFR Part 261.

Ground water means water below the land surface in a zone of saturation.

Hazardous waste means a hazardous waste as defined in 40 CFR 261.3.

Hazardous Waste Management facility (HWM facility) means all contiguous land, and structures, other appurtenances, and improvements on the land, used for treating, storing, or disposing of hazardous waste. A facility may consist of several treatment, storage, or disposal operational units (for example, one or more landfills, surface impoundments, or combinations of them).

HWM facility means Hazardous Waste Management facility.

Injection well means a well into which fluids are being injected.

In operation means a facility which is treating, storing, or disposing of hazardous waste.

Interim authorization means approval by EPA of a State hazardous waste program which has met the requirements of section 3006(c) of RCRA and applicable requirements of Part 271, Subpart B.

Major facility means any facility or activity classified as such by the Regional Administrator, or, in the case of approved State programs, the Region-

al Administrator in conjunction with the State Director.

Manifest means the shipping document originated and signed by the generator which contains the information required by Subpart B of 40 CFR Part 262.

National Pollutant Discharge Elimination System means the national program for issuing, modifying, revoking and reissuing, terminating, monitoring and enforcing permits, and imposing and enforcing pretreatment requirements, under sections 307, 402, 318, and 405 of the CWA. The term includes an approved program.

NPDES means National Pollutant Discharge Elimination System.

New HWM facility means a Hazardous Waste Management facility which began operation or for which construction commenced after November 19, 1980.

Off-site means any site which is not on-site.

On-site means on the same or geographically continguous property which may be divided by public or private right(s)-of-way, provided the entrance and exit between the properties is at a cross-roads intersection, and access is by crossing as opposed to going along, the right(s)-of-way. Noncontiguous properties owned by the same person but connected by a right-of-way which the person controls and to which the public does not have access, is also considered on-site property.

Owner or operator means the owner or operator of any facility or activity subject to regulation under RCRA.

Permit means an authorization, license, or equivalent control document issued by EPA or an approved State to implement the requirements of this part and Parts 271 and 124. Permit includes permit by rule (§ 270.60), and emergency permit (§ 270.61). Permit does not include RCRA interim status (Subpart G of this part), or any permit which has not yet been the subject of final agency action, such as a draft permit or a proposed permit.

Permit-by-rule means a provision of these regulations stating that a facility or activity is deemed to have a RCRA permit if it meets the requirements of the provision.

Person means an individual, association, partnership, corporation, municipality, State or Federal agency, or an agent or employee thereof.

Phase I means that phase of the Federal hazardous waste management program commencing on the effective date of the last of the following to be initially promulgated: 40 CFR Parts 260, 261, 262, 263, 265, 270 and 271. Promulgation of Phase I refers to promulgation of the regulations necessary for Phase I to begin.

Phase II means that phase of Federal hazardous waste management program commencing on the effective date of the first subpart of 40 CFR Part 264, Subparts F through R to be initially promulgated. Promulgation of Phase II refers to promulgation of the regulations necessary for Phase II to begin.

Physical construction means excavation, movement of earth, erection of forms or structures, or similar activity to prepare an HWM facility to accept hazardous waste.

POTW means publicly owned treatment works.

Publicly owned treatment works (POTW) means any device or system unsed in the treatment (including recycling and reclamation) of municipal sewage or industrial wastes of a liquid nature which is owned by a State or municipality. This definition includes sewers, pipes, or other conveyances only if they convey wastewater to a POTW providing treatment.

RCRA means the Solid Waste Disposal Act as amended by the Resource Conservation and Recovery Act of 1976 (Pub. L. 94-580, as amended by Pub. L. 95-609 and Pub. L. 96-482, 42 U.S.C. 6901 *et seq.*)

Regional Administrator means the Regional Administrator of the appropriate Regional Office of the Environmental Protection Agency or the authorized representative of the Regional Administrator.

Schedule of compliance means a schedule of remedial measures included in a permit, including an enforceable sequence of interim requirements (for example, actions, operations, or milestone events) leading to compliance with the Act and regulations.

SDWA means the Safe Drinking Water Act (Pub. L. 95-523, as amended by Pub. L. 95-1900; 42 U.S.C. 3001 *et seq.*).

Site means the land or water area where any facility or activity is physically located or conducted, including adjacent land used in connection with the facility or activity.

State means any of the 50 States, the District of Columbia, Guam, the Commonwealth of Puerto Rico, the Virgin Islands, American Samoa, and the Commonwealth of the Northern Mariana Islands.

State Director means the chief administrative officer of any State agency operating an approved program, or the delegated representative of the State Director. If responsibility is divided among two or more State agencies, State Director means the chief administrative officer of the State agency authorized to perform the particular procedure or function to which reference is made.

State/EPA Agreement means an agreement between the Regional Administrator and the State which coordinates EPA and State activities, responsibilities and programs.

Storage means the holding of hazardous waste for a temporary period, at the end of which the hazardous waste is treated, disposed, or stored elsewhere.

Transfer facility means any transportation-related facility including loading docks, parking areas, storage areas and other similar areas where shipments of hazardous waste are held during the normal course of transportation.

Transporter means a person engaged in the off-site transportation of hazardous waste by air, rail, highway or water.

Treatment means any method, technique, or process, including neutralization, designed to change the physical, chemical, or biological character or composition of any hazardous waste so as to neutralize such wastes, or so as to recover energy or material resources from the waste, or so as to render such waste non-hazardous, or less hazardous; safer to transport, store, or dispose of; or amenable for recovery, amenable for storage, or reduced in volume.

UIC means the Underground Injection Control Program under Part C of the Safe Drinking Water Act, including an approved program.

Underground injection means a well injection.

Underground source of drinking water (USDW) means an aquifer or its portion:

(a)(1) Which supplies any public water system; or

(2) Which contains a sufficient quantity of ground water to supply a public water system; and

(i) Currently supplies drinking water for human consumption; or

(ii) Contains fewer than 10,000 mg/l total dissolved solids; and

(b) Which is not an exempted aquifer.

USDW means underground source of drinking water.

Wastewater treatment unit means a device which:

(a) Is part of a wastewater treatment facility which is subject to regulation under either section 402 or 307(b) of the Clean Water Act; and

(b) Receives and treats or stores an influent wastewater which is a hazardous waste as defined in § 261.3 of this chapter, or generates and accumulates a wastewater treatment sludge which is a hazardous waste as defined in § 261.3 of this chapter, or treats or stores a wastewater treatment sludge which is a hazardous waste as defined in § 261.3 of this chapter; and

(c) Meets the definition of tank or tank system in § 260.10 of this chapter.

[48 FR 14228, Apr. 1, 1983, as amended at 48 FR 30113, June 30, 1983; 53 FR 34087, Sept. 2, 1988; 53 FR 37935, Sept. 28, 1988]

§ 270.3 Considerations under Federal law.

The following is a list of Federal laws that may apply to the issuance of permits under these rules. When any of these laws is applicable, its procedures must be followed. When the applicable law requires consideration or adoption of particular permit conditions or requires the denial of a permit, those requirements also must be followed.

(a) *The Wild and Scenic Rivers Act.* 16 U.S.C. 1273 *et seq.* Section 7 of the Act prohibits the Regional Administrator from assisting by license or otherwise the construction of any water resources project that would have a direct, adverse effect on the values for which a national wild and scenic river was established.

(b) *The National Historic Preservation Act of 1966.* 16 U.S.C. 470 *et seq.* Section 106 of the Act and implementing regulations (36 CFR Part 800) require the Regional Administrator, before issuing a license, to adopt measures when feasible to mitigate potential adverse effects of the licensed activity and properties listed or eligible for listing in the National Register of Historic Places. The Act's requirements are to be implemented in cooperation with State Historic Preservation Officers and upon notice to, and when appropriate, in consultation with the Advisory Council on Historic Preservation.

(c) *The Endangered Species Act.* 16 U.S.C. 1531 *et seq.* Section 7 of the Act and implementing regulations (50 CFR Part 402) require the Regional Administrator to ensure, in consultation with the Secretary of the Interior or Commerce, that any action authorized by EPA is not likely to jeopardize the continued existence of any endangered or threatened species or adversely affect its critical habitat.

(d) *The Coastal Zone Management Act.* 16 U.S.C. 1451 *et seq.* Section 307(c) of the Act and implementing regulations (15 CFR Part 930) prohibit EPA from issuing a permit for an activity affecting land or water use in the coastal zone until the applicant certifies that the proposed activity complies with the State Coastal Zone Management program, and the State or its designated agency concurs with the certification (or the Secretary of Commerce overrides the State's nonconcurrence).

(e) *The Fish and Wildlife Coordination Act.* 16 U.S.C. 661 *et seq.* requires that the Regional Administrator, before issuing a permit proposing or authorizing the impoundment (with certain exemptions), diversion, or other control or modification of any body of water, consult with the appropriate State agency exercising jurisdiction over wildlife resources to conserve those resources.

(f) *Executive orders.* [Reserved]

(Clean Water Act (33 U.S.C. 1251 et seq.), Safe Drinking Water Act (42 U.S.C. 300f et seq.), Clean Air Act (42 U.S.C. 7401 et seq.), Resource Conservation and Recovery Act (42 U.S.C. 6901 et seq.))

[48 FR 14228, Apr 1, 1983, as amended at 48 FR 39622, Sept. 1, 1983]

§ 270.4 Effect of a permit.

(a) Compliance with an RCRA permit during its term constitutes compliance for purpose of enforcement, with Subtitle C of RCRA except for those requirements not included in the permit which become effective by statute, or which are promulgated under Part 268 of this chapter restricting the placement of hazardous wastes in or on the land.

(b) The issuance of a permit does not convey any property rights of any sort, or any exclusive privilege.

(c) The issuance of a permit does not authorize any injury to persons or property or invasion of other private rights, or any infringement of State or local law or regulations.

[48 FR 14228, Apr. 1, 1983, as amended at 52 FR 45799, Dec. 1, 1987]

EDITORIAL NOTE: At 53 FR 37935, September 28, 1988, a rule document incorrectly amended § 270.1 by revising the last sentence of paragraph (a) to read as follows:

§ 270.4 Effect of a permit.

(a) * * * However, a permit may be modified, revoked and reissued, or terminated during its term for cause as set forth in §§ 270.41 and 270.43, or the permit may be modified upon the request of the permittee as set forth in § 270.42.

* * * * *

The existing text in § 270.4(a) included only one sentence, therefore, this amendment could not be incorporated. At a later date, EPA will publish a document in the FEDERAL REGISTER to correctly amend this paragraph.

§ 270.5 Noncompliance and program reporting by the Director.

The Director shall prepare quarterly and annual reports as detailed below. When the State is the permit-issuing

authority, the State Director shall submit any reports required under this section to the Regional Administrator. When EPA is the permit-issuing authority, the Regional Administrator shall submit any report required under this section to EPA Headquarters. For purposes of this section only, RCRA permittees shall include RCRA interim status facilities, when appropriate.

(a) *Quarterly reports.* The Director shall submit quarterly narrative reports for major facilities as follows:

(1) *Format.* The report shall use the following format:

(i) Information on noncompliance for each facility;

(ii) Alphabetize by permittee name. When two or more permittees have the same name, the lowest permit number shall be entered first;

(iii) For each entry on the list, include the following information in the following order:

(A) Name, location, and permit number of the noncomplying permittee.

(B) A brief description and date of each instance of noncompliance for that permittee. Instances of noncompliance may include one or more of the kinds set forth in paragraph (a)(2) of this section. When a permittee has noncompliance of more than one kind, combine the information into a single entry for each such permittee.

(C) The date(s) and a brief description of the action(s) taken by the Director to ensure compliance.

(D) Status of the instance(s) of noncompliance with the date of the review of the status or the date of resolution.

(E) Any details which tend to explain or mitigate the instance(s) of noncompliance.

(2) *Instances of noncompliance to be reported.* Any instances of noncompliance within the following categories shall be reported in successive reports until the noncompliance is reported as resolved. Once noncompliance is reported as resolved it need not appear in subsequent reports.

(i) *Failure to complete construction elements.* When the permittee has failed to complete, by the date specified in the permit, an element of a compliance schedule involving either planning for construction (for example, award of a contract, preliminary plans), or a construction step (for example, begin construction, attain operation level); and the permittee has not returned to compliance by accomplishing the required element of the schedule within 30 days from the date a compliance schedule report is due under the permit.

(ii) *Modifications to schedules of compliance.* When a schedule of compliance in the permit has been modified under § 270.41 or § 270.42 because of the permittee's noncompliance.

(iii) *Failure to complete or provide compliance schedule or monitoring reports.* When the permittee has failed to complete or provide a report required in a permit compliance schedule (for example, progress report or notice of noncompliance or compliance) or a monitoring report; and the permittee has not submitted the complete report within 30 days from the date it is due under the permit for compliance schedules, or from the date specified in the permit for monitoring reports.

(iv) *Deficient reports.* When the required reports provided by the permittee are so deficient as to cause misunderstanding by the Director and thus impede the review of the status of compliance.

(v) *Noncompliance with other permit requirements.* Noncompliance shall be reported in the following circumstances:

(A) Whenever the permittee has violated a permit requirement (other than reported under paragraph (a)(2)(i) or (ii) of this section), and has not returned to compliance within 45 days from the date reporting of noncompliance was due under the permit; or

(B) When the Director determines that a pattern of noncompliance exists for a major facility permittee over the most recent four consecutive reporting periods. This pattern includes any violation of the same requirement in two consecutive reporting periods, and any violation of one or more requirements in each of four consecutive reporting periods; or

(C) When the Director determines significant permit non-compliance or

other significant event has occurred such as a fire or explosion or migration of fluids into a USDW.

(vi) *All other.* Statistical information shall be reported quarterly on all other instances of noncompliance by major facilities with permit requirements not otherwise reported under paragraph (a) of this section.

(b) *Annual reports*—(1) *Annual noncompliance report.* Statistical reports shall be submitted by the Director on nonmajor RCRA permittees indicating the total number reviewed, the number of noncomplying nonmajor permittees, the number of enforcement actions, and number of permit modifications extending compliance deadlines. The statistical information shall be organized to follow the types of noncompliance listed in paragraph (a) of this section.

(2) In addition to the annual noncompliance report, the Director shall prepare a "program report" which contains information (in a manner and form prescribed by the Administrator) on generators and transporters and the permit status of regulated facilities. The Director shall also include, on a biennial basis, summary information on the quantities and types of hazardous wastes generated, transported, treated, stored and disposed during the preceding odd-numbered year. This summary information shall be reported in a manner and form prescribed by the Administrator and shall be reported according to EPA characteristics and lists of hazardous wastes at 40 CFR Part 261.

(c) *Schedule.* (1) For all quarterly reports. On the last working day of May, August, November, and February, the State Director shall submit to the Regional Administrator information concerning noncompliance with RCRA permit requirements by major facilities in the State in accordance with the following schedule. The Regional Administrator shall prepare and submit information for EPA-issued permits to EPA Headquarters in accordance with the same schedule.

QUARTERS COVERED BY REPORTS ON NONCOMPLIANCE BY MAJOR DISCHARGERS

[Date for completion of reports]

January, February, and March	[1] May 31
April, May, and June	[1] August 31
July, August, and September	[1] November 30
October, November, and December.	[1] February 28

[1] Reports must be made available to the public for inspection and copying on this date.

[48 FR 14228, Apr. 1, 1983, as amended at 48 FR 30113, June 30, 1983]

§ 270.6 References.

(a) When used in Part 270 of this chapter, the following publications are incorporated by reference:

"Test Methods for Evaluating Solid Waste, Physical/Chemical Methods", EPA Publication SW-846 [Second Edition, 1982 as amended by Update I (April, 1984), and Update II (April, 1985)]. The second edition of SW-846 and Updates I, II and III are available from the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161, (703) 487-4600, as document no. PB 87-120-291. The cost is $48.95 for paper and $13.50 for microfiche.

(b) The references listed in paragraph (a) of this section are also available for inspection at the Office of the Federal Register, 1100 L Street, NW., Washington, DC 20408. These incorporations by reference were approved by the Director of the Federal Register. These materials are incorporated as they exist on the date of approval and a notice of any change in these materials will be published in the FEDERAL REGISTER.

[48 FR 14228, Apr. 1, 1983, as amended at 48 FR 30113, June 30, 1983; 52 FR 8073, Mar. 16, 1987]

Subpart B—Permit Application

§ 270.10 General application requirements.

(a) *Permit application.* Any person who is required to have a permit (including new applicants and permittees with expiring permits) shall complete, sign, and submit an application to the Director as described in this section and §§ 270.70 through 270.73. Persons currently authorized with interim

status shall apply for permits when required by the Director. Persons covered by RCRA permits by rule (§ 270.60), need not apply. Procedures for applications, issuance and administration of emergency permits are found exclusively in § 270.61. Procedures for application, issuance and administration of research, development, and demonstration permits are found exclusively in § 270.65.

(b) *Who applies?* When a facility or activity is owned by one person but is operated by another person, it is the operator's duty to obtain a permit, except that the owner must also sign the permit application.

(c) *Completeness.* The Director shall not issue a permit before receiving a complete application for a permit except for permits by rule, or emergency permits. An application for a permit is complete when the Director receives an application form and any supplemental information which are completed to his satisfaction. An application for a permit is complete notwithstanding the failure of the owner or operator to submit the exposure information described in paragraph (j) of this section. The Director may deny a permit for the active life of a hazardous waste management facility or unit before receiving a complete application for a permit.

(d) *Information requirements.* All applicants for RCRA permits shall provide information set forth in § 270.13 and applicable sections in §§ 270.14 through 270.29 to the Director, using the application form provided by the Director.

(e) *Existing HWM facilities and interim status qualifications.* (1) Owners and operators of existing hazardous waste management facilities or of hazardous waste management facilities in existence on the effective date of statutory or regulatory amendments under the act that render the facility subject to the requirement to have a RCRA permit must submit Part A of their permit application no later than:

(i) Six months after the date of publication of regulations which first require them to comply with the standards set forth in 40 CFR Part 265 or 266, or

(ii) Thirty days after the date they first become subject to the standards set forth in 40 CFR Part 265 or 266, whichever first occurs.

(iii) For generators generating greater than 100 kilograms but less than 1000 kilograms of hazardous waste in a calendar month and treats, stores, or disposes of these wastes on-site, by March 24, 1987.

NOTE: For facilities which must comply with Part 265 because they handle a waste listed in EPA's May 19, 1980, Part 261 regulations (45 FR 33006 *et seq.*), the deadline for submitting an application is November 19, 1980. Where other existing facilities must begin in complying with Part 265 or 266 at a later date because of revisions to Part 260, 261, 265, or 266, the Administrator will specify in the preamble to those revisions when those facilities must submit a permit application.

(2) The Administrator may by publication in the FEDERAL REGISTER extend the date by which owners and operators of specified classes of existing hazardous waste management facilities must submit Part A of their permit application if he finds that (i) there has been substantial confusion as to whether the owners and operators of such facilities were required to file a permit application and (ii) such confusion is attributed to ambiguities in EPA's Parts 260, 261, 265, or 266 regulations.

(3) The Administrator may by compliance order issued under section 3008 of RCRA extend the date by which the owner and operator of an existing hazardous waste management facility must submit Part A of their permit application.

(4) At any time after promulgation of Phase II the owner and operator of an existing HWM facility may be required to submit Part B of their permit application. The State Director may require submission of Part B (or equivalent completion of the State RCRA application process) if the State in which the facility is located has received interim authorization for Phase II or final authorization; if not, the Regional Administrator may require submission of Part B. Any owner or operator shall be allowed at least six months from the date of request to submit Part B of the application. Any

owner or operator of an existing HWM facility may voluntarily submit Part B of the application at any time. Notwithstanding the above, any owner or operator of an existing HWM facility must submit a Part B permit application in accordance with the dates specified in § 270.73. Any owner or operator of a land disposal facility in existence on the effective date of statutory or regulatory amendments under this Act that render the facility subject to the requirement to have a RCRA permit must submit a Part B application in accordance with the dates specified in § 270.73.

(5) Failure to furnish a requested Part B application on time, or to furnish in full the information required by the Part B application, is grounds for termination of interim status under Part 124.

(f) *New HWM facilities.* (1) Except as provided in paragraph (f)(3) of this section, no person shall begin physical construction of a new HWM facility without having submitted Parts A and B of the permit application and having received a finally effective RCRA permit.

(2) An application for a permit for a new HWM facility (including both Parts A and B) may be filed any time after promulgation of those standards in Part 264, Subpart I *et seq.* applicable to such facility. The application shall be filed with the Regional Administrator if at the time of application the State in which the new HWM facility is proposed to be located has not received Phase II interim authorization for permitting such facility or final authorization; otherwise it shall be filed with the State Director. Except as provided in paragraph (f)(3) of this section, all applications must be submitted at least 180 days before physical construction is expected to commence.

(3) Notwithstanding paragraph (f)(1) of this section, a person may construct a facility for the incineration of polychlorinated biphenyls pursuant to an approval issued by the Administrator under section (6)(e) of the Toxic Substances Control Act and any person owning or operating such a facility may, at any time after construction or operation of such facility has begun, file an application for a RCRA permit to incinerate hazardous waste authorizing such facility to incinerate waste identified or listed under Subtitle C of RCRA.

(g) *Updating permit applications.* (1) If any owner or operator of a HWM facility has filed Part A of a permit application and has not yet filed Part B, the owner or operator shall file an amended Part A application:

(i) With the Regional Administrator, if the facility is located in a State which has not obtained interim authorization for phase II or final authorization, within six months after the promulgation of revised regulations under Part 261 listing or identifying additional hazardous wastes, if the facility is treating, storing, or disposing of any of those newly listed or identified wastes.

(ii) With the State Director, if the facility is located in a State which has obtained Phase II interim authorization or final authorization, no later than the effective date of regulatory provisions listing or designating wastes as hazardous in that State in addition to those listed or designated under the previously approved State program, if the facility is treating, storing, or disposing of any of those newly listed or designated wastes; or

(iii) As necessary to comply with provisions of § 270.72 for changes during interim status or with the analogous provisions of a State program approved for final authorization or interim authorization for Phase II. Revised Part A applications necessary to comply with the provisions of § 270.72 shall be filed with the Regional Administrator if the State in which the facility in question is located does not have Phase II interim authorization or final authorization; otherwise it shall be filed with the State Director (if the State has an analogous provision).

(2) The owner or operator of a facility who fails to comply with the updating requirements of paragraph (g)(1) of this section does not receive interim status as to the wastes not covered by duly filed Part A applications.

(h) *Reapplications.* Any HWM facility with an effective permit shall submit a new application at least 180

days before the expiration date of the effective permit, unless permission for a later date has been granted by the Director. (The Director shall not grant permission for applications to be submitted later than the expiration date of the existing permit.)

(i) *Recordkeeping.* Applicants shall keep records of all data used to complete permit applications and any supplemental information submitted under §§ 270.10(d), 270.13, 270.14 through 270.21 for a period of at least 3 years from the date the application is signed.

(j) *Exposure information.* (1) After August 8, 1985, any Part B permit application submitted by an owner or operator of a facility that stores, treats, or dispose of hazardous waste in a surface impoundment or a landfill must be accompanied by information, reasonably ascertainable by the owner or operator, on the potential for the public to be exposed to hazardous wastes or hazardous constituents through releases related to the unit. At a minimum, such information must address:

(i) Reasonably foreseeable potential releases from both normal operations and accidents at the unit, including releases associated with transportation to or from the unit;

(ii) The potential pathways of human exposure to hazardous wastes or constituents resulting from the releases described under paragraph (j)(1)(i) of this section; and

(iii) The potential magnitude and nature of the human exposure resulting from such releases.

(2) By August 8, 1985, owners and operators of a landfill or a surface impoundment who have already submitted a Part B application must submit the exposure information required in paragraph (j)(1) of this section.

(k) The Director may require a permittee or an applicant to submit information in order to establish permit conditions under §§ 270.32(b)(2) and 270.50(d) of this chapter.

(Approved by the Office of Management and Budget under control numbers 2050-0009, 2050-0002, and 2050-0007)

[48 FR 14228, Apr. 1, 1983; 48 FR 30114, June 30, 1983, as amended at 50 FR 28751, July 15, 1985; 51 FR 10176, Mar. 24, 1986; 52 FR 45799, Dec. 1, 1987; 54 FR 9607, Mar. 7, 1989]

§ 270.11 Signatories to permit applications and reports.

(a) *Applications.* All permit applications shall be signed as follows:

(1) *For a corporation:* By a responsible corporate officer. For the purpose of this section, a responsible corporate officer means (i) A president, secretary, treasurer, or vice-president of the corporation in charge of a principal business function, or any other person who performs similar policy- or decisionmaking functions for the corporation, or (ii) the manager of one or more manufacturing, production or operating facilities employing more than 250 persons or having gross annual sales or expenditures exceeding $25 million (in second-quarter 1980 dollars), if authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures.

NOTE: EPA does not require specific assignments or delegations of authority to responsible corporate officers identified in § 270.11(a)(1)(i). The Agency will presume that these responsible corporate officers have the requisite authority to sign permit applications unless the corporation has notified the Director to the contrary. Corporate procedures governing authority to sign permit applications may provide for assignment or delegation to applicable corporate positions under § 270.11(a)(1)(ii) rather than to specific individuals.

(2) *For a partnership or sole proprietorship;* by a general partner or the proprietor, respectively; or

(3) *For a municipality, State, Federal, or other public agency:* by either a principal executive officer or ranking elected official. For purposes of this section, a principal executive officer of a Federal agency includes: (i) The chief executive officer of the agency, or (ii) a senior executive officer having responsibility for the overall operations of a principal geographic unit of the agency (e.g., Regional Administrators of EPA).

(b) *Reports.* All reports required by permits and other information requested by the Director shall be signed by a person described in paragraph (a) of this section, or by a duly

authorized representative of that person. A person is a duly authorized representative only if:

(1) The authorization is made in writing by a person described in paragraph (a) of this section;

(2) The authorization specifies either an individual or a position having responsibility for overall operation of the regulated facility or activity such as the position of plant manager, operator of a well or a well field, superintendent, or position of equivalent responsibility. (A duly authorized representative may thus be either a named individual or any individual occupying a named position); and

(3) The written authorization is submitted to the Director.

(c) *Changes to authorization.* If an authorization under paragraph (b) of this section is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of paragraph (b) of this section must be submitted to the Director prior to or together with any reports, information, or applications to be signed by an authorized representative.

(d) *Certification.* Any person signing a document under paragraph (a) or (b) of this section shall make the following certification:

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to be the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

(Clean Water Act (33 U.S.C. 1251 et seq.), Safe Drinking Water Act (42 U.S.C. 300f et seq.), Clean Air Act (42 U.S.C. 7401 et seq.), Resource Conservation and Recovery Act (42 U.S.C. 6901 et seq.))

[48 FR 14228, Apr. 1, 1983, as amended at 48 FR 39622, Sept. 1, 1983]

§ 270.12 Confidentiality of information.

(a) In accordance with 40 CFR Part 2, any information submitted to EPA pursuant to these regulations may be claimed as confidential by the submitter. Any such claim must be asserted at the time of submission in the manner prescribed on the application form or instructions or, in the case of other submissions, by stamping the words "confidential business information" on each page containing such information. If no claim is made at the time of submission, EPA may make the information available to the public without further notice. If a claim is asserted, the information will be treated in accordance with the procedures in 40 CFR Part 2 (Public Information).

(b) Claims of confidentiality for the name and address of any permit applicant or permittee will be denied.

§ 270.13 Contents of Part A of the permit application.

Part A of the RCRA application shall include the following information:

(a) The activities conducted by the applicant which require it to obtain a permit under RCRA.

(b) Name, mailing address, and location, including latitude and longitude of the facility for which the application is submitted.

(c) Up to four SIC codes which best reflect the principal products or services provided by the facility.

(d) The operator's name, address, telephone number, ownership status, and status as Federal, State, private, public, or other entity.

(e) The name, address, and phone number of the owner of the facility.

(f) Whether the facility is located on Indian lands.

(g) An indication of whether the facility is new or existing and whether it is a first or revised application.

(h) For existing facilities, (1) a scale drawing of the facility showing the location of all past, present, and future treatment, storage, and disposal areas; and (2) photographs of the facility clearly delineating all existing structures; existing treatment, storage, and disposal areas; and sites of future treatment, storage, and disposal areas.

(i) A description of the processes to be used for treating, storing, and disposing of hazardous waste, and the design capacity of these items.

(j) A specification of the hazardous wastes listed or designated under 40 CFR Part 261 to be treated, stored, or disposed of at the facility, an estimate of the quantity of such wastes to be treated, stored, or disposed annually, and a general description of the processes to be used for such wastes.

(k) A listing of all permits or construction approvals received or applied for under any of the following programs:

(1) Hazardous Waste Management program under RCRA.

(2) UIC program under the SWDA.

(3) NPDES program under the CWA.

(4) Prevention of Significant Deterioration (PSD) program under the Clean Air Act.

(5) Nonattainment program under the Clean Air Act.

(6) National Emission Standards for Hazardous Pollutants (NESHAPS) preconstruction approval under the Clean Air Act.

(7) Ocean dumping permits under the Marine Protection Research and Sancturaies Act.

(8) Dredge or fill permits under section 404 of the CWA.

(9) Other relevant environmental permits, including State permits.

(l) A topographic map (or other map if a topographic map is unavailable) extending one mile beyond the property boundaries of the source, depicting the facility and each of its intake and discharge structures; each of its hazardous waste treatment, storage, or disposal facilities; each well where fluids from the facility are injected underground; and those wells, springs, other surface water bodies, and drinking water wells listed in public records or otherwise known to the applicant within ¼ mile of the facility property boundary.

(m) A brief description of the nature of the business.

§ 270.14 Contents of Part B: General requirements.

(a) Part B of the permit application consists of the general information requirements of this section, and the specific information requirements in §§ 270.14 through 270.29 applicable to the facility. The Part B information requirements presented in §§ 270.14 through 270.29 reflect the standards promulgated in 40 CFR Part 264. These information requirements are necessary in order for EPA to determine compliance with the Part 264 standards. If owners and operators of HWM facilities can demonstrate that the information prescribed in Part B can not be provided to the extent required, the Director may make allowance for submission of such information on a case-by-case basis. Information required in Part B shall be submitted to the Director and signed in accordance with requirements in § 270.11. Certain technical data, such as design drawings and specifications, and engineering studies shall be certified by a registered professional engineer.

(b) General information requirements. The following information is required for all HWM facilities, except as § 264.1 provides otherwise:

(1) A general description of the facility.

(2) Chemical and physical analyses of the hazardous waste to be handled at the facility. At a minimum, these analyses shall contain all the information which must be known to treat, store, or dispose of the wastes properly in accordance with Part 264.

(3) A copy of the waste analysis plan required by § 264.13(b) and, if applicable § 264.13(c).

(4) A description of the security procedures and equipment required by § 264.14, or a justification demonstrating the reasons for requesting a waiver of this requirement.

(5) A copy of the general inspection schedule required by § 264.15(b). Include, where applicable, as part of the inspection schedule, specific requirements in §§ 264.174, 264.193(i), 264.195, 264.226, 264.254, 264.273, 264.303, 264.602, 264.1033, 264.1052, 264.1053, and 264.1058.

(6) A justification of any request for a waiver(s) of the preparedness and prevention requirements of Part 264, Subpart C.

(7) A copy of the contingency plan required by Part 264, Subpart D. Note: Include, where applicable, as part of the contingency plan, specific requirements in §§ 264.227, 264.255, and 264.200.

(8) A description of procedures, structures, or equipment used at the facility to:

(i) Prevent hazards in unloading operations (for example, ramps, special forklifts);

(ii) Prevent runoff from hazardous waste handling areas to other areas of the facility or environment, or to prevent flooding (for example, berms, dikes, trenches);

(iii) Prevent contamination of water supplies;

(iv) Mitigate effects of equipment failure and power outages;

(v) Prevent undue exposure of personnel to hazardous waste (for example, protective clothing); and

(vi) Prevent releases to atmosphere.

(9) A description of precautions to prevent accidental ignition or reaction of ignitable, reactive, or incompatible wastes as required to demonstrate compliance with § 264.17 including documentation demonstrating compliance with § 264.17(c).

(10) Traffic pattern, estimated volume (number, types of vehicles) and control (for example, show turns across traffic lanes, and stacking lanes (if appropriate); describe access road surfacing and load bearing capacity; show traffic control signals).

(11) Facility location information;

(i) In order to determine the applicability of the seismic standard [§ 264.18(a)] the owner or operator of a new facility must identify the political jurisdiction (e.g., county, township, or election district) in which the facility is proposed to be located.

[*Comment*: If the county or election district is not listed in Appendix VI of Part 264, no further information is required to demonstrate compliance with § 264.18(a).]

(ii) If the facility is proposed to be located in an area listed in Appendix VI of Part 264, the owner or operator shall demonstrate compliance with the seismic standard. This demonstration may be made using either published geologic data or data obtained from field investigations carried out by the applicant. The information provided must be of such quality to be acceptable to geologists experienced in identifying and evaluating seismic activity. The information submitted must show that either:

(A) No faults which have had displacement in Holocene time are present, or no lineations which suggest the presence of a fault (which have displacement in Holocene time) within 3,000 feet of a facility are present, based on data from:

(*1*) Published geologic studies,

(*2*) Aerial reconnaissance of the area within a five-mile radius from the facility.

(*3*) An analysis of aerial photographs covering a 3,000 foot radius of the facility, and

(*4*) If needed to clarify the above data, a reconnaissance based on walking portions of the area within 3,000 feet of the facility, or

(B) If faults (to include lineations) which have had displacement in Holocene time are present within 3,000 feet of a facility, no faults pass with 200 feet of the portions of the facility where treatment, storage, or disposal of hazardous waste will be conducted, based on data from a comprehensive geologic analysis of the site. Unless a site analysis is otherwise conclusive concerning the absence of faults within 200 feet of such portions of the facility data shall be obtained from a subsurface exploration (trenching) of the area within a distance no less than 200 feet from portions of the facility where treatment, storage, or disposal of hazardous waste will be conducted. Such trenching shall be performed in a direction that is perpendicular to known faults (which have had displacement in Holocene time) passing within 3,000 feet of the portions of the facility where treatment, storage, or disposal of hazardous waste will be conducted. Such investigation shall document with supporting maps and other analyses, the location of faults found.

[*Comment*: The Guidance Manual for the Location Standards provides greater detail on the content of each type of seismic investigation and the appropriate conditions under which each approach or a combination of approaches would be used.]

(iii) Owners and operators of all facilities shall provide an identification of whether the facility is located within a 100-year floodplain. This identification must indicate the source of data for such determination and include a copy of the relevant Federal Insurance Administration (FIA) flood map, if used, or the calculations and maps used where an FIA map is not available. Information shall also be provided identifying the 100-year flood level and any other special flooding factors (e.g., wave action) which must be considered in designing, constructing, operating, or maintaining the facility to withstand washout from a 100-year flood.

[*Comment*: Where maps for the National Flood Insurance Program produced by the Federal Insurance Administration (FIA) of the Federal Emergency Management Agency are available, they will normally be determinative of whether a facility is located within or outside of the 100-year floodplain. However, where the FIA map excludes an area (usually areas of the floodplain less than 200 feet in width), these areas must be considered and a determination made as to whether they are in the 100-year floodplain. Where FIA maps are not available for a proposed facility location, the owner or operator must use equivalent mapping techniques to determine whether the facility is within the 100-year floodplain, and if so located, what the 100-year flood elevation would be.]

(iv) Owners and operators of facilities located in the 100-year floodplain must provide the following information:

(A) Engineering analysis to indicate the various hydrodynamic and hydrostatic forces expected to result at the site as consequence of a 100-year flood.

(B) Structural or other engineering studies showing the design of operational units (e.g., tanks, incinerators) and flood protection devices (e.g., floodwalls, dikes) at the facility and how these will prevent washout.

(C) If applicable, and in lieu of paragraphs (b)(11)(iv) (A) and (B) of this section, a detailed description of procedures to be followed to remove hazardous waste to safety before the facility is flooded, including:

(*1*) Timing of such movement relative to flood levels, including estimated time to move the waste, to show that such movement can be completed before floodwaters reach the facility.

(*2*) A description of the location(s) to which the waste will be moved and demonstration that those facilities will be eligible to receive hazardous waste in accordance with the regulations under Parts 270, 271, 124, and 264 through 266 of this chapter.

(*3*) The planned procedures, equipment, and personnel to be used and the means to ensure that such resources will be available in time for use.

(*4*) The potential for accidental discharges of the waste during movement.

(v) Existing facilities NOT in compliance with § 264.18(b) shall provide a plan showing how the facility will be brought into compliance and a schedule for compliance.

(12) An outline of both the introductory and continuing training programs by owners or operators to prepare persons to operate or maintain the HWM facility in a safe manner as required to demonstrate compliance with § 264.16. A brief description of how training will be designed to meet actual job tasks in accordance with requirements in § 264.16(a)(3).

(13) A copy of the closure plan and, where applicable, the post-closure plan required by §§ 264.112, 264.118, and 264.197. Include, where applicable, as part of the plans, specific requirements in §§ 264.178, 264.197, 264.228, 264.258, 264.280, 264.310, 264.351, 264.601, and 264.603.

(14) For hazardous waste disposal units that have been closed, documentation that notices required under § 264.119 have been filed.

(15) The most recent closure cost estimate for the facility prepared in accordance with § 264.142 and a copy of the documentation required to demonstrate financial assurance under § 264.143. For a new facility, a copy of the required documentation may be submitted 60 days prior to the initial receipt of hazardous wastes, if that is later than the submission of the Part B.

(16) Where applicable, the most recent post-closure cost estimate for the facility prepared in accordance with § 264.144 plus a copy of the docu-

mentation required to demonstrate financial assurance under § 264.145. For a new facility, a copy of the required documentation may be submitted 60 days prior to the initial receipt of hazardous wastes, if that is later than the submission of the Part B.

(17) Where applicable, a copy of the insurance policy or other documentation which comprises compliance with the requirements of § 264.147. For a new facility, documentation showing the amount of insurance meeting the specification of § 264.147(a) and, if applicable, § 264.147(b), that the owner or operator plans to have in effect before initial receipt of hazardous waste for treatment, storage, or disposal. A request for a variance in the amount of required coverage, for a new or existing facility, may be submitted as specified in § 264.147(c).

(18) Where appropriate, proof of coverage by a State financial mechanism in compliance with § 264.149 or § 264.150.

(19) A topographic map showing a distance of 1000 feet around the facility at a scale of 2.5 centimeters (1 inch) equal to not more than 61.0 meters (200 feet). Contours must be shown on the map. The contour interval must be sufficient to clearly show the pattern of surface water flow in the vicinity of and from each operational unit of the facility. For example, contours with an interval of 1.5 meters (5 feet), if relief is greater than 6.1 meters (20 feet), or an interval of 0.6 meters (2 feet), if relief is less than 6.1 meters (20 feet). Owners and operators of HWM facilities located in mountainous areas should use large contour intervals to adequately show topographic profiles of facilities. The map shall clearly show the following:

(i) Map scale and date.

(ii) 100-year floodplain area.

(iii) Surface waters including intermittant streams.

(iv) Surrounding land uses (residential, commercial, agricultural, recreational).

(v) A wind rose (i.e., prevailing wind-speed and direction).

(vi) Orientation of the map (north arrow).

(vii) Legal boundaries of the HWM facility site.

(viii) Access control (fences, gates).

(ix) Injection and withdrawal wells both on-site and off-site.

(x) Buildings; treatment, storage, or disposal operations; or other structure (recreation areas, runoff control systems, access and internal roads, storm, sanitary, and process sewerage systems, loading and unloading areas, fire control facilities, etc.)

(xi) Barriers for drainage or flood control.

(xii) Location of operational units within the HWM facility site, where hazardous waste is (or will be) treated, stored, or disposed (include equipment cleanup areas).

NOTE: For large HWM facilities the Agency will allow the use of other scales on a case-by-case basis.

(20) Applicants may be required to submit such information as may be necessary to enable the Regional Administrator to carry out his duties under other Federal laws as required in § 270.3 of this part.

(21) For land disposal facilities, if a case-by-case extension has been approved under § 268.5 or a petition has been approved uner § 268.6, a copy of the notice of approval for the extension or petition is required.

(c) *Additional information requirements.* The following additional information regarding protection of groundwater is required from owners or operators of hazardous waste facilities containing a regulated unit except as provided in § 264.90(b) of this chapter:

(1) A summary of the ground-water monitoring data obtained during the interim status period under §§ 265.90 through 265.94, where applicable.

(2) Identification of the uppermost aquifer and aquifers hydraulically interconnected beneath the facility property, including ground-water flow direction and rate, and the basis for such identification (*i.e.*, the information obtained from hydrogeologic investigations of the facility area).

(3) On the topographic map required under paragraph (b)(19) of this section, a delineation of the waste management area, the property boundary, the proposed "point of compliance" as defined under § 264.95, the proposed

location of ground-water monitoring wells as required under § 264.97, and, to the extent possible, the information required in paragraph (c)(2) of this section.

(4) A description of any plume of contamination that has entered the ground water from a regulated unit at the time that the application was submitted that:

(i) Delineates the extent of the plume on the topographic map required under paragraph (b)(19) of this section;

(ii) Identifies the concentration of each Appendix IX, of Part 264 of this chapter, constituent throughout the plume or identifies the maximum concentrations of each Appendix IX constituent in the plume.

(5) Detailed plans and an engineering report describing the proposed ground water monitoring program to be implemented to meet the requirements of § 264.97.

(6) If the presence of hazardous constituents has *not* been detected in the ground water at the time of permit application, the owner or operator must submit sufficient information, supporting data, and analyses to establish a detection monitoring program which meets the requirements of § 264.98. This submission must address the following items specified under § 264.98:

(i) A proposed list of indicator parameters, waste constituents, or reaction products that can provide a reliable indication of the presence of hazardous constituents in the ground water;

(ii) A proposed ground-water monitoring system;

(iii) Background values for each proposed monitoring parameter or constituent, or procedures to calculate such values; and

(iv) A description of proposed sampling, analysis and statistical comparison procedures to be utilized in evaluating ground-water monitoring data.

(7) If the presence of hazardous constituents has been detected in the ground water at the point of compliance at the time of the permit application, the owner or operator must submit sufficient information, supporting data, and analyses to establish a compliance monitoring program which meets the requirements of § 264.99. Except as provided in § 264.98(h)(5), the owner or operator must also submit an engineering feasibility plan for a corrective action program necessary to meet the requirements of § 264.100, unless the owner or operator obtains written authorization in advance from the Regional Administrator to submit a proposed permit schedule for submittal of such a plan. To demonstrate compliance with § 264.99, the owner or operator must address the following items:

(i) A description of the wastes previously handled at the facility;

(ii) A characterization of the contaminated ground water, including concentrations of hazardous constituents;

(iii) A list of hazardous constituents for which compliance monitoring will be undertaken in accordance with §§ 264.97 and 264.99;

(iv) Proposed concentration limits for each hazardous constituent, based on the criteria set forth in § 264.94(a), including a justification for establishing any alternate concentration limits;

(v) Detailed plans and an engineering report describing the proposed ground-water monitoring system, in accordance with the requirements of § 264.97; and

(vi) A description of proposed sampling, analysis and statistical comparison procedures to be utilized in evaluating ground-water monitoring data.

(8) If hazardous constituents have been measured in the ground water which exceed the concentration limits established under § 264.94 Table 1, or if ground water monitoring conducted at the time of permit application under §§ 265.90 through 265.94 at the waste boundary indicates the presence of hazardous constituents from the facility in ground water over background concentrations, the owner or operator must submit sufficient information, supporting data, and analyses to establish a corrective action program which meets the requirements of § 264.100. However, an owner or operator is not required to submit information to establish a corrective action program if he demonstrates to the Regional Administrator that alternate concentration limits will protect human health

and the environment after considering the criteria listed in § 264.94(b). An owner or operator who is not required to establish a corrective action program for this reason must instead submit sufficient information to establish a compliance monitoring program which meets the requirements of § 264.99 and paragraph (c)(6) of this section. To demonstrate compliance with § 264.100, the owner or operator must address, at a minimum, the following items:

(i) A characterization of the contaminated ground water, including concentrations of hazardous constituents;

(ii) The concentration limit for each hazardous constituent found in the ground water as set forth in § 264.94;

(iii) Detailed plans and an engineering report describing the corrective action to be taken; and

(iv) A description of how the groundwater monitoring program will demonstrate the adequacy of the corrective action.

(v) The permit may contain a schedule for submittal of the information required in paragraphs (c)(8) (iii) and (iv) provided the owner or operator obtains written authorization from the Regional Administrator prior to submittal of the complete permit application.

(d) Information requirements for solid waste management units.

(1) The following information is required for each solid waste management unit at a facility seeking a permit:

(i) The location of the unit on the topographic map required under paragraph (b)(19) of this section.

(ii) Designation of type of unit.

(iii) General dimensions and structural description (supply any available drawings).

(iv) When the unit was operated.

(v) Specification of all wastes that have been managed at the unit, to the extent available.

(2) The owner or operator of any facility containing one or more solid waste management units must submit all available information pertaining to any release of hazardous wastes or hazardous constituents from such unit or units.

(3) The owner/operator must conduct and provide the results of sampling and analysis of groundwater, landsurface, and subsurface strata, surface water, or air, which may include the installation of wells, where the Director ascertains it is necessary to complete a RCRA Facility Assessment that will determine if a more complete investigation is necessary.

(Approved by the Office of Management and Budget under control numbers 2050-0009, 2050-0002, and 2050-0007)

[48 FR 14228, Apr. 1, 1983; 48 FR 30114, June 30, 1983, as amended at 50 FR 2006, Jan 14, 1985; 51 FR 16458, May 2, 1986; 51 FR 40653, Nov. 7, 1986; 52 FR 23450, July 9, 1987; 52 FR 25953, July 9, 1987; 52 FR 33936, Sept. 9, 1987; 52 FR 45799, Dec. 1, 1987; 52 FR 46965, Dec. 10, 1987; 54 FR 617, Jan. 9, 1989; 55 FR 25517, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25517, June 21, 1990, in §270.14, the last sentence of paragraph (b)(5), (8)(iv) and (v) were revised and paragraph (b)(8)(vi) was added, effective December 21, 1990. For the cvonvenience of the user the superseded text appears as follows:

§ 270.14 Contents of Part B: General requirements.

* * * * *

(b) * * *

(5) * * * Include where applicable, as part of the inspection schedule, specific requirements in §§ 264.174, 264.193(i), 264.195, 264.226, 264.254, 264.273, 264.303, and 264.602.

* * * * *

(8) * * *

(iv) Mitigate effects of equipment failure and power outages; and

(v) Prevent undue exposure of personnel to hazardous waste (for example, protective clothing).

* * * * *

§ 270.15 Specific Part B information requirements for containers.

Except as otherwise provided in § 264.170, owners or operators of facilities that store containers of hazardous waste must provide the following additional information:

(a A description of the containment system to demonstrate compliance with § 264.1 5. Show at least the following:

(1) Basic design parameters, dimensions, and materials of construction.

(2) How the design promotes drainage or how containers are kept from contact with standing liquids in the containment system.

(3) Capacity of the containment system relative to the number and volume of containers to be stored.

(4) Provisions for preventing or managing run-on.

(5) How accumulated liquids can be analyzed and removed to prevent overflow.

(b) For storage areas that store containers holding wastes that do not contain free liquids, a demonstration of compliance with § 264.175(c), including:

(1) Test procedures and results or other documentation or information to show that the wastes do not contain free liquids; and

(2) A description of how the storage area is designed or operated to drain and remove liquids or how containers are kept from contact with standing liquids.

(c) Sketches, drawings, or data demonstrating compliance with § 264.176 (location of buffer zone and containers holding ignitable or reactive wastes) and § 264.177(c) (location of incompatible wastes), where applicable.

(d) Where incompatible wastes are stored or otherwise managed in containers, a description of the procedures used to ensure compliance with §§ 264.177 (a) and (b), and 264.17 (b) and (c).

[48 FR 14228, Apr. 1, 1983; 48 FR 30114, June 30, 1983]

§ 270.16 Specific Part B information requirements for tank systems.

Except as otherwise provided in § 264.190, owners and operators of facilities that use tanks to store or treat hazardous waste must provide the following additional information:

(a) A written assessment that is reviewed and certified by an independent, qualified, registered professional engineer as to the structural integrity and suitability for handling hazardous waste of each tank system, as required under §§ 264.191 and 264.192;

(b) Dimensions and capacity of each tank;

(c) Description of feed systems, safety cutoff, bypass systems, and pressure controls (e.g., vents);

(d) A diagram of piping, instrumentation, and process flow for each tank system;

(e) A description of materials and equipment used to provide external corrosion protection, as required under § 264.192(a)(3)(ii);

(f) For new tank systems, a detailed description of how the tank system(s) will be installed in compliance with § 264.192 (b), (c), (d), and (e);

(g) Detailed plans and description of how the secondary containment system for each tank system is or will be designed, constructed, and operated to meet the requirements of § 264.193 (a), (b), (c), (d), (e), and (f);

(h) For tank systems for which a variance from the requirements of § 264.193 is sought (as provided by §§ 264.193(g)):

(1) Detailed plans and engineering and hydrogeologic reports, as appropriate, describing alternate design and operating practices that will, in conjunction with location aspects, prevent the migration of any hazardous waste or hazardous constituents into the ground water or surface water during the life of the facility, or

(2) A detailed assessment of the substantial present or potential hazards posed to human health or the environment should a release enter the environment.

(i) Description of controls and practices to prevent spills and overflows, as required under § 264.194(b); and

(j) For tank systems in which ignitable, reactive, or incompatible wastes are to be stored or treated, a description of how operating procedures and tank system and facility design will achieve compliance with the requirements of §§ 264.198 and 264.199.

(Information collection requirements contained in paragraphs (a)-(j) were approved by the Office of Management and Budget under control number 2050-0050)

[51 FR 25486, July 14, 1986; 51 FR 29431, Aug. 15, 1986]

§ 270.17 Specific Part B information requirements for surface impoundments.

Except as otherwise provided in § 264.1, owners and operators of facilities that store, treat or dispose of hazardous waste in surface impoundments must provide the following additional information:

(a) A list of the hazardous wastes placed or to be placed in each surface impoundment;

(b) Detailed plans and an engineering report describing how the surface impoundment is or will be designed, constructed, operated and maintained to meet the requirements of § 264.221. This submission must address the following items as specified in § 264.221:

(1) The liner system (except for an existing portion of a surface impoundment). If an exemption from the requirement for a liner is sought as provided by § 264.221(b), submit detailed plans and engineering and hydrogeologic reports, as appropriate, describing alternate design and operating practices that will, in conjunction with location aspects, prevent the migration of any hazardous constituents into the ground water or surface water at any future time;

(2) Prevention of overtopping; and

(3) Structural integrity of dikes;

(c) A description of how each surface impoundment, including the liner and cover systems and appurtenances for control of overtopping, will be inspected in order to meet the requirements of § 264.226(a) and (b). This information should be included in the inspection plan submitted under § 270.14(b)(5);

(d) A certification by a qualified engineer which attests to the structural integrity of each dike, as required under § 264.226(c). For new units, the owner or operator must submit a statement by a qualified engineer that he will provide such a certification upon completion of construction in accordance with the plans and specifications;

(e) A description of the procedure to be used for removing a surface impoundment from service, as required under § 264.227(b) and (c). This information should be included in the contingency plan submitted under § 270.14(b)(7);

(f) A description of how hazardous waste residues and contaminated materials will be removed from the unit at closure, as required under § 264.228(a)(1). For any wastes not to be removed from the unit upon closure, the owner or operator must submit detailed-plans and an engineering report describing how § 264.228(a)(2) and (b) will be complied with. This information should be included in the closure plan and, where applicable, the post-closure plan submitted under § 270.14(b)(13);

(g) If ignitable or reactive wastes are to be placed in a surface impoundment, an explanation of how § 264.229 will be complied with;

(h) If incompatible wastes, or incompatible wastes and materials will be placed in a surface impoundment, an explanation of how § 264.230 will be complied with.

(i) A waste management plan for EPA Hazardous Waste Nos. FO20, FO21, FO22, FO23, FO26, and FO27 describing how the surface impoundment is or will be designed, constructed, operated, and maintained to meet the requirements of § 264.231. This submission must address the following items as specified in § 264.231:

(1) The volume, physical, and chemical characteristics of the wastes, including their potential to migrate through soil or to volatilize or escape into the atmosphere;

(2) The attenuative properties of underlying and surrounding soils or other materials;

(3) The mobilizing properties of other materials co-disposed with these wastes; and

(4) The effectiveness of additional treatment, design, or monitoring techniques.

[48 FR 14228, Apr. 1, 1983, as amended at 50 FR 2006, Jan. 14, 1985; 50 FR 28752, July 15, 1985]

§ 270.18 Specific Part B information requirements for waste piles.

Except as otherwise provided in § 264.1, owners and operators of facilities that store or treat hazardous waste in waste piles must provide the following additional information:

(a) A list of hazardous wastes placed or to be placed in each waste pile;

(b) If an exemption is sought to § 264.251 and Subpart F of Part 264 as provided by § 264.250(c) or § 264.90(2), an explanation of how the standards of § 264.250(c) will be complied with or detailed plans and an engineering report describing how the requirements of § 264.90(b)(2) will be met.

(c) Detailed plans and an engineering report describing how the pile is or will be designed, constructed, operated and maintained to meet the requirements of § 264.251. This submission must address the following items as specified in § 264.251:

(1) The liner system (except for an existing portion of a pile). If an exemption from the requirement for a liner is sought, as provided by § 264.252(b), the owner or operator must submit detailed plans and engineering and hydrogeologic reports, as applicable, describing alternate design and operating practices that will, in conjunction with location aspects, prevent the migration of any hazardous constituents into the ground water or surface water at any future time;

(2) Control of run-on;

(3) Control of run-off;

(4) Management of collection and holding units associated with run-on and run-off control systems; and

(5) Control of wind dispersal of particulate matter, where applicable;

(d) A description of how each waste pile, including the liner and appurtenances for control of run-on and run-off, will be inspected in order to meet the requirements of § 264.254(a) and (b). This information should be included in the inspection plan submitted under § 270.14(b)(5).

(e) If treatment is carried out on or in the pile, details of the process and equipment used, and the nature and quality of the residuals;

(f) If ignitable or reactive wastes are to be placed in a waste pile, an explanation of how the requirements of § 264.256 will be complied with;

(g) If incompatible wastes, or incompatible wastes and materials will be place in a waste pile, an explanation of how § 264.257 will be complied with;

(h) A description of how hazardous waste residues and contaminated materials will be removed from the waste pile at closure, as required under § 264.258(a). For any waste not to be removed from the waste pile upon closure, the owner or operator must submit detailed plans and an engineering report describing how § 264.310 (a) and (b) will be complied with. This information should be included in the closure plan and, where applicable, the post-closure plan submitted under § 270.14(b)(13).

(i) A waste management plan for EPA Hazardous Waste Nos. FO20, FO21, FO22, FO23, FO26, and FO27 describing how a waste pile that is not enclosed (as defined in § 264.250(c)) is or will be designed, constructed, operated, and maintained to meet the requirements of § 264.259. This submission must address the following items as specified in § 264.259:

(1) The volume, physical, and chemical characteristics of the wastes to be disposed in the waste pile, including their potential to migrate through soil or to volatilize or escape into the atmosphere;

(2) The attenuative properties of underlying and surrounding soils or other materials;

(3) The mobilizing properties of other materials co-disposed with these wastes; and

(4) The effectiveness of additional treatment, design, or monitoring techniques.

[48 FR 14228, Apr. 1, 1983, as amended at 50 FR 2006, Jan. 14, 1985; 50 FR 28752, July 15, 1985]

§ 270.19 Specific Part B information requirements for incinerators.

Except as § 264.340 of this chapter provides otherwise, owners and operators of facilities that incinerate hazardous waste must fulfill the requirements of (a), (b), or (c) of this section.

(a) When seeking an exemption under § 264.340 (b) or (c) of this chapter (Ignitable, corrosive, or reactive wastes only):

(1) Documentation that the waste is listed as a hazardous waste in Part 261, Subpart D of this chapter, solely because it is ignitable (Hazard Code I) or corrosive (Hazard Code C) or both; or

(2) Documentation that the waste is listed as a hazardous waste in Part 261, Subpart D of this chapter, solely because it is reactive (Hazard Code R) for characteristics other than those listed in § 261.23(a) (4) and (5) of this chapter, and will not be burned when other hazardous wastes are present in the combustion zone; or

(3) Documentation that the waste is a hazardous waste solely because it possesses the characteristic of ignitability, corrosivity, or both, as determined by the tests for characteristics of hazardous waste under Part 261, Subpart C of this chapter; or

(4) Documentation that the waste is a hazardous waste solely because it possesses the reactivity characteristics listed in § 261.23(a) (1), (2), (3), (6), (7), or (8) of this chapter, and that it will not be burned when other hazardous wastes are present in the combustion zone; or

(b) Submit a trial burn plan or the results of a trial burn, including all required determinations, in accordance with § 270.62; or

(c) In lieu of a trial burn, the applicant may submit the following information:

(1) An analysis of each waste or mixture of wastes to be burned including:

(i) Heat value of the waste in the form and composition in which it will be burned.

(ii) Viscosity (if applicable), or description of physical form of the waste.

(iii) An identification of any hazardous organic constituents listed in Part 261, Appendix VIII, of this chapter, which are present in the waste to be burned, except that the applicant need not analyze for constituents listed in Part 261, Appendix VIII, of this chapter which would reasonably not be expected to be found in the waste. The constituents excluded from analysis must be identified and the basis for their exclusion stated. The waste analysis must rely on analytical techniques specified in "Test methods for the evaluation of Solid Waste, Physical/Chemical Methods" (incorporated by reference, see § 270.6 and referenced in 40 CFR Part 261, Appendix III), or their equivalent.

(iv) An approximate quantification of the hazardous constituents identified in the waste, within the precision produced by the analytical methods specified in "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods" (incorporated by reference, see § 270.6).

(v) A quantification of those hazardous constituents in the waste which may be designated as POHC's based on data submitted from other trial or operational burns which demonstrate compliance with the performance standards in § 264.343 of this chapter.

(2) A detailed engineering description of the incinerator, including:

(i) Manufacturer's name and model number of incinerator.

(ii) Type of incinerator.

(iii) Linear dimension of incinerator unit including cross sectional area of combustion chamber.

(iv) Decription of auxiliary fuel system (type/feed).

(v) Capacity of prime mover.

(vi) Description of automatic waste feed cutoff system(s).

(vii) Stack gas monitoring and pollution control monitoring system.

(viii) Nozzle and burner design.

(ix) Construction materials.

(x) Location and description of temperature, pressure, and flow indicating devices and control devices.

(3) A description and analysis of the waste to be burned compared with the waste for which data from operational or trial burns are provided to support the contention that a trial burn is not needed. The data should include those items listed in paragraph (c)(1) of this section. This analysis should specify the POHC's which the applicant has idenitified in the waste for which a permit is sought, and any differeneces from the POHC's in the waste for which burn data are provided.

(4) The design and operating conditions of the incinerator unit to be used, compared with that for which comparative burn data are available.

(5) A description of the results submitted from any previously conducted trial burn(s) including:

(i) Sampling and analysis techniques used to calculate performance standards in § 264.343 of this chapter,

(ii) Methods and results of monitoring temperatures, waste feed rates, carbon monoxide, and an appropriate indicator of combustion gas velocity (including a statement concerning the precision and accuracy of this measurement),

(6) The expected incinerator operation information to demonstrate compliance with §§ 264.343 and 264.345 of this chapter including:

(i) Expected carbon monoxide (CO) level in the stack exhaust gas.

(ii) Waste feed rate.

(iii) Combustion zone temperature.

(iv) Indication of combustion gas velocity.

(v) Expected stack gas volume, flow rate, and temperature.

(vi) Computed residence time for waste in the combustion zone.

(vii) Expected hydrochloric acid removal efficiency.

(viii) Expected fugitive emissions and their control procedures.

(ix) Proposed waste feed cut-off limits based on the identified significant operating parameters.

(7) Such supplemental information as the Director finds necessary to achieve the purposes of this paragraph.

(8) Waste analysis data, including that submitted in paragraph (c)(1) of this section, sufficient to allow the Director to specify as permit Principal Organic Hazardous Constituents (permit POHC's) those constituents for which destruction and removal efficiencies will be required.

(d) The Director shall approve a permit application without a trial burn if he finds that:

(1) The wastes are sufficiently similar; and

(2) The incinerator units are sufficiently similar, and the data from other trial burns are adequate to specify (under § 264.345 of this chapter) operating conditions that will ensure that the performance standards in § 264.343 of this chapter will be met by the incinerator.

§ 270.20 Specific Part B information requirements for land treatment facilities.

Except as otherwise provided in § 264.1, owners and operators of facilities that use land treatment to dispose of hazardous waste must provide the following additional information:

(a) A description of plans to conduct a treatment demonstration as required under § 264.272. The description must include the following information;

(1) The wastes for which the demonstration will be made and the potential hazardous constituents in the waste;

(2) The data sources to be used to make the demonstration (*e.g.*, literature, laboratory data, field data, or operating data);

(3) Any specific laboratory or field test that will be conducted, including:

(i) The type of test (*e.g.*, column leaching, degradation);

(ii) Materials and methods, including analytical procedures;

(iii) Expected time for completion;

(iv) Characteristics of the unit that will be simulated in the demonstration, including treatment zone characteristics, climatic conditions, and operating practices.

(b) A description of a land treatment program, as required under § 264.271. This information must be submitted with the plans for the treatment demonstration, and updated following the treatment demonstration. The land treatment program must address the following items:

(1) The wastes to be land treated;

(2) Design measures and operating practices necessary to maximize treatment in accordance with § 264.273(a) including:

(i) Waste application method and rate;

(ii) Measures to control soil pH;

(iii) Enhancement of microbial or chemical reactions;

(iv) Control of moisture content;

(3) Provisions for unsaturated zone monitoring, including:

(i) Sampling equipment, procedures, and frequency;

(ii) Procedures for selecting sampling locations;

(iii) Analytical procedures;

(iv) Chain of custody control;

(v) Procedures for establishing background values;

(vi) Statistical methods for interpreting results;

(vii) The justification for any hazardous constituents recommended for

selection as principal hazardous constituents, in accordance with the criteria for such selection in § 264.278(a);

(4) A list of hazardous constituents reasonably expected to be in, or derived from, the wastes to be land treated based on waste analysis performed pursuant to § 264.13;

(5) The proposed dimensions of the treatment zone;

(c) A description of how the unit is or will be designed, constructed, operated, and maintained in order to meet the requirements of § 264.273. This submission must address the following items:

(1) Control of run-on;

(2) Collection and control of run-off;

(3) Minimization of run-off of hazardous constituents from the treatment zone;

(4) Management of collection and holding facilities associated with run-on and run-off control systems;

(5) Periodic inspection of the unit. This information should be included in the inspection plan submitted under § 270.14(b)(5);

(6) Control of wind dispersal of particulate matter, if applicable;

(d) If food-chain crops are to be grown in or on the treatment zone of the land treatment unit, a description of how the demonstration required under § 264.276(a) will be conducted including:

(1) Characteristics of the food-chain crop for which the demonstration will be made.

(2) Characteristics of the waste, treatment zone, and waste application method and rate to be used in the demonstration;

(3) Procedures for crop growth, sample collection, sample analysis, and data evaluation;

(4) Characteristics of the comparison crop including the location and conditions under which it was or will be grown;

(e) If food-chain crops are to be grown, and cadmium is present in the land-treated waste, a description of how the requirements of § 264.276(b) will be complied with;

(f) A description of the vegetative cover to be applied to closed portions of the facility, and a plan for maintaining such cover during the post-closure care period, as required under § 264.280(a)(8) and § 264.280(c)(2). This information should be included in the closure plan and, where applicable, the post-closure care plan submitted under § 270.14(b)(13);

(g) If ignitable or reactive wastes will be placed in or on the treatment zone, an explanation of how the requirements of § 264.281 will be complied with;

(h) If incompatible wastes, or incompatible wastes and materials, will be placed in or on the same treatment zone, an explanation of how § 264.282 will be complied with.

(i) A waste management plan for EPA Hazardous Waste Nos. FO20, FO21, FO22, FO23, FO26, and FO27 describing how a land treatment facility is or will be designed, constructed, operated, and maintained to meet the requirements of § 264.283. This submission must address the following items as specified in § 264.283:

(1) The volume, physical, and chemical characteristics of the wastes, including their potential to migrate through soil or to volatilize or escape into the atmosphere;

(2) The attentuative properties of underlying and surrounding soils or other materials;

(3) The mobilizing properties of other materials co-disposed with these wastes; and

(4) The effectiveness of additional treatment, design, or monitoring techniques.

[48 FR 14228, Apr. 1, 1983; 48 FR 30114, June 30, 1983, as amended at 50 FR 2006, Jan. 14, 1985]

§ 270.21 Specific Part B information requirements for landfills.

Except as otherwise provided in § 264.1, owners and operators of facilities that dispose of hazardous waste in landfills must provide the following additional information:

(a) A list of the hazardous wastes placed or to be placed in each landfill or landfill cell;

(b) Detailed plans and an engineering report describing how the landfill is or will be designed, constructed, operated and maintained to comply with the requirements of § 264.301. This

submission must address the following items as specified in § 264.301:

(1) The liner system and leachate collection and removal system (except for an existing portion of a landfill). If an exemption from the requirements for a liner and a leachate collection and removal system is sought as provided by § 264.301(b), submit detailed plans and engineering and hydrogeologic reports, as appropriate, describing alternate design and operating practices that will, in conjunction with location aspects, prevent the migration of any hazardous constituent into the ground water or surface water at any future time;

(2) Control of run-on;

(3) Control of run-off;

(4) Management of collection and holding facilities associated with run-on and run-off control systems; and

(5) Control of wind dispersal of particulate matter, where applicable;

(c) If an exemption from Subpart F of Part 264 is sought, as provided by § 264.302(a), the owner or operator must submit detailed plans and an engineering report explaining the location of the saturated zone in relation to the landfill, the design of a double-liner system that incorporates a leak detection system between the liners, and a leachate collection and removal system above the liners;

(d) A description of how each landfill, including the liner and cover systems, will be inspected in order to meet the requirements of § 264.303 (a) and (b). This information should be included in the inspection plan submitted under § 270.14(b)(5).

(e) Detailed plans and an engineering report describing the final cover which will be applied to each landfill or landfill cell at closure in accordance with § 264.310(a), and a description of how each landfill will be maintained and monitored after closure in accordance with § 264.310(b). This information should be included in the closure and post-closure plans submitted under § 270.14(b)(13).

(f) If ignitable or reactive wastes will be landfilled, an explanation of how the standards of § 264.312 will be complied with;

(g) If incompatible wastes, or incompatible wastes and materials will be landfilled, an explanation of how § 264.313 will be complied with;

(h) If bulk or non-containerized liquid waste or wastes containing free liquids is to be landfilled prior to May 8, 1985, an explanation of how the requirements of § 264.314(a) will be complied with;

(i) If containers of hazardous waste are to be landfilled, an explanation of how the requirements of § 264.315 or § 264.316, as applicable, will be complied with.

(j) A waste management plan for EPA Hazardous Waste Nos. FO20, FO21, FO22, FO23, FO26, and FO27 describing how a landfill is or will be designed, constructed, operated, and maintained to meet the requirements of § 264.317. This submission must address the following items as specified in § 264.317:

(1) The volume, physical, and chemical characteristics of the wastes, including their potential to migrate through soil or to volatilize or escape into the atmosphere;

(2) The attenuative properties of underlying and surrounding soils or other materials;

(3) The mobilizing properties of other materials co-disposed with these wastes; and

(4) The effectiveness of additional treatment, design, or monitoring techniques.

[48 FR 14228, Apr. 1, 1983; 48 FR 30114, June 30, 1983, as amended at 50 FR 2006, Jan. 14, 1985; 50 FR 28752, July 15, 1985]

§§ 270.22 [Reserved]

§ 270.23 Specific Part B information requirements for miscellaneous units.

Except as otherwise provided in § 264.600, owners and operators of facilities that treat, store, or dispose of hazardous waste in miscellaneous units must provide the following additional information:

(a) A detailed description of the unit being used or proposed for use, including the following:

(1) Physical characteristics, materials of construction, and dimensions of the unit;

(2) Detailed plans and engineering reports describing how the unit will be

located, designed, constructed, operated, maintained, monitored, inspected, and closed to comply with the requirements of §§ 264.601 and 264.602; and

(3) For disposal units, a detailed description of the plans to comply with the post-closure requirements of § 264.603.

(b) Detailed hydrologic, geologic, and meteorologic assessments and land-use maps for the region surrounding the site that address and ensure compliance of the unit with each factor in the environmental performance standards of § 264.601. If the applicant can demonstrate that he does not violate the environmental performance standards of § 264.601 and the Director agrees with such demonstration, preliminary hydrologic, geologic, and meteorologic assessments will suffice.

(c) Information on the potential pathways of exposure of humans or environmental receptors to hazardous waste or hazardous constituents and on the potential magnitude and nature of such exposures.

(d) For any treatment unit, a report on a demonstration of the effectiveness of the treatment based on laboratory or field data.

(e) Any additional information determined by the Director to be necessary for evaluation of compliance of the unit with the environmental performance standards of § 264.601.

(Information collection requirements in this section have been approved by the Office of Management and Budget under control number 2050-0074)

§ 270.24 Specific Part B information requirements for process vents.

Except as otherwise provided in § 264.1, owners and operators of facilities that have process vents to which subpart AA of part 264 applies must provide the following additional information:

(a) For facilities that cannot install a closed-vent system and control device to comply with the provisions of 40 CFR 264 subpart AA on the effective date that the facility becomes subject to the provisions of 40 CFR 264 or 265 subpart AA, an implementation schedule as specified in § 264.1033(a)(2).

(b) Documentation of compliance with the process vent standards in § 264.1032, including:

(1) Information and data identifying all affected process vents, annual throughput and operating hours of each affected unit, estimated emission rates for each affected vent and for the overall facility (i.e., the total emissions for all affected vents at the facility), and the approximate location within the facility of each affected unit (e.g., identify the hazardous waste management units on a facility plot plan).

(2) Information and data supporting estimates of vent emissions and emission reduction achieved by add-on control devices based on engineering calculations or source tests. For the purpose of determining compliance, estimates of vent emissions and emission reductions must be made using operating parameter values (e.g., temperatures, flow rates, or concentrations) that represent the conditions that exist when the waste management unit is operating at the highest load or capacity level reasonably expected to occur.

(3) Information and data used to determine whether or not a process vent is subject to the requirements of § 264.1032.

(c) Where an owner or operator applies for permission to use a control device other than a thermal vapor incinerator, catalytic vapor incinerator, flare, boiler, process heater, condenser, or carbon adsorption system to comply with the requirements of § 264.1032, and chooses to use test data to determine the organic removal efficiency or the total organic compound concentration achieved by the control device, a performance test plan as specified in § 264.1035(b)(3).

(d) Documentation of compliance with § 264.1033, including:

(1) A list of all information references and sources used in preparing the documentation.

(2) Records including the dates of each compliance test required by § 264.103(k).

(3) A design analysis, specifications, drawings, schematics, and piping and instrumentation diagrams based on the appropriate sections of "APTI

Course 415: Control of Gaseous Emissions" (incorporated by reference as specified in § 260.11) or other engineering texts acceptable to the Regional Administrator that present basic control device design information. The design analysis shall address the vent stream characteristics and control device operation parameters as specified in § 264.1035(b)(4)(iii).

(4) A statement signed and dated by the owner or operator certifying that the operating parameters used in the design analysis reasonably represent the conditions that exist when the hazardous waste management unit is or would be operating at the highest load or capacity level reasonably expected to occur.

(5) A statement signed and dated by the owner or operator certifying that the control device is designed to operate at an efficiency of 95 weight percent or greater unless the total organic emission limits of § 264.1032(a) for affected process vents at the facility can be attained by a control device involving vapor recovery at an efficiency less than 95 weight percent.

(Approved by the Office of Management and Budget under control number 2060-0195)

[55 FR 25518, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25518, June 21, 1990, § 270.24 was added, effective December 21, 1990.

§ 270.25 Specific part B information requirements for equipment.

Except as otherwise provided in § 264.1, owners and operators of facilities that have equipment to which subpart BB of part 264 applies must provide the following additional information:

(a) For each piece of equipment to which subpart BB of part 264 applies:

(1) Equipment identification number and hazardous waste management unit identification.

(2) Approximate locations within the facility (e.g., identify the hazardous waste management unit on a facility plot plan).

(3) Type of equipment (e.g., a pump or pipeline valve).

(4) Percent by weight total organics in the hazardous waste stream at the equipment.

(5) Hazardous waste state at the equipment (e.g., gas/vapor or liquid).

(6) Method of compliance with the standard (e.g., "monthly leak detection and repair" or "equipped with dual mechanical seals").

(b) For facilities that cannot install a closed-vent system and control device to comply with the provisions of 40 CFR 264 subpart BB on the effective date that the facility becomes subject to the provisions of 40 CFR 264 or 265 subpart BB, an implementation schedule as specified in § 264.1033(a)(2).

(c) Where an owner or operator applies for permission to use a control device other than a thermal vapor incinerator, catalytic vapor incinerator, flare, boiler, process heater, condenser, or carbon adsorption system and chooses to use test data to determine the organic removal efficiency or the total organic compound concentration achieved by the control device, a performance test plan as specified in § 264.1035(b)(3).

(d) Documentation that demonstrates compliance with the equipment standards in §§ 264.1052 to 264.1059. This documentation shall contain the records required under § 264.1064. The Regional Administrator may request further documentation before deciding if compliance has been demonstrated.

(e) Documentation to demonstrate compliance with § 264.1060 shall include the following information:

(1) A list of all information references and sources used in preparing the documentation.

(2) Records including the dates of each compliance test required by § 264.1033(j).

(3) A design analysis, specifications, drawings, schematics, and piping and instrumentation diagrams based on the appropriate sections of "ATPI Course 415: Control of Gaseous Emissions" (incorporated by reference as specified in § 260.11) or other engineering texts acceptable to the Regional Administrator that present basic control device design information. The design analysis shall address the vent stream characteristics and control device operation parameters as specified in § 264.1035(b)(4)(iii).

(4) A statement signed and dated by the owner or operator certifying that the operating parameters used in the design analysis reasonably represent the conditions that exist when the hazardous waste management unit is operating at the highest load or capacity level reasonably expected to occur.

(5) A statement signed and dated by the owner or operator certifying that the control device is designed to operate at an efficiency of 95 weight percent or greater.

(Approved by the Office of Management and Budget under control number 2060-0915)

[55 FR 25518, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25518, June 21, 1990, § 270.25 was added, effective December 21, 1990.

§ § 270.26—270.28 [Reserved]

§ 270.29 Permit denial.

The Director may, pursuant to the procedures in Part 124, deny the permit application either in its entirety or as to the active life of a hazardous waste management facility or unit only.

[54 FR 9607, Mar. 7, 1989]

Subpart C—Permit Conditions

§ 270.30 Conditions applicable to all permits.

The following conditions apply to all RCRA permits, and shall be incorporated into the permits either expressly or by reference. If incorporated by reference, a specific citation to these regulations (or the corresponding approved State regulations) must be given in the permit.

(a) *Duty to comply.* The permittee must comply with all conditions of this permit, except that the permittee need not comply with the conditions of this permit to the extent and for the duration such noncompliance is authorized in an emergency permit. (See § 270.61). Any permit noncompliance, except under the terms of an emergency permit, constitutes a violation of the appropriate Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or for denial of a permit renewal application.

(b) *Duty to reapply.* If the permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the permittee must apply for and obtain a new permit.

(c) *Need to halt or reduce activity not a defense.* It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

(d) In the event of noncompliance with the permit, the permittee shall take all reasonable steps to minimize releases to the environment, and shall carry out such measures as are reasonable to prevent significant adverse impacts on human health or the environment.

(e) *Proper operation and maintenance.* The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance includes effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory and process controls, including appropriate quality assurance procedures. This provision requires the opration of back-up or auxiliary facilities or similar systems only when necessary to achieve compliance with the conditions of the permit.

(f) *Permit actions.* This permit may be modified, revoked and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance, does not stay any permit condition.

(g) *Property rights.* The permit does not convey any property rights of any sort, or any exclusive privilege.

(h) *Duty to provide information.* The permittee shall furnish to the Director, within a reasonable time, any relevant information which the Director may request to determine whether cause exists for modifying, revoking

and reissuing, or terminating this permit, or to determine compliance with this permit. The permittee shall also furnish to the Director, upon request, copies of records required to be kept by this permit.

(i) *Inspection and entry.* The permittee shall allow the Director, or an authorized representative, upon the presentation of credentials and other documents as may be required by law to:

(1) Enter at reasonable times upon the permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this permit;

(2) Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;

(3) Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and

(4) Sample or monitor at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by RCRA, any substances or parameters at any location.

(j) *Monitoring and records.* (1) Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity.

(2) The permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, the certification required by § 264.73(b)(9) of this chapter, and records of all data used to complete the application for this permit, for a period of at least 3 years from the date of the sample, measurement, report, certification, or application. This period may be extended by request of the Director at any time. The permittee shall maintain records from all ground-water monitoring wells and associated ground-water surface elevations, for the active life of the facility, and for disposal facilities for the post-closure care period as well.

(3) Records for monitoring information shall include:

(i) The date, exact place, and time of sampling or measurements;

(ii) The individual(s) who performed the sampling or measurements;

(iii) The date(s) analyses were performed;

(iv) The individual(s) who performed the analyses;

(v) The analytical techniques or methods used; and

(vi) The results of such analyses.

(k) *Signatory requirements.* All applications, reports, or information submitted to the Director shall be signed and certified (See § 270.11.)

(l) *Reporting requirements.* (1) *Planned changes.* The permittee shall give notice to the Director as soon as possible of any planned physical alterations or additions to the permitted facility.

(2) *Anticipated noncompliance.* The permittee shall give advance notice to the Director of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements. For a new facility, the permittee may not treat, store, or dispose of hazardous waste; and for a facility being modified, the permittee may not treat, store, or dispose of hazardous waste in the modified portion of the facility except as provided in § 270.42, until:

(i) The permittee has submitted to the Director by certified mail or hand delivery a letter signed by the permittee and a registered professional engineer stating that the facility has been constructed or modified in compliance with the permit; and

(ii)(A) The Director has inspected the modified or newly constructed facility and finds it is in compliance with the conditions of the permit; or

(B) Within 15 days of the date of submission of the letter in paragraph (l)(2)(i) of this section, the permittee has not received notice from the Director of his or her intent to inspect, prior inspection is waived and the permittee may commence treatment, storage, or disposal of hazardous waste.

(3) *Transfers.* This permit is not transferable to any person except after notice to the Director. The Director may require modification or revocation and reissuance of the permit to change the name of the per-

mittee and incorporate such other requirements as may be necessary under RCRA. (See § 270.40)

(4) *Monitoring reports.* Monitoring results shall be reported at the intervals specified elsewhere in this permit.

(5) *Compliance schedules.* Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this permit shall be submitted no later than 14 days following each schedule date.

(6) *Twenty-four hour reporting.* (i) The permittee shall report any noncompliance which may endanger health or the environment orally within 24 hours from the time the permittee becomes aware of the circumstances, including:

(A) Information concerning release of any hazardous waste that may cause an endangerment to public drinking water supplies.

(B) Any information of a release or discharge of hazardous waste or of a fire or explosion from the HWM facility, which could threaten the environment or human health outside the facility.

(ii) The description of the occurrence and its cause shall include:

(A) Name, address, and telephone number of the owner or operator;

(B) Name, address, and telephone number of the facility;

(C) Date, time, and type of incident;

(D) Name and quantity of material(s) involved;

(E) The extent of injuries, if any;

(F) An assessment of actual or potential hazards to the environment and human health outside the facility, where this is applicable; and

(G) Estimated quantity and disposition of recovered material that resulted from the incident.

(iii) A written submission shall also be provided within 5 days of the time the permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance. The Director may waive the five day written notice requirement in favor of a written report within fifteen days.

(7) *Manifest discrepancy report:* If a significant discrepancy in a manifest is discovered, the permittee must attempt to reconcile the discrepancy. If not resolved within fifteen days, the permittee must submit a letter report, including a copy of the manifest, to the Director. (See 40 CFR 264.72.)

(8) *Unmanifested waste report:* This report must be submitted to the Director within 15 days of receipt of unmanifested waste. (See 40 CFR 264.76)

(9) *Biennial report:* A biennial report must be submitted covering facility activities during odd numbered calendar years. (See 40 CFR 264.75.)

(10) *Other noncompliance.* The permittee shall report all instances of noncompliance not reported under paragraphs (l)(4), (5), and (6) of this section, at the time monitoring reports are submitted. The reports shall contain the information listed in paragraph (l)(6) of this section.

(11) *Other information.* Where the permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to the Director, it shall promptly submit such facts or information.

(Clean Water Act (33 U.S.C. 1251 et seq.), Safe Drinking Water Act (42 U.S.C. 300f et seq.), Clean Air Act (42 U.S.C. 7401 et seq.), Resource Conservation and Recovery Act (42 U.S.C. 6901 et seq.))

[48 FR 14228, Apr. 1, 1983, as amended at 48 FR 30114, June 30, 1983; 48 FR 39622, Sept. 1, 1983; 50 FR 28752, July 15, 1985; 53 FR 37935, Sept. 28, 1988]

§ 270.31 Requirements for recording and reporting of monitoring results.

All permits shall specify:

(a) Requirements concerning the proper use, maintenance, and installation, when appropriate, of monitoring equipment or methods (including biological monitoring methods when appropriate);

(b) Required monitoring including type, intervals, and frequency sufficient to yield data which are representative of the monitored activity in-

cluding, when appropriate, continuous monitoring;

(c) Applicable reporting requirements based upon the impact of the regulated activity and as specified in Parts 264, 266 and 267. Reporting shall be no less frequent than specified in the above regulations.

§ 270.32 Establishing permit conditions.

(a) In addition to conditions required in all permits (§ 270.30), the Director shall establish conditions, as required on a case-by-case basis, in permits under §§ 270.50 (duration of permits), 270.33(a) (schedules of compliance), 270.31 (monitoring), and for EPA issued permits only, 270.33(b) (alternate schedules of compliance) and 270.3 (considerations under Federal law).

(b)(1) Each RCRA permit shall include permit conditions necessary to achieve compliance with the Act and regulations, including each of the applicable requirements specified in Parts 264 and 266 through 268 of this chapter. In satisfying this provision, the Administrator may incorporate applicable requirements of Parts 264 and 266 through 268 of this chapter directly into the permit or establish other permit conditions that are based on these parts.

(2) Each permit issued under section 3005 of this act shall contain terms and conditions as the Administrator or State Director determines necessary to protect human health and the environment.

(c) For a State issued permit, an applicable requirement is a State statutory or regulatory requirement which takes effect prior to final administrative disposition of a permit. For a permit issued by EPA, an applicable requirement is a statutory or regulatory requirement (including any interim final regulation) which takes effect prior to the issuance of the permit (except as provided in § 124.86(c) for RCRA permits being processed under Subpart E or F of Part 124). Section 124.14 (reopening of comment period) provides a means for reopening EPA permit proceedings at the discretion of the Director where new requirements become effective during the permitting process and are of sufficient magnitude to make additional proceedings desirable. For State and EPA administered programs, an applicable requirement is also any requirement which takes effect prior to the modification or revocation and reissuance of a permit, to the extent allowed in § 270.41.

(d) New or reissued permits, and to the extent allowed under § 270.41, modified or revoked and reissued permits, shall incorporate each of the applicable requirements referenced in this section and in 40 CFR 270.31.

(e) *Incorporation.* All permit conditions shall be incorporated either expressly or by reference. If incorporated by reference, a specific citation to the applicable regulations or requirements must be given in the permit.

[48 FR 14228, Apr. 1, 1983, as amended at 50 FR 28752, July 15, 1985; 51 FR 40653, Nov. 7, 1986]

§ 270.33 Schedules of compliance.

(a) The permit may, when appropriate, specify a schedule of compliance leading to compliance with the Act and regulations.

(1) *Time for compliance.* Any schedules of compliance under this section shall require compliance as soon as possible.

(2) *Interim dates.* Except as provided in paragraph (b)(1)(ii) of this section, if a permit establishes a schedule of compliance which exceeds 1 year from the date of permit issuance, the schedule shall set forth interim requirements and the dates for their achievement.

(i) The time between interim dates shall not exceed 1 year.

(ii) If the time necessary for completion of any interim requirement is more than 1 year and is not readily divisible into stages for completion, the permit shall specify interim dates for the submission of reports of progress toward completion of the interim requirements and indicate a projected completion date.

(3) *Reporting.* The permit shall be written to require that no later than 14 days following each interim date and the final date of compliance, the permittee shall notify the Director in writing, of its compliance or noncom-

pliance with the interim or final requirements.

(b) *Alternative schedules of compliance.* An RCRA permit applicant or permittee may cease conducting regulated activities (by receiving a terminal volume of hazardous waste and, for treatment and storage HWM facilities, closing pursuant to applicable requirements; and, for disposal HWM facilities, closing and conducting post-closure care pursuant to applicable requirements) rather than continue to operate and meet permit requirements as follows:

(1) If the permittee decides to cease conducting regulated activities at a given time within the term of a permit which has already been issued:

(i) The permit may be modified to contain a new or additional schedule leading to timely cessation of activities; or

(ii) The permittee shall cease conducting permitted activities before noncompliance with any interim or final compliance schedule requirement already specified in the permit.

(2) If the decision to cease conducting regulated activities is made before issuance of a permit whose term will include the termination date, the permit shall contain a schedule leading to termination which will ensure timely compliance with applicable requirements.

(3) If the permittee is undecided whether to cease conducting regulated activities, the Director may issue or modify a permit to contain two schedules as follows:

(i) Both schedules shall contain an identical interim deadline requiring a final decision on whether to cease conducting regulated activities no later than a date which ensures sufficient time to comply with applicable requirements in a timely manner if the decision is to continue conducting regulated activities;

(ii) One schedule shall lead to timely compliance with applicable requirements;

(iii) The second schedule shall lead to cessation of regulated activities by a date which will ensure timely compliance with applicable requirements;

(iv) Each permit containing two schedules shall include a requirement that after the permittee has made a final decision under paragraph (b)(3)(i) of this section it shall follow the schedule leading to compliance if the decision is to continue conducting regulated activities, and follow the schedule leading to termination if the decision is to cease conducting regulated activities.

(4) The applicant's or permittee's decision to cease conducting regulated activities shall be evidenced by a firm public commitment satisfactory to the Director, such as resolution of the board of directors of a corporation.

[48 FR 14228, Apr. 1, 1983, as amended at 48 FR 30114, June 30, 1983]

Subpart D—Changes to Permit

§ 270.40 Transfer of permits.

(a) A permit may be transferred by the permittee to a new owner or operator only if the permit has been modified or revoked and reissued (under § 270.40(b) or § 270.41(b)(2)) to identify the new permittee and incorporate such other requirements as may be necessary under the appropriate Act.

(b) Changes in the ownership or operational control of a facility may be made as a Class 1 modification with prior written approval of the Director in accordance with § 270.42. The new owner or operator must submit a revised permit application no later than 90 days prior to the scheduled change. A written agreement containing a specific date for transfer of permit responsibility between the current and new permittees must also be submitted to the Director. When a transfer of ownership or operational control occurs, the old owner or operator shall comply with the requirements of 40 CFR Part 264, Subpart H (Financial Requirements) until the new owner or operator has demonstrated that he or she is complying with the requirements of that Subpart. The new owner or operator must demonstrate compliance with Subpart H requirements within six months of the date of the change of ownership or operational control of the facility. Upon demonstration to the Director by the new owner or operator of compliance with Subpart H, the Director shall notify

the old owner or operator that he or she no longer needs to comply with Subpart H as of the date of demonstration.

[53 FR 37935, Sept. 28, 1988]

§ 270.41 Modification or revocation and reissuance of permits.

When the Director receives any information (for example, inspects the facility, receives information submitted by the permittee as required in the permit (see § 270.30), receives a request for revocation and reissuance under § 124.5 or conducts a review of the permit file), he or she may determine whether one or more of the causes listed in paragraphs (a) and (b) of this section for modification, or revocation and reissuance or both exist. If cause exists, the Director may modify or revoke and reissue the permit accordingly, subject to the limitations of paragraph (c) of this section, and may request an updated application if necessary. When a permit is modified, only the conditions subject to modification are reopened. If a permit is revoked and reissued, the entire permit is reopened and subject to revision and the permit is reissued for a new term. (See 40 CFR 124.5(c)(2).) If cause does not exist under this section, the Director shall not modify or revoke and reissue the permit, except on request of the permittee. If a permit modification is requested by the permittee, the Director shall approve or deny the request according to the procedures of 40 CFR 270.42. Otherwise, a draft permit must be prepared and other procedures in Part 124 (or procedures of an authorized State program) followed.

(a) *Causes for modification.* The following are causes for modification, but not revocation and reissuance, of permits; the following may be causes for revocation and reissuance, as well as modification, when the permittee requests or agrees.

(1) *Alterations.* There are material and substantial alterations or additions to the permitted facility or activity which occurred after permit issuance which justify the application of permit conditions that are different or absent in the existing permit.

(2) *Information.* The Director has received information. Permits may be modified during their terms for this cause only if the information was not available at the time of permit issuance (other than revised regulations, guidance, or test methods) and would have justified the application of different permit conditions at the time of issuance.

(3) *New statutory requirements or regulations.* The standards or regulations on which the permit was based have been changed by statute, through promulgation of new or amended standards or regulations, or by judicial decision after the permit was issued.

(4) *Compliance schedules.* The Director determines good cause exists for modification of a compliance schedule, such as an act of God, strike, flood, or materials shortage or other events over which the permittee has little or no control and for which there is no reasonably available remedy.

(5) Notwithstanding any other provision in this section, when a permit for a land disposal facility is reviewed by the Director under § 270.50(d), the Director shall modify the permit as necessary to assure that the facility continues to comply with the currently applicable requirements in Parts 124, 260 through 266, and 270.

(b) *Causes for modification or revocation and reissuance.* The following are causes to modify or, alternatively, revoke and reissue a permit:

(1) Cause exists for termination under § 270.43, and the Director determines that modification or revocation and reissuance is appropriate.

(2) The Director has received notification (as required in the permit, see § 270.30(l)(3)) of a proposed transfer of the permit.

(c) *Facility siting.* Suitability of the facility location will not be considered at the time of permit modification or revocation and reissuance unless new information or standards indicate that a threat to human health or the environmental exists which was unknown at the time of permit issuance.

[48 FR 14228, Apr. 1, 1983, as amended at 48 FR 30114, June 30, 1983; 50 FR 28752, July

15, 1985; 52 FR 45799, Dec. 1, 1987; 53 FR 37936, Sept. 28, 1988]

§ 270.42 Permit modification at the request of the permittee.

(a) *Class 1 modifications.* (1) Except as provided in paragraph (a)(2) of this section, the permittee may put into effect Class 1 modifications listed in Appendix I of this section under the following conditions:

(i) The permittee must notify the Director concerning the modification by certified mail or other means that establish proof of delivery within 7 calendar days after the change is put into effect. This notice must specify the changes being made to permit conditions or supporting documents referenced by the permit and must explain why they are necessary. Along with the notice, the permittee must provide the applicable information required by §§ 270.13 through 270.21, 270.62, and 270.63.

(ii) The permittee must send a notice of the modification to all persons on the facility mailing list, maintained by the Director in accordance with 40 CFR 124.10(c)(viii), and the appropriate units of State and local government, as specified in 40 CFR 124.10(c)(ix). This notification must be made within 90 calendar days after the change is put into effect. For the Class I modifications that require prior Director approval, the notification must be made within 90 calendar days after the Director approves the request.

(iii) Any person may request the Director to review, and the Director may for cause reject, any Class 1 modification. The Director must inform the permittee by certified mail that a Class 1 modification has been rejected, explaining the reasons for the rejection. If a Class 1 modification has been rejected, the permittee must comply with the original permit conditions.

(2) Class 1 permit modifications identified in Appendix I by an asterisk may be made only with the prior written approval of the Director.

(3) For a Class 1 permit modification, the permittee may elect to follow the procedures in § 270.42(b) for Class 2 modifications instead of the Class 1 procedures. The permittee must inform the Director of this decision in the notice required in § 270.42(b)(1).

(b) *Class 2 modifications.* (1) For Class 2 modifications, listed in Appendix I of this section, the permittee must submit a modification request to the Director that:

(i) Describes the exact change to be made to the permit conditions and supporting documents referenced by the permit;

(ii) Identifies that the modification is a Class 2 modification;

(iii) Explains why the modification is needed; and

(iv) Provides the applicable information required by §§ 270.13 through 270.21, 270.62, and 270.63.

(2) The permittee must send a notice of the modification request to all persons on the facility mailing list maintained by the Director and to the appropriate units of State and local government as specified in 40 CFR 124.10(c)(ix) and must publish this notice in a major local newspaper of general circulation. This notice must be mailed and published within 7 days before or after the date of submission of the modification request, and the permittee must provide to the Director evidence of the mailing and publication. The notice must include:

(i) Announcement of a 60-day comment period, in accordance with § 270.42(b)(5), and the name and address of an Agency contact to whom comments must be sent;

(ii) Announcement of the date, time, and place for a public meeting held in accordance with § 270.42(b)(4);

(iii) Name and telephone number of the permittee's contact person;

(iv) Name and telephone number of an Agency contact person;

(v) Location where copies of the modification request and any supporting documents can be viewed and copied; and

(vi) The following statement: "The permittee's compliance history during the life of the permit being modified is available from the Agency contact person."

(3) The permittee must place a copy of the permit modification request and supporting documents in a location accessible to the public in the vicinity of the permitted facility.

(4) The permittee must hold a public meeting no earlier than 15 days after the publication of the notice required in paragraph (b)(2) of this section and no later than 15 days before the close of the 60-day comment period. The meeting must be held to the extent practicable in the vicinity of the permitted facility.

(5) The public shall be provided 60 days to comment on the modification request. The comment period will begin on the date the permittee publishes the notice in the local newspaper. Comments should be submitted to the Agency contact identified in the public notice.

(6)(i) No later than 90 days after receipt of the notification request, the Director must:

(A) Approve the modification request, with or without changes, and modify the permit accordingly;

(B) Deny the request;

(C) Determine that the modification request must follow the procedures in § 270.42(c) for Class 3 modifications for the following reasons:

(*1*) There is significant public concern about the proposed modification; or

(*2*) The complex nature of the change requires the more extensive procedures of Class 3.

(D) Approve the request, with or without changes, as a temporary authorization having a term of up to 180 days, or

(E) Notify the permittee that he or she will decide on the request within the next 30 days.

(ii) If the Director notifies the permittee of a 30-day extension for a decision, the Director must, no later than 120 days after receipt of the modification request:

(A) Approve the modification request, with or without changes, and modify the permit accordingly;

(B) Deny the request; or

(C) Determine that the modification request must follow the procedures in § 270.42(c) for Class 3 modifications for the following reasons:

(*1*) There is significant public concern about the proposed modification; or

(*2*) The complex nature of the change requires the more extensive procedures of Class 3.

(D) Approve the request, with or without changes, as a temporary authorization having a term of up to 180 days.

(iii) If the Director fails to make one of the decisions specified in paragraph (b)(6)(ii) of this section by the 120th day after receipt of the modification request, the permittee is automatically authorized to conduct the activities described in the modification request for up to 180 days, without formal Agency action. The authorized activities must be conducted as described in the permit modification request and must be in compliance with all appropriate standards of 40 CFR Part 265. If the Director approves, with or without changes, or denies the modification request during the term of the temporary or automatic authorization provided for in paragraphs (b)(6) (i), (ii), or (iii) of this section, such action cancels the temporary or automatic authorization.

(iv)(A) In the case of an automatic authorization under paragraph (b)(6)(iii) of this section, or a temporary authorization under paragraph (b)(6) (i)(D) or (ii)(D) of this section, if the Director has not made a final approval or denial of the modification request by the date 50 days prior to the end of the temporary or automatic authorization, the permittee must within seven days of that time send a notification to persons on the facility mailing list, and make a reasonable effort to notify other persons who submitted written comments on the modification request, that:

(*1*) The permittee has been authorized temporarily to conduct the activities described in the permit modification request, and

(*2*) Unless the Director acts to give final approval or denial of the request by the end of the authorization period, the permittee will receive authorization to conduct such activities for the life of the permit.

(B) If the owner/operator fails to notify the public by the date specified in paragraph (b)(6)(iv)(A) of this section, the effective date of the permanent authorization will be deferred

until 50 days after the owner/operator notifies the public.

(v) Except as provided in paragraph (b)(6)(vii) of this section, if the Director does not finally approve or deny a modification request before the end of the automatic or temporary authorization period or reclassify the modification as a Class 3, the permittee is authorized to conduct the activities described in the permit modification request for the life of the permit unless modified later under § 270.41 or § 270.42. The activities authorized under this paragraph must be conducted as described in the permit modification request and must be in compliance with all appropriate standards of 40 CFR Part 265.

(vi) In making a decision to approve or deny a modification request, including a decision to issue a temporary authorization or to reclassify a modification as a Class 3, the Director must consider all written comments submitted to the Agency during the public comment period and must respond in writing to all significant comments in his or her decision.

(vii) With the written consent of the permittee, the Director may extend indefinitely or for a specified period the time periods for final approval or denial of a modification request or for reclassifying a modification as a Class 3.

(7) The Director may deny or change the terms of a Class 2 permit modification request under paragraphs (b)(6) (i) through (iii) of this section for the following reasons:

(i) The modification request is incomplete;

(ii) The requested modification does not comply with the appropriate requirements of 40 CFR Part 264 or other applicable requirements; or

(iii) The conditions of the modification fail to protect human health and the environment.

(8) The permittee may perform any construction associated with a Class 2 permit modification request beginning 60 days after the submission of the request unless the Director establishes a later date for commencing construction and informs the permittee in writing before day 60.

(c) *Class 3 modifications.* (1) For Class 3 modifications listed in Appendix I of this section, the permittee must submit a modification request to the Director that:

(i) Describes the exact change to be made to the permit conditions and supporting documents referenced by the permit;

(ii) Identifies that the modification is a Class 3 modification;

(iii) Explains why the modification is needed; and

(iv) Provides the applicable information required by 40 CFR 270.13 through 270.21, 270.62 and 270.63.

(2) The permittee must send a notice of the modification request to all persons on the facility mailing list maintained by the Director and to the appropriate units of State and local government as specified in 40 CFR 124.10(c)(ix) and must publish this notice in a major local newspaper of general circulation. This notice must be mailed and published within seven days before or after the date of submission of the modification request, and the permittee must provide to the Director evidence of the mailing and publication. The notice must include:

(i) Announcement of a 60-day comment period, and a name and address of an Agency contact to whom comments must be sent;

(ii) Announcement of the date, time, and place for a public meeting on the modification request, in accordance with § 270.42(c)(4);

(iii) Name and telephone number of the permittee's contact person;

(iv) Name and telephone number of an Agency contact person;

(v) Location where copies of the modification request and any supporting documents can be viewed and copied; and

(vi) The following statement: "The permittee's compliance history during the life of the permit being modified is available from the Agency contact person."

(3) The permittee must place a copy of the permit modification request and supporting documents in a location accessible to the public in the vicinity of the permitted facility.

(4) The permittee must hold a public meeting no earlier than 15 days after

the publication of the notice required in paragraph (c)(2) of this section and no later than 15 days before the close of the 60-day comment period. The meeting must be held to the extent practicable in the vicinity of the permitted facility.

(5) The public shall be provided at least 60 days to comment on the modification request. The comment period will begin on the date the permittee publishes the notice in the local newspaper. Comments should be submitted to the Agency contact identified in the notice.

(6) After the conclusion of the 60-day comment period, the Director must grant or deny the permit modification request according to the permit modification procedures of 40 CFR Part 124. In addition, the Director must consider and respond to all significant written comments received during the 60-day comment period.

(d) *Other modifications.* (1) In the case of modifications not explicitly listed in Appendix I of this section, the permittee may submit a Class 3 modification request to the Agency, or he or she may request a determination by the Director that the modification should be reviewed and approved as a Class 1 or Class 2 modification. If the permittee requests that the modification be classified as a Class 1 or 2 modification, he or she must provide the Agency with the necessary information to support the requested classification.

(2) The Director shall make the determination described in paragraph (d)(1) of this section as promptly as practicable. In determining the appropriate class for a specific modification, the Director shall consider the similarity of the modification to other modifications codified in Appendix I and the following criteria:

(i) Class 1 modifications apply to minor changes that keep the permit current with routine changes to the facility or its operation. These changes do no substantially alter the permit conditions or reduce the capacity of the facility to protect human health or the environment. In the case of Class 1 modifications, the Director may require prior approval.

(ii) Class 2 modifications apply to changes that are necessary to enable a permittee to respond, in a timely manner, to,

(A) Common variations in the types and quantities of the wastes managed under the facility permit,

(B) Technological advancements, and

(C) Changes necessary to comply with new regulations, where these changes can be implemented without substantially changing design specifications or management practices in the permit.

(iii) Class 3 modifications substantially alter the facility or its operation.

(e) *Temporary authorizations.* (1) Upon request of the permittee, the Director may, without prior public notice and comment, grant the permittee a temporary authorization in accordance with this subsection. Temporary authorizations must have a term of not more than 180 days.

(2)(i) The permittee may request a temporary authorization for:

(A) Any Class 2 modification meeting the criteria in paragraph (e)(3)(ii) of this section, and

(B) Any Class 3 modification that meets the criteria in paragraph (3)(ii) (A) or (B) of this section; or that meets the criteria in paragraphs (3)(ii) (C) through (E) of this section and provides improved management or treatment of a hazardous waste already listed in the facility permit.

(ii) The temporary authorization request must include:

(A) A description of the activities to be conducted under the temporary authorization;

(B) An explanation of why the temporary authorization is necessary; and

(C) Sufficient information to ensure compliance with 40 CFR Part 264 standards.

(iii) The permittee must send a notice about the temporary authorization request to all persons on the facility mailing list maintained by the Director and to appropriate units of State and local governments as specified in 40 CFR 124.10(c)(ix). This notification must be made within seven days of submission of the authorization request.

(3) The Director shall approve or deny the temporary authorization as quickly as practical. To issue a temporary authorization, the Director must find:

(i) The authorized activities are in compliance with the standards of 40 CFR Part 264.

(ii) The temporary authorization is necessary to achieve one of the following objectives before action is likely to be taken on a modification request:

(A) To facilitate timely implementation of closure or corrective action activities;

(B) To allow treatment or storage in tanks or containers of restricted wastes in accordance with 40 CFR Part 268;

(C) To prevent disruption of ongoing waste management activities;

(D) To enable the permittee to respond to sudden changes in the types or quantities of the wastes managed under the facility permit; or

(E) To facilitate other changes to protect human health and the environment.

(4) A temporary authorization may be reissued for one additional term of up to 180 days provided that the permittee has requested a Class 2 or 3 permit modification for the activity covered in the temporary authorization, and:

(i) The reissued temporary authorization constitutes the Director's decision on a Class 2 permit modification in accordance with paragraph (b)(6)(i)(D) or (ii)(D) of this section, or

(ii) The Director determines that the reissued temporary authorization involving a Class 3 permit modification request is warranted to allow the authorized activities to continue while the modification procedures of paragraph (c) of this section are conducted.

(f) *Public notice and appeals of permit modification decisions.* (1) The Director shall notify persons on the facility mailing list and appropriate units of State and local government within 10 days of any decision under this section to grant or deny a Class 2 or 3 permit modification request. The Director shall also notify such persons within 10 days after an automatic authorization for a Class 2 modification goes into effect under § 270.42(b)(6)(iii) or (v).

(2) The Director's decision to grant or deny a Class 2 or 3 permit modification request under this section may be appealed under the permit appeal procedures of 40 CFR 124.19.

(3) An automatic authorization that goes into effect under § 270.42(b)(6)(iii) or (v) may be appealed under the permit appeal procedures of 40 CFR 124.19; however, the permittee may continue to conduct the activities pursuant to the automatic authorization until the appeal has been granted pursuant to § 124.19(c), notwithstanding the provisions of § 124.15(b).

(g) *Newly listed or identified wastes.* (1) The permittee is authorized to continue to manage wastes listed or identified as hazardous under 40 CFR Part 261 if he or she:

(i) Was in existence as a hazardous waste facility with respect to the newly listed or characterized waste on the effective date of the final rule listing or identifying the waste;

(ii) Submits a Class 1 modification request on or before the date on which the waste becomes subject to the new requirements;

(iii) Is in compliance with the standards of 40 CFR Part 265;

(iv) In the case of Classes 2 and 3 modifications, also submits a complete permit modification request within 180 days after the effective date of the rule listing or identifying the waste; and

(v) In the case of land disposal units, certifies that such unit is in compliance with all applicable Part 265 ground-water monitoring and financial responsibility requirements on the date 12 months after the effective date of the rule identifying or listing the waste as hazardous. If the owner or operator fails to clarify compliance with these requirements, he or she shall lose authority to operate under this section.

(2) New wastes or units added to a facility's permit under this subsection do not constitute expansions for the purpose of the 25 percent capacity expansion limit for Class 2 modifications.

(h) *Permit modification list.* The Director must maintain a list of all ap-

pr[illegible]d permit modifications and must pu[illegible]sh a notice once a year in a State-wide newspaper that an updated list is available for review.

APPENDIX I TO § 270.42—CLASSIFICATION OF PERMIT MODIFICATION

Modifications	Class
A. *General Permit Provisions*	
1. Administrative and informational changes	1
2. Correction of typographical errors	1
3. Equipment replacement or upgrading with functionally equivalent components (e.g., pipes, valves, pumps, conveyors, controls)	1
4. Changes in the frequency of or procedures for monitoring, reporting, sampling, or maintenance activities by the permittee:	
a. To provide for more frequent monitoring, reporting, sampling, or maintenance	1
b. Other changes	2
5. Schedule of compliance:	
a. Changes in interim compliance dates, with prior approval of the Director	[1] 1
b. Extension of final compliance date	3
6. Changes in expiration date of permit to allow earlier permit termination, with prior approval of the Director	[1] 1
7. Changes in ownership or operational control of a facility, provided the procedures of § 270.40(b) are followed	[1] 1
B. *General Facility Standards*	
1. Changes to waste sampling or analysis methods:	
a. To conform with agency guidance or regulations	1
b. To incorporate changes associated with F039 (multi-source leachate) sampling or analysis methods	1
c. Other changes	2
2. Changes to analytical quality assurance/control plan:	
a. To conform with agency guidance or regulations	1
b. Other changes	2
3. Changes in procedures for maintaining the operating record	1
4. Changes in frequency or content of inspection schedules	2
5. Changes in the training plan:	
a. That affect the type or decrease the amount of training given to employees	2
b. Other changes	1
6. Contingency plan:	
a. Changes in emergency procedures (i.e., spill or release response procedures)	2
b. Replacement with functionally equivalent equipment, upgrade, or relocate emergency equipment listed	1
c. Removal of equipment from emergency equipment list	2
d. Changes in name, address, or phone number of coordinators or other persons or agencies identified in the plan	1
Note: When a permit modification (such as introduction of a new unit) requires a change in facility plans or other general facility standards, that change shall be reviewed under the same procedures as the permit modification.	
C. *Ground-Water Protection*	
1. Changes to wells:	
a. Changes in the number, location, depth, or design of upgradient or downgradient wells of permitted ground-water monitoring system	2
b. Replacement of an existing well that has been damaged or rendered inoperable, without change to location, design, or depth of the well	1
2. Changes in ground-water sampling or analysis procedures or monitoring schedule, with prior approval of the Director	[1] 1
3. Changes in statistical procedure for determining whether a statistically significant change in ground-water quality between upgradient and downgradient wells has occurred, with prior approval of the Director	[1] 1
4. Changes in point of compliance	[1] 2
5. Changes in indicator parameters, hazardous constituents, or concentration limits (including ACLs):	
a. As specified in the groundwater protection standard	3
b. As specified in the detection monitoring program	2
6. Changes to a detection monitoring program as required by § 264.98(j), unless otherwise specified in this appendix	2
7. Compliance monitoring program:	
a. Addition of compliance monitoring program as required by §§ 264.98(h)(4) and 264.99	3
b. Changes to a compliance monitoring program as required by § 264.99(k), unless otherwise specified in this appendix	2
8. Corrective action program:	
a. Addition of a corrective action program as required by §§ 264.99(i)(2) and 264.100	3
b. Changes to a corrective action program as required by § 264.100(h), unless otherwise specified in this Appendix	2
D. *Closure*	
1. Changes to the closure plan:	
a. Changes in estimate of maximum extent of operations or maximum inventory of waste on-site at any time during the active life of the facility, with prior approval of the Director	[1] 1
b. Changes in the closure schedule for any unit, changes in the final closure schedule for the facility, or extension of the closure period, with prior approval of the Director	[1] 1

Modifications	Class
c. Changes in the expected year of final closure, where other permit conditions are not changed, with prior approval of the Director	[1] 1
d. Changes in procedures for decontamination of facility equipment or structures, with prior approval of the Director	[1] 1
e. Changes in approved closure plan resulting from unexpected events occurring during partial or final closure, unless otherwise specified in this appendix	2
f. Extension of the closure period to allow a landfill, surface impoundment or land treatment unit to receive non-hazardous wastes after final receipt of hazardous wastes under § 264.113 (d) and (e)	2
2. Creation of a new landfill unit as part of closure	3
3. Addition of the following new units to be used temporarily for closure activities:	
a. Surface impoundments	3
b. Incinerators	3
c. Waste piles that do not comply with § 264.250(c)	3
d. Waste piles that comply with § 264.250(c)	2
e. Tanks or containers (other than specified below)	2
f. Tanks used for neutralization, dewatering, phase separation, or component separation, with prior approval of the Director	[1] 1
E. *Post-Closure*	
1. Changes in name, address, or phone number of contact in post-closure plan	1
2. Extension of post-closure care period	2
3. Reduction in the post-closure care period	3
4. Changes to the expected year of final closure, where other permit conditions are not changed	1
5. Changes in post-closure plan necessitated by events occurring during the active life of the facility, including partial and final closure	2
F. *Containers*	
1. Modification or addition of container units:	
a. Resulting in greater than 25% increase in the facility's container storage capacity, except as provided in F(1)(c) and F(4)(a) below	3
b. Resulting in up to 25% increase in the facility's container storage capacity, except as provided in F(1)(c) and F(4)(a) below	2
c. Or treatment processes necessary to treat wastes that are restricted from land disposal to meet some or all of the applicable treatment standards or to treat wastes to satisfy (in whole or in part) the standard of "use of practically available technology that yields the greatest environmental benefit" contained in § 268.8(a)(2)(ii), with prior approval of the Director. This modification may also involve addition of new waste codes or narrative descriptions of wastes. It is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028)	[1] 1
2:	
a. Modification of a container unit without increasing the capacity of the unit	2
b. Addition of a roof to a container unit without alteration of the containment system	1
3. Storage of different wastes in containers, except as provided in (F)(4) below:	
a. That require additional or different management practices from those authorized in the permit	3
b. That do not require additional or different management practices from those authorized in the permit	2
Note: See § 270.42(g) for modification procedures to be used for the management of newly listed or identified wastes.	
4. Storage of treatment of different wastes in containers:	
a. That require addition of units or change in treatment process or management standards, provided that the wastes are restricted from land disposal and are to be treated to meet some or all of the applicable treatment standards, or that are to be treated to satisfy (in whole or in part) the standard of "use of practically available technology that yields the greatest environmental benefit" contained in § 268.8(a)(2)(ii). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028)	1
b. That do not require the addition of units or a change in the treatment process or management standards, and provided that the units have previously received wastes of the same type (e.g., incinerator scrubber water). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028)	[1] 1
G. *Tanks*	
1:	
a. Modification or addition of tank units resulting in greater than 25% increase in the facility's tank capacity, except as provided in G(1)(c), G(1)(d), and G(1)(e) below	3
b. Modification or addition of tank units resulting in up to 25% increase in the facility's tank capacity, except as provided in G(1)(d) and G(1)(e) below	2
c. Addition of a new tank that will operate for more than 90 days using any of the following physical or chemical treatment technologies: neutralization, dewatering, phase separation, or component separation	2
d. After prior approval of the Director, addition of a new tank that will operate for up to 90 days using any of the following physical or chemical treatment technologies: neutralization, dewatering, phase separation, or component separation	[1] 1
e. Modification or addition of tank units or treatment processes necessary to treat wastes that are restricted from land disposal to meet some or all of the applicable treatment standards or to treat wastes to satisfy (in whole or in part) the standard of "use of practically available technology that yields the greatest environmental benefit" contained in § 268.8(a)(2)(ii), with prior approval of the Director. This modification may also involve addition of new waste codes. It is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028)	[1] 1
2. Modification of a tank unit or secondary containment system without increasing the capacity of the unit	2

Modifications	Class
3. Replacement of a tank with a tank that meets the same design standards and has a capacity within +/− 10% of the replaced tank provided —The capacity difference is no more than 1500 gallons, —The facility's permitted tank capacity is not increased, and —The replacement tank meets the same conditions in the permit.	1
4. Modification of a tank management practice	2
5. Management of different wastes in tanks:	
a. That require additional or different management practices, tank design, different fire protection specifications, or significantly different tank treatment process from that authorized in the permit, except as provided in (G)(5)(c) below	3
b. That do not require additional or different management practices, tank design, different fire protection specifications, or significantly different tank treatment process than authorized in the permit, except as provided in (G)(5)(d)	2
c. That require addition of units or change in treatment processes or management standards, provided that the wastes are restricted from land disposal and are to be treated to meet some or all of the applicable treatment standards or that are to be treated to satisfy (in whole or in part) the standard of "use of practically available technology that yields the greatest environmental benefit" contained in § 268.8(a)(2)(ii). The modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028)	1
d. That do not require the addition of units or a change in the treatment process or management standards, and provided that the units have previously received wastes of the same type (e.g., incinerator scrubber water). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028)	1
Note: See § 270.42(g) for modification procedures to be used for the management of newly lilsted or identified wastes.	
H. *Surface Impoundments*	
1. Modification or addition of surface impoundment units that result in increasing the facility's surface impoundment storage or treatment capacity	3
2. Replacement of a surface impoundment unit	3
3. Modification of a surface impoundment unit without increasing the facility's surface impoundment storage or treatment capacity and without modifying the unit's liner, leak detection system, or leachate collection system	2
4. Modification of a surface impoundment management practice	2
5. Treatment, storage, or disposal of different wastes in surface impoundments:	
a. That require additional or different management practices or different design of the liner or leak detection system than authorized in the permit	3
b. That do not require additional or different management practices or different design of the liner or leak detection system than authorized in the permit	2
c. That are wastes restricted from land disposal that meet the applicable treatment standards or that are treated to satisfy the standard of "use of practically available technology that yields the greatest environmental benefit" contained in § 269.8(a)(2)(ii), and provided that the unit meets the minimum technological requirements stated in § 268.5(h)(2). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028)	1
d. That are residues from wastewater treatment or incineration, provided that disposal occurs in a unit that meets the minimum technological requirements stated in §268.5(h)(2), and provided further that the surface impoundment has previously received wastes of the same type (for example, incinerator scrubber water). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028)	1
Note: See § 270.42(g) for modification procedures to be used for the management of newly listed or identified wastes	
I. *Enclosed Waste Piles.* For all waste piles except those complying with § 264.250(c), modifications are treated the same as for a landfill. The following modifications are applicable only to waste piles complying with § 264.250(c).	
1. Modification or addition of waste pile units:	
a. Resulting in greater than 25% increase in the facility's waste pile storage or treatment capacity	3
b. Resulting in up to 25% increase in the facility's waste pile storage or treatment capacity	2
2. Modification of waste pile unit without increasing the capacity of the unit	2
3. Replacement of a waste pile unit with another waste pile unit of the same design and capacity and meeting all waste pile conditions in the permit	1
4. Modification of a waste pile management practice	2
5. Storage or treatment of different wastes in waste piles:	
a. That require additional or different management practices or different design of the unit	3
b. That do not require additional or different management practices or different design of the unit	2
Note: See § 270.42(g) for modification procedures to be used for the management of newly listed or identified wastes.	
J. *Landfills and Unenclosed Waste Piles*	
1. Modification or addition of landfill units that result in increasing the facility's disposal capacity	3
2. Replacement of a landfill	3
3. Addition or modification of a liner, leachate collection system, leachate detection system, run-off control, or final cover system	3
4. Modification of a landfill unit without changing a liner, leachate collection system, leachate detection system, run-off control, or final cover system	2
5. Modification of a landfill management practice	2
6. Landfill different wastes:	
a. That require additional or different management practices, different design of the liner, leachate collection system, or leachate detection system	3

Modifications	Class
b. That do not require additional or different management practices, different design of the liner, leachate collection system, or leachate detection system	2
c. That are wastes restricted from land disposal that meet the applicable treatment standards or that are treated to satisfy the standard of "use of practically available technology that yields the greatest environmental benefit" contained in § 268.8(a)(2)(ii), and provided that the landfill unit meets the minimum technological requirements stated in § 268.5(h)(2). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028)	1
d. That are residues from wastewater treatment or incineration, provided that disposal occurs in a landfill unit that meets the minimum technological requirements stated in §268.5(h)(2), and provided further that the landfill has previously received wastes of the same type (for example, incinerator ash). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028)	1
Note: See § 270.42(g) for modification procedures to be used for the management of newly listed or identified wastes.	
K. *Land Treatment*	
1. Lateral expansion of or other modification of a land treatment unit to increase areal extent	3
2. Modification of run-on control system	2
3. Modify run-off control system	3
4. Other modifications of land treatment unit component specifications or standards required in permit	2
5. Management of different wastes in land treatment units:	
a. That require a change in permit operating conditions or unit design specifications	3
b. That do not require a change in permit operating conditions or unit design specifications	2
Note: See § 270.42(g) for modification procedures to be used for the management of newly listed or identified wastes	
6. Modification of a land treatment unit management practice to:	
a. Increase rate or change method of waste application	3
b. Decrease rate of waste application	1
7. Modification of a land treatment unit management practice to change measures of pH or moisture content, or to enhance microbial or chemical reactions	2
8. Modification of a land treatment unit management practice to grow food chain crops, to add to or replace existing permitted crops with different food chain crops, or to modify operating plans for distribution of animal feeds resulting from such crops	3
9. Modification of operating practice due to detection of releases from the land treatment unit pursuant to § 264.278(g)(2)	3
10. Changes in the unsaturated zone monitoring system, resulting in a change to the location, depth, number of sampling points, or replace unsaturated zone monitoring devices or components of devices with devices or components that have specifications different from permit requirements	3
11. Changes in the unsaturated zone monitoring system that do not result in a change to the location, depth, number of sampling points, or that replace unsaturated zone monitoring devices or components of devices with devices or components having specifications different from permit requirements	2
12. Changes in background values for hazardous constituents in soil and soil-pore liquid	2
13. Changes in sampling, analysis, or statistical procedure	2
14. Changes in land treatment demonstration program prior to or during the demonstration	2
15. Changes in any condition specified in the permit for a land treatment unit to reflect results of the land treatment demonstration, provided performance standards are met, and the Director's prior approval has been received	[1] 1
16. Changes to allow a second land treatment demonstration to be conducted when the results of the first demonstration have not shown the conditions under which the wastes can be treated completely, provided the conditions for the second demonstration are substantially the same as the conditions for the first demonstration and have received the prior approval of the Director	[1] 1
17. Changes to allow a second land treatment demonstration to be conducted when the results of the first demonstration have not shown the conditions under which the wastes can be treated completely, where the conditions for the second demonstration are not substantially the same as the conditions for the first demonstration	3
18. Changes in vegetative cover requirements for closure	2
L. *Incinerators*	
1. Changes to increase by more than 25% any of the following limits authorized in the permit: A thermal feed rate limit, a waste feed rate limit, or an organic chlorine feed rate limit. The Director will require a new trial burn to substantiate compliance with the regulatory performance standards unless this demonstration can be made through other means	3
2. Changes to increase by up to 25% any of the following limits authorized in the permit: A thermal feed rate limit, a waste feed limit, or an organic chlorine feed rate limit. The Director will require a new trial burn to substantiate compliance with the regulatory performance standards unless this demonstration can be made through other means	2
3. Modification of an incinerator unit by changing the internal size or geometry of the primary or secondary combustion units, by adding a primary or secondary combustion unit, by substantially changing the design of any component used to remove HCl or particulate from the combustion gases, or by changing other features of the incinerator that could affect its capability to meet the regulatory performance standards. The Director will require a new trial burn to substantiate compliance with the regulatory performance standards unless this demonstration can be made through other means	3

Modifications	Class
4. Modification of an incinerator unit in a manner that would not likely affect the capability of the unit to meet the regulatory performance standards but which would change the operating conditions or monitoring requirements specified in the permit. The Director may require a new trial burn to demonstrate compliance with the regulatory performance standards	2
5. Operating requirements:	
a. Modification of the limits specified in the permit for minimum combustion gas temperature, minimum combustion gas residence time, or oxygen concentration in the secondary combustion chamber. The Director will require a new trial burn to substantiate compliance with the regulatory performance standards unless this demonstration can be made through other means	3
b. Modification of any stack gas emission limits specified in the permit, or modification of any conditions in the permit concerning emergency shutdown or automatic waste feed cutoff procedures or controls	3
c. Modification of any other operating condition or any inspection or recordkeeping requirement specified in the permit	2
6. Incineration of different wastes:	
a. If the waste contains a POHC that is more difficult to incinerate than authorized by the permit or if incineration of the waste requires compliance with different regulatory performance standards than specified in the permit. The Director will require a new trial burn to substantiate compliance with the regulatory performance standards unless this demonstration can be made through other means	3
b. If the waste does not contain a POHC that is more difficult to incinerate than authorized by the permit and if incineration of the waste does not require compliance with different regulatory performance standards than specified in the permit	2
Note: See § 270.42(g) for modification procedures to be used for the management of newly listed or identified wastes.	
7. Shakedown and trial burn:	
a. Modification of the trial burn plan or any of the permit conditions applicable during the shakedown period for determining operational readiness after construction, the trial burn period, or the period immediately following the trial burn	2
b. Authorization of up to an additional 720 hours of waste incineration during the shakedown period for determining operational readiness after construction, with the prior approval of the Director	[1] 1
c. Changes in the operating requirements set in the permit for conducting a trial burn, provided the change is minor and has received the prior approval of the Director	[1] 1
d. Changes in the ranges of the operating requirements set in the permit to reflect the results of the trial burn, provided the change is minor and has received the prior approval of the Director	[1] 1
8. Substitution of an alternate type of fuel that is not specified in the permit	1

[1] Class 1 modifications requiring prior Agency approval.

[53 FR 37936, Sept. 28, 1988, as amended at 53 FR 37939, Sept. 28, 1988; 53 FR 41649, October 24, 1988; 54 FR 9607, Mar. 7, 1989; 54 FR 33398, Aug. 14, 1989; 55 FR 22719, June 1, 1990]

§ 270.43 Termination of permits.

(a) The following are causes for terminating a permit during its term, or for denying a permit renewal application:

(1) Noncompliance by the permittee with any condition of the permit;

(2) The permittee's failure in the application or during the permit issuance process to disclose fully all relevant facts, or the permittee's misrepresentation of any relevant facts at any time; or

(3) A determination that the permitted activity endangers human health or the environment and can only be regulated to acceptable levels by permit modification or termination.

(b) The Director shall follow the applicable procedures in Part 124 or State procedures in terminating any permit under this section.

Subpart E—Expiration and Continuation of Permits

§ 270.50 Duration of permits.

(a) RCRA permits shall be effective for a fixed term not to exceed 10 years.

(b) Except as provided in § 270.51, the term of a permit shall not be extended by modification beyond the maximum duration specified in this section.

(c) The Director may issue any permit for a duration that is less than the full allowable term under this section.

(d) Each permit for a land disposal facility shall be reviewed by the Director five years after the date of permit issuance or reissuance and shall be modified as necessary, as provided in § 270.41.

[48 FR 14228, Apr. 1, 1983, as amended at 50 FR 28752, July 15, 1985]

§ 270.51 Continuation of expiring permits.

(a) *EPA permits.* When EPA is the permit-issuing authority, the conditions of an expired permit continue in force under 5 U.S.C. 558(c) until the effective date of a new permit (see § 124.15) if:

(1) The permittee has submitted a timely application under § 270.14 and the applicable sections in §§ 270.15 through 270.29 which is a complete (under § 270.10(c)) application for a new permit; and

(2) The Regional Administrator through no fault of the permittee, does not issue a new permit with an effective date under § 124.15 on or before the expiration date of the previous permit (for example, when issuance is impracticable due to time or resource constraints).

(b) *Effect.* Permits continued under this section remain fully effective and enforceable.

(c) *Enforcement.* When the permittee is not in compliance with the conditions of the expiring or expired permit, the Regional Administrator may choose to do any or all of the following:

(1) Initiate enforcement action based upon the permit which has been continued;

(2) Issue a notice of intent to deny the new permit under § 124.6. If the permit is denied, the owner or operator would then be required to cease the activities authorized by the continued permit or be subject to enforcement action for operating without a permit;

(3) Issue a new permit under Part 124 with appropriate conditions; or

(4) Take other actions authorized by these regulations.

(d) *State continuation.* In a State with an hazardous waste program authorized under 40 CFR Part 271, if a permittee has submitted a timely and complete application under applicable State law and regulations, the terms and conditions of an EPA-issued RCRA permit continue in force beyond the expiration date of the permit, but only until the effective date of the State's issuance or denial of a State RCRA permit.

(Clean Water Act (33 U.S.C. 1251 et seq.), Safe Drinking Water Act (42 U.S.C. 300f et seq.), Clean Air Act (42 U.S.C. 7401 et seq.), Resource Conservation and Recovery Act (42 U.S.C. 6901 et seq.))

[48 FR 14228, Apr. 1, 1983, as amended at 48 FR 39622, Sept. 1, 1983]

Subpart F—Special Forms of Permits

§ 270.60 Permits by rule.

Notwithstanding any other provision of this part or Part 124, the following shall be deemed to have a RCRA permit if the conditions listed are met:

(a) *Ocean disposal barges or vessels.* The owner or operator of a barge or other vessel which accepts hazardous waste for ocean disposal, if the owner or operator:

(1) Has a permit for ocean dumping issued under 40 CFR Part 220 (Ocean Dumping, authorized by the Marine Protection, Research, and Sanctuaries Act, as amended, 33 U.S.C. 1420 *et seq.*);

(2) Complies with the conditions of that permit; and

(3) Complies with the following hazardous waste regulations:

(i) 40 CFR 264.11, Identification number;

(ii) 40 CFR 264.71, Use of manifest system;

(iii) 40 CFR 264.72, Manifest discrepancies;

(iv) 40 CFR 264.73(a) and (b)(1), Operating record;

(v) 40 CFR 264.75, Biennial report; and

(vi) 40 CFR 264.76, Unmanifested waste report.

(b) *Injection wells.* The owner or operator of an injection well disposing of hazardous waste, if the owner or operator:

(1) Has a permit for underground injection issued under Part 144 or 145; and

(2) Complies with the conditions of that permit and the requirements of § 144.14 (requirements for wells managing hazardous waste).

(3) For UIC permits issued after November 8, 1984:

(i) Complies with 40 CFR 264.101; and

(ii) Where the UIC well is the only unit at a facility which requires a RCRA permit, complies with 40 CFR 270.14(d).

(c) *Publicly owned treatment works.* The owner or operator of a POTW which accepts for treatment hazardous waste, if the owner or operator:

(1) Has an NPDES permit;

(2) Complies with the conditions of that permit; and

(3) Complies with the following regulations:

(i) 40 CFR 264.11, Identification number;

(ii) 40 CFR 264.71, Use of manifest system;

(iii) 40 CFR 264.72, Manifest discrepancies;

(iv) 40 CFR 264.73(a) and (b)(1), Operating record;

(v) 40 CFR 264.75, Biennial report;

(vi) 40 CFR 264.76, Unmanifested waste report; and

(vii) For NPDES permits issued after November 8, 1984, 40 CFR 264.101.

(4) If the waste meets all Federal, State, and local pretreatment requirements which would be applicable to the waste if it were being discharged into the POTW through a sewer, pipe, or similar conveyance.

(Approved by the Office of Management and Budget under control number 2050-0007)

[48 FR 14228, Apr. 1, 1983, as amended at 50 FR 28752, July 15, 1985; 52 FR 45799, Dec. 1, 1987]

§ 270.61 Emergency permits.

(a) Notwithstanding any other provision of this part or Part 124, in the event the Director finds an imminent and substantial endangerment to human health or the environment the Director may issue a temporary emergency permit: (1) To a non-permitted facility to allow treatment, storage, or disposal of hazardous waste or (2) to a permitted facility to allow treatment, storage, or disposal of a hazardous waste not covered by an effective permit.

(b) This emergency permit:

(1) May be oral or written. If oral, it shall be followed in five days by a written emergency permit;

(2) Shall not exceed 90 days in duration;

(3) Shall clearly specify the hazardous wastes to be received, and the manner and location of their treatment, storage, or disposal;

(4) May be terminated by the Director at any time without process if he or she determines that termination is appropriate to protect human health and the environment;

(5) Shall be accompanied by a public notice published under § 124.11(b) including:

(i) Name and address of the office granting the emergency authorization;

(ii) Name and location of the permitted HWM facility;

(iii) A brief description of the wastes involved;

(iv) A brief description of the action authorized and reasons for authorizing it; and

(v) Duration of the emergency permit; and

(6) Shall incorporate, to the extent possible and not inconsistent with the emergency situation, all applicable requirements of this part and 40 CFR Parts 264 and 266.

[48 FR 14228, Apr. 1, 1983, as amended at 48 FR 30114, June 30, 1983]

§ 270.62 Hazardous waste incinerator permits.

(a) For the purposes of determining operational readiness following completion of physical construction, the Director must establish permit conditions, including but not limited to allowable waste feeds and operating conditions, in the permit to a new hazardous waste incinerator. These permit conditions will be effective for the minimum time required to bring the incinerator to a point of operational readiness to conduct a trial burn, not to exceed 720 hours operating time for treatment of hazardous waste. The Director may extend the duration of this operational period once, for up to 720 additional hours, at the request of the applicant when good cause is shown. The permit may be modified to reflect the extension according to § 270.42 of this chapter.

(1) Applicants must submit a statement, with Part B of the permit application, which suggests the conditions necessary to operate in compliance with the performance standards of § 264.343 of this chapter during this period. This statement should include, at a minimum, restrictions on waste

Please print or type (Form designed for use on elite (12-pitch) typewriter.) Form Approved OMB No. 2050-0039 Expires 9-30-91

UNIFORM HAZARDOUS WASTE MANIFEST *(Continuation Sheet)*	21. Generator's US EPA ID No.	Manifest Document No.	22. Page
Information in the shaded areas is not required by Federal law			

GENERATOR

23. Generator's Name

L. State Manifest Document Number

M. State Generator's ID

24. Transporter ____ Company Name

25. US EPA ID Number

N. State Transporter's ID

O. Transporter's Phone

26. Transporter ____ Company Name

27. US EPA ID Number

P. State Transporter's ID

Q. Transporter's Phone

28. US DOT Description *(Including Proper Shipping Name, Hazard Class, and ID Number)*	29. Containers No.	Type	30. Total Quantity	31. Unit Wt./Vol.	R. Waste No.
a					
b					
c					
d					
e					
f					
g					
h					
i					

S. Additional Descriptions for Materials Listed Above

T. Handling Codes for Wastes Listed Above

32. Special Handling Instructions and Additional Information

TRANSPORTER

33. Transporter ____ Acknowledgement of Receipt of Materials — Date

Printed/Typed Name — Signature — Month Day Year

34. Transporter ____ Acknowledgement of Receipt of Materials — Date

Printed/Typed Name — Signature — Month Day Year

FACILITY

35. Discrepancy Indication Space

EPA Form 8700-22A (Rev. 9-88) Previous edition is obsolete

INSTRUCTIONS—CONTINUATION SHEET, U.S. EPA FORM 8700-22A

Read all instructions before completing this form.

This form has been designed for use on a 12-pitch (elite) typewriter; a firm point pen may also be used—press down hard.

This form must be used as a continuation sheet to U.S. EPA Form 8700-22 if:

- More than two transporters are to be used to transport the waste;
- More space is required for the U.S. DOT description and related information in Item 11 of U.S. EPA Form 8700-22.

Federal regulations require generators and transporters of hazardous waste and owners or operators of hazardous waste treatment, storage, or disposal facilities to use the uniform hazardous waste manifest (EPA Form 8700-22) and, if necessary, this continuation sheet (EPA Form 8700-22A) for both inter- and intrastate transportation.

GENERATORS

Item 21. Generator's U.S. EPA ID Number—Manifest Document Number

Enter the generator's U.S. EPA twelve digit identification number and the unique five digit number assigned to this Manifest (e.g., 00001) as it appears in item 1 on the first page of the Manifest.

Item 22. Page ——

Enter the page number of this Continuation Sheet.

Item 23. Generator's Name

Enter the generator's name as it appears in item 3 on the first page of the Manifest.

Item 24. Transporter —— Company Name

If additional transporters are used to transport the waste described on this Manifest, enter the company name of each additional transporter in the order in which they will transport the waste. Enter after the word "Transporter" the order of the transporter. For example, Transporter 3 Company Name. Each Continuation Sheet will record the names of two additional transporters.

Item 25. U.S. EPA ID Number

Enter the U.S. EPA twelve digit identification number of the transporter described in item 24.

Item 26. Transporter —— Company Name

If additional transporters are used to transport the waste described on this Manifest, enter the company name of each additional transporter in the order in which they will transport the waste. Enter after the word "Transporter" the order of the transporter. For example, Transporter 4 Company Name. Each Continuation Sheet will record the names of two additional transporters.

Item 27. U.S. EPA ID Number

Enter the U.S. EPA twelve digit identification number of the transporter described in item 26.

Item 28. U.S. DOT Description Including Proper Shipping Name, Hazardous Class, and ID Number (UN/NA)

Refer to item 11.

Item 29. Containers (No. and Type)

Refer to item 12.

Item 30. Total Quantity

Refer to item 13.

Item 31. Unit (Wt./Vol.)

Refer to item 14.

Item 32. Special Handling Instructions

Generators may use this space to indicate special transportation, treatment, storage, or disposal information or Bill of Lading information. States are *not* authorized to require additional, new, or different information in this space.

* * * * *

TRANSPORTERS

Item 33. Transporter —— Acknowledgement of Receipt of Materials

Enter the same number of the Transporter as identified in item 24. Enter also the name of the person accepting the waste on behalf of the Transporter (Company Name) identified in item 24. That person must acknowledge acceptance of the waste described on the Manifest by signing and entering the date of receipt.

Item 34. Transporter —— Acknowledgement of Receipt of Materials

Enter the same number as identified in item 26. Enter also the name of the person accepting the waste on behalf of the Transporter (Company Name) identified in item 26. That person must acknowledge acceptance of the waste described on the Manifest by signing and entering the date of receipt.

* * * * *

OWNERS AND OPERATORS OF TREATMENT, STORAGE, OR DISPOSAL FACILITIES

Item 35. Discrepancy Indication Space

Refer to item 19.

Items L-R are not required by Federal regulations for intra- or interstate transportation. However, States may require generators and owners or operators of treatment, storage, or disposal facilities to complete some or all of items L-R as part of State manifest reporting requirements. Generators and owners and operators of treatment, storage, or disposal facilities are advised to contact State officials for guidance on completing the shaded areas of the manifest.

[49 FR 10501, Mar. 20, 1984, as amended at 51 FR 28685, Aug. 8, 1986; 51 FR 35192, Oct. 1, 1986; 53 FR 45091, Nov. 8, 1988]

PART 263—STANDARDS APPLICABLE TO TRANSPORTERS OF HAZARDOUS WASTE

Subpart A—General

Sec.
263.10 Scope.
263.11 EPA identification number.
263.12 Transfer facility requirements.

Subpart B—Compliance With the Manifest System and Recordkeeping

263.20 The manifest system.
263.21 Compliance with the manifest.
263.22 Recordkeeping.

Subpart C—Hazardous Waste Discharges

263.30 Immediate action.
263.31 Discharge clean up.

AUTHORITY: Secs. 2002(a), 3002, 3003, 3004 and 3005 of the Solid Waste Disposal Act as amended by the Resource Conservation and Recovery Act of 1976 and as amended by the Quiet Communities Act of 1978, (42 U.S.C. 6912a, 6922, 6923, 6924, 6925).

SOURCE: 45 FR 33151, May 19, 1980, unless otherwise noted.

Subpart A—General

§ 263.10 Scope.

(a) These regulations establish standards which apply to persons transporting hazardous waste within the United States if the transportation requires a manifest under 40 CFR Part 262.

NOTE: The regulations set forth in Parts 262 and 263 establish the responsibilities of generators and transporters of hazardous waste in the handling, transportation, and management of that waste. In these regulations, EPA has expressly adopted certain regulations of the Department of Transportation (DOT) governing the transportation of hazardous materials. These regulations concern, among other things, labeling, marking, placarding, using proper containers, and reporting discharges. EPA has expressly adopted these regulations in order to satisfy its statutory obligation to promulgate regulations which are necessary to protect human health and the environment in the transportation of hazardous waste. EPA's adoption of these DOT regulations ensures consistency with the requirements of DOT and thus avoids the establishment of duplicative or conflicting requirements with respect to these matters. These EPA regulations which apply to both interstate and intrastate transportation of hazardous waste are enforceable by EPA.

DOT has revised its hazardous materials transportation regulations in order to encompass the transportation of hazardous waste and to regulate intrastate, as well as interstate, transportation of hazardous waste. Transporters of hazardous waste are cautioned that DOT's regulations are fully applicable to their activities and enforceable by DOT. These DOT regulations are codified in Title 49, Code of Federal Regulations, Subchapter C.

EPA and DOT worked together to develop standards for transporters of hazardous waste in order to avoid conflicting requirements. Except for transporters of bulk shipments of hazardous waste by water, a transporter who meets all applicable requirements of 49 CFR Parts 171 through 179 and the requirements of 40 CFR 263.11 and 263.31 will be deemed in compliance with this part. Regardless of DOT's action, EPA retains its authority to enforce these regulations.

(b) These regulations do not apply to on-site transportation of hazardous waste by generators or by owners or operators of permitted hazardous waste management facilities.

(c) A transporter of hazardous waste must also comply with 40 CFR Part 262, Standards Applicable to Generators of Hazardous Waste, if he:

(1) Transports hazardous waste into the United States from abroad; or

(2) Mixes hazardous wastes of different DOT shipping descriptions by placing them into a single container.

[45 FR 33151, May 19, 1980, as amended at 45 FR 86968, Dec. 31, 1980]

§ 263.11 EPA identification number.

(a) A transporter must not transport hazardous wastes without having received an EPA identification number from the Administrator.

(b) A transporter who has not received an EPA identification number may obtain one by applying to the Administrator using EPA Form 8700-12. Upon receiving the request, the Administrator will assign an EPA identification number to the transporter.

§ 263.12 Transfer facility requirements.

A transporter who stores manifested shipments of hazardous waste in containers meeting the requirements of § 262.30 at a transfer facility for a period of ten days or less is not subject to regulation under Parts 270, 264, 265, and 268 of this chapter with respect to the storage of those wastes.

[45 FR 86968, Dec. 31, 1980, as amended at 48 FR 14294, Apr. 1, 1983; 51 FR 40637, Nov. 7, 1986]

Subpart B—Compliance With the Manifest System and Recordkeeping

§ 263.20 The manifest system.

(a) A transporter may not accept hazardous waste from a generator unless it is accompanied by a manifest signed in accordance with the provisions of 40 CFR 262.20. In the case of exports, a transporter may not accept such waste from a primary exporter or other person (1) if he knows the shipment does not conform to the EPA Acknowledgment of Consent; and (2) unless, in addition to a manifest signed in accordance with the provisions of 40 CFR 262.20, such waste is also accompanied by an EPA Acknowledgment of Consent which, except for shipment by rail, is attached to the manifest (or shipping paper for exports by water (bulk shipment)).

(b) Before transporting the hazardous waste, the transporter must sign and date the manifest acknowledging acceptance of the hazardous waste from the generator. The transporter must return a signed copy to the generator before leaving the generator's property.

(c) The transporter must ensure that the manifest accompanies the hazardous waste. In the case of exports, the transporter must ensure that a copy of the EPA Acknowledgment of Consent also accompanies the hazardous waste.

(d) A transporter who delivers a hazardous waste to another transporter or to the designated facility must:

(1) Obtain the date of delivery and the handwritten signature of that transporter or of the owner or operator of the designated facility on the manifest; and

(2) Retain one copy of the manifest in accordance with § 263.22; and

(3) Give the remaining copies of the manifest to the accepting transporter or designated facility.

(e) The requirements of paragraphs (c), (d) and (f) of this section do not apply to water (bulk shipment) transporters if:

(1) The hazardous waste is delivered by water (bulk shipment) to the designated facility; and

(2) A shipping paper containing all the information required on the manifest (excluding the EPA identification numbers, generator certification, and signatures) and, for exports, an EPA Acknowledgment of Consent accompanies the hazardous waste; and

(3) The delivering transporter obtains the date of delivery and handwritten signature of the owner or operator of the designated facility on either the manifest or the shipping paper; and

(4) The person delivering the hazardous waste to the initial water (bulk shipment) transporter obtains the date of delivery and signature of the water (bulk shipment) transporter on the manifest and forwards it to the designated facility; and

(5) A copy of the shipping paper or manifest is retained by each water (bulk shipment) transporter in accordance with § 263.22.

(f) For shipments involving rail transportation, the requirements of paragraphs (c), (d) and (e) do not apply and the following requirements do apply:

(1) When accepting hazardous waste from a non-rail transporter, the initial rail transporter must:

(i) Sign and date the manifest acknowledging acceptance of the hazardous waste;

(ii) Return a signed copy of the manifest to the non-rail transporter;

(iii) Forward at least three copies of the manifest to:

(A) The next non-rail transporter, if any; or,

(B) The designated facility, if the shipment is delivered to that facility by rail; or

(C) The last rail transporter designated to handle the waste in the United States;

(iv) Retain one copy of the manifest and rail shipping paper in accordance with § 263.22.

(2) Rail transporters must ensure that a shipping paper containing all the information required on the manifest (excluding the EPA identification numbers, generator certification, and signatures) and, for exports an EPA Acknowledgment of Consent accompanies the hazardous waste at all times.

NOTE: Intermediate rail transporters are not required to sign either the manifest or shipping paper.

(3) When delivering hazardous waste to the designated facility, a rail transporter must:

(i) Obtain the date of delivery and handwritten signature of the owner or operator of the designated facility on the manifest or the shipping paper (if the manifest has not been received by the facility); and

(ii) Retain a copy of the manifest or signed shipping paper in accordance with § 263.22.

(4) When delivering hazardous waste to a non-rail transporter a rail transporter must:

(i) Obtain the date of delivery and the handwritten signature of the next non-rail transporter on the manifest; and

(ii) Retain a copy of the manifest in accordance with § 263.22.

(5) Before accepting hazardous waste from a rail transporter, a non-rail transporter must sign and date the manifest and provide a copy to the rail transporter.

(g) Transporters who transport hazardous waste out of the United States must:

(1) Indicate on the manifest the date the hazardous waste left the United States; and

(2) Sign the manifest and retain one copy in accordance with § 263.22(c); and

(3) Return a signed copy of the manifest to the generator; and

(4) Give a copy of the manifest to a U.S. Customs official at the point of departure from the United States.

(h) A transporter transporting hazardous waste from a generator who generates greater than 100 kilograms but less than 1000 kilograms of hazardous waste in a calendar month need not comply with the requirements of this section or those of § 263.22 provided that:

(1) The waste is being transported pursuant to a reclamation agreement as provided for in § 262.20(e);

(2) The transporter records, on a log or shipping paper, the following information for each shipment:

(i) The name, address, and U.S. EPA Identification Number of the generator of the waste;

(ii) The quantity of waste accepted;

(iii) All DOT-required shipping information;

(iv) The date the waste is accepted; and

(3) The transporter carries this record when transporting waste to the reclamation facility; and

(4) The transporter retains these records for a period of at least three years after termination or expiration of the agreement.

[45 FR 33151, May 19, 1980, as amended at 45 FR 86973, Dec. 31, 1980; 51 FR 10176, Mar. 24, 1986; 51 FR 28685, Aug. 8, 1986]

§ 263.21 Compliance with the manifest.

(a) The transporter must deliver the entire quantity of hazardous waste which he has accepted from a generator or a transporter to:

(1) The designated facility listed on the manifest; or

(2) The alternate designated facility, if the hazardous waste cannot be delivered to the designated facility because an emergency prevents delivery; or

(3) The next designated transporter; or

(4) The place outside the United States designated by the generator.

(b) If the hazardous waste cannot be delivered in accordance with paragraph (a) of this section, the transporter must contact the generator for further directions and must revise the manifest according to the generator's instructions.

§ 263.22 Recordkeeping.

(a) A transporter of hazardous waste must keep a copy of the manifest signed by the generator, himself, and the next designated transporter or the owner or operator of the designated facility for a period of three years from the date the hazardous waste was accepted by the initial transporter.

(b) For shipments delivered to the designated facility by water (bulk shipment), each water (bulk shipment) transporter must retain a copy of the shipping paper containing all the information required in § 263.20(e)(2) for a period of three years from the date the hazardous waste was accepted by the initial transporter.

(c) For shipments of hazardous waste by rail within the United States:

(i) The initial rail transporter must keep a copy of the manifest and shipping paper with all the information required in § 263.20(f)(2) for a period of three years from the date the hazardous waste was accepted by the initial transporter; and

(ii) The final rail transporter must keep a copy of the signed manifest (or the shipping paper if signed by the designated facility in lieu of the manifest) for a period of three years from the date the hazardous waste was accepted by the initial transporter.

NOTE: Intermediate rail transporters are not required to keep records pursuant to these regulations.

(d) A transporter who transports hazardous waste out of the United States must keep a copy of the manifest indicating that the hazardous waste left the United States for a period of three years from the date the hazardous waste was accepted by the initial transporter.

(e) The periods of retention referred to in this Section are extended automatically during the course of any unresolved enforcement action regarding the regulated activity or as requested by the Administrator.

[45 FR 33151, May 19, 1980, as amended at 45 FR 86973, Dec. 31, 1980]

Subpart C—Hazardous Waste Discharges

§ 263.30 Immediate action.

(a) In the event of a discharge of hazardous waste during transportation, the transporter must take appropriate immediate action to protect human health and the environment (e.g., notify local authorities, dike the discharge area).

(b) If a discharge of hazardous waste occurs during transportation and an official (State or local government or a Federal Agency) acting within the scope of his official responsibilities determines that immediate removal of the waste is necessary to protect human health or the environment, that official may authorize the removal of the waste by transporters who do not have EPA identification numbers and without the preparation of a manifest.

(c) An air, rail, highway, or water transporter who has discharged hazardous waste must:

(1) Give notice, if required by 49 CFR 171.15, to the National Response Center (800-424-8802 or 202-426-2675); and

(2) Report in writing as required by 49 CFR 171.16 to the Director, Office of Hazardous Materials Regulations, Materials Transportation Bureau, Department of Transportation, Washington, DC 20590.

(d) A water (bulk shipment) transporter who has discharged hazardous waste must give the same notice as required by 33 CFR 153.203 for oil and hazardous substances.

§ 263.31 Discharge clean up.

A transporter must clean up any hazardous waste discharge that occurs during transportation or take such action as may be required or approved by Federal, State, or local officials so

that the hazardous waste discharge no longer presents a hazard to human health or the environment.

PART 264—STANDARDS FOR OWNERS AND OPERATORS OF HAZARDOUS WASTE TREATMENT, STORAGE, AND DISPOSAL FACILITIES

Subpart A—General

Sec.
264.1 Purpose, scope and applicability.
264.2 [Reserved]
264.3 Relationship to interim status standards.
264.4 Imminent hazard action.

Subpart B—General Facility Standards

264.10 Applicability.
264.11 Identification number.
264.12 Required notices.
264.13 General waste analysis.
264.14 Security.
264.15 General inspection requirements.
264.16 Personnel training.
264.17 General reguirements for ignitable, reactive, or incompatible wastes.
264.18 Location standards.

Subpart C—Preparedness and Prevention

264.30 Applicability.
264.31 Design and operation of facility.
264.32 Required equipment.
264.33 Testing and maintenance of equipment.
264.34 Access to communications or alarm system.
264.35 Required aisle space.
264.36 [Reserved]
264.37 Arrangements with local authorities.

Subpart D—Contingency Plan and Emergency Procedures

264.50 Applicability.
264.51 Purpose and implementation of contingency plan.
264.52 Content of contingency plan.
264.53 Copies of contingency plan.
264.54 Amendment of contingency plan.
264.55 Emergency coordinator.
264.56 Emergency procedures.

Subpart E—Manifest System, Recordkeeping, and Reporting

264.70 Applicability.
264.71 Use of manifest system.
264.72 Manifest discrepancies
264.73 Operating record.
264.74 Availability, retention, and disposition of records.
264.75 Biennial report.
264.76 Unmanifested waste report.
264.77 Additional reports.

Subpart F—Releases From Solid Waste Management Units

264.90 Applicability.
264.91 Required programs.
264.92 Ground-water protection standard.
264.93 Hazardous constituents.
264.94 Concentration limits.
264.95 Point of compliance.
264.96 Compliance period.
264.97 General ground-water monitoring requirements.
264.98 Detection monitoring program.
264.99 Compliance monitoring program.
264.100 Corrective action program.
264.101 Corrective action for solid waste management units.

Subpart G—Closure and Post-Closure

264.110 Applicability.
264.111 Closure performance standard.
264.112 Closure plan; amendment of plan.
264.113 Closure; time allowed for closure.
264.114 Disposal or decontamination of equipment, structures and soils.
264.115 Certification of closure.
264.116 Survey plat.
264.117 Post-closure care and use of property.
264.118 Post-closure plan; amendment of plan.
264.119 Post-closure notices.
264.120 Certification of completion of post-closure care.

Subpart H—Financial Requirements

264.140 Applicability.
264.141 Definitions of terms as used in this subpart.
264.142 Cost estimate for closure.
264.143 Financial assurance for closure.
264.144 Cost estimate for post-closure care.
264.145 Financial assurance for post-closure care.
264.146 Use of a mechanism for financial assurance of both closure and post-closure care.
264.147 Liability requirements.
264.148 Incapacity of owners or operators, guarantors, or financial institutions.
264.149 Use of State-required mechanisms.
264.150 State assumption of responsibility.
264.151 Wording of the instruments.

Sec.

Subpart I—Use and Management of Containers

264.170 Applicability.
264.171 Condition of containers.
264.172 Compatibility of waste with containers.
264.173 Management of containers.
264.174 Inspections.
264.175 Containment.
264.176 Special requirements for ignitable or reactive waste.
264.177 Special requirements for incompatible wastes.
264.178 Closure.

Subpart J—Tank Systems

264.190 Applicability.
264.191 Assessment of existing tank system's integrity.
264.192 Design and installation of new tank systems or components.
264.193 Containment and detection of releases.
264.194 General operating requirements.
264.195 Inspections.
264.196 Response to leaks or spills and disposition of leaking or unfit-for-use tank systems.
264.197 Closure and post-closure care.
264.198 Special requirements for ignitable or reactive wastes.
264.199 Special requirements for incompatible wastes.

Subpart K—Surface Impoundments

264.220 Applicability.
264.221 Design and operating requirements.
264.222—264.225 [Reserved]
264.226 Monitoring and inspection.
264.227 Emergency repairs; contingency plans.
264.228 Closure and post-closure care.
264.229 Special requirements for ignitable or reactive waste.
264.230 Special requirements for incompatible wastes.
264.231 Special requirements for hazardous wastes FO20, FO21, FO22, FO23, FO26, and FO27.

Subpart L—Waste Piles

264.250 Applicability.
264.251 Design and operating requirements.
264.252—264.253 [Reserved]
264.254 Monitoring and inspection.
264.255 [Reserved]
264.256 Special requirements for ignitable or reactive waste.
264.257 Special requirements for incompatible wastes.
264.258 Closure and post-closure care.
264.259 Special requirements for hazardous wastes FO20, FO21, FO22, FO23, FO26, and FO27.

Subpart M—Land Treatment

264.270 Applicability.
264.271 Treatment program.
264.272 Treatment demonstration.
264.273 Design and operating requirements.
264.274—264.275 [Reserved]
264.276 Food-chain crops.
264.277 [Reserved]
264.278 Unsaturated zone monitoring.
264.279 Recordkeeping.
264.280 Closure and post-closure care.
264.281 Special requirements for ignitable or reactive waste.
264.282 Special requirements for incompatible wastes.
264.283 Special requirements for hazardous wastes FO20, FO21, FO22, FO23, FO26, and FO27.

Subpart N—Landfills

264.300 Applicability.
264.301 Design and operating requirements.
264.302 [Reserved]
264.303 Monitoring and inspection.
264.304—264.308 [Reserved]
264.309 Surveying and recordkeeping.
264.310 Closure and post-closure care.
264.311 [Reserved]
264.312 Special requirements for ignitable or reactive waste.
264.313 Special requirements for incompatible wastes.
264.314 Special requirements for bulk and containerized liquids.
264.315 Special requirements for containers.
264.316 Disposal of small containers of hazardous waste in overpacked drums (lab packs).
264.317 Special requirements for hazardous wastes FO20, FO21, FO22, FO23, FO26, and FO27.

Subpart O—Incinerators

264.340 Applicability.
264.341 Waste analysis.
264.342 Principal organic hazardous constituents (POHCs).
264.343 Performance standards.
264.344 Hazardous waste incinerator permits.
264.345 Operating requirements.
264.346 [Reserved]
264.347 Monitoring and inspections.
264.348—264.350 [Reserved]
264.351 Closure.

Sec.

Subparts P-W [Reserved]

Subpart X—Miscellaneous Units

264.600 Applicability.
264.601 Environmental performance standards.
264.602 Monitoring, analysis, inspection, response, reporting, and corrective action.
264.603 Post-closure care.

Subparts Y-Z [Reserved]

Subpart AA—Air Emission Standards for Process Vents

264.1030 Applicability.
264.1031 Definitions.
264.1032 Standards: Process vents.
264.1033 Standards: Closed-vent systems and control devices.
264.1034 Test methods and procedures.
264.1035 Recordkeeping requirements.
264.1036 Reporting requirements.
264.1037—264.1049 [Reserved]

Subpart BB—Air Emission Standards for Equipment Leaks

264.1050 Applicability.
264.1051 Definitions.
264.1052 Standards: Pumps in light liquid service.
264.1053 Standards: Compressors.
264.1054 Standards: Pressure relief devices in gas/vapor service.
264.1055 Standards: Sampling connecting systems.
264.1056 Standards: Open-ended valves or lines.
264.1057 Standards: Valves in gas/vapor service or in light liquid service.
264.1058 Standards: Pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and flanges and other connectors.
264.1059 Standards: Delay of repair.
264.1060 Standards: Closed-vent systems and control devices.
264.1061 Alternative standards for valves in gas/vapor service or in light liquid service: percentage of valves allowed to leak.
264.1062 Alternative standards for valves in gas/vapor service or in light liquid service: skip period leak detection and repair.
264.1063 Test methods and procedures.
264.1064 Recordkeeping requirements.
264.1065 Reporting requirements.
264.1066—264.1079 [Reserved]

APPENDIX I—RECORDKEEPING INSTRUCTIONS
APPENDICES II—III [RESERVED]

Sec.

APPENDIX IV—COCHRAN'S APPROXIMATION TO THE BEHRENS-FISHER STUDENTS' T-TEST
APPENDIX V—EXAMPLES OF POTENTIALLY INCOMPATIBLE WASTE
APPENDIX VI—POLITICAL JURISDICTIONS IN WHICH COMPLIANCE WITH § 264.18(a) MUST BE DEMONSTRATED
APPENDICES VII—VIII [RESERVED]
APPENDIX IX—GROUND-WATER MONITORING LIST

AUTHORITY: 42 U.S.C. 6905, 6912(a), 6924, and 6925.

SOURCE: 45 FR 33221, May 19, 1980, unless otherwise noted.

Subpart A—General

§ 264.1 Purpose, scope and applicability.

(a) The purpose of this part is to establish minimum national standards which define the acceptable management of hazardous waste.

(b) The standards in this part apply to owners and operators of all facilities which treat, store, or dispose of hazardous waste, except as specifically provided otherwise in this part or Part 261 of this chapter.

(c) The requirements of this part apply to a person disposing of hazardous waste by means of ocean disposal subject to a permit issued under the Marine Protection, Research, and Sanctuaries Act only to the extent they are included in a RCRA permit by rule granted to such a person under Part 270 of this chapter.

[*Comment:* These Part 264 regulations do apply to the treatment or storage of hazardous waste before it is loaded onto an ocean vessel for incineration or disposal at sea.]

(d) The requirements of this part apply to a person disposing of hazardous waste by means of underground injection subject to a permit issued under an Underground Injection Control (UIC) program approved or promulgated under the Safe Drinking Water Act only to the extent they are required by § 144.14 of this chapter.

[*Comment:* These Part 264 regulations do apply to the above-ground treatment or storage of hazardous waste before it is injected underground.]

(e) The requirements of this part apply to the owner or operator of a POTW which treats, stores, or dis-

poses of hazardous waste only to the extent they are included in a RCRA permit by rule granted to such a person under Part 270 of this chapter.

(f) The requirements of this part do not apply to a person who treats, stores, or disposes of hazardous waste in a State with a RCRA hazardous waste program authorized under Subpart A of Part 271 of this chapter, or in a State authorized under Subpart B of Part 271 of this chapter for the component or components of Phase II interim authorization which correspond to the person's treatment, storage or disposal processes; except that this part will apply:

(1) As stated in paragraph (d) of this section, if the authorized State RCRA program does not cover disposal of hazardous waste by means of underground injection; and

(2) To a person who treats, stores or disposes of hazardous waste in a State authorized under Subpart A of Part 271 of this chapter, at a facility which was not covered by standards under this part when the State obtained authorization, and for which EPA promulgates standards under this part after the State is authorized. This paragraph will only apply until the State is authorized to permit such facilities under Subpart A of Part 271 of this chapter.

(3) To a person who treats, stores, or disposes of hazardous waste in a State which is authorized under Subpart A or B of Part 271 of this chapter if the State has not been authorized to carry out the requirements and prohibitions applicable to the treatment, storage, or disposal of hazardous waste at his facility which are imposed pursuant to the Hazardous and Solid Waste Amendments of 1984. The requirements and prohibitions that are applicable until a State receives authorization to carry them out include all Federal program requirements identified in § 271.1(j).

(g) The requirements of this part do not apply to:

(1) The owner or operator of a facility permitted, licensed, or registered by a State to manage municipal or industrial solid waste, if the only hazardous waste the facility treats, stores, or disposes of is excluded from regulation under this part by § 261.5 of this chapter;

(2) The owner or operator of a facility managing recyclable materials described in § 261.6(a) (2) and (3) of this chapter (except to the extent that requirements of this part are referred to in Subparts C, D, F, or G of Part 266 of this chapter).

(3) A generator accumulating waste on-site in compliance with § 262.34 of this chapter;

(4) A farmer disposing of waste pesticides from his own use in compliance with § 262.70 of this chapter; or

(5) The owner or operator of a totally enclosed treatment facility, as defined in § 260.10.

(6) The owner or operator of an elementary neutralization unit or a wastewater treatment unit as defined in § 260.10 of this chapter.

(7) [Reserved]

(8)(i) Except as provided in paragraph (g)(8)(ii) of this section, a person engaged in treatment or containment activities during immediate response to any of the following situations:

(A) A discharge of a hazardous waste;

(B) An imminent and substantial threat of a discharge of hazardous waste;

(C) A discharge of a material which, when discharged, becomes a hazardous waste.

(ii) An owner or operator of a facility otherwise regulated by this part must comply with all applicable requirements of Subparts C and D.

(iii) Any person who is covered by paragraph (g)(8)(i) of this section and who continues or initiates hazardous waste treatment or containment activities after the immediate response is over is subject to all applicable requirements of this part and Parts 122 through 124 of this chapter for those activities.

(9) A transporter storing manifested shipments of hazardous waste in containers meeting the requirements of 40 CFR 262.30 at a transfer facility for a period of ten days or less.

(10) The addition of absorbent material to waste in a container (as defined in § 260.10 of this chapter) or the addition of waste to absorbent material in

a container, provided that these actions occur at the time waste is first placed in the container; and §§ 264.17(b), 264.171, and 264.172 are complied with.

(h) The requirements of this part apply to owners or operators of all facilities which treat, store, or dispose of hazardous wastes referred to in Part 268.

[45 FR 33221, May 19, 1980, as amended at 45 FR 76075, Nov. 17, 1980; 45 FR 86968, Dec. 31, 1980; 46 FR 27480, May 20, 1981; 47 FR 8306, Feb. 25, 1982; 47 FR 32384, July 26, 1982; 48 FR 2511, Jan. 19, 1983; 48 FR 14294, Apr. 1, 1983; 50 FR 665, Jan. 4, 1985; 50 FR 28746, July 15, 1985; 52 FR 21016, June 4, 1987; 53 FR 27165, July 19, 1988]

§ 264.2 [Reserved]

§ 264.3 Relationship to interim status standards.

A facility owner or operator who has fully complied with the requirements for interim status—as defined in section 3005(e) of RCRA and regulations under § 270.70 of this chapter—must comply with the regulations specified in Part 265 of this chapter in lieu of the regulations in this part, until final administrative disposition of his permit application is made.

[*Comment:* As stated in section 3005(a) of RCRA, after the effective date of regulations under that section, i.e., Parts 270 and 124 of this chapter, the treatment, storage, or disposal of hazardous waste is prohibited except in accordance with a permit. Section 3005(e) of RCRA provides for the continued operation of an existing facility which meets certain conditions until final administrative disposition of the owner's or operator's permit application is made.]

[45 FR 33221, May 19, 1980, as amended at 48 FR 14294, Apr. 1, 1983]

§ 264.4 Imminent hazard action.

Notwithstanding any other provisions of these regulations, enforcement actions may be brought purusant to section 7003 of RCRA.

Subpart B—General Facility Standards

§ 264.10 Applicability.

(a) The regulations in this subpart apply to owners and operators of all hazardous waste facilities, except as provided in § 264.1 and in paragraph (b) of this section.

(b) Section 264.18(b) applies only to facilities subject to regulation under Subparts I through O and Subpart X of this part.

[46 FR 2848, Jan. 12, 1981, as amended at 52 FR 46963, Dec. 10, 1987]

§ 264.11 Identification number.

Every facility owner or operator must apply to EPA for an EPA identification number in accordance with the EPA notification procedures (45 FR 12746).

(Approved by the Office of Management and Budget under control number 2050-0028)

[45 FR 33221, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 264.12 Required notices.

(a) The owner or operator of a facility that has arranged to receive hazardous waste from a foreign source must notify the Regional Administrator in writing at least four weeks in advance of the date the waste is expected to arrive at the facility. Notice of subsequent shipments of the same waste from the same foreign source is not required.

(b) The owner or operator of a facility that receives hazardous waste from an off-site source (except where the owner or operator is also the generator) must inform the generator in writing that he has the appropriate permit(s) for, and will accept, the waste the generator is shipping. The owner or operator must keep a copy of this written notice as part of the operating record.

(c) Before transferring ownership or operation of a facility during its operating life, or of a disposal facility during the post-closure care period, the owner or operator must notify the new owner or operator in writing of the requirements of this part and Part 270 of this chapter.

[*Comment:* An owner's or operator's failure to notify the new owner or operator of the requirements of this part in no way relieves the new owner or operator of his obligation to comply with all applicable requirements.]

(Approved by the Office of Management and Budget under control number 2050-0012)

[45 FR 33221, May 19, 1980, as amended at 48 FR 14294, Apr. 1, 1983; 50 FR 4514, Jan. 31, 1985]

§ 264.13 General waste analysis.

(a)(1) Before an owner or operator treats, stores, or disposes of any hazardous wastes, or non-hazardous wastes if applicable under § 264.113(d), he must obtain a detailed chemical and physical analysis of a representative sample of the wastes.

(2) The analysis may include data developed under Part 261 of this chapter, and existing published or documented data on the hazardous waste or on hazardous waste generated from similar processes.

[*Comment:* For example, the facility's records of analyses performed on the waste before the effective date of these regulations, or studies conducted on hazardous waste generated from processes similar to that which generated the waste to be managed at the facility, may be included in the data base required to comply with paragraph (a)(1) of this section. The owner or operator of an off-site facility may arrange for the generator of the hazardous waste to supply part of the information required by paragraph (a)(1) of this section, except as othewise specified in 40 CFR 268.7 (b) and (c). If the generator does not supply the information, and the owner or operator chooses to accept a hazardous waste, the owner or operator is responsible for obtaining the information required to comply with this section.]

(3) The analysis must be repeated as necessary to ensure that it is accurate and up to date. At a minimum, the analysis must be repeated:

(i) When the owner or operator is notified, or has reason to believe, that the process or operation generating the hazardous wastes, or non-hazardous wastes if applicable under § 264.113(d), has changed; and

(ii) For off-site facilities, when the results of the inspection required in paragraph (a)(4) of this section indicate that the hazardous waste received at the facility does not match the waste designated on the accompanying manifest or shipping paper.

(4) The owner or operator of an off-site facility must inspect and, if necessary, analyze each hazardous waste movement received at the facility to determine whether it matches the identity of the waste specified on the accompanying manifest or shipping paper.

(b) The owner or operator must develop and follow a written waste analysis plan which describes the procedures which he will carry out to comply with paragraph (a) of this section. He must keep this plan at the facility. At a minimum, the plan must specify:

(1) The parameters for which each hazardous waste, or non-hazardous waste if applicable under § 264.113(d), will be analyzed and the rationale for the selection of these parameters (i.e., how analysis for these parameters will provide sufficient information on the waste's properties to comply with paragraph (a) of this section);

(2) The test methods which will be used to test for these parameters;

(3) The sampling method which will be used to obtain a representative sample of the waste to be analyzed. A representative sample may be obtained using either:

(i) One of the sampling methods described in Appendix I of Part 261 of this chapter; or

(ii) An equivalent sampling method.

[*Comment:* See § 260.21 of this chapter for related discussion.]

(4) The frequency with which the initial analysis of the waste will be reviewed or repeated to ensure that the analysis is accurate and up to date; and

(5) For off-site facilities, the waste analyses that hazardous waste generators have agreed to supply.

(6) Where applicable, the methods that will be used to meet the additional waste analysis requirements for specific waste management methods as specified in §§ 264.17, 264.314, 264.341, 264.1034(d), 264.1063(d), and 268.7 of this chapter.

(7) For surface impoundments exempted from land disposal restrictions under § 268.4(a), the procedures and schedules for:

(i) The sampling of impoundment contents;

(ii) The analysis of test data; and,

(iii) The annual removal of residues which are not delisted under § 260.22 of this chapter or which exhibit a characteristic of hazardous waste and either:

(A) Do not meet applicable treatment standards of Part 268, Subpart D; or

(B) Where no treatment standards have been established;

(*1*) Such residues are prohibited from land disposal under § 268.32 or RCRA section 3004(d); or

(*2*) Such residues are prohibited from land disposal under § 268.33(f).

(c) For off-site facilities, the waste analysis plan required in paragraph (b) of this section must also specify the procedures which will be used to in-spect and, if necessary, analyze each movement of hazardous waste received at the facility to ensure that it matches the identity of the waste designated on the accompanying manifest or shipping paper. At a minimum, the plan must describe:

(1) The procedures which will be used to determine the identity of each movement of waste managed at the facility; and

(2) The sampling method which will be used to obtain a representative sample of the waste to be identified, if the identification method includes sampling.

[*Comment:* Part 270 of this chapter requires that the waste analysis plan be submitted with Part B of the permit application.]

(Approved by the Office of Management and Budget under control number 2050-0012)

[45 FR 33221, May 19, 1980, as amended at 46 FR 2848, Jan. 12, 1981; 50 FR 4514, Jan. 31, 1985; 51 FR 40637, Nov. 7, 1986; 53 FR 31211, Aug. 17, 1988; 54 FR 33394, Aug. 14, 1989; 55 FR 22685, June 1, 1990; 55 FR 25494, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25494, June 21, 1990, in § 264.13, paragraph (b)(6) was revised, effective December 21, 1990. For the convenience of the user the superseded text appears as follows:

§ 264.13 General waste analysis.

* * * * *

(b)* * *

(6) Where applicable, the methods which will be used to meet the additional waste analysis requirements for specific waste management methods as specified in §§ 264.17, 264.314, 264.341 and 268.7 of this chapter.

* * * * *

§ 264.14 Security.

(a) The owner or operator must prevent the unknowing entry, and minimize the possibility for the unauthorized entry, of persons or livestock onto the active portion of his facility, *unless* he can demonstrate to the Regional Administrator that:

(1) Physical contact with the waste, structures, or equipment within the active portion of the facility will not injure unknowing or unauthorized persons or livestock which may enter the active portion of a facility; and

(2) Disturbance of the waste or equipment, by the unknowing or unauthorized entry of persons or livestock onto the active portion of a facility, will not cause a violation of the requirements of this part.

[*Comment:* Part 270 of this chapter requires that an owner or operator who wishes to make the demonstration referred to above must do so with Part B of the permit application.]

(b) Unless the owner or operator has made a successful demonstration under paragraphs (a)(1) and (2) of this section, a facility must have:

(1) A 24-hour surveillance system (e.g., television monitoring or surveillance by guards or facility personnel) which continuously monitors and controls entry onto the active portion of the facility; or

(2)(i) An artificial or natural barrier (e.g., a fence in good repair or a fence combined with a cliff), which completely surrounds the active portion of the facility; and

(ii) A means to control entry, at all times, through the gates or other entrances to the active portion of the facility (e.g., an attendant, television monitors, locked entrance, or controlled roadway access to the facility).

[*Comment:* The requirements of paragraph (b) of this section are satisfied if the facility or plant within which the active portion is located itself has a surveillance system, or a barrier and a means to control entry, which

40-147 O—90——6

complies with the requirements of paragraph (b)(1) or (2) of this section.]

(c) Unless the owner or operator has made a successful demonstration under paragraphs (a)(1) and (2) of this section, a sign with the legend, "Danger—Unauthorized Personnel Keep Out", must be posted at each entrance to the active portion of a facility, and at other locations, in sufficient numbers to be seen from any approach to this active portion. The legend must be written in English and in any other language predominant in the area surrounding the facility (e.g., facilities in counties bordering the Canadian province of Quebec must post signs in French; facilities in counties bordering Mexico must post signs in Spanish), and must be legible from a distance of at least 25 feet. Existing signs with a legend other than "Danger—Unauthorized Personnel Keep Out" may be used if the legend on the sign indicates that only authorized personnel are allowed to enter the active portion, and that entry onto the active portion can be dangerous.

[*Comment:* See § 264.117(b) for discussion of security requirements at disposal facilities during the post-closure care period.]

(Approved by the Office of Management and Budget under control number 2050-0012)

[45 FR 33221, May 19, 1980, as amended at 46 FR 2848, Jan. 12, 1981; 48 FR 14294, Apr. 1, 1983; 50 FR 4514, Jan. 31, 1985]

§ 264.15 General inspection requirements.

(a) The owner or operator must inspect his facility for malfunctions and deterioration, operator errors, and discharges which may be causing—or may lead to—(1) release of hazardous waste constituents to the environment or (2) a threat to human health. The owner or operator must conduct these inspections often enough to identify problems in time to correct them before they harm human health or the environment.

(b)(1) The owner or operator must develop and follow a written schedule for inspecting monitoring equipment, safety and emergency equipment, security devices, and operating and structural equipment (such as dikes and sump pumps) that are important to preventing, detecting, or responding to environmental or human health hazards.

(2) He must keep this schedule at the facility.

(3) The schedule must identify the types of problems (e.g., malfunctions or deterioration) which are to be looked for during the inspection (e.g., inoperative sump pump, leaking fitting, eroding dike, etc.).

(4) The frequency of inspection may vary for the items on the schedule. However, it should be based on the rate of possible deterioration of the equipment and the probability of an environmental or human health incident if the deterioration or malfunction of any operator error goes undetected between inspections. Areas subject to spills, such as loading and unloading areas, must be inspected daily when in use. At a minimum, the inspection schedule must include the terms and frequencies called for in §§ 264.174, 264.194, 264.226, 264.253, 264.254, 264.303, 264.347, 264.602, 264.1033, 264.1052, 264.1053, and 264.1058, where applicable.

[*Comment:* Part 270 of this chapter requires the inspection schedule to be submitted with Part B of the permit application. EPA will evaluate the schedule along with the rest of the application to ensure that it adequately protects human health and the environment. As part of this review, EPA may modify or amend the schedule as may be necessary.]

(c) The owner or operator must remedy any deterioration or malfunction of equipment or structures which the inspection reveals on a schedule which ensures that the problem does not lead to an environmental or human health hazard. Where a hazard is imminent or has already occurred, remedial action must be taken immediately.

(d) The owner or operator must record inspections in an inspection log or summary. He must keep these records for at least three years from the date of inspection. At a minimum, these records must include the date and time of the inspection, the name of the inspector, a notation of the observations made, and the date and nature of any repairs or other remedial actions.

(Approved by the Office of Management and Budget under control number 2050-0012)

[45 FR 33221, May 19, 1980, as amended at 48 FR 14294, Apr. 1, 1983; 50 FR 4514, Jan. 31, 1985; 51 FR 25472, July 14, 1986; 52 FR 46963, Dec. 10, 1987; 55 FR 25494 June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25494, June 21, 1990, in § 264.15, the last sentence of paragraph (b)(4) was revised, effective December 21, 1990. For the convenience of the user the superseded text appears as follows:

§ 264.15 General inspection requirements.

* * * * *

(b)* * *

(4)* * * At a minimum, the inspection schedule must include the terms and frequencies called for in §§ 264.174, 264.194, 264.226, 264.253, 264.254, 264.303, 264.347, and 264.602, where applicable.

* * * * *

§ 264.16 Personnel training.

(a)(1) Facility personnel must successfully complete a program of classroom instruction or on-the-job training that teaches them to perform their duties in a way that ensures the facility's compliance with the requirements of this part. The owner or operator must ensure that this program includes all the elements described in the document required under paragraph (d)(3) of this section.

[*Comment:* Part 270 of this chapter requires that owners and operators submit with Part B of the RCRA permit application, an outline of the training program used (or to be used) at the facility and a brief description of how the training program is designed to meet actual job tasks.]

(2) This program must be directed by a person trained in hazardous waste management procedures, and must include instruction which teaches facility personnel hazardous waste management procedures (including contingency plan implementation) relevant to the positions in which they are employed.

(3) At a minimum, the training program must be designed to ensure that facility personnel are able to respond effectively to emergencies by familiarizing them with emergency procedures, emergency equipment, and emergency systems, including, where applicable:

(i) Procedures for using, inspecting, repairing, and replacing facility emergency and monitoring equipment;

(ii) Key parameters for automatic waste feed cut-off systems;

(iii) Communications or alarm systems;

(iv) Response to fires or explosions;

(v) Response to ground-water contamination incidents; and

(vi) Shutdown of operations.

(b) Facility personnel must successfully complete the program required in paragraph (a) of this section within six months after the effective date of these regulations or six months after the date of their employment or assignment to a facility, or to a new position at a facility, whichever is later. Employees hired after the effective date of these regulations must not work in unsupervised positions until they have completed the training requirements of paragraph (a) of this section.

(c) Facility personnel must take part in an annual review of the initial training required in paragraph (a) of this section.

(d) The owner or operator must maintain the following documents and records at the facility:

(1) The job title for each position at the facility related to hazardous waste management, and the name of the employee filling each job;

(2) A written job description for each position listed under paragraph (d)(1) of this section. This description may be consistent in its degree of specificity with descriptions for other similar positions in the same company location or bargaining unit, but must include the requisite skill, education, or other qualifications, and duties of employees assigned to each position;

(3) A written description of the type and amount of both introductory and continuing training that will be given to each person filling a position listed under paragraph (d)(1) of this section;

(4) Records that document that the training or job experience required under paragraphs (a), (b), and (c) of this section has been given to, and completed by, facility personnel.

(e) Training records on current personnel must be kept until closure of the facility; training records on former employees must be kept for at least three years from the date the employee last worked at the facility. Personnel training records may accompany personnel transferred within the same company.

(Approved by the Office of Management and Budget under control number 2050-0012)

[45 FR 33221, May 19, 1980, as amended at 46 FR 2848, Jan. 12, 1981; 48 FR 14294, Apr. 1, 1983; 50 FR 4514, Jan. 31, 1985]

§ 264.17 General requirements for ignitable, reactive, or incompatible wastes.

(a) The owner or operator must take precautions to prevent accidental ignition or reaction of ignitable or reactive waste. This waste must be separated and protected from sources of ignition or reaction including but not limited to: open flames, smoking, cutting and welding, hot surfaces, frictional heat, sparks (static, electrical, or mechanical), spontaneous ignition (e.g., from heat-producing chemical reactions), and radiant heat. While ignitable or reactive waste is being handled, the owner or operator must confine smoking and open flame to specially designated locations. "No Smoking" signs must be conspicuously placed wherever there is a hazard from ignitable or reactive waste.

(b) Where specifically required by other sections of this part, the owner or operator of a facility that treats, stores or disposes ignitable or reactive waste, or mixes incompatible waste or incompatible wastes and other materials, must take precautions to prevent reactons which:

(1) Generate extreme heat or pressure, fire or explosions, or violent reactions;

(2) Produce uncontrolled toxic mists, fumes, dusts, or gases in sufficient quantities to threaten human health or the environment;

(3) Produce uncontrolled flammable fumes or gases in sufficient quantities to pose a risk of fire or explosions;

(4) Damage the structural integrity of the device or facility;

(5) Through other like means threaten human health or the environment.

(c) When required to comply with paragraph (a) or (b) of this section, the owner or operator must document that compliance. This documentation may be based on references to published scientific or engineering literature, data from trial tests (e.g., bench scale or pilot scale tests), waste analyses (as specified in § 264.13), or the results of the treatment of similar wastes by similar treatment processes and under similar operating conditions.

(Approved by the Office of Management and Budget under control number 2050-0012)

[46 FR 2848, Jan. 12, 1981, as amended at 50 FR 4514, Jan. 31, 1985]

§ 264.18 Location standards.

(a) *Seismic considerations.* (1) Portions of new facilities where treatment, storage, or disposal of hazardous waste will be conducted must not be located within 61 meters (200 feet) of a fault which has had displacement in Holocene time.

(2) As used in paragraph (a)(1) of this section:

(i) "Fault" means a fracture along which rocks on one side have been displaced with respect to those on the other side.

(ii) "Displacement" means the relative movement of any two sides of a fault measured in any direction.

(iii) "Holocene" means the most recent epoch of the Quarternary period, extending from the end of the Pleistocene to the present.

[*Comment:* Procedures for demonstrating compliance with this standard in Part B of the permit application are specified in § 270.14(b)(11). Facilities which are located in political jurisdictions other than those listed in Appendix VI of this part, are assumed to be in compliance with this requirement.]

(b) *Floodplains.* (1) A facility located in a 100-year floodplain must be designed, constructed, operated, and maintained to prevent washout or any hazardous waste by a 100-year flood, *unless* the owner or operator can dem-

onstrate to the Regional Administrator's satisfaction that:

(i) Procedures are in effect which will cause the waste to be removed safely, before flood waters can reach the facility, to a location where the wastes will not be vulnerable to flood waters; or

(ii) For existing surface impoundments, waste piles, land treatment units, landfills, and miscellaneous units, no adverse effects on human health or the environment will result if washout occurs, considering:

(A) The volume and physical and chemical characteristics of the waste in the facility;

(B) The concentration of hazardous constituents that would potentially affect surface waters as a result of washout;

(C) The impact of such concentrations on the current or potential uses of and water quality standards established for the affected surface waters; and

(D) The impact of hazardous constituents on the sediments of affected surface waters or the soils of the 100-year floodplain that could result from washout.

[*Comment:* The location where wastes are moved must be a facility which is either permitted by EPA under Part 270 of this chapter, authorized to manage hazardous waste by a State with a hazardous waste management program authorized under Part 271 of this chapter, or in interim status under Parts 270 and 265 of this chapter.]

(2) As used in paragraph (b)(1) of this section:

(i) "100-year floodplain" means any land area which is subject to a one percent or greater chance of flooding in any given year from any source.

(ii) "Washout" means the movement of hazardous waste from the active portion of the facility as a result of flooding.

(iii) "100-year flood" means a flood that has a one percent chance of being equalled or exeeded in any given year.

[*Comment:* (1) Requirements pertaining to other Federal laws which affect the location and permitting of facilities are found in § 270.3 of this chapter. For details relative to these laws, see EPA's manual for SEA (special environmental area) requirements for hazardous waste facility permits. Through EPA is responsible for complying with these requirements, applicants are advised to consider them in planning the location of a facility to help prevent subsequent project delays.]

(c) *Salt dome formations, salt bed formations, underground mines and caves.* The placement of any noncontainerized or bulk liquid hazardous waste in any salt dome formation, salt bed formation, underground mine or cave is prohibited, except for the Department of Energy Waste Isolation Pilot Project in New Mexico.

(Approved by the Office of Management and Budget under control numbers 2050-0010 and 2050-0012)

[46 FR 2848, Jan. 12, 1981, as amended at 47 FR 32350, July 26, 1982; 48 FR 14294, Apr. 1, 1983; 48 FR 30115, June 30, 1983; 50 FR 4514, Jan. 31, 1985; 50 FR 28746, July 15, 1985; 52 FR 46963, Dec. 10, 1987]

Subpart C—Preparedness and Prevention

§ 264.30 Applicability.

The regulations in this subpart apply to owners and operators of all hazardous waste facilities, except as § 264.1 provides otherwise.

§ 264.31 Design and operation of facility.

Facilities must be designed, constructed, maintained, and operated to minimize the possibility of a fire, explosion, or any unplanned sudden or non-sudden release of hazardous waste or hazardous waste constituents to air, soil, or surface water which could threaten human health or the environment.

§ 264.32 Required equipment.

All facilities must be equipped with the following, *unless* it can be demonstrated to the Regional Administrator that none of the hazards posed by waste handled at the facility could require a particular kind of equipment specified below:

(a) An internal communications or alarm system capable of providing immediate emergency instruction (voice or signal) to facility personnel;

(b) A device, such as a telephone (immediately available at the scene of operations) or a hand-held two-way radio, capable of summoning emergen-

cy assistance from local police departments, fire departments, or State or local emergency response teams;

(c) Portable fire extinguishers, fire control equipment (including special extinguishing equipment, such as that using foam, inert gas, or dry chemicals), spill control equipment, and decontamination equipment; and

(d) Water at adequate volume and pressure to supply water hose streams, or foam producing equipment, or automatic sprinklers, or water spray systems.

[*Comment:* Part 270 of this chapter requires that an owner or operator who wishes to make the demonstration referred to above must do so with Part B of the permit application.]

[45 FR 33221, May 19, 1980, as amended at 48 FR 14294, Apr. 1, 1983]

§ 264.33 Testing and maintenance of equipment.

All facility communications or alarm systems, fire protection equipment, spill control equipment, and decontamination equipment, where required, must be tested and maintained as necessary to assure its proper operation in time of emergency.

§ 264.34 Access to communications or alarm system.

(a) Whenever hazardous waste is being poured, mixed, spread, or otherwise handled, all personnel involved in the operation must have immediate access to an internal alarm or emergency communication device, either directly or through visual or voice contact with another employee, *unless* the Regional Administrator has ruled that such a device is not required under § 264.32.

(b) If there is ever just one employee on the premises while the facility is operating, he must have immediate access to a device, such as a telephone (immediately available at the scene of operation) or a hand-held two-way radio, capable of summoning external emergency assistance, *unless* the Regional Administrator has ruled that such a device is not required under § 264.32.

§ 264.35 Required aisle space.

The owner or operator must maintain aisle space to allow the unobstructed movement of personnel, fire protection equipment, spill control equipment, and decontamination equipment to any area of facility operation in an emergency, *unless* it can be demonstrated to the Regional Administrator that aisle space is not needed for any of these purposes.

[*Comment:* Part 270 of this chapter requires that an owner or operator who wishes to make the demonstration referred to above must do so with Part B of the permit application.]

[45 FR 33221, May 19, 1980, as amended at 48 FR 14294, Apr. 1, 1983]

§ 264.36 [Reserved]

§ 264.37 Arrangements with local authorities.

(a) The owner or operator must attempt to make the following arrangements, as appropriate for the type of waste handled at his facility and the potential need for the services of these organizations:

(1) Arrangements to familiarize police, fire departments, and emergency response teams with the layout of the facility, properties of hazardous waste handled at the facility and associated hazards, places where facility personnel would normally be working, entrances to and roads inside the facility, and possible evacuation routes;

(2) Where more than one police and fire department might respond to an emergency, agreements designating primary emergency authority to a specific police and a specific fire department, and agreements with any others to provide support to the primary emergency authority;

(3) Agreements with State emergency response teams, emergency response contractors, and equipment suppliers; and

(4) Arrangements to familiarize local hospitals with the properties of hazardous waste handled at the facility and the types of injuries or illnesses which could result from fires, explosions, or releases at the facility.

(b) Where State or local authorities decline to enter into such arrange-

ments, the owner or operator must document the refusal in the operating record.

Subpart D—Contingency Plan and Emergency Procedures

§ 264.50 Applicability.

The regulations in this subpart apply to owners and operators of all hazardous waste facilities, except as § 264.1 provides otherwise.

§ 264.51 Purpose and implementation of contingency plan.

(a) Each owner or operator must have a contingency plan for his facility. The contingency plan must be designed to minimize hazards to human health or the environment from fires, explosions, or any unplanned sudden or non-sudden release of hazardous waste or hazardous waste constituents to air, soil, or surface water.

(b) The provisions of the plan must be carried out immediately whenever there is a fire, explosion, or release of hazardous waste or hazardous waste constituents which could threaten human health or the environment.

(Approved by the Office of Management and Budget under control number 2050-0011)

[45 FR 33221, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 264.52 Content of contingency plan.

(a) The contingency plan must describe the actions facility personnel must take to comply with §§ 264.51 and 264.56 in response to fires, explosions, or any unplanned sudden or non-sudden release of hazardous waste or hazardous waste constituents to air, soil, or surface water at the facility.

(b) If the owner or operator has already prepared a Spill Prevention, Control, and Countermeasures (SPCC) Plan in accordance with Part 112 of this chapter, or Part 1510 of Chapter V, or some other emergency or contingency plan, he need only amend that plan to incorporate hazardous waste management provisions that are sufficient to comply with the requirements of this part.

(c) The plan must describe arrangements agreed to by local police departments, fire departments, hospitals, contractors, and State and local emergency response teams to coordinate emergency services, pursuant to § 264.37.

(d) The plan must list names, addresses, and phone numbers (office and home) of all persons qualified to act as emergency coordinator (see § 264.55), and this list must be kept up to date. Where more than one person is listed, one must be named as primary emergency coordinator and others must be listed in the order in which they will assume responsibility as alternates. *For new facilities*, this information must be supplied to the Regional Administrator at the time of certification, rather than at the time of permit application.

(e) The plan must include a list of all emergency equipment at the facility (such as fire extinguishing systems, spill control equipment, communications and alarm systems (internal and external), and decontamination equipment), where this equipment is required. This list must be kept up to date. In addition, the plan must include the location and a physical description of each item on the list, and a brief outline of its capabilities.

(f) The plan must include an evacuation plan for facility personnel where there is a possibility that evacuation could be necessary. This plan must describe signal(s) to be used to begin evacuation, evacuation routes, and alternate evacuation routes (in cases where the primary routes could be blocked by releases of hazardous waste or fires).

(Approved by the Office of Management and Budget under control number 2050-0011)

[45 FR 33221, May 19, 1980, as amended at 46 FR 27480, May 20, 1981; 50 FR 4514, Jan. 31, 1985]

§ 264.53 Copies of contingency plan.

A copy of the contingency plan and all revisions to the plan must be:

(a) Maintained at the facility; and

(b) Submitted to all local police departments, fire departments, hospitals, and State and local emergency response teams that may be called upon to provide emergency services.

[*Comment:* The contingency plan must be submitted to the Regional Administrator with Part B of the permit application under Part 270, of this chapter and, after modification or approval, will become a condition of any permit issued.]

(Approved by the Office of Management and Budget under control number 2050-0011)

[45 FR 33221, May 19, 1980, as amended at 48 FR 30115, June 30, 1983; 50 FR 4514, Jan. 31, 1985]

§ 264.54 Amendment of contingency plan.

The contingency plan must be reviewed, and immediately amended, if necessary, whenever:

(a) The facility permit is revised;

(b) The plan fails in an emergency;

(c) The facility changes—in its design, construction, operation, maintenance, or other circumstances—in a way that materially increases the potential for fires, explosions, or releases of hazardous waste or hazardous waste constituents, or changes the response necessary in an emergency;

(d) The list of emergency coordinators changes; or

(e) The list of emergency equipment changes.

(Approved by the Office of Management and Budget under control number 2050-0011)

[45 FR 33221, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985; 53 FR 37935, Sept. 28, 1988]

§ 264.55 Emergency coordinator.

At all times, there must be at least one employee either on the facility premises or on call (i.e., available to respond to an emergency by reaching the facility within a short period of time) with the responsibility for coordinating all emergency response measures. This emergency coordinator must be thoroughly familiar with all aspects of the facility's contingency plan, all operations and activities at the facility, the location and characteristics of waste handled, the location of all records within the facility, and the facility layout. In addition, this person must have the authority to commit the resources needed to carry out the contingency plan.

[*Comment:* The emergency coordinator's responsibilities are more fully spelled out in § 264.56. Applicable responsibilities for the emergency coordinator vary, depending on factors such as type and variety of waste(s) handled by the facility, and type and complexity of the facility.]

§ 264.56 Emergency procedures.

(a) Whenever there is an imminent or actual emergency situation, the emergency coordinator (or his designee when the emergency coordinator is on call) must immediately:

(1) Activate internal facility alarms or communication systems, where applicable, to notify all facility personnel; and

(2) Notify appropriate State or local agencies with designated response roles if their help is needed.

(b) Whenever there is a release, fire, or explosion, the emergency coordinator must immediately identify the character, exact source, amount, and areal extent of any released materials. He may do this by observation or review of facility records or manifests, and, if necessary, by chemical analysis.

(c) Concurrently, the emergency coordinator must assess possible hazards to human health or the environment that may result from the release, fire, or explosion. This assessment must consider both direct and indirect effects of the release, fire, or explosion (e.g., the effects of any toxic, irritating, or asphyxiating gases that are generated, or the effects of any hazardous surface water run-off from water or chemical agents used to control fire and heat-induced explosions).

(d) If the emergency coordinator determines that the facility has had a release, fire, or explosion which could threaten human health, or the environment, outside the facility, he must report his findings as follows:

(1) If his assessment indicates that evacuation of local areas may be advisable, he must immediately notify appropriate local authorities. He must be available to help appropriate officials decide whether local areas should be evacuated; and

(2) He must immediately notify either the government official designated as the on-scene coordinator for that geographical area, (in the applicable regional contingency plan under Part 1510 of this title) or the National

Response Center (using their 24-hour toll free number 800/424-8802). The report must include:

(i) Name and telephone number of reporter;

(ii) Name and address of facility;

(iii) Time and type of incident (e.g., release, fire);

(iv) Name and quantity of material(s) involved, to the extent known;

(v) The extent of injuries, if any; and

(vi) The possible hazards to human health, or the environment, outside the facility.

(e) During an emergency, the emergency coordinator must take all reasonable measures necessary to ensure that fires, explosions, and releases do not occur, recur, or spread to other hazardous waste at the facility. These measures must include, where applicable, stopping processes and operations, collecting and containing release waste, and removing or isolating containers.

(f) If the facility stops operations in response to a fire, explosion, or release, the emergency coordinator must monitor for leaks, pressure buildup, gas generation, or ruptures in valves, pipes, or other equipment, wherever this is appropriate.

(g) Immediately after an emergency, the emergency coordinator must provide for treating, storing, or disposing of recovered waste, contaminated soil or surface water, or any other material that results from a release, fire, or explosion at the facility.

[*Comment:* Unless the owner or operator can demonstrate, in accordance with § 261.3(c) or (d) of this chapter, that the recovered material is not a hazardous waste, the owner or operator becomes a generator of hazardous waste and must manage it in accordance with all applicable requirements of Parts 262, 263, and 264 of this chapter.]

(h) The emergency coordinator must ensure that, in the affected area(s) of the facility:

(1) No waste that may be incompatible with the released material is treated, stored, or disposed of until cleanup procedures are completed; and

(2) All emergency equipment listed in the contingency plan is cleaned and fit for its intended use before operations are resumed.

(i) The owner or operator must notify the Regional Administrator, and appropriate State and local authorities, that the facility is in compliance with paragraph (h) of this section before operations are resumed in the affected area(s) of the facility.

(j) The owner or operator must note in the operating record the time, date, and details of any incident that requires implementing the contingency plan. Within 15 days after the incident, he must submit a written report on the incident to the Regional Administrator. The report must include:

(1) Name, address, and telephone number of the owner or operator;

(2) Name, address, and telephone number of the facility;

(3) Date, time, and type of incident (e.g., fire, explosion);

(4) Name and quantity of material(s) involved;

(5) The extent of injuries, if any;

(6) An assessment of actual or potential hazards to human health or the environment, where this is applicable; and

(7) Estimated quantity and disposition of recovered material that resulted from the incident.

(Approved by the Office of Management and Budget under control number 2050-0012)

[45 FR 33221, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

Subpart E—Manifest System, Recordkeeping, and Reporting

§ 264.70 Applicability.

The regulations in this subpart apply to owners and operators of both on-site and off-site facilities, except as § 264.1 provides otherwise. Sections 264.71, 264.72, and 264.76 do not apply to owners and operators of on-site facilities that do not receive any hazardous waste from off-site sources. Section 264.73(b) only applies to permittees who treat, store, or dispose of hazardous wastes on-site where such wastes were generated.

[50 FR 28746, July 15, 1985]

§ 264.71 Use of manifest system.

(a) If a facility receives hazardous waste accompanied by a manifest, the owner or operator, or his agent, must:

(1) Sign and date each copy of the manifest to certify that the hazardous waste covered by the manifest was received;

(2) Note any significant discrepancies in the manifest (as defined in § 264.72(a)) on each copy of the manifest;

[*Comment:* The Agency does not intend that the owner or operator of a facility whose procedures under § 264.13(c) include waste analysis must perform that analysis before signing the manifest and giving it to the transporter. Section 264.72(b), however, requires reporting an unreconciled discrepancy discovered during later analysis.]

(3) Immediately give the transporter at least one copy of the signed manifest;

(4) Within 30 days after the delivery, send a copy of the manifest to the generator; and

(5) Retain at the facility a copy of each manifest for at least three years from the date of delivery.

(b) If a facility receives, from a rail or water (bulk shipment) transporter, hazardous waste which is accompanied by a shipping paper containing all the information required on the manifest (excluding the EPA identification numbers, generator's certification, and signatures), the owner or operator, or his agent, must:

(1) Sign and date each copy of the manifest or shipping paper (if the manifest has not been received) to certify that the hazardous waste covered by the manifest or shipping paper was received;

(2) Note any significant discrepancies (as defined in § 264.72(a)) in the manifest or shipping paper (if the manifest has not been received) on each copy of the manifest or shipping paper.

[*Comment:* The Agency does not intend that the owner or operator of a facility whose procedures under § 264.13(c) include waste analysis must perform that analysis before signing the shipping paper and giving it to the transporter. Section 264.72(b), however, requires reporting an unreconciled discrepancy discovered during later analysis.]

(3) Immediately give the rail or water (bulk shipment) transporter at least one copy of the manifest or shipping paper (if the manifest has not been received);

(4) Within 30 days after the delivery, send a copy of the signed and dated manifest to the generator; however, if the manifest has not been received within 30 days after delivery, the owner or operator, or his agent, must send a copy of the shipping paper signed and dated to the generator; and

[*Comment:* Section 262.23(c) of this chapter requires the generator to send three copies of the manifest to the facility when hazardous waste is sent by rail or water (bulk shipment).]

(5) Retain at the facility a copy of the manifest and shipping paper (if signed in lieu of the manifest at the time of delivery) for at least three years from the date of delivery.

(c) Whenever a shipment of hazardous waste is initiated from a facility, the owner or operator of that facility must comply with the requirements of Part 262 of this chapter.

[*Comment:* The provisions of § 262.34 are applicable to the on-site accumulation of hazardous wastes by generators. Therefore, the provisions of § 262.34 only apply to owners or operators who are shipping hazardous waste which they generated at that facility.]

[45 FR 33221, May 19, 1980, as amended at 45 FR 86970, 86974, Dec. 31, 1980]

§ 264.72 Manifest discrepancies.

(a) Manifest discrepancies are differences between the quantity or type of hazardous waste designated on the manifest or shipping paper, and the quantity or type of hazardous waste a facility actually receives. Significant discrepancies in quantity are:

(1) For bulk waste, variations greater than 10 percent in weight, and (2) for batch waste, any variation in piece count, such as a discrepancy of one drum in a truckload. Significant discrepancies in type are obvious differences which can be discovered by inspection or waste analysis, such as waste solvent substituted for waste acid, or toxic constituents not reported on the manifest or shipping paper.

(b) Upon discovering a significant discrepancy, the owner or operator must attempt to reconcile the discrepancy with the waste generator or transporter (e.g., with telephone conversations). If the discrepancy is not resolved within 15 days after receiving the waste, the owner or operator must immediately submit to the Regional Administrator a letter describing the discrepancy and attempts to reconcile it, and a copy of the manifest or shipping paper at issue.

(Approved by the Office of Management and Budget under control number 2050-0012)

[45 FR 33221, May 19, 1980, as amended at 50 FR 4514, Jan. 31, 1985]

§ 264.73 Operating record.

(a) The owner or operator must keep a written operating record at his facility.

(b) The following information must be recorded, as it becomes available, and maintained in the operating record until closure of the facility:

(1) A description and the quantity of each hazardous waste received, and the method(s) and date(s) of its treatment, storage, or disposal at the facility as required by Appendix I;

(2) The location of each hazardous waste within the facility and the quantity at each location. For disposal facilities, the location and quantity of each hazardous waste must be recorded on a map or diagram of each cell or disposal area. For all facilities, this information must include cross-references to specific manifest document numbers, if the waste was accompanied by a manifest;

[*Comment:* See § 264.119 for related requirements.]

(3) Records and results of waste analyses performed as specified in §§ 264.13, 264.17, 264.314, 264.341, 264.1034, 264.1063, 268.4(a), and 268.7 of this chapter.

(4) Summary reports and details of all incidents that require implementing the contingency plan as specified in § 264.56(j);

(5) Records and results of inspections as required by § 264.15(d) (except these data need be kept only three years);

(6) Monitoring, testing or analytical data, and corrective action where required by subpart F and §§ 264.226, 264.253, 264.254, 264.276, 264.278, 264.280, 264.303, 264.309, 264.347, 264.602, 264.1034(c)-264.1034(f), 264.1035, 264.1063(d)-264.1063(i), and 264.1064.

(7) For off-site facilities, notices to generators as specified in § 264.12(b); and

(8) All closure cost estimates under § 264.142, and, for disposal facilities, all post-closure cost estimates under § 264.144.

(9) A certification by the permittee no less often than annually, that the permittee has a program in place to reduce the volume and toxicity of hazardous waste that he generates to the degree determined by the permittee to be economically practicable; and the proposed method of treatment, storage or disposal is that practicable method currently available to the permittee which minimizes the present and future threat to human health and the environment.

(10) Records of the quantities (and date of placement) for each shipment of hazardous waste placed in land disposal units under an extension to the effective date of any land disposal restriction granted pursuant to § 268.5, a petition pursuant to § 268.6, or a certification under § 268.8, and the applicable notice required by a generator under § 268.7(a);

(11) For an off-site treatment facility, a copy of the notice, and the certification and demonstration, if applicable, required by the generator or the owner or operator under § 268.7 or § 268.8;

(12) For an on-site treatment facility, the information contained in the notice (except the manifest number), and the certification and demonstration if applicable, required by the generator or the owner or operator under § 268.7 or § 268.8;

(13) For an off-site land disposal facility, a copy of the notice, and the certification and demonstration if applicable, required by the generator or the owner or operator of a treatment facility under § 268.7 and § 268.8, whichever is applicable; and

(14) For an on-site land disposal facility, the information contained in the notice required by the generator or owner or operator of a treatment facility under § 268.7, except for the manifest number, and the certification and demonstration if applicable, required under § 268.8, whichever is applicable.

(15) For an off-site storage facility, a copy of the notice, and the certification and demonstration if applicable, required by the generator or the owner or operator under § 268.7 or § 268.8; and

(16) For an on-site storage facility, the information contained in the notice (except the manifest number), and the certification and demonstration if applicable, required by the generator or the owner or operator under § 268.7 or § 268.8.

(Approved by the Office of Management and Budget under control numbers 2050-0012, 2050-0013 and 2040-0042. The reporting and recordkeeping requirements contained in paragraph (b)(9) were approved by the Office of Management and Budget under control number 2050-0037)

[45 FR 33221, May 19, 1980, as amended at 46 FR 2849, Jan. 12, 1981; 46 FR 7678, Jan. 23, 1981; 50 FR 4514, Jan. 31, 1985; 50 FR 18374, Apr. 30, 1985; 50 FR 28746, July 15, 1985; 51 FR 40637, Nov. 7, 1986; 52 FR 21016, June 4, 1987; 52 FR 46963, Dec. 10, 1987; 53 FR 31211, Aug. 17, 1988; 54 FR 26647, June 23, 1989; 55 FR 25494, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25494, June 21, 1990, in § 264.73, paragraphs (b)(3) and (6) were revised, effective December 21, 1990. For the convenience of the user the superseded text appears as follows:

§ 264.73 Operation record.

* * * * *

(b)* * *

(3) Records and results of waste analyses performed as specified in §§ 264.13, 264.17, 264.314, 264,341, 268.4(a), and 268.7 of this chapter.

* * * * *

(6) Monitoring, testing or analytical data, and corrective action where required by Subpart F and §§ 264.226, 264.253, 264.254, 264.276, 264.278, 264.280, 264.303, 264.309, 264.347, and 264.602;

* * * * *

§ 264.74 Availability, retention, and disposition of records.

(a) All records, including plans, required under this part must be furnished upon request, and made available at all reasonable times for inspection, by any officer, employee, or representative of EPA who is duly designated by the Administrator.

(b) The retention period for all records required under this part is extended automatically during the course of any unresolved enforcement action regarding the facility or as requested by the Administrator.

(c) A copy of records of waste disposal locations and quantities under § 264.73(b)(2) must be submitted to the Regional Administrator and local land authority upon closure of the facility.

§ 264.75 Biennial report.

The owner or operator must prepare and submit a single copy of a biennial report to the Regional Administrator by March 1 of each even numbered year. The biennial report must be submitted on EPA form 8700-13B. The report must cover facility activities during the previous calendar year and must include:

(a) The EPA identification number, name, and address of the facility;

(b) The calendar year covered by the report;

(c) For off-site facilities, the EPA identification number of each hazardous waste generator from which the facility received a hazardous waste during the year; for imported shipments, the report must give the name and address of the foreign generator;

(d) A description and the quantity of each hazardous waste the facility received during the year. For off-site facilities, this information must be listed by EPA identification number of each generator;

(e) The method of treatment, storage, or disposal for each hazardous waste;

(f) [Reserved]

(g) The most recent closure cost estimate under § 264.142, and, for disposal facilities, the most recent post-closure cost estimate under § 264.144; and

(h) For generators who treat, store, or dispose of hazardous waste on-site, a description of the efforts undertaken during the year to reduce the volume and toxicity of waste generated.

(i) For generators who treat, store, or dispose of hazardous waste on-site, a description of the changes in volume and toxicity of waste actually achieved during the year in comparison to previous years to the extent such information is available for the years prior to 1984.

(j) The certification signed by the owner or operator of the facility or his authorized representative.

(Approved by the Office of Management and Budget under control number 2050-0024)

[45 FR 33221, May 19, 1980, as amended at 46 FR 2849, Jan. 12, 1981; 48 FR 3982, Jan. 28, 1983; 50 FR 4514, Jan. 31, 1985; 51 FR 28556, Aug. 8, 1986]

§ 264.76 Unmanifested waste report.

If a facility accepts for treatment, storage, or disposal any hazardous waste from an off-site source without an accompanying manifest, or without an accompanying shipping paper as described in § 263.20(e)(2) of this chapter, and if the waste is not excluded from the manifest requirement by § 261.5 of this chapter, then the owner or operator must prepare and submit a single copy of a report to the Regional Administrator within fifteen days after receiving the waste. The unmanifested waste report must be submitted on EPA form 8700-13B. Such report must be designated 'Unmanifested Waste Report' and include the following information:

(a) The EPA identification number, name, and address of the facility;

(b) The date the facility received the waste;

(c) The EPA identification number, name, and address of the generator and the transporter, if available;

(d) A description and the quantity of each unmanifested hazardous waste and facility received;

(e) The method of treatment, storage, or disposal for each hazardous waste;

(f) The certification signed by the owner or operator of the facility or his authorized representative; and

(g) A brief explanation of why the waste was unmanifested, if known.

[*Comment:* Small quantities of hazardous waste are excluded from regulation under this part and do not require a manifest. Where a facility receives unmanifested hazardous wastes, the Agency suggests that the owner or operator obtain from each generator a certification that the waste qualifies for exclusion. Otherwise, the Agency suggests that the owner or operator file an unmanifested waste report for the hazardous waste movement.]

(Approved by the Office of Management and Budget under control number 2050-0012)

[45 FR 33221, May 19, 1980, as amended at 48 FR 3982, Jan. 28, 1983; 50 FR 4514, Jan. 31, 1985]

§ 264.77 Additional reports.

In addition to submitting the biennial reports and unmanifested waste reports described in §§ 264.75 and 264.76, the owner or operator must also report to the Regional Administrator:

(a) Releases, fires, and explosions as specified in § 264.56(j);

(b) Facility closures specified in §264.115; and

(c) As otherwise required by subparts F, K through N, AA, and BB.

[46 FR 2849, Jan. 12, 1981, as amended at 47 FR 32350, July 26, 1982; 48 FR 3982, Jan. 28, 1983; 55 FR 25494, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25494, June 21, 1990, in § 264.77, paragraph (c) was revised, effective December 21, 1990. For the convenience of the user the superseded text appears as follows:

§ 264.77 Additional reports.

* * * * *

(c) As otherwise required by Subparts F and K through N.

* * * * *

Subpart F—Releases From Solid Waste Management Units

SOURCE: 47 FR 32350, July 26, 1982, unless otherwise noted.

§ 264.90 Applicability.

(a)(1) Except as provided in paragraph (b) of this section, the regulations in this subpart apply to owners

or operators of facilities that treat, store or dispose of hazardous waste. The owner or operator must satisfy the requirements identified in paragraph (a)(2) of this section for all wastes (or constituents thereof) contained in solid waste management units at the facility, regardless of the time at which waste was placed in such units.

(2) All solid waste management units must comply with the requirements in § 264.101. A surface impoundment, waste pile, and land treatment unit or landfill that receives hazardous waste after July 26, 1982 (hereinafter referred to as a "regulated unit") must comply with the requirements of §§ 264.91 through 264.100 in lieu of § 264.101 for purposes of detecting, characterizing and responding to releases to the uppermost aquifer. The finanical responsibility requirements of § 264.101 apply to regulated units.

(b) The owner or operator's regulated unit or units are not subject to regulation for releases into the uppermost aquifer under this subpart if:

(1) The owner or operator is exempted under § 264.1; or

(2) He operates a unit which the Regional Administrator finds:

(i) Is an engineered structure,

(ii) Does not receive or contain liquid waste or waste containing free liquids,

(iii) Is designed and operated to exclude liquid, precipitation, and other run-on and run-off,

(iv) Has both inner and outer layers of containment enclosing the waste,

(v) Has a leak detection system built into each containment layer,

(vi) The owner or operator will provide continuing operation and maintenance of these leak detection systems during the active life of the unit and the closure and post-closure care periods, and

(vii) To a reasonable degree of certainty, will not allow hazardous constituents to migrate beyond the outer containment layer prior to the end of the the post-closure care period.

(3) The Regional Administrator finds, pursuant to § 264.280(d), that the treatment zone of a land treatment unit that qualifies as a regulated unit does not contain levels of hazardous constituents that are above background levels of those constituents by an amount that is statistically significant, and if an unsaturated zone monitoring program meeting the requirements of § 264.278 has not shown a statistically significant increase in hazardous constituents below the treatment zone during the operating life of the unit. An exemption under this paragraph can only relieve an owner or operator of responsibility to meet the requirements of this subpart during the post-closure care period; or

(4) The Regional Administrator finds that there is no potential for migration of liquid from a regulated unit to the uppermost aquifer during the active life of the regulated unit (including the closure period) and the port-closure care period specified under § 264.117. This demonstration must be certified by a qualified geologist or geotechnical engineer. In order to provide an adequate margin of safety in the prediction of potential migration of liquid, the owner or operator must base any predictions made under this paragraph on assumptions that maximize the rate of liquid migration.

(5) He designs and operates a pile in compliance with § 264.250(c).

(c) The regulations under this subpart apply during the active life of the regulated unit (including the closure period). After closure of the regulated unit, the regulations in this subpart:

(1) Do not apply if all waste, waste residues, contaminated containment system components, and contaminated subsoils are removed or decontaminated at closure;

(2) Apply during the post-closure care period under § 264.117 if the owner or operator is conducting a detection monitoring program under § 264.98; or

(3) Apply during the compliance period under § 264.96 if the owner or operator is conducting a compliance monitoring program under § 264.99 or a corrective action program under § 264.100.

(d) Regulations in this subpart may apply to miscellaneous units when necessary to comply with §§ 264.601 through 264.603.

[47 FR 32350, July 26, 1982, as amended at 50 FR 28746, July 15, 1985; 52 FR 46963, Dec. 10, 1987]

§ 264.91 Required programs.

(a) Owners and operators subject to this subpart must conduct a monitoring and response program as follows:

(1) Whenever hazardous constituents under § 264.93 from a regulated unit are detected at a compliance point under § 264.95, the owner or operator must institute a compliance monitoring program under § 264.99. Detected is defined as statistically significant evidence of contamination as described in § 264.98(f);

(2) Whenever the ground-water protection standard under § 264.92 is exceeded, the owner or operator must institute a corrective action program under § 264.100. Exceeded is defined as statistically significant evidence of increased contamination as described in § 264.99(d);

(3) Whenever hazardous constituents under § 264.93 from a regulated unit exceed concentration limits under § 264.94 in ground water between the compliance point under § 264.95 and the downgradient facility property boundary, the owner or operator must institute a corrective action program under § 264.100; or

(4) In all other cases, the owner or operator must institute a detection monitoring program under § 264.98.

(b) The Regional Administrator will specify in the facility permit the specific elements of the monitoring and response program. The Regional Administrator may include one or more of the programs identified in paragraph (a) of this section in the facility permit as may be necessary to protect human health and the environment and will specify the circumstances under which each of the programs will be required. In deciding whether to require the owner or operator to be prepared to institute a particular program, the Regional Administrator will consider the potential adverse effects on human health and the environment that might occur before final administrative action on a permit modification application to incorporate such a program could be taken.

[47 FR 32350, July 26, 1982, as amended at 53 FR 39728, Oct. 11, 1988]

§ 264.92 Ground-water protection standard.

The owner or operator must comply with conditions specified in the facility permit that are designed to ensure that hazardous constituents under § 264.93 detected in the ground water from a regulated unit do not exceed the concentration limits under § 264.94 in the uppermost aquifer underlying the waste management area beyond the point of compliance under § 264.95 during the compliance period under § 264.96. The Regional Administrator will establish this ground-water protection standard in the facility permit when hazardous constituents have been detected in the ground water.

[53 FR 39728, Oct. 11, 1988]

§ 264.93 Hazardous constituents.

(a) The Regional Administrator will specify in the facility permit the hazardous constituents to which the ground-water protection standard of § 264.92 applies. Hazardous constituents are constituents identified in Appendix VIII of Part 261 of this chapter that have been detected in ground water in the uppermost aquifer underlying a regulated unit and that are reasonably expected to be in or derived from waste contained in a regulated unit, unless the Regional Administrator has excluded them under paragraph (b) of this section.

(b) The Regional Administrator will exclude an Appendix VIII constituent from the list of hazardous constituents specified in the facility permit if he finds that the constituent is not capable of posing a substantial present or potential hazard to human health or the environment. In deciding whether to grant an exemption, the Regional Administrator will consider the following:

(1) Potential adverse effects on ground-water quality, considering:

(i) The physical and chemical characteristics of the waste in the regulated unit, including its potential for migration;

(ii) The hydrogeological characteristics of the facility and surrounding land;

(iii) The quantity of ground water and the direction of ground-water flow;

(iv) The proximity and withdrawal rates of ground-water users;

(v) The current and future uses of ground water in the area;

(vi) The existing quality of ground water, including other sources of contamination and their cumulative impact on the ground-water quality;

(vii) The potential for health risks caused by human exposure to waste constituents;

(viii) The potential damage to wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents;

(ix) The persistence and permanence of the potential adverse effects; and

(2) Potential adverse effects on hydraulically-connected surface water quality, considering:

(i) The volume and physical and chemical characteristics of the waste in the regulated unit;

(ii) The hydrogeological characteristics of the facility and surrounding land;

(iii) The quantity and quality of ground water, and the direction of ground-water flow;

(iv) The patterns of rainfall in the region;

(v) The proximity of the regulated unit to surface waters;

(vi) The current and future uses of surface waters in the area and any water quality standards established for those surface waters;

(vii) The existing quality of surface water, including other sources of contamination and the cumulative impact on surface-water quality;

(viii) The potential for health risks caused by human exposure to waste constituents;

(ix) The potential damage to wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents; and

(x) The persistence and permanence of the potential adverse effects.

(c) In making any determination under paragraph (b) of this section about the use of ground water in the area around the facility, the Regional Administrator will consider any identification of underground sources of drinking water and exempted aquifers made under § 144.8 of this chapter.

[47 FR 32350, July 26, 1982, as amended at 48 FR 14294, Apr. 1, 1983]

§ 264.94 Concentration limits.

(a) The Regional Administrator will specify in the facility permit concentration limits in the ground water for hazardous constituents established under § 264.93. The concentration of a hazardous constituent:

(1) Must not exceed the background level of that constituent in the ground water at the time that limit is specified in the permit; or

(2) For any of the constituents listed in Table 1, must not exceed the respective value given in that table if the background level of the constituent is below the value given in Table 1; or

TABLE 1—MAXIMUM CONCENTRATION OF CONSTITUENTS FOR GROUND-WATER PROTECTION

Constituent	Maximum concentration [1]
Arsenic	0.05
Barium	1.0
Cadmium	0.01
Chromium	0.05
Lead	0.05
Mercury	0.002
Selenium	0.01
Silver	0.05
Endrin (1,2,3,4,10,10-hexachloro-1,7-epoxy-1,4,4a,5,6,7,8,9a-octahydro-1, 4-endo, endo-5,8-dimethano naphthalene)	0.0002
Lindane (1,2,3,4,5,6-hexachlorocyclohexane, gamma isomer)	0.004
Methoxychlor (1,1,1-Trichloro-2,2-bis (p-methoxyphenylethane)	0.1
Toxaphene ($C_{10}H_{10}Cl_8$, Technical chlorinated camphene, 67-69 percent chlorine)	0.005
2,4-D (2,4-Dichlorophenoxyacetic acid)	0.1
2,4,5-TP Silvex (2,4,5-Trichlorophenoxypropionic acid)	0.01

[1] Milligrams per liter.

(3) Must not exceed an alternate limit established by the Regional Administrator under paragraph (b) of this section.

(b) The Regional Administrator will establish an alternate concentration limit for a hazardous constituent if he finds that the constituent will not

pose a substantial present or potential hazard to human health or the environment as long as the alternate concentration limit is not exceeded. In establishing alternate concentration limits, the Regional Administrator will consider the following factors:

(1) Potential adverse effects on ground-water quality, considering:

(i) The physical and chemical characteristics of the waste in the regulated unit, including its potential for migration;

(ii) The hydrogeological characteristics of the facility and surrounding land;

(iii) The quantity of ground water and the direction of ground-water flow;

(iv) The proximity and withdrawal rates of ground-water users;

(v) The current and future uses of ground water in the area;

(vi) The existing quality of ground water, including other sources of contamination and their cumulative impact on the ground-water quality;

(vii) The potential for health risks caused by human exposure to waste constituents;

(viii) The potential damage to wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents;

(ix) The persistence and permanence of the potential adverse effects; and

(2) Potential adverse effects on hydraulically-connected surface-water quality, considering:

(i) The volume and physical and chemical characteristics of the waste in the regulated unit;

(ii) The hydrogeological characteristics of the facility and surrounding land;

(iii) The quantity and quality of ground water, and the direction of ground-water flow;

(iv) The patterns of rainfall in the region;

(v) The proximity of the regulated unit to surface waters;

(vi) The current and future uses of surface waters in the area and any water quality standards established for those surface waters;

(vii) The existing quality of surface water, including other sources of contamination and the cumulative impact on surface water quality;

(viii) The potential for health risks caused by human exposure to waste constituents;

(ix) The potential damage to wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents; and

(x) The persistence and permanence of the potential adverse effects.

(c) In making any determination under paragraph (b) of this section about the use of ground water in the area around the facility the Regional Administrator will consider any identification of underground sources of drinking water and exempted aquifers made under § 144.8 of this chapter.

[47 FR 32350, July 26, 1982, as amended at 48 FR 14294, Apr. 1, 1983]

§ 264.95 Point of compliance.

(a) The Regional Administrator will specify in the facility permit the point of compliance at which the ground-water protection standard of § 264.92 applies and at which monitoring must be conducted. The point of compliance is a vertical surface located at the hydraulically downgradient limit of the waste management area that extends down into the uppermost aquifer underlying the regulated units.

(b) The waste management area is the limit projected in the horizontal plane of the area on which waste will be placed during the active life of a regulated unit.

(1) The waste management area includes horizontal space taken up by any liner, dike, or other barrier designed to contain waste in a regulated unit.

(2) If the facility contains more than one regulated unit, the waste management area is described by an imaginary line circumscribing the several regulated units.

§ 264.96 Compliance period.

(a) The Regional Administrator will specify in the facility permit the compliance period during which the ground-water protection standard of § 264.92 applies. The compliance period is the number of years equal to the active life of the waste manage-

ment area (including any waste management activity prior to permitting, and the closure period.)

(b) The compliance period begins when the owner or operator initiates a compliance monitoring program meeting the requirements of § 264.99.

(c) If the owner or operator is engaged in a corrective action program at the end of the compliance period specified in paragraph (a) of this section, the compliance period is extended until the owner or operator can demonstrate that the ground-water protection standard of § 264.92 has not been exceeded for a period of three consecutive years.

§ 264.97 General ground-water monitoring requirements.

The owner or operator must comply with the following requirements for any ground-water monitoring program developed to satisfy § 264.98, § 264.99, or § 264.100:

(a) The ground-water monitoring system must consist of a sufficient number of wells, installed at appropriate locations and depths to yield ground-water samples from the uppermost aquifer that:

(1) Represent the quality of background water that has not been affected by leakage from a regulated unit;

(i) A determination of background quality may include sampling of wells that are not hydraulically upgradient of the waste management area where:

(A) Hydrogeologic conditions do not allow the owner or operator to determine what wells are hydraulically upgradient; and

(B) Sampling at other wells will provide an indication of background ground-water quality that is representative or more representative than that provided by the upgradient wells; and

(2) Represent the quality of ground water passing the point of compliance.

(3) Allow for the detection of contamination when hazardous waste or hazardous constituents have migrated from the waste management area to the uppermost aquifer.

(b) If a facility contains more than one regulated unit, separate ground-water monitoring systems are not required for each regulated unit provided that provisions for sampling the ground water in the uppermost aquifer will enable detection and measurement at the compliance point of hazardous constituents from the regulated units that have entered the ground water in the uppermost aquifer.

(c) All monitoring wells must be cased in a manner that maintains the integrity of the monitoring-well bore hole. This casing must be screened or perforated and packed with gravel or sand, where necessary, to enable collection of ground-water samples. The annular space (i.e., the space between the bore hole and well casing) above the sampling depth must be sealed to prevent contamination of samples and the ground water.

(d) The ground-water monitoring program must include consistent sampling and analysis procedures that are designed to ensure monitoring results that provide a reliable indication of ground-water quality below the waste management area. At a minimum the program must include procedures and techniques for:

(1) Sample collection;

(2) Sample preservation and shipment;

(3) Analytical procedures; and

(4) Chain of custody control.

(e) The ground-water monitoring program must include sampling and analytical methods that are appropriate for ground-water sampling and that accurately measure hazardous constituents in ground-water samples.

(f) The ground-water monitoring program must include a determination of the ground-water surface elevation each time ground water is sampled.

(g) In detection monitoring or where appropriate in compliance monitoring, data on each hazardous constituent specified in the permit will be collected from background wells and wells at the compliance point(s). The number and kinds of samples collected to establish background shall be appropriate for the form of statistical test employed, following generally accepted statistical principles. The sample size shall be as large as necessary to ensure with reasonable confidence that a contaminant release to ground water from a facility will be detected. The owner or operator will determine an appropriate sampling procedure and interval

for each hazardous constituent listed in the facility permit which shall be specified in the unit permit upon approval by the Regional Administrator. This sampling procedure shall be:

(1) A sequence of at least four samples, taken at an interval that assures, to the greatest extent technically feasible, that an independent sample is obtained, by reference to the uppermost aquifer's effective porosity, hydraulic conductivity, and hydraulic gradient, and the fate and transport characteristics of the potential contaminants, or

(2) an alternate sampling procedure proposed by the owner or operator and approved by the Regional Administrator.

(h) The owner or operator will specify one of the following statistical methods to be used in evaluating ground-water monitoring data for each hazardous constituent which, upon approval by the Regional Administrator, will be specified in the unit permit. The statistical test chosen shall be conducted separately for each hazardous constituent in each well. Where practical quantification limits (pql's) are used in any of the following statistical procedures to comply with § 264.97(i)(5), the pql must be proposed by the owner or operator and approved by the Regional Administrator. Use of any of the following statistical methods must be protective of human health and the environment and must comply with the performance standards outlined in paragraph (i) of this section.

(1) A parametric analysis of variance (ANOVA) followed by multiple comparisons procedures to identify statistically significant evidence of contamination. The method must include estimation and testing of the contrasts between each compliance well's mean and the background mean levels for each constituent.

(2) An analysis of variance (ANOVA) based on ranks followed by multiple comparisons procedures to identify statistically significant evidence of contamination. The method must include estimation and testing of the contrasts between each compliance well's median and the background median levels for each constituent.

(3) A tolerance or prediction interval procedure in which an interval for each constituent is established from the distribution of the background data, and the level of each constituent in each compliance well is compared to the upper tolerance or prediction limit.

(4) A control chart approach that gives control limits for each constituent.

(5) Another statistical test method submitted by the owner or operator and approved by the Regional Administrator.

(i) Any statistical method chosen under § 264.97(h) for specification in the unit permit shall comply with the following performance standards, as appropriate:

(1) The statistical method used to evaluate ground-water monitoring data shall be appropriate for the distribution of chemical parameters or hazardous constituents. If the distribution of the chemical parameters or hazardous constituents is shown by the owner or operator to be inappropriate for a normal theory test, then the data should be transformed or a distribution-free theory test should be used. If the distributions for the constituents differ, more than one statistical method may be needed.

(2) If an individual well comparison procedure is used to compare an individual compliance well constituent concentration with background constituent concentrations or a ground-water protection standard, the test shall be done at a Type I error level no less than 0.01 for each testing period. If a multiple comparisons procedure is used, the Type I experimentwise error rate for each testing period shall be no less than 0.05; however, the Type I error of no less than 0.01 for individual well comparisons must be maintained. This performance standard does not apply to tolerance intervals, prediction intervals or control charts.

(3) If a control chart approach is used to evaluate ground-water monitoring data, the specific type of control chart and its associated parameter values shall be proposed by the owner or operator and approved by the Regional Administrator if he or she finds

it to be protective of human health and the environment.

(4) If a tolerance interval or a prediction interval is used to evaluate groundwater monitoring data, the levels of confidence and, for tolerance intervals, the percentage of the population that the interval must contain, shall be proposed by the owner or operator and approved by the Regional Administrator if he or she finds these parameters to be protective of human health and the environment. These parameters will be determined after considering the number of samples in the background data base, the data distribution, and the range of the concentration values for each constituent of concern.

(5) The statistical method shall account for data below the limit of detection with one or more statistical procedures that are protective of human health and the environment. Any practical quantification limit (pql) approved by the Regional Administrator under § 264.97(h) that is used in the statistical method shall be the lowest concentration level tha can be reliably achieved within specified limits of precision and accuracy during routine laboratory operating conditions that are available to the facility.

(6) If necessary, the statistical method shall include procedures to control or correct for seasonal and spatial variability as well as temporal correlation in the data.

(j) Ground-water monitoring data collected in accordance with paragraph (g) of this section including actual levels of constituents must be maintained in the facility operating record. The Regional Administrator will specify in the permit when the data must be submitted for review.

(Approved by the Office of Management and Budget under control number 2050-0033)

[47 FR 32350, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985; 53 FR 39728, Oct. 11, 1988]

§ 264.98 Detection monitoring program.

An owner or operator required to establish a detection monitoring program under this subpart must, at a minimum, discharge the following responsibilities:

(a) The owner or operator must monitor for indicator parameters (e.g., specific conductance, total organic carbon, or total organic halogen), waste constituents, or reaction products that provide a reliable indication of the presence of hazardous constituents in ground water. The Regional Administrator will specify the parameters or constituents to be monitored in the facility permit, after considering the following factors:

(1) The types, quantities, and concentrations of constituents in wastes managed at the regulated unit;

(2) The mobility, stability, and persistance of waste constituents or their reaction products in the unsaturated zone beneath the waste management area;

(3) The detectability of indicator parameters, waste constituents, and reaction products in ground water; and

(4) The concentrations or values and coefficients of variation of proposed monitoring parameters or constituents in the ground-water background.

(b) The owner or operator must install a ground-water monitoring system at the compliance point as specified under § 264.95. The ground-water monitoring system must comply with § 264.97(a)(2), (b), and (c).

(c) The owner or operator must conduct a ground-water monitoring program for each chemical parameter and hazardous constituent specified in the permit pursuant to paragraph (a) of this section in accordance with § 264.97(g). The owner or operator must maintain a record of ground-water analytical data as measured and in a form necessary for the determination of statistical significance under § 264.97(h).

(d) The Regional Administrator will specify the frequencies for collecting samples and conducting statistical tests to determine whether there is statistically significant evidence of contamination for any parameter or hazardous constituent specified in the permit under paragraph (a) of this section in accordance with § 264.97(g). A sequence of at least four samples from each well (background and compliance wells) must be collected at least semi-annually during detection monitoring.

(e) The owner or operator must determine the ground-water flow rate and direction in the uppermost aquifer at least annually.

(f) The owner or operator must determine whether there is statistically significant evidence of contamination for any chemical parameter of hazardous constituent specified in the permit pursuant to paragraph (a) of this section at a frequency specified under paragraph (d) of this section.

(1) In determining whether statistically significant evidence of contamination exists, the owner or operator must use the method(s) specified in the permit under § 264.97(h). These method(s) must compare data collected at the compliance point(s) to the background ground-water quality data.

(2) The owner or operator must determine whether there is statistically significant evidence of contamination at each monitoring well as the compliance point within a reasonable period of time after completion of sampling. The Regional Administrator will specify in the facility permit what period of time is reasonable, after considering the complexity of the statistical test and the availability of laboratory facilities to perform the analysis of ground-water samples.

(g) If the owner or operator determines pursuant to paragraph (f) of this section that there is statistically significant evidence of contamination for chemical parameters or hazardous constituents specified pursuant to paragraph (a) of this section at any monitoring well at the compliance point, he or she must:

(1) Notify the Regional Administrator of this finding in writing within seven days. The notification must indicate what chemical parameters or hazardous constituents have shown statistically significant evidence of contamination;

(2) Immediately sample the ground water in all monitoring wells and determine whether constituents in the list of Appendix IX of Part 264 are present, and if so, in what concentration.

(3) For any Appendix IX compounds found in the analysis pursuant to paragraph (g)(2) of this section, the owner or operator may resample within one month and repeat the analysis for those compounds detected. If the results of the second analysis confirm the initial results, then these constituents will form the basis for compliance monitoring. If the owner or operator does not resample for the compounds found pursuant to paragraph (g)(2) of this section, the hazardous constituents found during this initial Appendix IX analysis will form the basis for compliance monitoring.

(4) Within 90 days, submit to the Regional Administrator an application for a permit modification to establish a compliance monitoring program meeting the requirements of § 264.99. The application must include the following information:

(i) An identification of the concentration or any Appendix IX constituent detected in the ground water at each monitoring well at the compliance point;

(ii) Any proposed changes to the ground-water monitoring system at the facility necessary to meet the requirements of § 264.99;

(iii) Any proposed additions or changes to the monitoring frequency, sampling and analysis procedures or methods, or statistical methods used at the facility necessary to meet the requirements of § 264.99;

(iv) For each hazardous constituent detected at the compliance point, a proposed concentration limit under § 264.94(a) (1) or (2), or a notice of intent to seek an alternate concentration limit under § 264.94(b); and

(5) Within 180 days, submit to the Regional Administrator:

(i) All data necessary to justify an alternate concentration limit sought under § 264.94(b); and

(ii) An engineering feasibility plan for a corrective action program necessary to meet the requirement of § 264.100, unless:

(A) All hazardous constituents identified under paragraph (g)(2) of this section are listed in Table 1 of § 264.94 and their concentrations do not exceed the respective values given in that Table; or

(B) The owner or operator has sought an alternate concentration limit under § 264.94(b) for every haz-

ardous constituent identified under paragraph (g)(2) of this section.

(6) If the owner or operator determines, pursuant to paragraph (f) of this section, that there is a statistically significant difference for chemical parameters or hazardous constituents specified pursuant to paragraph (a) of this section at any monitoring well at the compliance point, he or she may demonstrate that a source other than a regulated unit caused the contamination or that the detection is an artifact caused by an error in sampling, analysis, or statistical evaluation or natural variation in the ground water. The owner operator may make a demonstration under this paragraph in addition to, or in lieu of, submitting a permit modification application under paragraph (g)(4) of this section; however, the owner or operator is not relieved of the requirement to submit a permit modification application within the time specified in paragraph (g)(4) of this section unless the demonstration made under this paragraph successfully shows that a source other than a regulated unit caused the increase, or that the increase resulted from error in sampling, analysis, or evaluation. In making a demonstration under this paragraph, the owner or operator must:

(i) Notify the Regional Administrator in writing within seven days of determining statistically significant evidence of contamination at the compliance point that he intends to make a demonstration under this paragraph;

(ii) Within 90 days, submit a report to the Regional Administrator which demonstrates that a source other than a regulated unit caused the contamination or that the contamination resulted from error in sampling, analysis, or evaluation;

(iii) Within 90 days, submit to the Regional Administrator an application for a permit modification to make any appropriate changes to the detection monitoring program facility; and

(iv) Continue to monitor in accordance with the detection monitoring program established under this section.

(h) If the owner or operator determines that the detection monitoring program no longer satisfies the requirements of this section, he or she must, within 90 days, submit an application for a permit modification to make any appropriate changes to the program.

(Approved by the Office of Management and Budget under control number 2050-0033)

[47 FR 32350, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985; 52 FR 25946, July 9, 1987; 53 FR 39729, Oct. 11, 1988]

§ 264.99 Compliance monitoring program.

An owner or operator required to establish a compliance monitoring program under this subpart must, at a minimum, discharge the following responsibilities:

(a) The owner or operator must monitor the ground water to determine whether regulated units are in compliance with the ground-water protection standard under § 264.92. The Regional Administrator will specify the ground-water protection standard in the facility permit, including:

(1) A list of the hazardous constituents identified under § 264.93;

(2) Concentration limits under § 264.94 for each of those hazardous constituents;

(3) The compliance point under § 264.95; and

(4) The compliance period under § 264.96.

(b) The owner or operator must install a ground-water monitoring system at the compliance point as specified under § 264.95. The ground-water monitoring system must comply with § 264.97(a)(2), (b), and (c).

(c) The Regional Administrator will specify the sampling procedures and statistical methods appropriate for the constituents and the facility, consistent with § 264.97 (g) and (h).

(1) The owner or operator must conduct a sampling program for each chemical parameter or hazardous constituent in accordance with § 264.97(g).

(2) The owner or operator must record ground-water analytical data as measured and in form necessary for the determination of statistical significance under § 264.97(h) for the compliance period of the facility.

(d) The owner or operator must determine whether there is statistically

significant evidence of increased contamination for any chemical parameter or hazardous constituent specified in the permit, pursuant to paragraph (a) of this section, at a frequency specified under paragraph (f) under this section.

(1) In determining whether statistically significant evidence of increased contamination exists, the owner or operator must use the method(s) specified in the permit under § 264.97(h). The methods(s) must compare data collected at the compliance point(s) to a concentration limit developed in accordance with § 264.94.

(2) The owner or operator must determine whether there is statistically significant evidence of increased contamination at each monitoring well at the compliance point within a reasonable time period after completion of sampling. The Regional Administrator will specify that time period in the facility permit, after considering the complexity of the statistical test and the availability of laboratory facilities to perform the analysis of ground-water samples.

(e) The owner or operator must determine the ground-water flow rate and direction in the uppermost aquifer at least annually.

(f) The Regional Administrator will specify the frequencies for collecting samples and conducting statistical tests to determine statistically significant evidence of increased contamination in accordance with § 264.97(g). A sequence of at least four samples from each well (background and compliance wells) must be collected at least semi-annually during the compliance period of the facility.

(g) The owner or operator must analyze samples from all monitoring wells at the compliance point for all constituents contained in Appendix IX of Part 264 at least annually to determine whether additional hazardous constituents are present in the uppermost aquifer and, if so, at what concentration, pursuant to procedures in § 264.98(f). If the owner or operator finds Appendix IX constituents in the ground water that are not already identified in the permit as monitoring constituents, the owner or operator may resample within one month and repeat the Appendix IX analysis. If the second analysis confirms the presence of new constituents, the owner or operator must report the concentration of these additional constituents to the Regional Administrator within seven days after the completion of the second analysis and add them to the monitoring list. If the owner or operator chooses not to resample, then he or she must report the concentrations of these additional constituents to the Regional Administrator within seven days after completion of the intiial analysis and add them to the monitoring list.

(h) If the owner or operator determines pursuant to paragraph (d) of this section that any concentration limits under § 264.94 are being exceeded at any monitoring well at the point of compliance he or she must:

(1) Notify the Regional Administrator of this finding in writing within seven days. The notification must indicate what concentration limits have been exceeded.

(2) Submit to the Regional Administrator an application for a permit modification to establish a corrective action program meeting the requirements of § 264.100 within 180 days, or within 90 days if an engineering feasibility study has been previously submitted to the Regional Administrator under § 264.98(h)(5). The application must at a minimum include the following information:

(i) A detailed description of corrective actions that will achieve compliance with the ground-water protection standard specified in the permit under paragraph (a) of this section; and

(ii) A plan for a ground-water monitoring program that will demonstrate the effectiveness of the corrective action. Such a ground-water monitoring program may be based on a compliance monitoring program developed to meet the requirements of this section.

(i) If the owner or operator determines, pursuant to paragraph (d) of this section, that the ground-water concentration limits under this section are being exceeded at any monitoring well at the point of compliance, he or she may demonstrate that a source other than a regulated unit caused the

contamination or that the detection is an artifact caused by an error in sampling, analysis, or statistical evaluation or natural variation in the ground water. In making a demonstration under this paragraph, the owner or operator must:

(1) Notify the Regional Administrator in writing within seven days that he intends to make a demonstration under this paragraph;

(2) Within 90 days, submit a report to the Regional Administrator which demonstrates that a source other than a regulated unit caused the standard to be exceeded or that the apparent noncompliance with the standards resulted from error in sampling, analysis, or evaluation;

(3) Within 90 days, submit to the Regional Administrator an application for a permit modification to make any appropriate changes to the compliance monitoring program at the facility; and

(4) Continue to monitor in accord with the compliance monitoring program established under this section.

(j) If the owner or operator determines that the compliance monitoring program no longer satisfies the requirements of this section, he must, within 90 days, submit an application for a permit modification to make any appropriate changes to the program.

(Approved by the Office of Management and Budget under control number 2050-0033)

[47 FR 32350, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985; 52 FR 25946, July 9, 1987; 53 FR 39730, Oct. 11, 1988]

§ 264.100 Corrective action program.

An owner or operator required to establish a corrective action program under this subpart must, at a minimum, discharge the following responsibilities:

(a) The owner or operator must take corrective action to ensure that regulated units are in compliance with the ground-water protection standard under § 264.92. The Regional Administrator will specify the ground-water protection standard in the facility permit, including:

(1) A list of the hazardous constituents identified under § 264.93;

(2) Concentration limits under § 264.94 for each of those hazardous constituents;

(3) The compliance point under § 264.95; and

(4) The compliance period under § 264.96.

(b) The owner or operator must implement a corrective action program that prevents hazardous constituents from exceeding their respective concentration limits at the compliance point by removing the hazardous waste constituents or treating them in place. The permit will specify the specific measures that will be taken.

(c) The owner or operator must begin corrective action within a reasonable time period after the ground-water protection standard is exceeded. The Regional Administrator will specify that time period in the facility permit. If a facility permit includes a corrective action program in addition to a compliance monitoring program, the permit will specify when the corrective action will begin and such a requirement will operate in lieu of § 264.99(i)(2).

(d) In conjunction with a corrective action program, the owner or operator must establish and implement a ground-water monitoring program to demonstrate the effectiveness of the corrective action program. Such a monitoring program may be based on the requirements for a compliance monitoring program under § 264.99 and must be as effective as that program in determining compliance with the ground-water protection standard under § 264.92 and in determining the success of a corrective action program under paragraph (e) of this section, where appropriate.

(e) In addition to the other requirements of this section, the owner or operator must conduct a corrective action program to remove or treat in place any hazardous constituents under § 264.93 that exceed concentration limits under § 264.94 in ground-water:

(1) Between the compliance point under § 264.95 and the downgradient property boundary; and

(2) Beyond the facility boundary, where necessary to protect human health and the environment, unless

the owner or operator demonstrates to the satisfaction of the Regional Administrator that, despite the owner's or operator's best efforts, the owner or operator was unable to obtain the necessary permission to undertake such action. The owner/operator is not relieved of all responsibility to clean up a release that has migrated beyond the facility boundary where off-site access is denied. On-site measures to address such releases will be determined on a case-by-case basis.

(3) Corrective action measures under this paragraph must be initiated and completed within a reasonable period of time considering the extent of contamination.

(4) Corrective action measures under this paragraph may be terminated once the concentration of hazardous constituents under § 264.93 is reduced to levels below their respective concentration limits under § 264.94.

(f) The owner or operator must continue corrective action measures during the compliance period to the extent necessary to ensure that the ground-water protection standard is not exceeded. If the owner or operator is conducting corrective action at the end of the compliance period, he must continue that corrective action for as long as necessary to achieve compliance with the ground-water protection standard. The owner or operator may terminate corrective action measures taken beyond the period equal to the active life of the waste management area (including the closure period) if he can demonstrate, based on data from the ground-water monitoring program under paragraph (d) of this section, that the ground-water protection standard of § 264.92 has not been exceeded for a period of three consecutive years.

(g) The owner or operator must report in writing to the Regional Administrator on the effectiveness of the corrective action program. The owner or operator must submit these reports semi-annually.

(h) If the owner or operator determines that the corrective action program no longer satisfies the requirements of this section, he must, within 90 days, submit an application for a permit modification to make any appropriate changes to the program.

(Approved by the Office of Management and Budget under control number 2050-0033)

[47 FR 32350, July 26, 1985, as amended at 50 FR 4514, Jan. 31, 1985; 52 FR 45798, Dec. 1, 1987]

§ 264.101 Corrective action for solid waste management units.

(a) The owner or operator of a facility seeking a permit for the treatment, storage or disposal of hazardous waste must institute corrective action as necessary to protect human health and the environment for all releases of hazardous waste or constituents from any solid waste management unit at the facility, regardless of the time at which waste was placed in such unit.

(b) Corrective action will be specified in the permit. The permit will contain schedules of compliance for such corrective action (where such corrective action cannot be completed prior to issuance of the permit) and assurances of financial responsibility for completing such corrective action.

(c) The owner or operator must implement corrective actions beyond the facility property boundary, where necessary to protect human health and the environment, unless the owner or operator demonstrates to the satisfaction of the Regional Administrator that, despite the owner's or operator's best efforts, the owner or operator was unable to obtain the necessary permission to undertake such actions. The owner/operator is not relieved of all responsibility to clean up a release that has migrated beyond the facility boundary where off-site access is denied. On-site measures to address such releases will be determined on a case-by-case basis. Assurances of financial responsibility for such corrective action must be provided.

[50 FR 28747, July 15, 1985, as amended at 52 FR 45798, Dec. 1, 1987]

Subpart G—Closure and Post-Closure

SOURCE: 51 FR 16444, May 2, 1986, unless otherwise noted.

§ 264.110 Applicability.

Except as § 264.1 provides otherwise:

(a) Sections 264.111 through 264.115 (which concern closure) apply to the owners and operators of all hazardous waste management facilities; and

(b) Sections 264.116 through 264.120 (which concern post-closure care) apply to the owners and operators of:

(1) All hazardous waste disposal facilities; and

(2) Waste piles and surface impoundments from which the owner or operator intends to remove the wastes at closure to the extent that these sections are made applicable to such facilities in § 264.228 or § 264.258.

(3) Tank systems that are required under § 264.197 to meet the requirements for landfills.

[51 FR 16444, May 2, 1986, as amended at 51 FR 25472, July 14, 1986]

§ 264.111 Closure performance standard.

The owner or operator must close the facility in a manner that:

(a) Minimizes the need for further maintenance; and

(b) Controls, minimizes or eliminates, to the extent necessary to protect human health and the environment, post-closure escape of hazardous waste, hazardous constituents, leachate, contaminated run-off, or hazardous waste decomposition products to the ground or surface waters or to the atmosphere; and

(c) Complies with the closure requirements of this subpart, including, but not limited to, the requirements of §§ 264.178, 264.197, 264.228, 264.258, 264.280, 264.310, 264.351, and 264.601 through 264.603.

[51 FR 16444, May 2, 1986, as amended at 52 FR 46963, Dec. 10, 1987]

§ 264.112 Closure plan; amendment of plan.

(a) *Written plan.* (1) The owner or operator of a hazardous waste management facility must have a written closure plan. In addition, certain surface impoundments and waste piles from which the owner or operator intends to remove or decontaminate the hazardous waste at partial or final closure are required by §§ 264.228(c)(1)(i) and 264.258(c)(1)(i) to have contingent closure plans. The plan must be submitted with the permit application, in accordance with § 270.14(b)(13) of this chapter, and approved by the Regional Administrator as part of the permit issuance procedures under Part 124 of this chapter. In accordance with § 270.32 of this chapter, the approved closure plan will become a condition of any RCRA permit.

(2) The Director's approval of the plan must ensure that the approved closure plan is consistent with §§ 264.111 through 264.115 and the applicable requirements of §§ 264.90 *et seq.*, 264.178, 264.197, 264.228, 264.258, 264.280, 264.310, 264.351, and 264.601. Until final clsoure is completed and certified in accordance with § 264.115, a copy of the approved plan and all approved revisions must be furnished to the Director upon request, including request by mail.

(b) *Content of plan.* The plan must identify steps necessary to perform partial and/or final closure of the facility at any point during its active life. The closure plan must include, at least:

(1) A description of how each hazardous waste management unit at the facility will be closed in accordance with § 264.111;

(2) A description of how final closure of the facility will be conducted in accordance with § 264.111. The description must identify the maximum extent of the operations which will be unclosed during the active life of the facility; and

(3) An estimate of the maximum inventory of hazardous wastes ever onsite over the active life of the facility and a detailed description of the methods to be used during partial closures and final closure, including, but not limited to, methods for removing, transporting, treating, storing, or disposing of all hazardous wastes, and identification of the type(s) of the offsite hazardous waste management units to be used, if applicable; and

(4) A detailed description of the steps needed to remove or decontaminate all hazardous waste residues and contaminated containment system components, equipment, structures, and soils during partial and final closure, including, but not limited to, pro-

cedures for cleaning equipment and removing contaminated soils, methods for sampling and testing surrounding soils, and criteria for determining the extent of decontamination required to satisfy the closure performance standard; and

(5) A detailed description of other activities necessary during the closure period to ensure that all partial closures and final closure satisfy the closure performance standards, including, but not limited to, ground-water monitoring, leachate collection, and run-on and run-off control; and

(6) A schedule for closure of each hazardous waste management unit and for final closure of the facility. The schedule must include, at a minimum, the total time required to close each hazardous waste management unit and the time required for intervening closure activities which will allow tracking of the progress of partial and final closure. (For example, in the case of a landfill unit, estimates of the time required to treat or dispose of all hazardous waste inventory and of the time required to place a final cover must be included.)

(7) For facilities that use trust funds to establish financial assurance under § 264.143 or § 264.145 and that are expected to close prior to the expiration of the permit, an estimate of the expected year of final closure.

(c) *Amendment of plan.* The owner or operator must submit a written notification of or request for a permit modification to authorize a change in operating plans, facility design, or the approved closure plan in accordance with the applicable procedures in Parts 124 and 270. The written notification or request must include a copy of the amended closure plan for review or approval by the Regional Administrator.

(1) The owner or operator may submit a written notification or request to the Regional Administrator for a permit modification to amend the closure plan at any time prior to the notification of partial or final closure of the facility.

(2) The owner or operator must submit a written notification of or request for a permit modification to authorize a change in the approved closure plan whenever:

(i) Changes in operating plans or facility design affect the closure plan, or

(ii) There is a change in the expected year of closure, if applicable, or

(iii) In conducting partial or final closure activities, unexpected events require a modification of the approved closure plan.

(3) The owner or operator must submit a written request for a permit modification including a copy of the amended closure plan for approval at least 60 days prior to the proposed change in facility design or operation, or no later than 60 days after an unexpected event has occurred which has affected the closure plan. If an unexpected event occurs during the partial or final closure period, the owner or operator must request a permit modification no later than 30 days after the unexpected event. An owner or operator of a surface impoundment or waste pile that intends to remove all hazardous waste at closure and is not otherwise required to prepare a contingent closure plan under § 264.228(c)(1)(i) or § 264.258(c)(1)(i), must submit an amended closure plan to the Regional Administrator no later than 60 days from the date that the owner or operator or Regional Administrator determines that the hazardous waste management unit must be closed as a landfill, subject to the requirements of § 264.310, or no later than 30 days from that date if the determination is made during partial or final closure. The Regional Administrator will approve, disapprove, or modify this amended plan in accordance with the procedures in Parts 124 and 270. In accordance with § 270.32 of this chapter, the approved closure plan will become a condition of any RCRA permit issued.

(4) The Regional Administrator may request modifications to the plan under the conditions described in § 264.112(c)(2). The owner or operator must submit the modified plan within 60 days of the Regional Administrator's request, or within 30 days if the change in facility conditions occurs during partial or final closure. Any modifications requested by the Regional Administrator will be approved

in accordance with the procedures in Parts 124 and 270.

(d) *Notification of partial closure and final closure.* (1) The owner or operator must notify the Regional Administrator in writing at least 60 days prior to the date on which he expects to begin closure of a surface impoundment, waste pile, land treatment or landfill unit, or final closure of a facility with such a unit. The owner or operator must notify the Regional Administrator in writing at least 45 days prior to the date on which he expects to begin final closure of a facility with only treatment or storage tanks, container storage, or incinerator units to be closed.

(2) The date when he "expects to begin closure" must be either:

(i) No later than 30 days after the date on which any hazardous waste management unit receives the known final volume of hazardous wastes, or if there is a reasonable possibility that the hazardous waste management unit will receive additional hazardous wastes, no later than one year after the date on which the unit received the most recent volume of hazardous wastes. If the owner or operator of a hazardous waste management unit can demonstrate to the Regional Administrator that the hazardous waste management unit or facility has the capacity to receive additional hazardous wastes and he has taken all steps to prevent threats to human health and the environment, including compliance with all applicable permit requirements, the Regional Administrator may approve an extension to this one-year limit; or

(ii) For units meeting the requirements of § 264.113(d), no later than 30 days after the date on which the hazardous waste management unit receives the known final volume of non-hazardous wastes, or if there is a reasonable possibility that the hazardous waste management unit will receive additional non-hazardous wastes, no later than one year after the date on which the unit received the most recent volume of non-hazardous wastes. If the owner or operator can demonstrate to the Regional Administrator that the hazardous waste management unit has the capacity to receive additional non-hazardous wastes and he has taken, and will continue to take, all steps to prevent threats to human health and the environment, including compliance with all applicable permit requirements, the Regional Administrator may approve an extension to this one-year limit.

(3) If the facility's permit is terminated, or if the facility is otherwise ordered, by judicial decree or final order under section 3008 of RCRA, to cease receiving hazardous wastes or to close, then the requirements of this paragraph do not apply. However, the owner or operator must close the facility in accordance with the deadlines established in § 264.113.

(e) *Removal of wastes and decontamination or dismantling of equipment.* Nothing in this section shall preclude the owner or operator from removing hazardous wastes and decontaminating or dismantling equipment in accordance with the approved partial or final closure plan at any time before or after notification of partial or final closure.

[51 FR 16444, May 2, 1986, as amended at 52 FR 46963, Dec. 10, 1987; 53 FR 37935, Sept. 28, 1988; 54 FR 33394, Aug. 14, 1989]

§ 264.113 Closure; time allowed for closure.

(a) Within 90 days after receiving the final volume of hazardous wastes, or the final volume of non-hazardous wastes if the owner or operator complies with all applicable requirements in paragraphs (d) and (e) of this section, at a hazardous waste management unit or facility, the owner or operator must treat, remove from the unit or facility, or dispose of on-site, all hazardous wastes in accordance with the approved closure plan. The Regional Administrator may approve a longer period if the owner or operator complies with all applicable requirements for requesting a modification to the permit and demonstrates that:

(1)(i) The activities required to comply with this paragraph will, of necessity, take longer than 90 days to complete; or

(ii)(A) The hazardous waste management unit or facility has the capacity to receive additional hazardous wastes,

or has the capacity to receive non-hazardous wastes if the owner or operator complies with paragraphs (d) and (e) of this section; and

(B) There is a reasonable likelihood that he or another person will recommence operation of the hazardous waste management unit or the facility within one year; and

(C) Closure of the hazardous waste management unit or facility would be incompatible with continued operation of the site; and

(2) He has taken and will continue to take all steps to prevent threats to human health and the environment, including compliance with all applicable permit requirements.

(b) The owner or operator must complete partial and final closure activities in accordance with the approved closure plan and within 180 days after receiving the final volume of hazardous wastes, or the final volume of non-hazardous wastes if the owner or operator complies with all applicable requirements in paragraphs (d) and (e) of this section, at the hazardous waste management unit or facility. The Regional Administrator may approve an extension to the closure period if the owner or operator complies with all applicable requirements for requesting a modification to the permit and demonstrates that:

(1)(i) The partial or final closure activities will, of necessity, take longer than 180 days to complete; or

(ii)(A) The hazardous waste management unit or facility has the capacity to receive additional hazardous wastes, or has the capacity to receive non-hazardous wastes if the owner or operator complies with paragraphs (d) and (e) of this section; and

(B) There is reasonable likelihood that he or another person will recommence operation of the hazardous waste management unit or the facility within one year; and

(C) Closure of the hazardous waste management unit or facility would be incompatible with continued operation of the site; and

(2) He has taken and will continue to take all steps to prevent threats to human health and the environment from the unclosed but not operating hazardous waste management unit or facility, including compliance with all applicable permit requirements.

(c) The demonstrations referred to in paragraphs (a)(1) and (b)(1) of this section must be made as follows:

(1) The demonstrations in paragraph (a)(1) of this section must be made at least 30 days prior to the expiration of the 90-day period in paragraph (a) of this section; and

(2) The demonstration in paragraph (b)(1) of this section must be made at least 30 days prior to the expiration of the 180-day period in paragraph (b) of this section, unless the owner or operator is otherwise subject to the deadlines in paragraph (d) of this section.

(d) The Regional Administrator may allow an owner or operator to receive only non-hazardous wastes in a landfill, land treatment, or surface impoundment unit after the final receipt of hazardous wastes at that unit if:

(1) The owner or operator requests a permit modification in compliance with all applicable requirements in parts 270 and 124 of this title and in the permit modification request demonstrates that:

(i) The unit has the existing design capacity as indicated on the part A application to receive non-hazardous wastes; and

(ii) There is a reasonable likelihood that the owner or operator or another person will receive non-hazardous wastes in the unit within one year after the final receipt of hazardous wastes; and

(iii) The non-hazardous wastes will not be incompatible with any remaining wastes in the unit, or with the facility design and operating requirements of the unit or facility under this part; and

(iv) Closure of the hazardous waste management unit would be incompatible with continued operation of the unit or facility; and

(v) The owner or operator is operating and will continue to operate in compliance with all applicable permit requirements; and

(2) The request to modify the permit includes an amended waste analysis plan, ground-water monitoring and response program, human exposure assessment required under RCRA section 3019, and closure and post-closure

plans, and updated cost estimates and demonstrations of financial assurance for closure and post-closure care as necessary and appropriate, to reflect any changes due to the presence of hazardous constituents in the non-hazardous wastes, and changes in closure activities, including the expected year of closure if applicable under § 264.112(b)(7), as a result of the receipt of non-hazardous wastes following the final receipt of hazardous wastes; and

(3) The request to modify the permit includes revisions, as necessary and appropriate, to affected conditions of the permit to account for the receipt of non-hazardous wastes following receipt of the final volume of hazardous wastes; and

(4) The request to modify the permit and the demonstrations referred to in paragraphs (d)(1) and (d)(2) of this section are submitted to the Regional Administrator no later than 120 days prior to the date on which the owner or operator of the facility receives the known final volume of hazardous wastes at the unit, or no later than 90 days after the effective date of this rule in the state in which the unit is located, whichever is later.

(e) In addition to the requirements in paragraph (d) of this section, an owner or operator of a hazardous waste surface impoundment that is not in compliance with the liner and leachate collection system requirements in 42 U.S.C. 3004(o)(1) and 3005(j)(1) or 42 U.S.C. 3004(o) (2) or (3) or 3005(j) (2), (3), (4) or (13) must:

(1) Submit with the request to modify the permit:

(i) A contingent corrective measures plan, unless a corrective action plan has already been submitted under § 264.99; and

(ii) A plan for removing hazardous wastes in compliance with paragraph (e)(2) of this section; and

(2) Remove all hazardous wastes from the unit by removing all hazardous liquids, and removing all hazardous sludges to the extent practicable without impairing the integrity of the liner(s), if any.

(3) Removal of hazardous wastes must be completed no later than 90 days after the final receipt of hazardous wastes. The Regional Administrator may approve an extension to this deadline if the owner or operator demonstrates that the removal of hazardous wastes will, of necessity, take longer than the allotted period to complete and that an extension will not pose a threat to human health and the environment.

(4) If a release that is a statistically significant increase (or decrease in the case of pH) over background values for detection monitoring parameters or constituents specified in the permit or that exceeds the facility's groundwater protection standard at the point of compliance, if applicable, is detected in accordance with the requirements in subpart F of this part, the owner or operator of the unit:

(i) Must implement corrective measures in accordance with the approved contingent corrective measures plan required by paragraph (e)(1) of this section no later than one year after detection of the release, or approval of the contingent corrective measures plan, whichever is later;

(ii) May continue to receive wastes at the unit following detection of the release only if the approved corrective measures plan includes a demonstration that continued receipt of wastes will not impede corrective action; and

(iii) May be required by the Regional Administrator to implement corrective measures in less than one year or to cease the receipt of wastes until corrective measures have been implemented if necessary to protect human health and the environment.

(5) During the period of corrective action, the owner or operator shall provide semi-annual reports to the Regional Administrator that describe the progress of the corrective action program, compile all ground-water monitoring data, and evaluate the effect of the continued receipt of non-hazardous wastes on the effectiveness of the corrective action.

(6) The Regional Administrator may require the owner or operator to commence closure of the unit if the owner or operator fails to implement corrective action measures in accordance with the approved contingent corrective measures plan within one year as required in paragraph (e)(4) of this

section, or fails to make substantial progress in implementing corrective action and achieving the facility's ground-water protection standard or background levels if the facility has not yet established a ground-water protection standard.

(7) If the owner or operator fails to implement corrective measures as required in paragraph (e)(4) of this section, or if the Regional Administrator determines that substantial progress has not been made pursuant to paragraph (e)(6) of this section he shall:

(i) Notify the owner or operator in writing that the owner or operator must begin closure in accordance with the deadlines in paragraphs (a) and (b) of this section and provide a detailed statement of reasons for this determination, and

(ii) Provide the owner or operator and the public, through a newspaper notice, the opportunity to submit written comments on the decision no later than 20 days after the date of the notice.

(iii) If the Regional Administrator receives no written comments, the decision will become final five days after the close of the comment period. The Regional Administrator will notify the owner or operator that the decision is final, and that a revised closure plan, if necessary, must be submitted within 15 days of the final notice and that closure must begin in accordance with the deadlines in paragraphs (a) and (b) of this section.

(iv) If the Regional Administrator receives written comments on the decision, he shall make a final decision within 30 days after the end of the comment period, and provide the owner or operator in writing and the public through a newspaper notice, a detailed statement of reasons for the final decision. If the Regional Administrator determines that substantial progress has not been made, closure must be initiated in accordance with the deadlines in paragraphs (a) and (b) of this section.

(v) The final determinations made by the Regional Administrator under paragraphs (e)(7) (iii) and (iv) of this section are not subject to administrative appeal.

[51 FR 16444, May 2, 1986, as amended at 54 FR 33394, Aug. 14, 1989]

§ 264.114 Disposal or decontamination of equipment, structures and soils.

During the partial and final closure periods, all contaminated equipment, structures and soils must be properly disposed of or decontaminated unless otherwise specified in §§ 264.197, 264.228, 264.258, 264.280 or § 264.310. By removing any hazardous wastes or hazardous constituents during partial and final closure, the owner or operator may become a generator of hazardous waste and must handle that waste in accordance with all applicable requirements of Part 262 of this chapter.

[51 FR 16444, May 2, 1986, as amended at 52 FR 46963, Dec. 10, 1987; 53 FR 34086, Sept. 2, 1988]

§ 264.115 Certification of closure.

Within 60 days of completion of closure of each hazardous waste surface impoundment, waste pile, land treatment, and landfill unit, and within 60 days of the completion of final closure, the owner or operator must submit to the Regional Administrator, by registered mail, a certification that the hazardous waste management unit or facility, as applicable, has been closed in accordance with the specifications in the approved closure plan. The certification must be signed by the owner or operator and by an independent registered professional engineer. Documentation supporting the independent registered professional engineer's certification must be furnished to the Regional Administrator upon request until he releases the owner or operator from the financial assurance requirements for closure under § 264.143(i).

§ 264.116 Survey plat.

No later than the submission of the certification of closure of each hazardous waste disposal unit, the owner or operator must submit to the local zoning authority, or the authority with jurisdiction over local land use, and to the Regional Administrator, a survey plat indicating the location and dimensions of landfills cells or other hazardous waste disposal units with

respect to permanently surveyed benchmarks. This plat must be prepared and certified by a professional land surveyor. The plat filed with the local zoning authority, or the authority with jurisdiction over local land use, must contain a note, prominently displayed, which states the owner's or operator's obligation to restrict disturbance of the hazardous waste disposal unit in accordance with the applicable Subpart G regulations.

§ 264.117 Post-closure care and use of property.

(a)(1) Post-closure care for each hazardous waste management unit subject to the requirements of §§ 264.117 through 264.120 must begin after completion of closure of the unit and continue for 30 years after that date and must consist of at least the following:

(i) Monitoring and reporting in accordance with the requirements of Subparts F, K, L, M, N, and X of this part; and

(ii) Maintenance and monitoring of waste containment systems in accordance with the requirements of Subparts F, K, L, M, N, and X of this part.

(2) Any time preceding partial closure of a hazardous waste management unit subject to post-closure care requirements or final closure, or any time during the post-closure period for a particular unit, the Regional Administrator may, in accordance with the permit modification procedures in Parts 124 and 270:

(i) Shorten the post-closure care period applicable to the hazardous waste management unit, or facility, if all disposal units have been closed, if he finds that the reduced period is sufficient to protect human health and the environment (e.g., leachate or ground-water monitoring results, characteristics of the hazardous wastes, application of advanced technology, or alternative disposal, treatment, or reuse techniques indicate that the hazardous waste management unit or facility is secure); or

(ii) Extend the post-closure care period applicable to the hazardous waste management unit or facility if he finds that the extended period is necessary to protect human health and the environment (e.g., leachate or ground-water monitoring results indicate a potential for migration of hazardous wastes at levels which may be harmful to human health and the environment).

(b) The Regional Administrator may require, at partial and final closure, continuation of any of the security requirements of § 264.14 during part or all of the post-closure period when:

(1) Hazardous wastes may remain exposed after completion of partial or final closure; or

(2) Access by the public or domestic livestock may pose a hazard to human health.

(c) Post-closure use of property on or in which hazardous wastes remain after partial or final closure must never be allowed to disturb the integrity of the final cover, liner(s), or any other components of the containment system, or the function of the facility's monitoring systems, unless the Regional Administrator finds that the disturbance:

(1) Is necessary to the proposed use of the property, and will not increase the potential hazard to human health or the environment; or

(2) Is necessary to reduce a threat to human health or the environment.

(d) All post-closure care activities must be in accordance with the provisions of the approved post-closure plan as specified in § 264.118.

[51 FR 16444, May 2, 1986, as amended at 52 FR 46963, Dec. 10, 1987]

§ 264.118 Post-closure plan; amendment of plan.

(a) *Written Plan.* The owner or operator of a hazardous waste disposal unit must have a written post-closure plan. In addition, certain surface impoundments and waste piles from which the owner or operator intends to remove or decontaminate the hazardous wastes at partial or final closure are required by §§ 264.228(c)(1)(ii) and 264.258(c)(1)(ii) to have contingent post-closure plans. Owners or operators of surface impoundments and waste piles not otherwise required to prepare contingent post-closure plans under §§ 264.228(c)(1)(ii) and 264.258(c)(1)(ii) must submit a post-closure plan to the Regional Adminis-

trator within 90 days from the date that the owner or operator or Regional administrator determines that the hazardous waste management unit must be closed as a landfill, subject to the requirements of §§ 264.117 through 264.120. The plan must be submitted with the permit application, in accordance with § 270.14(b)(13) of this chapter, and approved by the Regional Administrator as part of the permit issuance procedures under Part 124 of this chapter. In accordance with § 270.32 of this chapter, the approved post-closure plan will become a condition of any RCRA permit issued.

(b) For each hazardous waste management unit subject to the requirements of this section, the post-closure plan must identify the activities that will be carried on after closure of each disposal unit and the frequency of these activities, and include at least:

(1) A description of the planned monitoring activities and frequencies at which they will be performed to comply with Subparts F, K, L, M, N, and X of this part during the post-closure care period; and

(2) A description of the planned maintenance activities, and frequencies at which they will be performed, to ensure:

(i) The integrity of the cap and final cover or other containment systems in accordance with the requirements of Subparts F, K, L, M, N, and X of this part; and

(ii) The function of the monitoring equipment in accordance with the requirements of Subparts, F, K, L, M, N, and X of this part; and

(3) The name, address, and phone number of the person or office to contact about the hazardous waste disposal unit or facility during the post-closure care period.

(c) Until final closure of the facility, a copy of the approved post-closure plan must be furnished to the Regional Administrator upon request, including request by mail. After final closure has been certified, the person or office specified in § 264.188(b)(3) must keep the approved post-closure plan during the remainder of the post-closure period.

(d) *Amendment of plan.* The owner or operator must submit a written notification of or request for a permit modification to authorize a change in the approved post-closure plan in accordance with the applicable requirements in Parts 124 and 270. The written notification or request must include a copy of the amended post-closure plan for review or approval by the Regional Administrator.

(1) The owner or operator may submit a written notification or request to the Regional Administrator for a permit modification to amend the post-closure plan at any time during the active life of the facility or during the post-closure care period.

(2) The owner or operator must submit a written notification of or request for a permit modification to authorize a change in the approved post-closure plan whenever:

(i) Changes in operating plans or facility design affect the approved post-closure plan, or

(ii) There is a change in the expected year of final closure, if applicable, or

(iii) Events which occur during the active life of the facility, including partial and final closures, affect the approved post-closure plan.

(3) The owner or operator must submit a written request for a permit modification at least 60 days prior to the proposed change in facility design or operation, or no later than 60 days after an unexpected event has occurred which has affected the post-closure plan. An owner or operator of a surface impoundment or waste pile that intends to remove all hazardous waste at closure and is not otherwise required to submit a contingent post-closure plan under §§ 264.228(c)(1)(ii) and 264.258(c)(1)(ii) must submit a post-closure plan to the Regional Administrator no later than 90 days after the date that the owner or operator or Regional Administrator determines that the hazardous waste management unit must be closed as a landfill, subject to the requirements of § 264.310. The Regional Administrator will approve, disapprove or modify this plan in accordance with the procedures in Parts 124 and 270. In accordance with § 270.32 of this chapter, the approved post-closure plan will become a permit condition.

40-147 O—90——7

(4) The Regional Administrator may request modifications to the plan under the conditions described in § 264.118(d)(2). The owner or operator must submit the modified plan no later than 60 days after the Regional Administrator's request, or no later than 90 days if the unit is a surface impoundment or waste pile not previously required to prepare a contingent post-closure plan. Any modifications requested by the Regional Administrator will be approved, disapproved, or modified in accordance with the procedures in Parts 124 and 270.

[51 FR 16444, May 2, 1986, as amended at 52 FR 46964, Dec. 10, 1987; 53 FR 37935, Sept. 28,1988]

§ 264.119 Post-closure notices.

(a) No later than 60 days after certification of closure of each hazardous waste disposal unit, the owner or operator must submit to the local zoning authority, or the authority with jurisdiction over local land use, and to the Regional Administrator a record of the type, location, and quantity of hazardous wastes disposed of within each cell or other disposal unit of the facility. For hazardous wastes disposed of before January 12, 1981, the owner or operator must identify the type, location, and quantity of the hazardous wastes to the best of his knowledge and in accordance with any records he has kept.

(b) Within 60 days of certification of closure of the first hazardous waste disposal unit and within 60 days of certification of closure of the last hazardous waste disposal unit, the owner or operator must:

(1) Record, in accordance with State law, a notation on the deed to the facility property—or on some other instrument which is normally examined during title search—that will in perpetuity notify any potential purchaser of the property that:

(i) The land has been used to manage hazardous wastes; and

(ii) Its use is restricted under 40 CFR Subpart G regulations; and

(iii) The survey plat and record of the type, location, and quantity of hazardous wastes disposed of within each cell or other hazardous waste disposal unit of the facility required by §§ 264.116 and 264.119(a) have been filed with the local zoning authority or the authority with jurisdiction over local land use and with the Regional Administrator; and

(2) Submit a certification, signed by the owner or operator, that he has recorded the notation specified in paragraph (b)(1) of this section, including a copy of the document in which the notation has been placed, to the Regional Administrator.

(c) If the owner or operator or any subsequent owner or operator of the land upon which a hazardous waste disposal unit is located wishes to remove hazardous wastes and hazardous waste residues, the liner, if any, or contaminated soils, he must request a modification to the post-closure permit in accordance with the applicable requirements in Parts 124 and 270. The owner or operator must demonstrate that the removal of hazardous wastes will satisfy the criteria of § 264.117(c). By removing hazardous waste, the owner or operator may become a generator of hazardous waste and must manage it in accordance with all applicable requirements of this chapter. If he is granted a permit modification or otherwise granted approval to conduct such removal activities, the owner or operator may request that the Regional Administrator approve either:

(1) The removal of the notation on the deed to the facility property or other instrument normally examined during title search; or

(2) The addition of a notation to the deed or instrument indicating the removal of the hazardous waste.

§ 264.120 Certification of completion of post-closure care.

No later than 60 days after completion of the established post-closure care period for each hazardous waste disposal unit, the owner or operator must submit to the Regional Administrator, by registered mail, a certification that the post-closure care period for the hazardous waste disposal unit was performed in accordance with the specifications in the approved post-closure plan. The certification must be signed by the owner or operator and

an independent registered professional engineer. Documentation supporting the independent registered professional engineer's certification must be furnished to the Regional Administrator upon request until he releases the owner or operator from the financial assurance requirements for post-closure care under § 264.145(i).

(The information collection requirements in Subpart G are approved by the Office of Management and Budget under control number 2050-0008)

Subpart H—Financial Requirements

SOURCE: 47 FR 15047, Apr. 7, 1982, unless otherwise noted.

§ 264.140 Applicability.

(a) The requirements of §§ 264.142, 264.143, and 264.147 through 264.151 apply to owners and operators of all hazardous waste facilities, except as provided otherwise in this section or in § 264.1.

(b) The requirements of §§ 264.144 and 264.145 apply only to owners and operators of:

(1) Disposal facilities, and

(2) Piles, and surface impoundments from which the owner or operator intends to remove the wastes at closure, to the extent that these sections are made applicable to such facilities in §§ 264.228 and 264.258.

(3) Tank systems that are required under § 264.197 to meet the requirements for landfills.

(c) States and the Federal government are exempt from the requirements of this subpart.

[47 FR 15047, Apr. 7, 1982, as amended at 47 FR 32357, July 26, 1982; 51 FR 25472, July 14, 1986]

§ 264.141 Definitions of terms as used in this subpart.

(a) "*Closure plan*" means the plan for closure prepared in accordance with the requirements of § 264.112.

(b) "*Current closure cost estimate*" means the most recent of the estimates prepared in accordance with § 264.142 (a), (b), and (c).

(c) "*Current post-closure cost estimate*" means the most recent of the estimates prepared in accordance with § 264.144 (a), (b), and (c).

(d) "*Parent corporation*" means a corporation which directly owns at least 50 percent of the voting stock of the corporation which is the facility owner or operator; the latter corporation is deemed a "subsidiary" of the parent corporation.

(e) "*Post-closure plan*" means the plan for post-closure care prepared in accordance with the requirements of §§ 264.117 through 264.120.

(f) The following terms are used in the specifications for the financial tests for closure, post-closure care, and liability coverage. The definitions are intended to assist in the understanding of these regulations and are not intended to limit the meanings of terms in a way that conflicts with generally accepted accounting practices.

"*Assets*" means all existing and all probable future economic benefits obtained or controlled by a particular entity.

"*Current assets*" means cash or other assets or resources commonly identified as those which are reasonably expected to be realized in cash or sold or consumed during the normal operating cycle of the business.

"*Current liabilities*" means obligations whose liquidation is reasonably expected to require the use of existing resources properly classifiable as current assets or the creation of other current liabilities.

"*Current plugging and abandonment cost estimate*" means the most recent of the estimates prepared in accordance with § 144.62(a), (b), and (c) of this title.

"*Independently audited*" refers to an audit performed by an independent certified public accountant in accordance with generally accepted auditing standards.

"*Liabilities*" means probable future sacrifices of economic benefits arising from present obligations to transfer assets or provide services to other entities in the future as a result of past transactions or events.

"*Net working capital*" means current assets minus current liabilities.

"*Net worth*" means total assets minus total liabilities and is equivalent to owner's equity.

"*Tangible net worth*" means the tangible assets that remain after deduct-

ing liabilities; such assets would not include intangibles such as goodwill and rights to patents or royalties.

(g) In the liability insurance requirements the terms "*bodily injury*" and "*property damage*" shall have the meanings given these terms by applicable State law. However, these terms do not include those liabilities which, consistent with standard industry practices, are excluded from coverage in liability policies for bodily injury and property damage. The Agency intends the meanings of other terms used in the liability insurance requirements to be consistent with their common meanings within the insurance industry. The definitions given below of several of the terms are intended to assist in the understanding of these regulations and are not intended to limit their meanings in a way that conflicts with general insurance industry usage.

"*Accidental occurrence*" means an accident, including continuous or repeated exposure to conditions, which results in bodily injury or property damage neither expected nor intended from the standpoint of the insured.

"*Legal defense costs*" means any expenses that an insurer incurs in defending against claims of third parties brought under the terms and conditions of an insurance policy.

"*Nonsudden accidental occurrence*" means an occurrence which takes place over time and involves continuous or repeated exposure.

"*Sudden accidental occurrence*" means an occurrence which is not continuous or repeated in nature.

(h) "*Substantial business relationship*" means the extent of a business relationship necessary under applicable State law to make a guarantee contract issued incident to that relationship valid and enforceable. A "substantial business relationship" must arise from a pattern of recent or ongoing business transactions, in addition to the guarantee itself, such that a currently existing business relationship between the guarantor and the owner or operator is demonstrated to the satisfaction of the applicable EPA Regional Administrator.

[47 FR 16554, Apr. 16, 1982, as amended at 51 FR 16447, May 2, 1986; 53 FR 33950, Sept. 1, 1988]

§ 264.142 Cost estimate for closure.

(a) The owner or operator must have a detailed written estimate, in current dollars, of the cost of closing the facility in accordance with the requirements in §§ 264.111 through 264.115 and applicable closure requirements in §§ 264.178, 264.197, 264.228, 264.258, 264.280, 264.310, 264.351, and 264.601 through 264.603.

(1) The estimate must equal the cost of final closure at the point in the facility's active life when the extent and manner of its operation would make closure the most expensive, as indicated by its closure plan (see § 264.112(b)); and

(2) The closure cost estimate must be based on the costs to the owner or operator of hiring a third party to close the facility. A third party is a party who is neither a parent nor a subsidiary of the owner or operator. (See definition of parent corporation in § 264.141(d).) The owner or operator may use costs for on-site disposal if he can demonstrate that on-site disposal capacity will exist at all times over the life of the facility.

(3) The closure cost estimate may not incorporate any salvage value that may be realized with the sale of hazardous wastes, or non-hazardous wastes if applicable under § 264.113(d), facility structures or equipment, land, or other assets associated with the facility at the time of partial or final closure.

(4) The owner or operator may not incorporate a zero cost for hazardous wastes, or non-hazardous wastes if applicable under § 264.113(d), that might have economic value.

(b) During the active life of the facility, the owner or operator must adjust the closure cost estimate for inflation within 60 days prior to the anniversary date of the establishment of the financial instrument(s) used to comply with § 264.143. For owners and operators using the financial test or corporate guarantee, the closure cost estimate must be updated for inflation within 30 days after the close of the firm's fiscal year and before submis-

sion of updated information to the Regional Administrator as specified in § 264.143(f)(3). The adjustment may be made by recalculating the maximum costs of closure in current dollars, or by using an inflation factor derived from the most recent Implicit Price Deflator for Gross National Product published by the U.S. Department of Commerce in its *Survey of Current Business*, as specified in paragraphs (b)(1) and (2) of this section. The inflation factor is the result of dividing the latest published annual Deflator by the Deflator for the previous year.

(1) The first adjustment is made by multiplying the closure cost estimate by the inflation factor. The result is the adjusted closure cost estimate.

(2) Subsequent adjustments are made by mutliplying the lastest adjusted closure cost estimate by the latest inflation factor.

(c) During the active life of the facility, the owner or operator must revise the closure cost estimate no later than 30 days after the Regional Administrator has approved the request to modify the closure plan, if the change in the closure plan increases the cost of closure. The revised closure cost estimate must be adjusted for inflation as specified in § 264.142(b).

(d) The owner or operator must keep the following at the facility during the operating life of the facility: The latest closure cost estimate prepared in accordance with § 264.142 (a) and (c) and, when this estimate has been adjusted in accordance with § 264.142(b), the latest adjusted closure cost estimate.

(Approved by the Office of Management and Budget under control number 2050-0036)

[47 FR 15047, Apr. 7, 1982, as amended at 50 FR 4514, Jan. 31, 1985; 51 FR 16447, May 2, 1986; 52 FR 46964, Dec. 10, 1987; 54 FR 33395, Aug. 14, 1989]

§ 264.143 Financial assurance for closure.

An owner or operator of each facility must establish financial assurance for closure of the facility. He must choose from the options as specified in paragraphs (a) through (f) of this section.

(a) *Closure trust fund.* (1) An owner or operator may satisfy the requirements of this section by establishing a closure trust fund which conforms to the requirements of this paragraph and submitting an originally signed duplicate of the trust agreement to the Regional Administrator. An owner or operator of a new facility must submit the originally signed duplicate of the trust agreement to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for treatment, storage, or disposal. The trustee must be an entity which has the authority to act as a trustee and whose trust operations are regulated and examined by a Federal or State agency.

(2) The wording of the trust agreement must be identical to the wording specified in § 264.151(a)(1), and the trust agreement must be accompanied by a formal certification of acknowledgment (for example, see § 264.151(a)(2)). Schedule A of the trust agreement must be updated within 60 days after a change in the amount of the current closure cost estimate covered by the agreement.

(3) Payments into the trust fund must be made annually by the owner or operator over the term of the initial RCRA permit or over the remaining operating life of the facility as estimated in the closure plan, whichever period is shorter; this period is hereafter referred to as the "pay-in period." The payments into the closure trust fund must be made as follows:

(i) For a new facility, the first payment must be made before the initial receipt of hazardous waste for treatment, storage, or disposal. A receipt from the trustee for this payment must be submitted by the owner or operator to the Regional Administrator before this initial receipt of hazardous waste. The first payment must be at least equal to the current closure cost estimate, except as provided in § 264.143(g), divided by the number of years in the pay-in period. Subsequent payments must be made no later than 30 days after each anniversary date of the first payment. The amount of each subsequent payment must be determined by this formula:

$$\text{Next payment} = \frac{CE - CV}{Y}$$

where CE is the current closure cost estimate, CV is the current value of the trust fund, and Y is the number of years remaining in the pay-in period.

(ii) If an owner or operator establishes a trust fund as specified in § 265.143(a) of this chapter, and the value of that trust fund is less than the current closure cost estimate when a permit is awarded for the facility, the amount of the current closure cost estimate still to be paid into the trust fund must be paid in over the pay-in period as defined in paragraph (a)(3) of this section. Payments must continue to be made no later than 30 days after each anniversary date of the first payment made pursuant to Part 265 of this chapter. The amount of each payment must be determined by this formula:

$$\text{Next payment} = \frac{CE - CV}{Y}$$

where CE is the current closure cost estimate, CV is the current value of the trust fund, and Y is the number of years remaining in the pay-in period.

(4) The owner or operator may accelerate payments into the trust fund or he may deposit the full amount of the current closure cost estimate at the time the fund is established. However, he must maintain the value of the fund at no less than the value that the fund would have if annual payments were made as specified in paragraph (a)(3) of this section.

(5) If the owner or operator establishes a closure trust fund after having used one or more alternate mechanisms specified in this section or in § 265.143 of this chapter, his first payment must be in at least the amount that the fund would contain if the trust fund were established initially and annual payments made according to specifications of this paragraph and § 265.143(a) of this chapter, as applicable.

(6) After the pay-in period is completed, whenever the current closure cost estimate changes, the owner or operator must compare the new estimate with the trustee's most recent annual valuation of the trust fund. If the value of the fund is less than the amount of the new estimate, the owner or operator, within 60 days after the change in the cost estimate, must either deposit an amount into the fund so that its value after this deposit at least equals the amount of the current closure cost estimate, or obtain other financial assurance as specified in this section to cover the difference.

(7) If the value of the trust fund is greater than the total amount of the current closure cost estimate, the owner or operator may submit a written request to the Regional Administrator for release of the amount in excess of the current closure cost estimate.

(8) If an owner or operator substitutes other financial assurance as specified in this section for all or part of the trust fund, he may submit a written request to the Regional Administrator for release of the amount in excess of the current closure cost estimate covered by the trust fund.

(9) Within 60 days after receiving a request from the owner or operator for release of funds as specified in paragraph (a) (7) or (8) of this section, the Regional Administrator will instruct the trustee to release to the owner or operator such funds as the Regional Administrator specifies in writing.

(10) After beginning partial or final closure, an owner or operator or another person authorized to conduct partial or final closure may request reimbursements for partial or final closure expenditures by submitting itemized bills to the Regional Administrator. The owner or operator may request reimbursements for partial closure only if sufficient funds are remaining in the trust fund to cover the maximum costs of closing the facility over its remaining operating life. Within 60 days after receiving bills for partial or final closure activities, the Regional Administrator will instruct the trustee to make reimbursements in those amounts as the Regional Administrator specifies in writing, if the Regional Administrator determines that

the partial or final closure expenditures are in accordance with the approved closure plan, or otherwise justified. If the Regional Administrator has reason to believe that the maximum cost of closure over the remaining life of the facility will be significantly greater than the value of the trust fund, he may withhold reimbursements of such amounts as he deems prudent until he determines, in accordance with § 264.143(i) that the owner or operator is no longer required to maintain financial assurance for final closure of the facility. If the Regional Administrator does not instruct the trustee to make such reimbursements, he will provide the owner or operator with a detailed written statement of reasons.

(11) The Regional Administrator will agree to termination of the trust when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 264.143(i).

(b) *Surety bond guaranteeing payment into a closure trust fund.* (1) An owner or operator may satisfy the requirements of this section by obtaining a surety bond which conforms to the requirements of this paragraph and submitting the bond to the Regional Administrator. An owner or operator of a new facility must submit the bond to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for treatment, storage, or disposal. The bond must be effective before this initial receipt of hazardous waste. The surety company issuing the bond must, at a minimum, be among those listed as acceptable sureties on Federal bonds in Circular 570 of the U.S. Department of the Treasury.

(2) The wording of the surety bond must be identical to the wording specified in § 264.151(b).

(3) The owner or operator who uses a surety bond to satisfy the requirements of this section must also establish a standby trust fund. Under the terms of the bond, all payments made thereunder will be deposited by the surety directly into the standby trust fund in accordance with instructions from the Regional Administrator. This standby trust fund must meet the requirements specified in § 264.143(a), except that:

(i) An originally signed duplicate of the trust agreement must be submitted to the Regional Administrator with the surety bond; and

(ii) Until the standby trust fund is funded pursuant to the requirements of this section, the following are not required by these regulations:

(A) Payments into the trust fund as specified in § 264.143(a);

(B) Updating of Schedule A of the trust agreement (see § 264.151(a)) to show current closure cost estimates;

(C) Annual valuations as required by the trust agreement; and

(D) Notices of nonpayment as required by the trust agreement.

(4) The bond must guarantee that the owner or operator will:

(i) Fund the standby trust fund in an amount equal to the penal sum of the bond before the beginning of final closure of the facility; or

(ii) Fund the standby trust fund in an amount equal to the penal sum within 15 days after an administrative order to begin final closure issued by the Regional Administrator becomes final, or within 15 days after an order to begin final closure is issued by a U.S. district court or other court of competent jurisdiction; or

(iii) Provide alternate financial assurance as specified in this section, and obtain the Regional Administrator's written approval of the assurance provided, within 90 days after receipt by both the owner or operator and the Regional Administrator of a notice of cancellation of the bond from the surety.

(5) Under the terms of the bond, the surety will become liable on the bond obligation when the owner or operator fails to perform as guaranteed by the bond.

(6) The penal sum of the bond must be in an amount at least equal to the current closure cost estimate, except as provided in § 264.143(g).

(7) Whenever the current closure cost estimate increases to an amount greater then the penal sum, the owner

or operator, within 60 days after the increase, must either cause the penal sum to be increased to an amount at least equal to the current closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. Whenever the current closure cost estimate decreases, the penal sum may be reduced to the amount of the current closure cost estimate following written approval by the Regional Administrator.

(8) Under the terms of the bond, the surety may cancel the bond by sending notice of cancellation by certified mail to the owner or operator and to the Regional Administrator. Cancellation may not occur, however, during the 120 days beginning on the date of receipt of the notice of cancellation by both the owner or operator and the Regional Administrator, as evidence by the return receipts.

(9) The owner or operator may cancel the bond if the Regional Administrator has given prior written consent based on his receipt of evidence of alternate financial assurance as specified in this section.

(c) *Surety bond guaranteeing performance of closure.* (1) An owner or operator may satisfy the requirements of this section by obtaining a surety bond which conforms to the requirements of this paragraph and submitting the bond to the Regional Administrator. An owner or operator of a new facility must submit the bond to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for treatment, storage, or disposal. The bond must be effective before this initial receipt of hazardous waste. The surety company issuing the bond must, at a minimum, be among those listed as acceptable sureties on Federal bonds in Circular 570 of the U.S. Department of the Treasury.

(2) The wording of the surety bond must be identical to the wording specified in § 264.151(c).

(3) The owner or operator who uses a surety bond to satisfy the requirements of this section must also establish a standby trust fund. Under the terms of the bond, all payments made thereunder will be deposited by the surety directly into the standby trust fund in accordance with instructions from the Regional Administrator. This standby trust must meet the requirements specified in § 264.143(a), except that:

(i) An originally signed duplicate of the trust agreement must be submitted to the Regional Administrator with the surety bond; and

(ii) Unless the standby trust fund is funded pursuant to the requirements of this section, the following are not required by these regulations:

(A) Payments into the trust fund as specified in § 264.143(a);

(B) Updating of Schedule A of the trust agreement (see § 264.151(a)) to show current closure cost estimates;

(C) Annual valuations as required by the trust agreement; and

(D) Notices of nonpayment as required by the trust agreement.

(4) The bond must guarantee that the owner or operator will:

(i) Perform final closure in accordance with the closure plan and other requirements of the permit for the facility whenever required to do so; or

(ii) Provide alternate financial assurance as specified in this section, and obtain the Regional Administrator's written approval of the assurance provided, within 90 days after receipt by both the owner or operator and the Regional Administrator of a notice of cancellation of the bond from the surety.

(5) Under the terms of the bond, the surety will become liable on the bond obligation when the owner or operator fails to perform as guaranteed by the bond. Following a final administrative determination pursuant to section 3008 of RCRA that the owner or operator has failed to perform final closure in accordance with the approved closure plan and other permit requirements when required to do so, under the terms of the bond the surety will perform final closure as guaranteed by the bond or will deposit the amount of the penal sum into the standby trust fund.

(6) The penal sum of the bond must be in an amount at least equal to the current closure cost estimate.

(7) Whenever the current closure cost estimate increases to an amount greater than the penal sum, the owner or operator, within 60 days after the increase, must either cause the penal sum to be increased to an amount at least equal to the current closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section. Whenever the current closure cost estimate decreases, the penal sum may be reduced to the amount of the current closure cost estimate following written approval by the Regional Administrator.

(8) Under the terms of the bond, the surety may canel the bond by sending notice of cancellation by certified mail to the owner or operator and to the Regional Administrator. Cancellation may not occur, however, during the 120 days beginning on the date of receipt of the notice of cancellation by both the owner or operator and the Regional Administrator, as evidenced by the return receipts.

(9) The owner or operator may cancel the bond if the Regional Administrator has given prior written consent. The Regional Administrator will provide such written consent when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 264.143(i).

(10) The surety will not be liable for deficiencies in the performance of closure by the owner or operator after the Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 264.143(i).

(d) *Closure letter of credit.* (1) An owner or operator may satisfy the requirements of this section by obtaining an irrevocable standby letter of credit which conforms to the requirements of this paragraph and submitting the letter to the Regional Administrator. An owner or operator of a new facility must submit the letter of credit to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for treatment, storage, or disposal. The letter of credit must be effective before this initial receipt of hazardous waste. The issuing institution must be an entity which has the authority to issue letters of credit and whose letter-of-credit operations are regulated and examined by a Federal or State agency.

(2) The wording of the letter of credit must be identical to the wording specified in § 264.151(d).

(3) An owner or operator who uses a letter of credit to satisfy the requirements of this section must also establish a standby trust fund. Under the terms of the letter of credit, all amounts paid pursuant to a draft by the Regional Administrator will be deposited by the issuing institution directly into the standby trust fund in accordance with instructions from the Regional Administrator. This standby trust fund must meet the requirements of the trust fund specified in § 264.143(a), except that:

(i) An originally signed duplicate of the trust agreement must be submitted to the Regional Administrator with the letter of credit; and

(ii) Unless the standby trust fund is funded pursuant to the requirements of this section, the following are not required by these regulations:

(A) Payments into the trust fund as specified in § 264.143(a);

(B) Updating of Schedule A of the trust agreement (see § 264.151(a)) to show current closure cost estimates;

(C) Annual valuations as required by the trust agreement; and

(D) Notices of nonpayment as required by the trust agreement.

(4) The letter of credit must be accompanied by a letter from the owner or operator referring to the letter of credit by number, issuing institution, and date, and providing the following information: the EPA Identification Number, name, and address of the facility, and the amount of funds assured for closure of the facility by the letter of credit.

(5) The letter of credit must be irrevocable and issued for a period of at least 1 year. The letter of credit must provide that the expiration date will be automatically extended for a period

of at least 1 year unless, at least 120 days before the current expiration date, the issuing institution notifies both the owner or operator and the Regional Administrator by certified mail of a decision not to extend the expiration date. Under the terms of the letter of credit, the 120 days will begin on the date when both the owner or operator and the Regional Administrator have received the notice, as evidenced by the return receipts.

(6) The letter of credit must be issued in an amount at least equal to the current closure cost estimate, except as provided in § 264.143(g).

(7) Whenever the current closure cost estimate increases to an amount greater than the amount of the credit, the owner or operator, within 60 days after the increase, must either cause the amount of the credit to be increased so that it at least equals the current closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. Whenever the current closure cost estimate decreases, the amount of the credit may be reduced to the amount of the current closure cost estimate following written approval by the Regional Administrator.

(8) Following a final administrative determination pursuant to section 3008 of RCRA that the owner or operator has failed to perform final closure in accordance with the closure plan and other permit requirements when required to do so, the Regional Administrator may draw on the letter of credit.

(9) If the owner or operator does not establish alternate financial assurance as specified in this section and obtain written approval of such alternate assurance from the Regional Administrator within 90 days after receipt by both the owner or operator and the Regional Administrator of a notice from issuing institution that it has decided not to extend the letter of credit beyond the current expiration date, the Regional Administrator will draw on the letter of credit. The Regional Administrator may delay the drawing if the issuing institution grants an extension of the term of the credit. During the last 30 days of any such extension the Regional Administrator will draw on the letter of credit if the owner or operator has failed to provide alternate financial assurance as specified in this section and obtain written approval of such assurance from the Regional Administrator.

(10) The Regional Administrator will return the letter of credit to the issuing institution for termination when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 264.143(i).

(e) *Closure insurance.* (1) An owner or operator may satisfy the requirements of this section by obtaining closure insurance which conforms to the requirements of this paragraph and submitting a certificate of such insurance to the Regional Administrator. An owner or operator of a new facility must submit the certificate of insurance to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for treatment, storage, or disposal. The insurance must be effective before this initial receipt of hazardous waste. At a minimum, the insurer must be licensed to transact the business of insurance, or eligible to provide insurance as an excess or suplus lines insurer, in one or more States.

(2) The wording of the certificate of insurance must be identical to the wording specified in § 264.151(e).

(3) The closure insurance policy must be issued for a face amount at least equal to the current closure cost estimate, except as provided in § 264.143(g). The term "face amount" means the total amount the insurer is obligated to pay under the policy. Actual payments by the insurer will not change the face amount, although the insurer's future liability will be lowered by the amount of the payments.

(4) The closure insurance policy must guarantee that funds will be available to close the facility whenever final closure occurs. The policy must also guarantee that once final closure

begins, the insurer will be responsible for paying out funds, up to an amount equal to the face amount of the policy, upon the direction of the Regional Administrator, to such party or parties as the Regional Administrator specifies.

(5) After beginning partial or final closure, an owner or operator or any other person authorized to conduct closure may request reimbursements for closure expenditures by submitting itemized bills to the Regional Administrator. The owner or operator may request reimbursements for partial closure only if the remaining value of the policy is sufficient to cover the maximum costs of closing the facility over its remaining operating life. Within 60 days after receiving bills for closure activities, the Regional Administrator will instruct the insurer to make reimbursements in such amounts as the Regional Administrator specifies in writing, if the Regional Administrator determines that the partial or final closure expenditures are in accordance with the approved closure plan or otherwise justified. If the Regional Administrator has reason to believe that the maximum cost of closure over the remaining life of the facility will be signficantly greater than the face amount of the policy, he may withhold reimbursements of such amounts as he deems prudent until he determines, in accordance with § 264.143(i), that the owner or operator is no longer required to maintain financial assurance for final closure of the facility. If the Regional Administrator does not instruct the insurer to make such reimbursements, he will provide the owner or operator with a detailed written statement of reasons.

(6) The owner or operator must maintain the policy in full force and effect until the Regional Administrator consents to termination of the policy by the owner or operator as specified in paragraph (e)(10) of this section. Failure to pay the premium, without substitution of alternate financial assurance as specified in this section, will constitute a significant violation of these regulations, warranting such remedy as the Regional Administrator deems necessary. Such violation will be deemed to begin upon receipt by the Regional Adminstrator of a notice of future cancellation, termination, or failure to renew due to nonpayment of the premium, rather than upon the date of expiration.

(7) Each policy must contain a provision allowing assignment of the policy to a successor owner or operator. Such assignment may be conditional upon consent of the insurer, provided such consent is not unreasonably refused.

(8) The policy must provide that the insurer may not cancel, terminate, or fail to renew the policy except for failure to pay the premium. The automatic renewal of the policy must, at a minimum, provide the insured with the option of renewal at the face amount of the expiring policy. If there is a failure to pay the premium, the insurer may elect to cancel, terminate, or fail to renew the policy by sending notice by certified mail to the owner or operator and the Regional Administrator. Cancellation, termination, or failure to renew may not occur, however, during the 120 days beginning with the date of receipt of the notice by both the Regional Administrator and the owner or operator, as evidenced by the return receipts. Cancellation, termination, or failure to renew may not occur and the policy will remain in full force and effect in the event that on or before the date of expiration:

(i) The Regional Administrator deems the facility abandoned; or

(ii) The permit is terminated or revoked or a new permit is denied; or

(iii) Closure is ordered by the Regional Administrator or a U.S. district court or other court of competent jurisdiction; or

(iv) The owner or operator is named as debtor in a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code; or

(v) The premium due is paid.

(9) Whenever the current closure cost estimate increases to an amount greater than the face amount of the policy, the owner or operator, within 60 days after the increase, must either cause the face amount to be increased to an amount at least equal to the current closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. When-

ever the current closure cost estimate decreases, the face amount may be reduced to the amount of the current closure cost estimate following written approval by the Regional Administrator.

(10) The Regional Administrator will give written consent to the owner or operator that he may terminate the insurance policy when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 264.143(i).

(f) *Financial test and corporate guarantee for closure.* (1) An owner or operator may satisfy the requirements of this section by demonstrating that he passes a financial test as specified in this paragraph. To pass this test the owner or operator must meet the criteria of either paragraph (f)(1)(i) or (ii) of this section:

(i) The owner or operator must have:

(A) Two of the following three ratios: a ratio of total liabilities to net worth less than 2.0; a ratio of the sum of net income plus depreciation, depletion, and amortization to total liabilities greater than 0.1; and a ratio of current assets to current liabilities greater than 1.5; and

(B) Net working capital and tangible net worth each at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates; and

(C) Tangible net worth of at least $10 million; and

(D) Assets located in the United States amounting to at least 90 percent of total assets or at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates.

(ii) The owner or operator must have:

(A) A current rating for his most recent bond issuance of AAA, AA, A, or BBB as issued by Standard and Poor's or Aaa, Aa, A, or Baa as issued by Moody's; and

(B) Tangible net worth at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates; and

(C) Tangible net worth of at least $10 million; and

(D) Assets located in the United States amounting to at least 90 percent of total assets or at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates.

(2) The phrase "current closure and post-closure cost estimates" as used in paragraph (f)(1) of this section refers to the cost estimates required to be shown in paragraphs 1-4 of the letter from the owner's or operator's chief financial officer (§ 264.151(f)). The phrase "current plugging and abandonment cost estimates" as used in paragraph (f)(1) of this section refers to the cost estimates required to be shown in paragraphs 1-4 of the letter from the owner's or operator's chief financial officer (§ 144.70(f) of this title).

(3) To demonstrate that he meets this test, the owner or operator must submit the following items to the Regional Administrator:

(i) A letter signed by the owner's or operator's chief financial officer and worded as specified in § 264.151(f); and

(ii) A copy of the independent certified public accountant's report on examination of the owner's or operator's financial statements for the latest completed fiscal year; and

(iii) A special report from the owner's or operator's independent certified public accountant to the owner or operator stating that:

(A) He has compared the data which the letter from the chief financial officer specifies as having been derived from the independently audited, year-end financial statements for the latest fiscal year with the amounts in such financial statements; and

(B) In connection with that procedure, no matters came to his attention which caused him to believe that the specified data should be adjusted.

(4) An owner or operator of a new facility must submit the items specified in paragraph (f)(3) of this section to the Regional Administrator at least 60 days before the date on which haz-

ardous waste is first received for treatment, storage, or disposal.

(5) After the initial submission of items specified in paragraph (f)(3) of this section, the owner or operator must send updated information to the Regional Administrator within 90 days after the close of each succeeding fiscal year. This information must consist of all three items specified in paragraph (f)(3) of this section.

(6) If the owner or operator no longer meets the requirements of paragraph (f)(1) of this section, he must send notice to the Regional Administrator of intent to establish alternate financial assurance as specified in this section. The notice must be sent by certified mail within 90 days after the end of the fiscal year for which the year-end financial data show that the owner or operator no longer meets the requirements. The owner or operator must provide the alternate financial assurance within 120 days after the end of such fiscal year.

(7) The Regional Administrator may, based on a reasonable belief that the owner or operator may no longer meet the requirements of paragraph (f)(1) of this section, require reports of financial condition at any time from the owner or operator in addition to those specified in paragraph (f)(3) of this section. If the Regional Administrator finds, on the basis of such reports or other information, that the owner or operator no longer meets the requirements of paragraph (f)(1) of this section, the owner or operator must provide alternate financial assurance as specified in this section within 30 days after notification of such a finding.

(8) The Regional Administrator may disallow use of this test on the basis of qualifications in the opinion expressed by the independent certified public accountant in his report on examination of the owner's or operator's financial statements (see paragraph (f)(3)(ii) of this section). An adverse opinion or a disclaimer of opinion will be cause for disallowance. The Regional Administrator will evaluate other qualifications on an individual basis. The owner or operator must provide alternate financial assurance as specified in this section within 30 days after notification of the disallowance.

(9) The owner or operator is no longer required to submit the items specified in paragraph (f)(3) of this section when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 264.143(i).

(10) An owner or operator may meet the requirements of this section by obtaining a written guarantee, hereafter referred to as "corporate guarantee." The guarantor must be the parent corporation of the owner or operator. The guarantor must meet the requirements for owners or operators in paragraphs (f)(1) through (8) of this section and must comply with the terms of the corporate guarantee. The wording of the corporate guarantee must be identical to the wording specified in § 264.151(h). The corporate guarantee must accompany the items sent to the Regional Administrator as specified in paragraph (f)(3) of this section. The terms of the corporate guarantee must provide that:

(i) If the owner or operator fails to perform final closure of a facility covered by the corporate guarantee in accordance with the closure plan and other permit requirements whenever required to do so, the guarantor will do so or establish a trust fund as specified in § 264.143(a) in the name of the owner or operator.

(ii) The corporate guarantee will remain in force unless the guarantor sends notice of cancellation by certified mail to the owner or operator and to the Regional Administrator. Cancellation may not occur, however, during the 120 days beginning on the date of receipt of the notice of cancellation by both the owner or operator and the Regional Administrator, as evidenced by the return receipts.

(iii) If the owner or operator fails to provide alternate financial assurance as specified in this section and obtain the written approval of such alternate assurance from the Regional Administrator within 90 days after receipt by both the owner or operator and the

Regional Administrator of a notice of cancellation of the corporate guarantee from the guarantor, the guarantor will provide such alternative financial assurance in the name of the owner or operator.

(g) *Use of multiple financial mechanisms.* An owner or operator may satisfy the requirements of this section by establishing more than one financial mechanism per facility. These mechanisms are limited to trust funds, surety bonds guaranteeing payment into a trust fund, letters of credit, and insurance. The mechanisms must be as specified in paragraphs (a), (b), (d), and (e), respectively, of this section, except that it is the combination of mechanisms, rather than the single mechanism, which must provide financial assurance for an amount at least equal to the current closure cost estimate. If an owner or operator uses a trust fund in combination with a surety bond or a letter of credit, he may use the trust fund as the standby trust fund for the other mechanisms. A single standby trust fund may be established for two or more mechanisms. The Regional Administrator may use any or all of the mechanisms to provide for closure of the facility.

(h) *Use of a financial mechanism for multiple facilities.* An owner or operator may use a financial assurance mechanism specified in this section to meet the requirements of this section for more than one facility. Evidence of financial assurance submitted to the Regional Administrator must include a list showing, for each facility, the EPA Identification Number, name, address, and the amount of funds for closure assured by the mechanism. If the facilities covered by the mechanism are in more than one Region, identical evidence of financial assurance must be submitted to and maintained with the Regional Administrators of all such Regions. The amount of funds available through the mechanism must be no less than the sum of funds that would be available if a separate mechanism had been established and maintained for each facility. In directing funds available through the mechanism for closure of any of the facilities covered by the mechanism, the Regional Administrator may direct only the amount of funds designated for that facility, unless the owner or operator agrees to the use of additional funds available under the mechanism.

(i) *Release of the owner or operator from the requirements of this section.* Within 60 days after receiving certifications from the owner or operator and an independent registered professional engineer that final closure has been completed in accordance with the approved closure plan, the Regional Administrator will notify the owner or operator in writing that he is no longer required by this section to maintain financial assurance for final closure of the facility, unless the Regional Administrator has reason to believe that final closure has not been in accordance with the approved closure plan. The Regional Administrator shall provide the owner or operator a detailed written statement of any such reason to believe that closure has not been in accordance with the approved closure plan.

[47 FR 15047, Apr. 7, 1982, as amended at 51 FR 16448, May 2, 1986]

§ 264.144 Cost estimate for post-closure care.

(a) The owner or operator of a disposal surface impoundment, disposal miscellaneous unit, land treatment unit, or landfill unit, or of a surface impoundment or waste pile required under §§ 264.228 and 264.258 to prepare a contingent closure and post-closure plan, must have a detailed written estimate, in current dollars, of the annual cost of post-closure monitoring and maintenance of the facility in accordance with the applicable post-closure regulations in §§ 264.117 through 264.120, 264.228, 264.258, 264.280, 264.310, and 264.603.

(1) The post-closure cost estimate must be based on the costs to the owner or operator of hiring a third party to conduct post-closure care activities. A third party is a party who is neither a parent nor a subsidiary of the owner or operator. (See definition of parent corporation in § 264.141(d).)

(2) The post-closure cost estimate is calculated by multiplying the annual post-closure cost estimate by the

number of years of post-closure care required under § 264.117.

(b) During the active life of the facility, the owner or operator must adjust the post-closure cost estimate for inflation within 60 days prior to the anniversary date of the establishment of the financial instrument(s) used to comply with § 264.145. For owners or operators using the financial test or corporate guarantee, the post-closure cost estimate must be updated for inflation within 30 days after the close of the firm's fiscal year and before the submission of updated information to the Regional Administrator as specified in § 264.145(f)(5). The adjustment may be made by recalculating the post-closure cost estimate in current dollars or by using an inflation factor derived from the most recent Implicit Price Deflator for Gross National Product published by the U.S. Department of Commerce in its *Survey of Current Business* as specified in § 264.145(b)(1) and (2). The inflation factor is the result of dividing the latest published annual Deflator by the Deflator for the previous year.

(1) The first adjustment is made by multiplying the post-closure cost estimate by the inflation factor. The result is the adjusted post-closure cost estimate.

(2) Subsequent adjustments are made by multiplying the latest adjusted post-closure cost estimate by the latest inflation factor.

(c) During the active life of the facility, the owner or operator must revise the post-closure cost estimate within 30 days after the Regional Administrator has approved the request to modify the post-closure plan, if the change in the post-closure plan increases the cost of post-closure care. The revised post-closure cost estimate must be adjusted for inflation as specified in § 264.144(b).

(d) The owner or operator must keep the following at the facility during the operating life of the facility: The latest post-closure cost estimate prepared in accordance with § 264.144 (a) and (c) and, when this estimate has been adjusted in accordance with § 264.144(b), the latest adjusted post-closure cost estimate.

(Approved by the Office of Management and Budget under control number 2050-0036)

[47 FR 15047, Apr. 7, 1982, as amended at 47 FR 32357, July 26, 1982; 50 FR 4514, Jan. 31, 1985; 51 FR 16449, May 2, 1986; 52 FR 46964, Dec. 10, 1987]

§ 264.145 Financial assurance for post-closure care.

The owner or operator of a hazardous waste management unit subject to the requirements of § 264.144 must establish financial assurance for post-closure care in accordance with the approved post-closure plan for the facility 60 days prior to the initial receipt of hazardous waste or the effective date of the regulation, whichever is later. He must choose from the following options:

(a) *Post-closure trust fund.* (1) An owner or operator may satisfy the requirements of this section by establishing a post-closure trust fund which conforms to the requirements of this paragraph and submitting an originally signed duplicate of the trust agreement to the Regional Administrator. An owner or operator of a new facility must submit the originally signed duplicate of the trust agreement to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for disposal. The trustee must be an entity which has the authority to act as a trustee and whose trust operations are regulated and examined by a Federal or State agency.

(2) The wording of the trust agreement must be identical to the wording specified in § 264.151(a)(1), and the trust agreement must be accompanied by a formal certification of acknowledgment (for example, see § 264.151(a)(2)). Schedule A of the trust agreement must be updated within 60 days after a change in the amount of the current post-closure cost estimate covered by the agreement.

(3) Payments into the trust fund must be made annually by the owner or operator over the term of the initial RCRA permit or over the remaining operating life of the facility as estimated in the closure plan, whichever period is shorter; this period is hereaf-

ter referred to as the "pay-in period." The payments into the post-closure trust fund must be made as follows:

(i) For a new facility, the first payment must be made before the initial receipt of hazardous waste for disposal. A receipt from the trustee for this payment must be submitted by the owner or operator to the Regional Administrator before this initial receipt of hazardous waste. The first payment must be at least equal to the current post-closure cost estimate, except as provided in § 264.145(g), divided by the number of years in the pay-in period. Subsequent payments must be made no later than 30 days after each anniversay date of the first payment. The amount of each subsequent payment must be determined by this formula:

$$\text{Next payment} = \frac{CE - CV}{Y}$$

where CE is the current post-closure cost estimate, CV is the current value of the trust fund, and Y is the number of years remaining in the pay-in period.

(ii) If an owner or operator establishes a trust fund as specified in § 265.145(a) of this chapter, and the value of that trust fund is less than the current post-closure cost estimate when a permit is awarded for the facility, the amount of the current post-closure cost estimate still to be paid into the fund must be paid in over the pay-in period as defined in paragraph (a)(3) of this section. Payments must continue to be made no later than 30 days after each anniversary date of the first payment made pursuant to Part 265 of this chapter. The amount of each payment must be determined by this formula:

$$\text{Next payment} = \frac{CE - CV}{Y}$$

where CE is the current post-closure cost estimate, CV is the current value of the trust fund, and Y is the number of years remaining in the pay-in period.

(4) The owner or operator may accelerate payments into the trust fund or he may deposit the full amount of the current post-closure cost estimate at the time the fund is established. However, he must maintain the value of the fund at no less than the value that the fund would have if annual payments were made as specified in paragraph (a)(3) of this section.

(5) If the owner or operator establishes a post-closure trust fund after having used one or more alternate mechanisms specified in this section or in § 265.145 of this chapter, his first payment must be in at least the amount that the fund would contain if the trust fund were established initially and annual payments made according to specifications of this paragraph and § 265.145(a) of this chapter, as applicable.

(6) After the pay-in period is completed, whenever the current post-closure cost estimate changes during the operating life of the facility, the owner or operator must compare the new estimate with the trustee's most recent annual valuation of the trust fund. If the value of the fund is less than the amount of the new estimate, the owner or operator, within 60 days after the change in the cost estimate, must either deposit an amount into the fund so that its value after this deposit at least equals the amount of the current post-closure cost estimate, or obtain other financial assurance as specified in this section to cover the difference.

(7) During the operating life of the facility, if the value of the trust fund is greater than the total amount of the current post-closure cost estimate, the owner or operator may submit a written request to the Regional Administrator for release of the amount in excess of the current post-closure cost estimate.

(8) If an owner or operator substitutes other financial assurance as specified in this section for all or part of the trust fund, he may submit a written request to the Regional Administrator for release of the amount in excess of the current post-closure cost estimate covered by the trust fund.

(9) Within 60 days after receiving a request from the owner or operator for release of funds as specified in

paragraph (a) (7) or (8) of this section, the Regional Administrator will instruct the trustee to release to the owner or operator such funds as the Regional Administrator specifies in writing.

(10) During the period of post-closure care, the Regional Administrator may approve a release of funds if the owner or operator demonstrates to the Regional Administrator that the value of the trust fund exceeds the remaining cost of post-closure care.

(11) An owner or operator or any other person authorized to conduct post-closure care may request reimbursements for post-closure care expenditures by submitting itemized bills to the Regional Administrator. Within 60 days after receiving bills for post-closure care activities, the Regional Administrator will instruct the trustee to make reimbursements in those amounts as the Regional Administrator specifies in writing, if the Regional Administrator determines that the post-closure care expenditures are in accordance with the approved post-closure plan or otherwise justified. If the Regional Administrator does not instruct the trustee to make such reimbursements, he will provide the owner or operator with a detailed written statement of reasons.

(12) The Regional Administrator will agree to termination of the trust when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 264.145(i).

(b) *Surety bond guaranteeing payment into a post-closure trust fund.* (1) An owner or operator may satisfy the requirements of this section by obtaining a surety bond which conforms to the requirements of this paragraph and submitting the bond to the Regional Administrator. An owner or operator of a new facility must submit the bond to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for disposal. The bond must be effective before this initial receipt of hazardous waste. The surety company issuing the bond must, at a minimum, be among those listed as acceptable sureties on Federal bonds in Circular 570 of the U.S. Department of the Treasury.

(2) The wording of the surety bond must be identical to the wording specified in § 264.151(b).

(3) The owner or operator who uses a surety bond to satisfy the requirements of this section must also establish a standby trust fund. Under the terms of the bond, all payments made thereunder will be deposited by the surety directly into the standby trust fund in accordance with instructions from the Regional Administrator. This standby trust fund must meet the requirements specified in § 264.145(a), except that:

(i) An originally signed duplicate of the trust agreement must be submitted to the Regional Administrator with the surety bond; and

(ii) Until the standby trust fund is funded pursuant to the requirements of this section, the following are not required by these regulations:

(A) Payments into the trust fund as specified in § 264.145(a);

(B) Updating of Schedule A of the trust agreement (see § 264.151(a)) to show current post-closure cost estimates;

(C) Annual valuations as required by the trust agreement; and

(D) Notices of nonpayment as required by the trust agreement.

(4) The bond must guarantee that the owner or operator will:

(i) Fund the standby trust fund in an amount equal to the penal sum of the bond before the beginning of final closure of the facility; or

(ii) Fund the standby trust fund in an amount equal to the penal sum within 15 days after an administrative order to begin final closure issued by the Regional Administrator becomes final, or within 15 days after an order to begin final closure is issued by a U.S. district court or other court of competent jurisdiction; or

(iii) Provide alternate financial assurance as specified in this section, and obtain the Regional Administrator's written approval of the assurance provided, within 90 days after receipt by both the owner or operator and the

Regional Administrator of a notice of cancellation of the bond from the surety.

(5) Under the terms of the bond, the surety will become liable on the bond obligation when the owner or operator fails to perform as guaranteed by the bond.

(6) The penal sum of the bond must be in an amount at least equal to the current post-closure cost estimate, except as provided in § 264.145(g).

(7) Whenever the current post-closure cost estimate increases to an amount greater than the penal sum, the owner or operator, within 60 days after the increase, must either cause the penal sum to be increased to an amount at least equal to the current post-closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. Whenever the current post-closure cost estimate decreases, the penal sum may be reduced to the amount of the current post-closure cost estimate following written approval by the Regional Administrator.

(8) Under the terms of the bond, the surety may cancel the bond by sending notice of cancellation by certified mail to the owner or operator and to the Regional Administrator. Cancellation may not occur, however, during the 120 days beginning on the date of receipt of the notice of cancellation by both the owner or operator and the Regional Administrator, as evidenced by the return receipts.

(9) The owner or operator may cancel the bond if the Regional Administrator has given prior written consent based on his receipt of evidence of alternate financial assurance as specified in this section.

(c) *Surety bond guaranteeing performance of post-closure care.* (1) An owner or operator may satisfy the requirements of this section by obtaining a surety bond which conforms to the requirements of this paragraph and submitting the bond to the Regional Administrator. An owner or operator of a new facility must submit the bond to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for disposal. The bond must be effective before this initial receipt of hazardous waste. The surety company issuing the bond must, at a minimum, be among those listed as acceptable sureties on Federal bonds in Circular 570 of the U.S. Department of the Treasury.

(2) The wording of the surety bond must be identical to the wording specified in § 264.151(c).

(3) The owner or operator who uses a surety bond to satisfy the requirements of this section must also establish a standby trust fund. Under the terms of the bond, all payments made thereunder will be deposited by the surety directly into the standby trust fund in accordance with instructions from the Regional Administrator. This standby trust fund must meet the requirements specified in § 264.145(a), except that:

(i) An originally signed duplicate of the trust agreement must be submitted to the Regional Administrator with the surety bond; and

(ii) Unless the standby trust fund is funded pursuant to the requirements of this section, the following are not required by these regulations:

(A) Payments into the trust fund as specified in § 264.145(a);

(B) Updating of Schedule A of the trust agreement (see § 264.151(a)) to show current post-closure cost estimates;

(C) Annual valuations as required by the trust agreement; and

(D) Notices of nonpayment as required by the trust agreement.

(4) The bond must guarantee that the owner or operator will:

(i) Perform post-closure care in accordance with the post-closure plan and other requirements of the permit for the facility; or

(ii) Provide alternate financial assurance as specified in this section, and obtain the Regional Administrator's written approval of the assurance provided, within 90 days of receipt by both the owner or operator and the Regional Administrator of a notice of cancellation of the bond from the surety.

(5) Under the terms of the bond, the surety will become liable on the bond obligation when the owner or operator

fails to perform as guaranteed by the bond. Following a final administrative determination pursuant to section 3008 of RCRA that the owner or operator has failed to perform post-closure care in accordance with the approved post-closure plan and other permit requirements, under the terms of the bond the surety will perform post-closure care in accordance with the post-closure plan and other permit requirements or will deposit the amount of the penal sum into the standby trust fund.

(6) The penal sum of the bond must be in an amount at least equal to the current post-closure cost estimate.

(7) Whenever the current post-closure cost estimate increases to an amount greater than the penal sum during the operating life of the facility, the owner or operator, within 60 days after the increase, must either cause the penal sum to be increased to an amount at least equal to the current post-closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section. Whenever the current post-closure cost estimate decreases during the operating life of the facility, the penal sum may be reduced to the amount of the current post-closure cost estimate following written approval by the Regional Administrator.

(8) During the period of post-closure care, the Regional Administrator may approve a decrease in the penal sum if the owner or operator demonstrates to the Regional Administrator that the amount exceeds the remaining cost of post-closure care.

(9) Under the terms of the bond, the surety may cancel the bond by sending notice of cancellation by certified mail to the owner or operator and to the Regional Administrator. Cancellation may not occur, however, during the 120 days beginning on the date of receipt of the notice of cancellation by both the owner or operator and the Regional Administrator, as evidenced by the return receipts.

(10) The owner or operator may cancel the bond if the Regional Administrator has given prior written consent. The Regional Administrator will provide such written consent when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 264.145(i).

(11) The surety will not be liable for deficiencies in the performance of post-closure care by the owner or operator after the Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 264.145(i).

(d) *Post-closure letter of credit.* (1) An owner or operator may satisfy the requirements of this section by obtaining an irrevocable standby letter of credit which conforms to the requirements of this paragraph and submitting the letter to the Regional Administrator. An owner or operator of a new facility must submit the letter of credit to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for disposal. The letter of credit must be effective before this initial receipt of hazardous waste. The issuing institution must be an entity which has the authority to issue letters of credit and whose letter-of-credit operations are regulated and examined by a Federal or State agency.

(2) The wording of the letter of credit must be identical to the wording specified in § 264.151(d).

(3) An owner or operator who uses a letter of credit to satisfy the requirements of this section must also establish a standby trust fund. Under the terms of the letter of credit, all amounts paid pursuant to a draft by the Regional Administrator will be deposited by the issuing institution directly into the standby trust fund in accordance with instructions from the Regional Administrator. This standby trust fund must meet the requirements of the trust fund specified in § 264.145(a), except that:

(i) An originally signed duplicate of the trust agreement must be submitted to the Regional Administrator with the letter of credit; and

(ii) Unless the standby trust fund is funded pursuant to the requirements

of this section, the following are not required by these regulations:

(A) Payments into the trust fund as specified in § 264.145(a);

(B) Updating of Schedule A of the trust agreement (see § 264.151(a)) to show current post-closure cost estimates;

(C) Annual valuations as required by the trust agreement; and

(D) Notices of nonpayment as required by the trust agreement.

(4) The letter of credit must be accompanied by a letter from the owner or operator referring to the letter of credit by number, issuing institution, and date, and providing the following information: the EPA Identification Number, name, and address of the facility, and the amount of funds assured for post-closure care of the facility by the letter of credit.

(5) The letter of credit must be irrevocable and issued for a period of at least 1 year. The letter of credit must provide that the expiration date will be automatically extended for a period of at least 1 year unless, at least 120 days before the current expiration date, the issuing institution notifies both the owner or operator and the Regional Administrator by certified mail of a decision not to extend the expiration date. Under the terms of the letter of credit, the 120 days will begin on the date when both the owner or operator and the Regional Administrator have received the notice, as evidenced by the return receipts.

(6) The letter of credit must be issued in a amount at least equal to the current post-closure cost estimate, except as provided in § 264.145(g).

(7) Whenever the current post-closure cost estimate increases to an amount greater than the amount of the credit during the operating life of the facility, the owner or operator, within 60 days after the increase, must either cause the amount of the credit to be increased so that it at least equals the current post-closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. Whenever the current post-closure cost estimate decreases during the operating life of the facility, the amount of the credit may be reduced to the amount of the current post-closure cost estimate following written approval by the Regional Administrator.

(8) During the period of post-closure care, the Regional Administrator may approve a decrease in the amount of the letter of credit if the owner or operator demonstrates to the Regional Administrator that the amount exceeds the remaining cost of post-closure care.

(9) Following a final administrative determination pursuant to section 3008 of RCRA that the owner or operator has failed to perform post-closure care in accordance with the approved post-closure plan and other permit requirements, the Regional Administrator may draw on the letter of credit.

(10) If the owner or operator does not establish alternate financial assurance as specified in this section and obtain written approval of such alternate assurance from the Regional Administrator within 90 days after receipt by both the owner or operator and the Regional Administrator of a notice from the issuing institution that it has decided not to extend the letter of credit beyond the current expiration date, the Regional Administrator will draw on the letter of credit. The Regional Administrator may delay the drawing if the issuing institution grants an extension of the term of the credit. During the last 30 days of any such extension the Regional Administrator will draw on the letter of credit if the owner or operator has failed to provide alternate financial assurance as specified in this section and obtain written approval of such assurance from the Regional Administrator.

(11) The Regional Administrator will return the letter of credit to the issuing institution for termination when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 264.145(i).

(e) *Post-closure insurance.* (1) An owner or operator may satisfy the requirements of this section by obtain-

ing post-closure insurance which conforms to the requirements of this paragraph and submitting a certificate of such insurance to the Regional Administrator. An owner or operator of a new facility must submit the certificate of insurance to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for disposal. The insurance must be effective before this initial receipt of hazardous waste. At a minimum, the insurer must be licensed to transact the business of insurance, or eligible to provide insurance as an excess or surplus lines insurer, in one or more States.

(2) The wording of the certificate of insurance must be identical to the wording specified in § 264.151(e).

(3) The post-closure insurance policy must be issued for a face amount at least equal to the current post-closure cost estimate, except as provided in § 264.145(g). The term "face amount" means the total amount the insurer is obligated to pay under the policy. Actual payments by the insurer will not change the face amount, although the insurer's future liability will be lowered by the amount of the payments.

(4) The post-closure insurance policy must guarantee that funds will be available to provide post-closure care of the facility whenever the post-closure period begins. The policy must also guarantee that once post-closure care begins, the insurer will be responsible for paying out funds, up to an amount equal to the face amount of the policy, upon the direction of the Regional Administrator, to such party or parties as the Regional Administrator specifies.

(5) An owner or operator or any other person authorized to conduct post-closure care may request reimbursements for post-closure care expenditures by submitting itemized bills to the Regional Administrator. Within 60 days after receiving bills for post-closure care activities, the Regional Administrator will instruct the insurer to make reimbursements in those amounts as the Regional Administrator specifies in writing, if the Regional Administrator determines that the post-closure care expenditures are in accordance with the approved post-closure plan or otherwise justified. If the Regional Administrator does not instruct the insurer to make such reimbursements, he will provide the owner or operator with a detailed written statement of reasons.

(6) The owner or operator must maintain the policy in full force and effect until the Regional Administrator consents to termination of the policy by the owner or operator as specified in paragraph (e)(11) of this section. Failure to pay the premium, without substitution of alternate financial assurance as specified in this section, will constitute a significant violation of these regulations, warranting such remedy as the Regional Administrator deems necessary. Such violation will be deemed to begin upon receipt by the Regional Administrator of a notice of future cancellation, termination, or failure to renew due to nonpayment of the premium, rather than upon the date of expiration.

(7) Each policy must contain a provision allowing assignment of the policy to a successor owner or operator. Such assignment may be conditional upon consent of the insurer, provided such consent is not unreasonably refused.

(8) The policy must provide that the insurer may not cancel, terminate, or fail to renew the policy except for failure to pay the premium. The automatic renewal of the policy must, at a minimum, provide the insured with the option of renewal at the face amount of the expiring policy. If there is a failure to pay the premium, the insurer may elect to cancel, terminate, or fail to renew the policy by sending notice by certified mail to the owner or operator and the Regional Administrator. Cancellation, termination, or failure to renew may not occur, however, during the 120 days beginning with the date of receipt of the notice by both the Regional Administrator and the owner or operator, as evidenced by the return receipts. Cancellation, termination, or failure to renew may not occur and the policy will remain in full force and effect in the event that on or before the date of expiration:

(i) The Regional Administrator deems the facility abandoned; or

(ii) The permit is terminated or revoked or a new permit is denied; or

(iii) Closure is ordered by the Regional Administrator or a U.S. district court or other court of competent jurisdiction; or

(iv) The owner or operator is named as debtor in a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code; or

(v) The premium due is paid.

(9) Whenever the current post-closure cost estimate increases to an amount greater than the face amount of the policy during the operating life of the facility, the owner or operator, within 60 days after the increase, must either cause the face amount to be increased to an amount at least equal to the current post-closure cost estimate and submit evidence of such increase to the Regional Administrator, or obtain other financial assurance as specified in this section to cover the increase. Whenever the current post-closure cost estimate decreases during the operating life of the facility, the face amount may be reduced to the amount of the current post-closure cost estimate following written approval by the Regional Administrator.

(10) Commencing on the date that liability to make payments pursuant to the policy accrues, the insurer will thereafter annually increase the face amount of the policy. Such increase must be equivalent to the face amount of the policy, less any payments made, multiplied by an amount equivalent to 85 percent of the most recent investment rate or of the equivalent coupon-issue yield announced by the U.S. Treasury for 26-week Treasury securities.

(11) The Regional Administrator will give written consent to the owner or operator that he may terminate the insurance policy when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the requirements of this section in accordance with § 264.145(i).

(f) *Financial test and corporate guarantee for post-closure care.* (1) An owner or operator may satisfy the requirements of this section by demonstrating that he passes a financial test as specified in this paragraph. To pass this test the owner or operator must meet the criteria of either paragraph (f)(1)(i) or (ii) of this section:

(i) The owner or operator must have:

(A) Two of the following three ratios: a ratio of total liabilities to net worth less than 2.0; a ratio of the sum of net income plus depreciation, depletion, and amortization to total liabilities greater than 0.1; and a ratio of current assets to current liabilities greater than 1.5; and

(B) Net working capital and tangible net worth each at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates; and

(C) Tangible net worth of at least $10 million; and

(D) Assets in the United States amounting to at least 90 percent of his total assets or at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates.

(ii) The owner or operator must have:

(A) A current rating for his most recent bond issuance of AAA, AA, A, or BBB as issued by Standard and Poor's or Aaa, Aa, A or Baa as issued by Moody's; and

(B) Tangible net worth at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates; and

(C) Tangible net worth of at least $10 million; and

(D) Assets located in the United States amounting to at least 90 percent of his total assets or at least six times the sum of the current closure and post-closure cost estimates and the current plugging and abandonment cost estimates.

(2) The phrase "current closure and post-closure cost estimates" as used in paragraph (f)(1) of this section refers to the cost estimates required to be shown in paragraphs 1-4 of the letter from the owner's or operator's chief financial officer (§ 264.151(f)). The phrase "current plugging and abandonment cost estimates" as used in

paragraph (f)(1) of this section refers to the cost estimates required to be shown in paragraphs 1–4 of the letter from the owner's or operator's chief financial officer (§ 144.70(f) of this title).

(3) To demonstrate that he meets this test, the owner or operator must submit the following items to the Regional Administrator:

(i) A letter signed by the owner's or operator's chief financial officer and worded as specified in § 264.151(f); and

(ii) A copy of the independent certified public accountant's report on examination of the owner's or operator's financial statements for the latest completed fiscal year; and

(iii) A special report from the owner's or operator's independent certified public accountant to the owner or operator stating that:

(A) He has compared the data which the letter from the chief financial officer specifies as having been derived from the independently audited, year-end financial statements for the latest fiscal year with the amounts in such financial statements; and

(B) In connection with that procedure, no matters came to his attention which caused him to believe that the specified data should be adjusted.

(4) An owner or operator of a new facility must submit the items specified in paragraph (f)(3) of this section to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for disposal.

(5) After the initial submission of items specified in paragraph (f)(3) of this section, the owner or operator must send updated information to the Regional Administrator within 90 days after the close of each succeeding fiscal year. This information must consist of all three items specified in paragraph (f)(3) of this section.

(6) If the owner or operator no longer meets the requirements of paragraph (f)(1) of this section, he must send notice to the Regional Administrator of intent to establish alternate financial assurance as specified in this section. The notice must be sent by certified mail within 90 days after the end of the fiscal year for which the year-end financial data show that the owner or operator no longer meets the requirements. The owner or operator must provide the alternate financial assurance within 120 days after the end of such fiscal year.

(7) The Regional Administrator may, based on a reasonable belief that the owner or operator may no longer meet the requirements of paragraph (f)(1) of this section, require reports of financial condition at any time from the owner or operator in addition to those specified in paragraph (f)(3) of this section. If the Regional Administrator finds, on the basis of such reports or other information, that the owner or operator no longer meets the requirements of paragraph (f)(1) of this section, the owner or operator must provide alternate financial assurance as specified in this section within 30 days after notification of such a finding.

(8) The Regional Administrator may disallow use of this test on the basis of qualifications in the opinion expressed by the independent certified public accountant in his report on examination of the owner's or operator's financial statements (see paragraph (f)(3)(ii) of this section). An adverse opinion or a disclaimer of opinion will be cause for disallowance. The Regional Administrator will evaluate other qualifications on an individual basis. The owner or operator must provide alternate financial assurance as specified in this section within 30 days after notification of the disallowance.

(9) During the period of post-closure care, the Regional Administrator may approve a decrease in the current post-closure cost estimate for which this test demonstrates financial assurance if the owner or operator demonstrates to the Regional Administrator that the amount of the cost estimate exceeds the remaining cost of post-closure care.

(10) The owner or operator is no longer required to submit the items specified in paragraph (f)(3) of this section when:

(i) An owner or operator substitutes alternate financial assurance as specified in this section; or

(ii) The Regional Administrator releases the owner or operator from the

requirements of this section in accordance with § 264.145(i).

(11) An owner or operator may meet the requirements of this section by obtaining a written guarantee, hereafter referred to as "corporate guarantee." The guarantor must be the parent corporation of the owner or operator. The guarantor must meet the requirements for owners or operators in paragraphs (f)(1) through (9) of this section and must comply with the terms of the corporate guarantee. The wording of the corporate guarantee must be identical to the wording specified in § 264.151(h). The corporate guarantee must accompany the items sent to the Regional Administrator as specified in paragraph (f)(3) of this section. The terms of the corporate guarantee must provide that:

(i) If the owner or operator fails to perform post-closure care of a facility covered by the corporate guarantee in accordance with the post-closure plan and other permit requirements whenever required to do so, the guarantor will do so or establish a trust fund as specified in § 264.145(a) in the name of the owner or operator.

(ii) The corporate guarantee will remain in force unless the guarantor sends notice of cancellation by certified mail to the owner or operator and to the Regional Administrator. Cancellation may not occur, however, during the 120 days beginning on the date of receipt of the notice of cancellation by both the owner or operator and the Regional Administrator, as evidenced by the return receipts.

(iii) If the owner or operator fails to provide alternate financial assurance as specified in this section and obtain the written approval of such alternate assurance from the Regional Administrator within 90 days after receipt by both the owner or operator and the Regional Administrator of a notice of cancellation of the corporate guarantee from the guarantor, the guarantor will provide such alternate financial assurance in the name of the owner or operator.

(g) *Use of multiple financial mechanisms.* An owner or operator may satisfy the requirements of this section by establishing more than one financial mechanism per facility. These mechanisms are limited to trust funds, surety bonds guaranteeing payment into a trust fund, letters of credit, and insurance. The mechanisms must be as specified in paragraphs (a), (b), (d), and (e), respectively, of this section, except that it is the combination of mechanisms, rather than the single mechanism, which must provide financial assurance for an amount at least equal to the current post-closure cost estimate. If an owner or operator uses a trust fund in combination with a surety bond or a letter of credit, he may use the trust fund as the standby trust fund for the other mechanisms. A single standby trust fund may be established for two or more mechanisms. The Regional Administrator may use any or all of the mechanisms to provide for post-closure care of the facility.

(h) *Use of a financial mechanism for multiple facilities.* An owner or operator may use a financial assurance mechanism specified in this section to meet the requirements of this section for more than one facility. Evidence of financial assurance submitted to the Regional Administrator must include a list showing, for each facility, the EPA Identification Number, name, address, and the amount of funds for post-closure care assured by the mechanism. If the facilities covered by the mechanism are in more than one Region, identical evidence of financial assurance must be submitted to and maintained with the Regional Administrators of all such Regions. The amount of funds available through the mechanism must be no less than the sum of funds that would be available if a separate mechanism had been established and maintained for each facility. In directing funds available through the mechanism for post-closure care of any of the facilities covered by the mechanism, the Regional Administrator may direct only the amount of funds designated for that facility, unless the owner or operator agrees to the use of additional funds available under the mechanism.

(i) *Release of the owner or operator from the requirements of this section.* Within 60 days after receiving certifications from the owner or operator and an independent registered profes-

sional engineer that the post-closure care period has been completed for a hazardous waste disposal unit in accordance with the approved plan, the Regional Administrator will notify the owner or operator that he is no longer required to maintain financial assurance for post-closure care of that unit, unless the Regional Administrator has reason to believe that post-closure care has not been in accordance with the approved post-closure plan. The Regional Administrator shall provide the owner or operator with a detailed written statement of any such reason to believe that post-closure care has not been in accordance with the approved post-closure plan.

[47 FR 15047, Apr. 7, 1982, as amended at 51 FR 16449, May 2, 1986]

§ 264.146 Use of a mechanism for financial assurance of both closure and post-closure care.

An owner or operator may satisfy the requirements for financial assurance for both closure and post-closure care for one or more facilities by using a trust fund, surety bond, letter of credit, insurance, financial test, or corporate guarantee that meets the specifications for the mechanism in both §§ 264.143 and 264.145. The amount of funds available through the mechanism must be no less than the sum of funds that would be available if a separate mechanism had been established and maintained for financial assurance of closure and of post-closure care.

§ 264.147 Liability requirements.

(a) *Coverage for sudden accidental occurrences.* An owner or operator of a hazardous waste treatment, storage, or disposal facility, or a group of such facilities, must demonstrate financial responsibility for bodily injury and property damage to third parties caused by sudden accidental occurrences arising from operations of the facility or group of facilities. The owner or operator must have and maintain liability coverage for sudden accidental occurrences in the amount of at least $1 million per occurrence with an annual aggregate of at least $2 million, exclusive of legal defense costs. This liability coverage may be demonstrated as specified in paragraphs (a) (1), (2), (3), (4), (5), or (6) of this section:

(1) An owner or operator may demonstrate the required liability coverage by having liability insurance as specified in this paragraph.

(i) Each insurance policy must be amended by attachment of the Hazardous Waste Facility Liability Endorsement or evidenced by a Certificate of Liability Insurance. The wording of the endorsement must be identical to the wording specified in § 264.151(i). The wording of the certificate of insurance must be identical to the wording specified in § 264.151(j). The owner or operator must submit a signed duplicate original of the endorsement or the certificate of insurance to the Regional Administrator, or Regional Administrators if the facilities are located in more than one Region. If requested by a Regional Administrator, the owner or operator must provide a signed duplicate original of the insurance policy. An owner or operator of a new facility must submit the signed duplicate original of the Hazardous Waste Facility Liability Endorsement or the Certificate of Liability Insurance to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for treatment, storage, or disposal. The insurance must be effective before this initial receipt of hazardous waste.

(ii) Each insurance policy must be issued by an insurer which, at a minimum, is licensed to transact the business of insurance, or eligible to provide insurance as an excess or surplus lines insurer, in one or more States.

(2) An owner or operator may meet the requirements of this section by passing a financial test or using the guarantee for liability coverage as specified in paragraph (g) of this section.

(3) An owner or operator may meet the requirements of this section by obtaining a letter of credit for liability coverage as specified in paragraph (h) of this section.

(4) An owner or operator may meet the requirements of this section by obtaining a surety bond for liability cov-

erage as specified in paragraph (i) of this section.

(5) An owner or operator may meet the requirements of this section by obtaining a trust fund for liability coverage as specified in paragraph (j) of this section.

(6) An owner or operator may demonstrate the required liability coverage through the use of combinations of insurance, financial test, guarantee, letter of credit, surety bond, and trust fund, except that the owner or operator may not combine a financial test covering part of the liability coverage requirement with a guarantee unless the financial statement of the owner or operator is not consolidated with the financial statement of the guarantor. The amounts of coverage demonstrated must total at least the minimum amounts required by this section. If the owner or operator demonstrates the required coverage through the use of a combination of financial assurances under this paragraph, the owner or operator shall specify at least one such assurance as "primary" coverage and shall specify other assurance as "excess" coverage.

(7) An owner or operator shall notify the Regional Administrator in writing within 30 days (i) whenever a claim for bodily injury or property damages caused by the operation of a hazardous waste treatment, storage, or disposal facility is made against the owner or operator or an instrument providing financial assurance for liability coverage under this section and (ii) whenever the amount of financial assurance for liability coverage under this section provided by a financial instrument authorized by paragraphs (a)(1) through (a)(6) of this section is reduced.

(b) *Coverage for nonsudden accidental occurrences.* An owner or operator of a surface impoundment, landfill, or land treatment facility which is used to manage hazardous waste, or a group of such facilities, must demonstrate financial responsibility for bodily injury and property damage to third parties caused by nonsudden accidental occurrences arising from operations of the facility or group of facilities. The owner or operator must have and maintain liability coverage for nonsudden accidental occurrences in the amount of at least $3 million per occurrence with an annual aggregate of at least $6 million, exclusive of legal defense costs. An owner or operator who must meet the requirements of this section may combine the required per-occurrence coverage levels for sudden and nonsudden accidental occurrences into a single per-occurrence level, and combine the required annual aggregate coverage levels for sudden and nonsudden accidental occurrences into a single annual aggregate level. Owners or operators who combine coverage levels for sudden and nonsudden accidental occurrences must maintain liability coverage in the amount of at least $4 million per occurrence and $8 million annual aggregate. This liability coverage may be demonstrated as specified in paragraphs (b) (1), (2), (3), (4), (5), or (6), of this section:

(1) An owner or operator may demonstrate the required liability coverage by having liability insurance as specified in this paragraph.

(i) Each insurance policy must be amended by attachment of the Hazardous Waste Facility Liability Endorsement or evidenced by a Certificate of Liability Insurance. The wording of the endorsement must be identical to the wording specified in § 264.151(i). The wording of the certificate of insurance must be identical to the wording specified in § 264.151(j). The owner or operator must submit a signed duplicate original of the endorsement or the certificate of insurance to the Regional Administrator, or Regional Administrators if the facilities are located in more than one Region. If requested by a Regional Administrator, the owner or operator must provide a signed duplicate original of the insurance policy. An owner or operator of a new facility must submit the signed duplicate original of the Hazardous Waste Facility Liability Endorsement or the Certificate of Liability Insurance to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for treatment, storage, or disposal. The insurance must be effective before this initial receipt of hazardous waste.

(ii) Each insurance policy must be issued by an insurer which, at a minimum, is licensed to transact the business of insurance, or eligible to provide insurance as an excess or surplus lines insurer, in one or more States.

(2) An owner or operator may meet the requirements of this section by passing a financial test or using the guarantee for liability coverage as specified in paragraphs (f) and (g) of this section.

(3) An owner or operator may meet the requirements of this section by obtaining a letter of credit for liability coverage as specified in paragraph (h) of this section.

(4) An owner or operator may meet the requirements of this section by obtaining a surety bond for liability coverage as specified in paragraph (i) of this section.

(5) An owner or operator may meet the requirements of this section by obtaining a trust fund for liability coverage as specified in paragraph (j) of this section.

(6) An owner or operator may demonstrate the required liability coverage through the use of combinations of insurance, financial test, guarantee, letter of credit, surety bond, and trust fund, except that the owner or operator may not combine a financial test covering part of the liability coverage requirement with a guarantee unless the financial statement of the owner or operator is not consolidated with the financial statement of the guarantor. The amounts of coverage demonstrated must total at least the minimum amount required by this section. If the owner or operator demonstrates the required coverage through the use of a combination of financial assurances under this paragraph, the owner or operator shall specify at least one such assurance as "primary" coverage and shall specify other assurance as "excess" coverage.

(7) An owner or operator shall notify the Regional Administrator in writing within 30 days (i) whenever a claim for bodily injury or property damages caused by the operation of a hazardous waste treatment, storage, or disposal facility is made against the owner or operator or an instrument providing financial assurance for liability coverage under this section and (ii) whenever the amount of financial assurance for liability coverage under this section provided by a financial instrument authorized by paragraphs (a)(1) through (a)(6) of this section is reduced.

(c) *Request for variance.* If an owner or operator can demonstrate to the satisfaction of the Regional Administrator that the levels of financial responsibility required by paragraph (a) or (b) of this section are not consistent with the degree and duration of risk associated with treatment, storage, or disposal at the facility or group of facilities, the owner or operator may obtain a variance from the Regional Administrator. The request for a variance must be submitted to the Regional Administrator as part of the application under § 270.14 of this chapter for a facility that does not have a permit, or pursuant to the procedures for permit modification under § 124.5 of this chapter for a facility that has a permit. If granted, the variance will take the form of an adjusted level of required liability coverage, such level to be based on the Regional Administrator's assessment of the degree and duration of risk associated with the ownership or operation of the facility or group of facilities. The Regional Administrator may require an owner or operator who requests a variance to provide such technical and engineering information as is deemed necessary by the Regional Administrator to determine a level of financial responsibility other than that required by paragraph (a) or (b) of this section. Any request for a variance for a permitted facility will be treated as a request for a permit modification under §§ 270.41(a)(5) and 124.5 of this chapter.

(d) *Adjustments by the Regional Administrator.* If the Regional Administrator determines that the levels of financial responsibility required by paragraph (a) or (b) of this section are not consistent with the degree and duration of risk associated with treatment, storage, or disposal at the facility or group of facilities, the Regional Administrator may adjust the level of financial responsibility required under paragraph (a) or (b) of this section as

may be necessary to protect human health and the environment. This adjusted level will be based on the Regional Administrator's assessment of the degree and duration of risk associated with the ownership or operation of the facility or group of facilities. In addition, if the Regional Administrator determines that there is a significant risk to human health and the environment from nonsudden accidental occurrences resulting from the operations of a facility that is not a surface impoundment, landfill, or land treatment facility, he may require that an owner or operator of the facility comply with paragraph (b) of this section. An owner or operator must furnish to the Regional Administrator, within a reasonable time, any information which the Regional Administrator requests to determine whether cause exists for such adjustments of level or type of coverage. Any adjustment of the level or type of coverage for a facility that has a permit will be treated as a permit modification under §§ 270.41(a)(5) and 124.5 of this chapter.

(e) *Period of coverage.* Within 60 days after receiving certifications from the owner or operator and an independent registered professional engineer that final closure has been completed in accordance with the approved closure plan, the Regional Administrator will notify the owner or operator in writing that he is no longer required by this section to maintain liability coverage for that facility, unless the Regional Administrator has reason to believe that closure has not been in accordance with the approved closure plan.

(f) *Financial test for liability coverage.* (1) An owner or operator may satisfy the requirements of this section by demonstrating that he passes a financial test as specified in this paragraph. To pass this test the owner or operator must meet the criteria of paragraph (f)(1)(i) or (ii):

(i) The owner or operator must have:

(A) Net working capital and tangible net worth each at least six times the amount of liability coverage to be demonstrated by this test; and

(B) Tangible net worth of at least $10 million; and

(C) Assets in the United States amounting to either: (*1*) At least 90 percent of his total assets; or (*2*) at least six times the amount of liability coverage to be demonstrated by this test.

(ii) The owner or operator must have:

(A) A current rating for his most recent bond issuance of AAA, AA, A, or BBB as issued by Standard and Poor's, or Aaa, Aa, A, or Baa as issued by Moody's; and

(B) Tangible net worth of at least $10 million; and

(C) Tangible net worth at least six times the amount of liability coverage to be demonstrated by this test; and

(D) Assets in the United States amounting to either: (*1*) At least 90 percent of his total assets; or (*2*) at least six times the amount of liability coverage to be demonstrated by this test.

(2) The phrase "amount of liability coverage" as used in paragraph (f)(1) of this section refers to the annual aggregate amounts for which coverage is required under paragraphs (a) and (b) of this section.

(3) To demonstrate that he meets this test, the owner or operator must submit the following three items to the Regional Administrator:

(i) A letter signed by the owner's or operator's chief financial officer and worded as specified in § 264.151(g). If an owner or operator is using the financial test to demonstrate both assurance for closure or post-closure care, as specified by §§ 264.143(f), 264.145(f), 265.143(e), and 265.145(e), and liability coverage, he must submit the letter specified in § 264.151(g) to cover both forms of financial responsibility; a separate letter as specified in § 264.151(f) is not required.

(ii) A copy of the independent certified public accountant's report on examination of the owner's or operator's financial statements for the latest completed fiscal year.

(iii) A special report from the owner's or operator's independent certified public accountant to the owner or operator stating that:

(A) He has compared the data which the letter from the chief financial officer specifies as having been derived

from the independently audited, year-end financial statements for the latest fiscal year with the amounts in such financial statements; and

(B) In connection with that procedure, no matters came to his attention which caused him to believe that the specified data should be adjusted.

(4) An owner or operator of a new facility must submit the items specified in paragraph (f)(3) of this section to the Regional Administrator at least 60 days before the date on which hazardous waste is first received for treatment, storage, or disposal.

(5) After the initial submission of items specified in paragraph (f)(3) of this section, the owner or operator must send updated information to the Regional Administrator within 90 days after the close of each succeeding fiscal year. This information must consist of all three items specified in paragraph (f)(3) of this section.

(6) If the owner or operator no longer meets the requirements of paragraph (f)(1) of this section, he must obtain insurance for the entire amount of required liability coverage as specified in this section. Evidence of insurance must be submitted to the Regional Administrator within 90 days after the end of the fiscal year for which the year-end financial data show that the owner or operator no longer meets the test requirements.

(7) The Regional Administrator may disallow use of this test on the basis of qualifications in the opinion expressed by the independent certified public accountant in his report on examination of the owner's or operator's financial statements (see paragraph (f)(3)(ii) of this section). An adverse opinion or a disclaimer of opinion will be cause for disallowance. The Regional Administrator will evaluate other qualifications on an individual basis. The owner or operator must provide evidence of insurance for the entire amount of required liability coverage as specified in this section within 30 days after notification of disallowance.

(g) *Guarantee for liability coverage.* (1) Subject to paragraph (g)(2) of this section, an owner or operator may meet the requirements of this section by obtaining a written guarantee, hereinafter referred to as "guarantee." The guarantor must be the direct or higher-tier parent corporation of the owner or operator, a firm whose parent corporation is also the parent corporation of the owner or operator, or a firm with a "substantial business relationship" with the owner or operator. The guarantor must meet the requirements for owners or operators in paragraphs (f)(1) through (f)(6) of this section. The wording of the guarantee must be identical to the wording specified in § 264.151(h)(2) of this part. A certified copy of the guarantee must accompany the items sent to the Regional Administrator as specified in paragraph (f)(3) of this section. One of these items must be the letter from the guarantor's chief financial officer. If the guarantor's parent corporation is also the parent corporation of the owner or operator, this letter must describe the value received in consideration of the guarantee. If the guarantor is a firm with a "substantial business relationship" with the owner or operator, this letter must describe this "substantial business relationship" and the value received in consideration of the guarantee.

(i) If the owner or operator fails to satisfy a judgment based on a determination of liability for bodily injury or property damage to third parties caused by sudden or nonsudden accidental occurrences (or both as the case may be), arising from the operation of facilities covered by this corporate guarantee, or fails to pay an amount agreed to in settlement of claims arising from or alleged to arise from such injury or damage, the guarantor will do so up to the limits of coverage.

(ii) [Reserved]

(2)(i) In the case of corporations incorporated in the United States, a guarantee may be used to satisfy the requirements of this section only if the Attorneys General or Insurance Commissioners of (A) the State in which the guarantor is incorporated, and (B) each State in which a facility covered by the guarantee is located have submitted a written statement to EPA that a guarantee executed as described in this section and § 264.151(h)(2) is a legally valid and enforceable obligation in that State.

(ii) In the case of corporations incorporated outside the United States, a guarantee may be used to satisfy the requirements of this section only if (A) the non-U.S. corporation has identified a registered agent for service of process in each State in which a facility covered by the guarantee is located and in the State in which it has its principal place of business, and (B) the Attorney General or Insurance Commissioner of each State in which a facility covered by the guarantee is located and the State in which the guarantor corporation has its principal place of business, has submitted a written statement to EPA that a guarantee executed as described in this section and § 264.151(h)(2) is a legally valid and enforceable obligation in that State.

(h) *Letter of credit for liability coverage.* (1) An owner or operator may satisfy the requirements of this section by obtaining an irrevocable standby letter or credit that conforms to the requirements of this paragraph and submitting a copy of the letter of credit to the Regional Administrator.

(2) The financial institution issuing the letter of credit must be an entity that has the authority to issue letters of credit and whose letter of credit operations are regulated and examined by a Federal or State agency.

(3) The wording of the letter of credit must be identical to the wording specified in § 264.151(k) of this part.

(i) *Surety bond for liability coverage.* (1) An owner or operator may satisfy the requirements of this section by obtaining a surety bond that conforms to the requirements of this paragraph and submitting a copy of the bond to the Regional Administrator.

(2) The surety company issuing the bond must be among those listed as acceptable sureties on Federal bonds in the most recent Circular 570 of the U.S. Department of the Treasury.

(3) The wording of the surety bond must be identical to the wording specified in § 264.151(l) of this part.

(4) A surety bond may be used to satisfy the requirements of this section only if the Attorneys General or Insurance Commissioners of (i) the State in which the surety is incorporated, and (ii) each State in which a facility covered by the surety bond is located have submitted a written statement to EPA that a surety bond executed as described in this section and § 264.151(l) of this part is a legally valid and enforceable obligation in that State.

(j) *Trust fund for liability coverage.* (1) An owner or operator may satisfy the requirements of this section by establishing a trust fund that conforms to the requirements of this paragraph and submitting an originally signed duplicate of the trust agreement to the Regional Administrator.

(2) The trustee must be an entity which has the authority to act as a trustee and whose trust operations are regulated and examined by a Federal or State agency.

(3) The trust fund for liability coverage must be funded for the full amount of the liability coverage to be provided by the trust fund before it may be relied upon to satisfy the requirements of this section. If at any time after the trust fund is created the amount of funds in the trust fund is reduced below the full amount of the liability coverage to be provided, the owner or operator, by the anniversary date of the establishment of the fund, must either add sufficient funds to the trust fund to cause its value to equal the full amount of liability coverage to be provided, or obtain other financial assurance as specified in this section to cover the difference. For purposes of this paragraph, "the full amount of the liability coverage to be provided" means the amount of coverage for sudden and/or nonsudden occurrences required to be provided by the owner or operator by this section, less the amount of financial assurance for liability coverage that is being provided by other financial assurance mechanisms being used to demonstrate financial assurance by the owner or operator.

(4) The wording of the trust fund must be identical to the wording specified in § 264.151(m) of this part.

(k) Notwithstanding any other provision of this part, an owner or operator using liability insurance to satisfy the requirements of this section may use, until October 16, 1982, a Hazardous Waste Facility Liability Endorsement

or Certificate of Liability Insurance that does not certify that the insurer is licensed to transact the business of insurance, or eligible as an excess or surplus lines insurer, in one or more States.

(Approved by the Office of Management and Budget under control number 2000-0445, for paragraphs (a)(1)(i), (b)(1)(i), (c), (d), and (f)(3) through (6))

[47 FR 16554, Apr. 16, 1982, as amended at 47 FR 28627, July 1, 1982; 47 FR 30447, July 13, 1982; 48 FR 30115, June 30, 1983; 51 FR 16450, May 2, 1986; 51 FR 25354, July 11, 1986; 52 FR 44320, Nov. 18, 1987; 52 FR 46964, Dec. 10, 1987; 53 FR 33950, Sept. 1, 1988]

§ 264.148 Incapacity of owners or operators, guarantors, or financial institutions.

(a) An owner or operator must notify the Regional Administrator by certified mail of the commencement of a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code, naming the owner or operator as debtor, within 10 days after commencement of the proceeding. A guarantor of a corporate guarantee as specified in §§ 264.143(f) and 264.145(f) must make such a notification if he is named as debtor, as required under the terms of the corporate guarantee (§ 264.151(h)).

(b) An owner or operator who fulfills the requirements of § 264.143, § 264.145, or § 264.147 by obtaining a trust fund, surety bond, letter of credit, or insurance policy will be deemed to be without the required financial assurance or liability coverage in the event of bankruptcy of the trustee or issuing institution, or a suspension or revocation of the authority of the trustee institution to act as trustee or of the institution issuing the surety bond, letter of credit, or insurance policy to issue such instruments. The owner or operator must establish other financial assurance or liability coverage within 60 days after such an event.

§ 264.149 Use of State-required mechanisms.

(a) For a facility located in a State where EPA is administering the requirements of this subpart but where the State has hazardous waste regulations that include requirements for financial assurance of closure or post-closure care or liability coverage, an owner or operator may use State-required financial mechanisms to meet the requirements of § 264.143, § 264.145, or § 264.147, if the Regional Administrator determines that the State mechanisms are at least equivalent to the financial mechanism specified in this subpart. The Regional Administrator will evaluate the equivalency of the mechanisms principally in terms of (1) certainty of the availability of funds for the required closure or post-closure care activities or liability coverage and (2) the amount of funds that will be made available. The Regional Administrator may also consider other factors as he deems appropriate. The owner or operator must submit to the Regional Administrator evidence of the establishment of the mechanism together with a letter requesting that the State-required mechanism be considered acceptable for meeting the requirements of this subpart. The submission must include the following information: The facility's EPA Identification Number, name, and address, and the amount of funds for closure or post-closure care or liability coverage assured by the mechanism. The Regional Administrator will notify the owner or operator of his determination regarding the mechanism's acceptability in lieu of financial mechanisms specified in this subpart. The Regional Administrator may require the owner or operator to submit additional information as is deemed necessary to make this determination. Pending this determination, the owner or operator will be deemed to be in compliance with the requirements of § 264.143, § 264.145, or § 264.147, as applicable.

(b) If a State-required mechanism is found acceptable as specified in paragraph (a) of this section except for the amount of funds available, the owner or operator may satisfy the requirements of this subpart by increasing the funds available through the State-required mechanism or using additional financial mechanisms as specified in this subpart. The amount of funds available through the State and Fed-

eral mechanisms must at least equal the amount required by this subpart.

§ 264.150 State assumption of responsibility.

(a) If a State either assumes legal responsibility for an owner's or operator's compliance with the closure, post-closure care, or liability requirements of this part or assures that funds will be available from State sources to cover those requirements, the owner or operator will be in compliance with the requirements of § 264.143, § 264.145, or § 264.147 if the Regional Administrator determines that the State's assumption of responsibility is at least equivalent to the financial mechanisms specified in this subpart. The Regional Administrator will evaluate the equivalency of State guarantees principally in terms of (1) certainty of the availability of funds for the required closure or post-closure care activities or liability coverage and (2) the amount of funds that will be made available. The Regional Administrator may also consider other factors as he deems appropriate. The owner or operator must submit to the Regional Administrator a letter from the State describing the nature of the State's assumption of responsibility together with a letter from the owner or operator requesting that the State's assumption of responsibility be considered acceptable for meeting the requirements of this subpart. The letter from the State must include, or have attached to it, the following information: the facility's EPA Identification Number, name, and address, and the amount of funds for closure or post-closure care or liability coverage that are guaranteed by the State. The Regional Administrator will notify the owner or operator of his determination regarding the acceptability of the State's guarantee in lieu of financial mechanisms specified in this subpart. The Regional Administrator may require the owner or operator to submit additional information as is deemed necessary to make this determination. Pending this determination, the owner or operator will be deemed to be in compliance with the requirements of § 264.143, § 264.145, or § 264.147, as applicable.

(b) If a State's assumption of responsibility is found acceptable as specified in paragraph (a) of this section except for the amount of funds available, the owner or operator may satisfy the requirements of this subpart by use of both the State's assurance *and* additional financial mechanisms as specified in this subpart. The amount of funds available through the State and Federal mechanisms must at least equal the amount required by this subpart.

§ 264.151 Wording of the instruments.

(a)(1) A trust agreement for a trust fund, as specified in § 264.143(a) or § 264.145(a) or § 265.143(a) or § 265.145(a) of this chapter, must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

TRUST AGREEMENT

Trust Agreement, the "Agreement," entered into as of [date] by and between [name of the owner or operator], a [name of State] [insert "corporation," "partnership," "association," or "proprietorship"], the "Grantor," and [name of corporate trustee], [insert "incorporated in the State of ——" or "a national bank"], the "Trustee."

Whereas, the United States Environmental Protection Agency, "EPA," an agency of the United States Government, has established certain regulations applicable to the Grantor, requiring that an owner or operator of a hazardous waste management facility shall provide assurance that funds will be available when needed for closure and/or post-closure care of the facility,

Whereas, the Grantor has elected to establish a trust to provide all or part of such financial assurance for the facilities identified herein,

Whereas, the Grantor, acting through its duly authorized officers, has selected the Trustee to be the trustee under this agreement, and the Trustee is willing to act as trustee,

Now, Therefore, the Grantor and the Trustee agree as follows:

Section 1. Definitions. As used in this Agreement:

(a) The term "Grantor" means the owner or operator who enters into this Agreement and any successors or assigns of the Grantor.

(b) The term "Trustee" means the Trustee who enters into this Agreement and any successor Trustee.

Section 2. Identification of Facilities and Cost Estimates. This Agreement pertains to the facilities and cost estimates identified on attached Schedule A [on Schedule A, for each facility list the EPA Identification Number, name, address, and the current closure and/or post-closure cost estimates, or portions thereof, for which financial assurance is demonstrated by this Agreement].

Section 3. Establishment of Fund. The Grantor and the Trustee hereby establish a trust fund, the "Fund," for the benefit of EPA. The Grantor and the Trustee intend that no third party have access to the Fund except as herein provided. The Fund is established initially as consisting of the property, which is acceptable to the Trustee, described in Schedule B attached hereto. Such property and any other property subsequently transferred to the Trustee is referred to as the Fund, together with all earnings and profits thereon, less any payments or distributions made by the Trustee pursuant to this Agreement. The Fund shall be held by the Trustee, IN TRUST, as hereinafter provided. The Trustee shall not be responsible nor shall it undertake any responsibility for the amount or adequacy of, nor any duty to collect from the Grantor, any payments necessary to discharge any liabilities of the Grantor established by EPA.

Section 4. Payment for Closure and Post-Closure Care. The Trustee shall make payments from the Fund as the EPA Regional Administrator shall direct, in writing, to provide for the payment of the costs of closure and/or post-closure care of the facilities covered by this Agreement. The Trustee shall reimburse the Grantor or other persons as specified by the EPA Regional Administrator from the Fund for closure and post-closure expenditures in such amounts as the EPA Regional Administrator shall direct in writing. In addition, the Trustee shall refund to the Grantor such amounts as the EPA Regional Administrator specifies in writing. Upon refund, such funds shall no longer constitute part of the Fund as defined herein.

Section 5. Payments Comprising the Fund. Payments made to the Trustee for the Fund shall consist of cash or securities acceptable to the Trustee.

Section 6. Trustee Management. The Trustee shall invest and reinvest the principal and income of the Fund and keep the Fund invested as a single fund, without distinction between principal and income, in accordance with general investment policies and guidelines which the Grantor may communicate in writing to the Trustee from time to time, subject, however, to the provisions of this section. In investing, reinvesting, exchanging, selling, and managing the Fund, the Trustee shall discharge his duties with respect to the trust fund solely in the interest of the beneficiary and with the care, skill, prudence, and diligence under the circumstances then prevailing which persons of prudence, acting in a like capacity and familiar with such matters, would use in the conduct of an enterprise of a like character and with like aims; *except that:*

(i) Securities or other obligations of the Grantor, or any other owner or operator of the facilities, or any of their affiliates as defined in the Investment Company Act of 1940, as amended, 15 U.S.C. 80a-2.(a), shall not be acquired or held, unless they are securities or other obligations of the Federal or a State government;

(ii) The Trustee is authorized to invest the Fund in time or demand deposits of the Trustee, to the extent insured by an agency of the Federal or State government; and

(iii) The Trustee is authorized to hold cash awaiting investment or distribution uninvested for a reasonable time and without liability for the payment of interest thereon.

Section 7. Commingling and Investment. The Trustee is expressly authorized in its discretion:

(a) To tranfer from time to time any or all of the assets of the Fund to any common, commingled, or collective trust fund created by the Trustee in which the Fund is eligible to participate, subject to all of the provisions thereof, to be commingled with the assets of other trusts participating therein; and

(b) To purchase shares in any investment company registered under the Investment Company Act of 1940, 15 U.S.C. 80a-1 et seq., including one which may be created, managed, underwritten, or to which investment advice is rendered or the shares of which are sold by the Trustee. The Trustee may vote such shares in its discretion.

Section 8. Express Powers of Trustee. Without in any way limiting the powers and discretions conferred upon the Trustee by the other provisions of this Agreement or by law, the Trustee is expressly authorized and empowered:

(a) To sell, exchange, convey, transfer, or otherwise dispose of any property held by it, by public or private sale. No person dealing with the Trustee shall be bound to see to the application of the purchase money or to inquire into the validity or expediency of any such sale or other disposition;

(b) To make, execute, acknowledge, and deliver any and all documents of transfer and conveyance and any and all other instruments that may be necessary or appropriate to carry out the powers herein granted;

(c) To register any securities held in the Fund in its own name or in the name of a nominee and to hold any security in bearer form or in book entry, or to combine certificates representing such securities with cer-

40-147 O—90——8

tificates of the same issue held by the Trustee in other fiduciary capacities, or to deposit or arrange for the deposit of such securities in a qualified central depositary even though, when so deposited, such securities may be merged and held in bulk in the name of the nominee of such depositary with other securities deposited therein by another person, or to deposit or arrange for the deposit of any securities issued by the United States Government, or any agency or instrumentality thereof, with a Federal Reserve bank, but the books and records of the Trustee shall at all times show that all such securities are part of the Fund;

(d) To deposit any cash in the Fund in interest-bearing accounts maintained or savings certificates issued by the Trustee, in its separate corporate capacity, or in any other banking institution affiliated with the Trustee, to the extent insured by an agency of the Federal or State government; and

(e) To compromise or otherwise adjust all claims in favor of or against the Fund.

Section 9. Taxes and Expenses. All taxes of any kind that may be assessed or levied against or in respect of the Fund and all brokerage commissions incurred by the Fund shall be paid from the Fund. All other expenses incurred by the Trustee in connection with the administration of this Trust, including fees for legal services rendered to the Trustee, the compensation of the Trustee to the extent not paid directly by the Grantor, and all other proper charges and disbursements of the Trustee shall be paid from the Fund.

Section 10. Annual Valuation. The Trustee shall annually, at least 30 days prior to the anniversary date of establishment of the Fund, furnish to the Grantor and to the appropriate EPA Regional Administrator a statement confirming the value of the Trust. Any securities in the Fund shall be valued at market value as of no more than 60 days prior to the anniversary date of establishment of the Fund. The failure of the Grantor to object in writing to the Trustee within 90 days after the statement has been furnished to the Grantor and the EPA Regional Administrator shall constitute a conclusively binding assent by the Grantor, barring the Grantor from asserting any claim or liability against the Trustee with respect to matters disclosed in the statement.

Section 11. Advice of Counsel. The Trustee may from time to time consult with counsel, who may be counsel to the Grantor, with respect to any question arising as to the construction of this Agreement or any action to be taken hereunder. The Trustee shall be fully protected, to the extent permitted by law, in acting upon the advice of counsel.

Section 12. Trustee Compensation. The Trustee shall be entitled to reasonable compensation for its services as agreed upon in writing from time to time with the Grantor.

Section 13. Successor Trustee. The Trustee may resign or the Grantor may replace the Trustee, but such resignation or replacement shall not be effective until the Grantor has appointed a successor trustee and this successor accepts the appointment. The successor trustee shall have the same powers and duties as those conferred upon the Trustee hereunder. Upon the successor trustee's acceptance of the appointment, the Trustee shall assign, transfer, and pay over to the successor trustee the funds and properties then constituting the Fund. If for any reason the Grantor cannot or does not act in the event of the resignation of the Trustee, the Trustee may apply to a court of competent jurisdiction for the appointment of a successor trustee or for instructions. The successor trustee shall specify the date on which it assumes administration of the trust in a writing sent to the Grantor, the EPA Regional Administrator, and the present Trustee by certified mail 10 days before such change becomes effective. Any expenses incurred by the Trustee as a result of any of the acts contemplated by this Section shall be paid as provided in Section 9.

Section 14. Instructions to the Trustee. All orders, requests, and instructions by the Grantor to the Trustee shall be in writing, signed by such persons as are designated in the attached Exhibit A or such other designees as the Grantor may designate by amendment to Exhibit A. The Trustee shall be fully protected in acting without inquiry in accordance with the Grantor's orders, requests, and instructions. All orders, requests, and instructions by the EPA Regional Administrator to the Trustee shall be in writing, signed by the EPA Regional Administrators of the Regions in which the facilities are located, or their designees, and the Trustee shall act and shall be fully protected in acting in accordance with such orders, requests, and instructions. The Trustee shall have the right to assume, in the absence of written notice to the contrary, that no event constituting a change or a termination of the authority of any person to act on behalf of the Grantor or EPA hereunder has occurred. The Trustee shall have no duty to act in the absence of such orders, requests, and instructions from the Grantor and/or EPA, except as provided for herein.

Section 15. Notice of Nonpayment. The Trustee shall notify the Grantor and the appropriate EPA Regional Administrator, by certified mail within 10 days following the expiration of the 30-day period after the anniversary of the establishment of the Trust, if no payment is received from the Grantor during that period. After the pay-

in period is completed, the Trustee shall not be required to send a notice of nonpayment.

Section 16. Amendment of Agreement. This Agreement may be amended by an instrument in writing executed by the Grantor, the Trustee, and the appropriate EPA Regional Administrator, or by the Trustee and the appropriate EPA Regional Administrator if the Grantor ceases to exist.

Section 17. Irrevocability and Termination. Subject to the right of the parties to amend this Agreement as provided in Section 16, this Trust shall be irrevocable and shall continue until terminated at the written agreement of the Grantor, the Trustee, and the EPA Regional Administrator, or by the Trustee and the EPA Regional Administrator, if the Grantor ceases to exist. Upon termination of the Trust, all remaining trust property, less final trust administration expenses, shall be delivered to the Grantor.

Section 18. Immunity and Indemnification. The Trustee shall not incur personal liability of any nature in connection with any act or omission, made in good faith, in the administration of this Trust, or in carrying out any directions by the Grantor or the EPA Regional Administrator issued in accordance with this Agreement. The Trustee shall be indemnified and saved harmless by the Grantor or from the Trust Fund, or both, from and against any personal liability to which the Trustee may be subjected by reason of any act or conduct in its official capacity, including all expenses reasonably incurred in its defense in the event the Grantor fails to provide such defense.

Section 19. Choice of Law. This Agreement shall be administered, construed, and enforced according to the laws of the State of [insert name of State].

Section 20. Interpretation. As used in this Agreement, words in the singular include the plural and words in the plural include the singular. The descriptive headings for each Section of this Agreement shall not affect the interpretation or the legal efficacy of this Agreement.

In Witness Whereof the parties have caused this Agreement to be executed by their respective officers duly authorized and their corporate seals to be hereunto affixed and attested as of the date first above written: The parties below certify that the wording of this Agreement is identical to the wording specified in 40 CFR 264.151(a)(1) as such regulations were constituted on the date first above written.

[Signature of Grantor]
[Title]
Attest:
[Title]
[Seal]
[Signature of Trustee]
Attest:
[Title]
[Seal]

(2) The following is an example of the certification of acknowledgment which must accompany the trust agreement for a trust fund as specified in §§ 264.143(a) and 264.145(a) or §§ 265.143(a) or 265.145(a) of this chapter. State requirements may differ on the proper content of this acknowledgment.

State of ——————————————
County of ——————————————

On this [date], before me personally came [owner or operator] to me known, who, being by me duly sworn, did depose and say that she/he resides at [address], that she/he is [title] of [corporation], the corporation described in and which executed the above instrument; that she/he knows the seal of said corporation; that the seal affixed to such instrument is such corporate seal; that it was so affixed by order of the Board of Directors of said corporation, and that she/he signed her/his name thereto by like order.

[Signature of Notary Public]

(b) A surety bond guaranteeing payment into a trust fund, as specified in § 264.143(b) or § 264.145(b) or § 265.143(b) or § 265.145(b) of this chapter, must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

FINANCIAL GUARANTEE BOND

Date bond executed:
Effective date:
Principal: [legal name and business address of owner or operator]
Type of Organization: [insert "individual," "joint venture," "partnership," or "corporation"]
State of incorporation: ——————————
Surety(ies): [name(s) and business address(es)]
EPA Identification Number, name, address and closure and/or post-closure amount(s) for each facility guaranteed by this bond [indicate closure and post-closure amounts separately]: ——————————
Total penal sum of bond: $ ——————————————
Surety's bond number: ——————————

Know All Persons By These Presents, That we, the Principal and Surety(ies) hereto are firmly bound to the U.S. Environmental Protection Agency (hereinafter called EPA), in the above penal sum for the payment of which we bind ourselves, our heirs, executors, administrators, successors,

and assigns jointly and severally; provided that, where the Surety(ies) are corporations acting as co-sureties, we, the Sureties, bind ourselves in such sum "jointly and severally" only for the purpose of allowing a joint action or actions against any or all of us, and for all other purposes each Surety binds itself, jointly and severally with the Principal, for the payment of such sum only as is set forth opposite the name of such Surety, but if no limit of liability is indicated, the limit of liability shall be the full amount of the penal sum.

Whereas said Principal is required, under the Resource Conservation and Recovery Act as amended (RCRA), to have a permit or interim status in order to own or operate each hazardous waste management facility identified above, and

Whereas said Principal is required to provide financial assurance for closure, or closure and post-closure care, as a condition of the permit or interim status, and

Whereas said Principal shall establish a standby trust fund as is required when a surety bond is used to provide such financial assurance;

Now, Therefore, the conditions of the obligation are such that if the Principal shall faithfully, before the beginning of final closure of each facility identified above, fund the standby trust fund in the amount(s) identified above for the facility,

Or, if the Principal shall fund the standby trust fund in such amount(s) within 15 days after a final order to begin closure is issued by an EPA Regional Administrator or a U.S. district court or other court of competent jurisdiction,

Or, if the Principal shall provide alternate financial assurance, as specified in Subpart H of 40 CFR Part 264 or 265, as applicable, and obtain the EPA Regional Administrator's written approval of such assurance, within 90 days after the date notice of cancellation is received by both the Principal and the EPA Regional Administrator(s) from the Surety(ies), then this obligation shall be null and void; otherwise it is to remain in full force and effect.

The Surety(ies) shall become liable on this bond obligation only when the Principal has failed to fulfill the conditions described above. Upon notification by an EPA Regional Administrator that the Principal has failed to perform as guaranteed by this bond, the Surety(ies) shall place funds in the amount guaranteed for the facility(ies) into the standby trust fund as directed by the EPA Regional Administrator.

The liability of the Surety(ies) shall not be discharged by any payment or succession of payments hereunder, unless and until such payment or payments shall amount in the aggregate to the penal sum of the bond, but in no event shall the obligation of the Surety(ies) hereunder exceed the amount of said penal sum.

The Surety(ies) may cancel the bond by sending notice of cancellation by certified mail to the Principal and to the EPA Regional Administrator(s) for the Region(s) in which the facility(ies) is (are) located, provided, however, that cancellation shall not occur during the 120 days beginning on the date of receipt of the notice of cancellation by both the Principal and the EPA Regional Administrator(s), as evidenced by the return receipts.

The Principal may terminate this bond by sending written notice to the Surety(ies), provided, however, that no such notice shall become effective until the Surety(ies) receive(s) written authorization for termination of the bond by the EPA Regional Administrator(s) of the EPA Region(s) in which the bonded facility(ies) is (are) located.

[The following paragraph is an optional rider that may be included but is not required.]

Principal and Surety(ies) hereby agree to adjust the penal sum of the bond yearly so that it guarantees a new closure and/or post-closure amount, provided that the penal sum does not increase by more than 20 percent in any one year, and no decrease in the penal sum takes place without the written permission of the EPA Regional Administrator(s).

In Witness Whereof, the Principal and Surety(ies) have executed this Financial Guarantee Bond and have affixed their seals on the date set forth above.

The persons whose signatures appear below hereby certify that they are authorized to execute this surety bond on behalf of the Principal and Surety(ies) and that the wording of this surety bond is identical to the wording specified in 40 CFR 264.151(b) as such regulations were constituted on the date this bond was executed.

Principal

[Signature(s)] ——————————————

[Name(s)] ——————————————

[Title(s)]——————————————

[Corporate seal] ——————————————

Corporate Surety(ies)

[Name and address]
State of incorporation:] ——————————

Liability limit: $ ——————————————

[Signature(s)]
[Name(s) and title(s)]
[Corporate seal]
[For every co-surety, provide signature(s), corporate seal, and other information in the same manner as for Surety above.]
Bond premium: $ ——————————————

(c) A surety bond guaranteeing performance of closure and/or post-closure care, as specified in § 264.143(c) or § 264.145(c), must be worded as follows, except that the instructions in brackets are to be replaced with the relevant information and the brackets deleted:

PERFORMANCE BOND

Date bond executed: ——————————

Effective date: ——————————————

Principal: [legal name and business address of owner or operator]

Type of organization: [insert "individual," "joint venture," "partnership," or "corporation"]

State of incorporation: ——————————

Surety(ies): [name(s) and business address(es)] ——————————————

EPA Identification Number, name, address, and closure and/or post-closure amount(s) for each facility guaranteed by this bond [indicate closure and post-closure amounts separately]:———

Total penal sum of bond: $ ——————————

Surety's bond number: ——————————

Know All Persons By These Presents, That we, the Principal and Surety(ies) hereto are firmly bound to the U.S. Environmental Protection Agency (hereinafter called EPA), in the above penal sum for the payment of which we bind ourselves, our heirs, executors, administrators, successors, and assigns jointly and severally; provided that, where the Surety(ies) are corporations acting as co-sureties, we, the Sureties, bind ourselves in such sum "jointly and severally" only for the purpose of allowing a joint action or actions against any or all of us, and for all other purposes each Surety binds itself, jointly and severally with the Principal, for the payment of such sum only as is set forth opposite the name of such Surety, but if no limit of liability is indicated, the limit of liability shall be the full amount of the penal sum.

Whereas said Principal is required, under the Resource Conservation and Recovery Act as amended (RCRA), to have a permit in order to own or operate each hazardous waste management facility indentified above, and

Whereas said Principal is required to provide financial assurance for closure, or closure and post-closure care, as a condition of the permit, and

Whereas said Principal shall establish a standby trust fund as is required when a surety bond is used to provide such financial assurance;

Now, Therefore, the conditions of this obligation are such that if the Principal shall faithfully perform closure, whenever required to do so, of each facility for which this bond guarantees closure, in accordance with the closure plan and other requirements of the permit as such plan and permit may be amended, pursuant to all applicable laws, statutes, rules, and regulations, as such laws, statutes, rules, and regulations may be amended,

And, if the Principal shall faithfully perform post-closure care of each facility for which this bond guarantees post-closure care, in accordance with the post-closure plan and other requirements of the permit, as such plan and permit may be amended, pursuant to all applicable laws, statutes, rules, and regulations, as such laws, statutes, rules, and regulations may be amended,

Or, if the Principal shall provide alternate financial assurance as specified in Subpart H of 40 CFR Part 264, and obtain the EPA Regional Administrator's written approval of such assurance, within 90 days after the date notice of cancellation is received by both the Principal and the EPA Regional Administrator(s) from the Surety(ies), then this obligation shall be null and void, otherwise it is to remain in full force and effect.

The Surety(ies) shall become liable on this bond obligation only when the Principal has failed to fulfill the conditions described above.

Upon notification by an EPA Regional Administrator that the Principal has been found in violation of the closure requirements of 40 CFR Part 264, for a facility for which this bond guarantees performance of closure, the Surety(ies) shall either perform closure in accordance with the closure plan and other permit requirements or place the closure amount guaranteed for the facility into the standby trust fund as directed by the EPA Regional Administrator.

Upon notification by an EPA Regional Administrator that the Principal has been found in violation of the post-closure requirements of 40 CFR Part 264 for a facility for which this bond guarantees performance of post-closure care, the Surety(ies) shall either perform post-closure care in accordance with the post-closure plan and other permit requirements or place the post-closure amount guaranteed for the facility into the standby trust fund as directed by the EPA Regional Administrator.

Upon notification by an EPA Regional Administrator that the Principal has failed to provide alternate financial assurance as specified in Subpart H of 40 CFR Part 264, and obtain written approval of such assurance from the EPA Regional Administrator(s) during the 90 days following receipt by both the Principal and the EPA Regional Administrator(s) of a notice of cancellation of the bond, the Surety(ies) shall place funds in the amount guaranteed

for the facility(ies) into the standby trust fund as directed by the EPA Regional Administrator.

The surety(ies) hereby waive(s) notification of amendments to closure plans, permits, applicable laws, statutes, rules, and regulations and agrees that no such amendment shall in any way alleviate its (their) obligation on this bond.

The liability of the Surety(ies) shall not be discharged by any payment or succession of payments hereunder, unless and until such payment or payments shall amount in the aggregate to the penal sum of the bond, but in no event shall the obligation of the Surety(ies) hereunder exceed the amount of said penal sum.

The Surety(ies) may cancel the bond by sending notice of cancellation by certified mail to the owner or operator and to the EPA Regional Administrator(s) for the Region(s) in which the facility(ies) is (are) located, provided, however, that cancellation shall not occur during the 120 days beginning on the date of receipt of the notice of cancellation by both the Principal and the EPA Regional Administrator(s), as evidenced by the return receipts.

The principal may terminate this bond by sending written notice to the Surety(ies), provided, however, that no such notice shall become effective until the Surety(ies) receive(s) written authorization for termination of the bond by the EPA Regional Administrator(s) of the EPA Region(s) in which the bonded facility(ies) is (are) located.

[The following paragraph is an *optional* rider that may be included but is not required.]

Principal and Surety(ies) hereby agree to adjust the penal sum of the bond yearly so that it guarantees a new closure and/or post-closure amount, provided that the penal sum does not increase by more than 20 percent in any one year, and no decrease in the penal sum takes place without the written permission of the EPA Regional Administrator(s).

In Witness Whereof, The Principal and Surety(ies) have executed this Performance Bond and have affixed their seals on the date set forth above.

The persons whose signatures appear below hereby certify that they are authorized to execute this surety bond on behalf of the Principal and Surety(ies) and that the wording of this surety bond is identical to the wording specified in 40 CFR 264.151(c) as such regulation was constituted on the date this bond was executed.

Principal

[Signature(s)]

[Name(s)]

[Title(s)]

[Corporate seal]

Corporate Surety(ies)

[Name and address]

State of incorporation: ——————————

Liability limit: $ ——————————————

[Signature(s)]

[Name(s) and title(s)]

[Corporate seal]

[For every co-surety, provide signature(s), corporate seal, and other information in the same manner as for Surety above.]

Bond premium: $ ——————————————

(d) A letter of credit, as specified in § 264.143(d) or § 264.145(d) or § 265.143(c) or § 265.145(c) of this chapter, must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

IRREVOCABLE STANDBY LETTER OF CREDIT

Regional Administrator(s)
Region(s) ——————————————
U.S. Environmental Protection Agency

Dear Sir or Madam: We hereby establish our Irrevocable Standby Letter of Credit No.—— in your favor, at the request and for the account of [owner's or operator's name and address] up to the aggregate amount of [in words] U.S. dollars $——, available upon presentation [insert, if more than one Regional Administrator is a beneficiary, "by any one of you"] of

(1) your sight draft, bearing reference to this letter of credit No.——, and

(2) your signed statement reading as follows: "I certify that the amount of the draft is payable pursuant to regulations issued under authority of the Resource Conservation and Recovery Act of 1976 as amended."

This letter of credit is effective as of [date] and shall expire on [date at least 1 year later], but such expiration date shall be automatically extended for a period of [at least 1 year] on [date] and on each successive expiration date, unless, at least 120 days before the current expiration date, we notify both you and [owner's or operator's name] by certified mail that we have decided not to extend this letter of credit beyond the current expiration date. In the event you are so notified, any unused portion of the credit shall be available upon presentation of your sight draft for 120 days after the date of receipt by both you and [owner's or operator's name], as shown on the signed return receipts.

Whenever this letter of credit is drawn on under and in compliance with the terms of this credit, we shall duly honor such draft upon presentation to us, and we shall depos-

it the amount of the draft directly into the standby trust fund of [owner's or operator's name] in accordance with your instructions.

We certify that the wording of this letter of credit is identical to the wording specified in 40 CFR 264.151(d) as such regulations were constituted on the date shown immediately below.

[Signature(s) and title(s) of official(s) of issuing institution] [Date]

This credit is subject to [insert "the most recent edition of the Uniform Customs and Practice for Documentary Credits, published by the International Chamber of Commerce," or "the Uniform Commercial Code"].

(e) A certificate of insurance, as specified in § 264.143(e) or § 264.145(e) or § 265.143(d) or § 265.145(d) of this chapter, must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

CERTIFICATE OF INSURANCE FOR CLOSURE OR POST-CLOSURE CARE

Name and Address of Insurer (herein called the "Insurer"): ————————
Name and Address of Insured (herein called the "Insured"): ————————
Facilities Covered: [List for each facility: The EPA Identification Number, name, address, and the amount of insurance for closure and/or the amount for post-closure care (these amounts for all facilities covered must total the face amount shown below).]
Face Amount: ————————————————
Policy Number: ————————————————
Effective Date: ————————————————

The Insurer hereby certifies that it has issued to the Insured the policy of insurance identified above to provide financial assurance for [insert "closure" or "closure and post-closure care" or "post-closure care"] for the facilities identified above. The Insurer further warrants that such policy conforms in all respects with the requirements of 40 CFR 264.143(e), 264.145(e), 265.143(d), and 265.145(d), as applicable and as such regulations were constituted on the date shown immediately below. It is agreed that any provision of the policy inconsistent with such regulations is hereby amended to eliminate such inconsistency.

Whenever requested by the EPA Regional Administrator(s) of the U.S. Environmental Protection Agency, the Insurer agrees to furnish to the EPA Regional Administrator(s) a duplicate original of the policy listed above, including all endorsements thereon.

I hereby certify that the wording of this certificate is identical to the wording specified in 40 CFR 264.151(e) as such regulations were constituted on the date shown immediately below.

[Authorized signature for Insurer]
[Name of person signing]
[Title of person signing]
Signature of witness or notary: ————————
[Date]

(f) A letter from the chief financial officer, as specified in § 264.143(f) or § 264.145(f) or § 265.143(e) or § 265.145(e) of this chapter, must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

LETTER FROM CHIEF FINANCIAL OFFICER

[Address to Regional Administrator of every Region in which facilities for which financial responsibility is to be demonstrated through the financial test are located.]

I am the chief financial officer of [name and address of firm]. This letter is in support of this firm's use of the financial test to demonstrate financial assurance, as specified in Subpart H of 40 CFR Parts 264 and 265.

[Fill out the following four paragraphs regarding facilities and associated cost estimates. If your firm has no facilities that belong in a particular paragraph, write "None" in the space indicated. For each facility, include its EPA Identification Number, name, address, and current closure and/or post-closure cost estimates. Identify each cost estimate as to whether it is for closure or post-closure care.]

1. This firm is the owner or operator of the following facilities for which financial assurance for closure or post-closure care is demonstrated through the financial test specified in Subpart H of 40 CFR Parts 264 and 265. The current closure and/or post-closure cost estimates covered by the test are shown for each facility: ————.

2. This firm guarantees, through the corporate guarantee specified in Subpart H of 40 CFR Parts 264 and 265, the closure or post-closure care of the following facilities owned or operated by subsidiaries of this firm. The current cost estimates for the closure or post-closure care so guaranteed are shown for each facility: ————.

3. In States where EPA is not administering the financial requirements of Subpart H of 40 CFR Part 264 or 265, this firm, as owner or operator or guarantor, is demonstrating financial assurance for the closure or post-closure care of the following facilities through the use of a test equivalent or substantially equivalent to the financial test specified in Subpart H of 40 CFR Parts 264 and 265. The current closure and/or post-

closure cost estimates covered by such a test are shown for each facility: ———.

4. This firm is the owner or operator of the following hazardous waste management facilities for which financial assurance for closure or, if a disposal facility, post-closure care, is *not* demonstrated either to EPA or a State through the financial test or any other financial assurance mechanism specified in Subpart H of 40 CFR Parts 264 and 265 or equivalent or substantially equivalent State mechanisms. The current closure and/or post-closure cost estimates not covered by such financial assurance are shown for each facility: ———.

This firm [insert "is required" or "is not required"] to file a Form 10K with the Securities and Exchange Commission (SEC) for the latest fiscal year.

The fiscal year of this firm ends on [month, day]. The figures for the following items marked with an asterisk are derived from this firm's independently audited, year-end financial statements for the latest completed fiscal year, ended [date].

[Fill in Alternative I if the criteria of paragraph (f)(1)(i) of § 264.143 or § 264.145, or of paragraph (e)(1)(i) of § 265.143 or § 265.145 of this chapter are used. Fill in Alternative II if the criteria of paragraph (f)(1)(ii) of § 264.143 or § 264.145, or of paragraph (e)(1)(ii) of § 265.143 or § 265.145 of this chapter are used.]

ALTERNATIVE I

1. Sum of current closure and post-closure cost estimates [total of *all* cost estimates shown in the four paragraphs above] ..... $.....
*2. Total liabilities [if any portion of the closure or post-closure cost estimates is included in total liabilities, you may deduct the amount of that portion from this line and add that amount to lines 3 and 4] .....
*3. Tangible net worth .....
*4. Net worth .....
*5. Current assets .....
*6. Current liabilities .....
7. Net working capital [line 5 minus line 6] .....
*8. The sum of net income plus depreciation, depletion, and amortization .....
*9. Total assets in U.S. (required only if less than 90% of firm's assets are located in the U.S.) .....

	Yes	No
10. Is line 3 at least $10 million?		
11. Is line 3 at least 6 times line 1?		
12. Is line 7 at least 6 times line 1?		
*13. Are at least 90% of firm's assets located in the U.S.? If not, complete line 14.		
14. Is line 9 at least 6 times line 1?		
15. Is line 2 divided by line 4 less than 2.0?		
16. Is line 8 divided by line 2 greater than 0.1?		
17. Is line 5 divided by line 6 greater than 1 5?		

ALTERNATIVE II

1. Sum of current closure and post-closure cost estimates [total of *all* cost estimates shown in the four paragraphs above] ..... $———
2. Current bond rating of most recent issuance of this firm and name of rating service ..... ———
3. Date of issuance of bond ..... ———
4. Date of maturity of bond ..... ———
*5. Tangible net worth [if any portion of the closure and post-closure cost estimates is included in "total liabilities" on your firm's financial statements, you may add the amount of that portion to this line] ..... $———
*6. Total assets in U.S. (required only if less than 90% of firm's assets are located in the U.S.) ..... $———

	Yes	No
7. Is line 5 at least $10 million?	—	—
8. Is line 5 at least 6 times line 1?	—	—
*9. Are at least 90% of firm's assets located in the U.S.? If not, complete line 10.	—	—
10. Is line 6 at least 6 times line 1?	—	—

I hereby certify that the wording of this letter is identical to the wording specified in 40 CFR 264.151(f) as such regulations were constituted on the date shown immediately below.

[Signature]
[Name]
[Title]
[Date]

5. This firm is the owner or operator of the following UIC facilities for which financial assurance for plugging and abandonment is required under Part 144. The current closure cost estimates as required by 40 CFR 144.62 are shown for each facility:

(g) A letter from the chief financial officer, as specified in § 264.147(f) or § 265.147(f) of this chapter, must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted.

LETTER FROM CHIEF FINANCIAL OFFICER

[Address to Regional Administrator of every Region in which facilities for which financial responsibility is to be demonstrated through the financial test are located.]

I am the chief financial officer of [firm's name and address]. This letter is in support of the use of the financial test to demonstrate financial responsibility for liability coverage [insert "and closure and/or post-closure care" if applicable] as specified in Subpart H of 40 CFR Parts 264 and 265.

[Fill out the following paragraphs regarding facilities and liability coverage. If there

are no facilities that belong in a particular paragraph, write "None" in the space indicated. For each facility, include its EPA Identification Number, name, and address.]

The firm identified above is the owner or operator of the following facilities for which liability coverage for [insert "sudden" or "nonsudden" or "both sudden and nonsudden"] accidental occurrences is being demonstrated through the financial test specified in Subpart H of 40 CFR Parts 264 and 265: _____.

The firm identified above guarantees, through the guarantee specified in Subpart H or 40 CFR Parts 264 and 265, liability coverage for [insert "sudden" or "nonsudden" or "both sudden and nonsudden"] accidental occurrences at the following facilities owned or operated by the following: _____. The firm identified above is [insert one or more: (1) The direct or higher-tier parent corporation of the owner or operator; (2) owned by the same parent corporation as the parent corporation of the owner or operator, and receiving the following value in consideration of this guarantee _____; or (3) engaged in the following substantial business relationship with the owner or operator _____, and receiving the following value in consideration of this guarantee _____.] [Attach a written description of the business relationship or a copy of the contract establishing such relationship to this letter.]

[If you are using the financial test to demonstrate coverage of both liability and closure and post-closure care, fill in the following four paragraphs regarding facilities and associated closure and post-closure cost estimates. If there are no facilities that belong in a particular paragraph, write "None" in the space indicated. For each facility, include its EPA Identification Number, name, address, and current closure and/or post-closure cost estimates. Identify each cost estimate as to whether it is for closure or post-closure care.]

1. The firm identified above owns or operates the following facilities for which financial assurance for closure or post-closure care or liability coverage is demonstrated through the financial test specified in Subpart H of 40 CFR Parts 264 and 265. The current closure and/or post-closure cost estimate covered by the test are shown for each facility: _____.

2. The firm identified above guarantees, through the guarantee specified in Subpart H of 40 CFR Parts 264 and 265, the closure and post-closure care or liability coverage of the following facilities owned or operated by the guaranteed party. The current cost estimates for the closure or post-closure care so guaranteed are shown for each facility: _____.

3. In States where EPA is not administering the financial requirements of Subpart H of 40 CFR Parts 264 and 265, this firm is demonstrating financial assurance for the closure or post-closure care of the following facilities through the use of a test equivalent or substantially equivalent to the financial test specified in Subpart H of 40 CFR Parts 264 and 265. The current closure or post-closure cost estimates covered by such a test are shown for each facility: _____.

4. The firm identified above owns or operates the following hazardous waste management facilities for which financial assurance for closure or, if a disposal facility, post-closure care, is not demonstrated either to EPA or a State through the financial test or any other financial assurance mechanisms specified in Subpart H of 40 CFR Parts 264 and 265 or equivalent or substantially equivalent State mechanisms. The current closure and/or post-closure cost estimates not covered by such financial assurance are shown for each facility: _____.

5. This firm is the owner or operator of the following UIC facilities for which financial assurance for plugging and abandonment is required under 40 CFR Part 144. The current closure cost estimates as required by 40 CFR 144.62 are shown for each facility: _____.

This firm [insert "is required" or "is not required"] to file a Form 10K with the Securities and Exchange Commission (SEC) for the latest fiscal year.

The fiscal year of this firm ends on [month, day]. The figures for the following items marked with an asterisk are derived from this firm's independently audited, year-end financial statements for the latest completed fiscal year, ended [date].

[Fill in part A if you are using the financial test to demonstrate coverage *only* for the liability requirements.]

Part A. Liability Coverage for Accidental Occurrences

[Fill in Alternative I if the criteria of paragraph (f)(1)(i) of § 264.147 or § 265.147 are used. Fill in Alternative II if the criteria of paragraph (f)(1)(ii) of § 264.147 or § 265.147 are used.]

Alternative I

1.	Amount of annual aggregate liability coverage to be demonstrated.	$.....
*2.	Current assets.....	$.....
*3.	Current liabilities.	$.....
4.	Net working capital (line 2 minus line 3).	$.....

*5. Tangible net worth. $.....

*6. If less than 90% or assets are located in the U.S., given total U.S. assets. $.....

		Yes	No
7.	Is line 5 at least $10 million?	.....	
8.	Is line 4 at least 6 times line 1?	.....	
9.	Is line 5 at least 6 times line 1?		
*10.	Are at least 90% of assets located in the U.S.? If not, complete line 11.	.....	
11.	Is line 6 at least 6 times line 1?	.....	

Alternative II

1. Amount of annual aggregate liability coverage to be demonstrated. $.....
2. Current bond rating of most recent issuance and name of rating service. .....
3. Date of issuance of bond. .....
4. Date of maturity of bond. .....

*5. Tangible net worth. $.....

*6. Total assets in U.S. (required only if less than 90% of assets are located in the U.S.). $.....

		Yes	No
7.	Is line 5 at least $10 million?	.....	
8.	Is line 5 at least 6 times line 1?	.....	
9.	Are at least 90% of assets located in the U.S.? If not, complete line 10.	.....	
10.	Is line 6 at least 6 times line 1?	.....	

[Fill in part B if you are using the financial test to demonstrate assurance of both liability coverage *and* closure or post-closure care.]

Part B. Closure or Post-Closure Care and Liability Coverage

[Fill in Alternative I if the criteria of paragraphs (f)(1)(i) of § 264.143 or § 264.145 and (f)(1)(i) of § 264.147 are used or if the criteria of paragraphs (e)(1)(i) of § 265.143 or § 265.145 and (f)(1)(i) of § 265.147 are used. Fill in Alternative II if the criteria of paragraphs (f)(1)(ii) of § 264.143 or § 264.145 and (f)(1)(ii) of § 264.147 are used or if the criteria of paragraphs (e)(1)(ii) of § 265.143 or § 265.145 and (f)(1)(ii) of § 265.147 are used.]

Alternative I

1. Sum of current closure and post-closure cost estimates (total of *all* cost estimates listed above). $.....
2. Amount of annual aggregate liability coverage to be demonstrated. $.....
3. Sum of lines 1 and 2. $.....

*4. Total liabilities (if any portion of your closure or post-closure cost estimates is included in your total liabilities, you may deduct that portion from this line and add that amount to lines 5 and 6). $.....

*5.	Tangible net worth.	$.....
*6.	Net worth	$.....
*7.	Current assets.....	$.....
*8.	Current liabilities.	$.....
9.	Net working capital (line 7 minus line 8).	$.....
*10.	The sum of net income plus depreciation, depletion, and amortization.	$.....
*11.	Total assets in U.S. (required only if less than 90% of assets are located in the U.S.).	$.....

		Yes	No
12.	Is line 5 at least $10 million?	.....	
13.	Is line 5 at least 6 times line 3?	.....	
14.	Is line 9 at least 6 times line 3?	.....	
*15.	Are at least 90% of assets located in the U.S.? If not, complete line 16.	.....	
16.	Is line 11 at least 6 times line 3?	.....	
17.	Is line 4 divided by line 6 less than 2.0?	.....	
18.	Is line 10 divided by line 4 greater than 0.1?	.....	
19.	Is line 7 divided by line 8 greater than 1.5?	.....	

Alternative II

1.	Sum of current closure and post-closure cost estimates (total of *all* cost estimates listed above).	$.....
2.	Amount of annual aggregate liability coverage to be demonstrated.	$.....
3.	Sum of lines 1 and 2.	$.....
4.	Current bond rating of most recent issuance and name of rating service.	.....
5.	Date of issuance of bond.	.....
6.	Date of maturity of bond.	.....
*7.	Tangible net worth (if any portion of the closure or post-closure cost estimates is included in "total liabilities" on your financial statements you may add that portion to this line).	$.....
*8.	Total assets in the U.S. (required only if less than 90% of assets are located in the U.S.).	$.....

		Yes	No
9.	Is line 7 at least $10 million?	.....	
10.	Is line 7 at least 6 times line 3?	.....	
*11.	Are at least 90% of assets located in the U.S.? If not, complete line 12.	.....	
12.	Is line 8 at least 6 times line 3?	.....	

I hereby certify that the wording of this letter is identical to the wording specified in 40 CFR 264.151(g) as such regulations were

constituted on the date shown immediately below.

[Signature] ——————————————————

[Name] ——————————————————

[Title] ——————————————————

[Date] ——————————————————

(h)(1) A corporate guarantee, as specified in § 264.143(f) or § 264.145(f) or § 265.143(e) or § 265.145(e) of this chapter, must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

CORPORATE GUARANTEE FOR CLOSURE OR POST-CLOSURE CARE

Guarantee made this [date] by [name of guaranteeing entity], a business corporation organized under the laws of the State of [insert name of State], herein referred to as guarantor, to the United States Environmental Protection Agency (EPA), obligee, on behalf of our subsidiary [owner or operator] of [business address].

Recitals

1. Guarantor meets or exceeds the financial test criteria and agrees to comply with the reporting requirements for guarantors as specified in 40 CFR 264.143(f), 264.145(f), 265.143(e), and 265.145(e).

2. [Owner or operator] owns or operates the following hazardous waste management facility(ies) covered by this guarantee: [List for each facility: EPA Identification Number, name, and address. Indicate for each whether guarantee is for closure, post-closure care, or both.]

3. "Closure plans" and "post-closure plans" as used below refer to the plans maintained as required by Subpart G of 40 CFR Parts 264 and 265 for the closure and post-closure care of facilities as identified above.

4. For value received from [owner or operator], guarantor guarantees to EPA that in the event that [owner or operator] fails to perform [insert "closure," "post-closure care" or "closure and post-closure care"] of the above facility(ies) in accordance with the closure or post-closure plans and other permit or interim status requirements whenever required to do so, the guarantor shall do so or establish a trust fund as specified in Subpart H of 40 CFR Part 264 or 265, as applicable, in the name of [owner or operator] in the amount of the current closure or post-closure cost estimates as specified in Subpart H of 40 CFR Parts 264 and 265.

5. Guarantor agrees that if, at the end of any fiscal year before termination of this guarantee, the guarantor fails to meet the financial test criteria, guarantor shall send within 90 days, by certified mail, notice to the EPA Regional Administrator(s) for the Region(s) in which the facility(ies) is (are) located and to [owner or operator] that he intends to provide alternate financial assurance as specified in Subpart H of 40 CFR Part 264 or 265, as applicable, in the name of [owner or operator]. Within 120 days after the end of such fiscal year, the guarantor shall establish such financial assurance unless [owner or operator] has done so.

6. The guarantor agrees to notify the EPA Regional Administrator by certified mail, of a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code, naming guarantor as debtor, within 10 days after commencement of the proceeding.

7. Guarantor agrees that within 30 days after being notified by an EPA Regional Administrator of a determination that guarantor no longer meets the financial test criteria or that he is disallowed from continuing as a guarantor of closure or post-closure care, he shall establish alternate financial assurance as specified in Subpart H of 40 CFR Part 264 or 265, as applicable, in the name of [owner or operator] unless [owner or operator] has done so.

8. Guarantor agrees to remain bound under this guarantee notwithstanding any or all of the following: amendment or modification of the closure or post-closure plan, amendment or modification of the permit, the extension or reduction of the time of performance of closure or post-closure, or any other modification or alteration of an obligation of the owner or operator pursuant to 40 CFR Part 264 or 265.

9. Guarantor agrees to remain bound under this guarantee for so long as [owner or operator] must comply with the applicable financial assurance requirements of Subpart H of 40 CFR Parts 264 and 265 for the above-listed facilities, except that guarantor may cancel this guarantee by sending notice by certified mail to the EPA Regional Administrator(s) for the Region(s) in which the facility(ies) is (are) located and to [owner or operator], such cancellation to become effective no earlier than 120 days after receipt of such notice by both EPA and [owner or operator], as evidenced by the return receipts.

10. Guarantor agrees that if [owner or operator] fails to provide alternate financial assurance as specified in Subpart H of 40 CFR Part 264 or 265, as applicable, and obtain written approval of such assurance from the EPA Regional Administrator(s) within 90 days after a notice of cancellation by the guarantor is received by an EPA Regional Administrator from guarantor, guarantor shall provide such alternate financial assurance in the name of [owner or operator].

11. Guarantor expressly waives notice of acceptance of this guarantee by the EPA or by [owner or operator]. Guarantor also expressly waives notice of amendments or modifications of the closure and/or post-closure plan and of amendments or modifications of the facility permit(s).

I hereby certify that the wording of this guarantee is identical to the wording specified in 40 CFR 264.151(h) as such regulations were constitituted on the date first above written.

Effective date: ——————————————
[Name of guarantor]
[Authorized signature for guarantor]
[Name of person signing]
[Title of person signing]
Signature of witness or notary: ————————

(2) A guarantee, as specified in § 264.147(g) or § 265.147(g) of this chapter, must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

GUARANTEE FOR LIABILITY COVERAGE

Guarantee made this [date] by [name of guaranteeing entity], a business corporation organized under the laws of [if incorporated within the United States insert "the State of ——" and insert name of State; if incorporated outside the United States insert the name of the country in which incorporated, the principal place of business within the United States, and the name and address of the registered agent in the State of the principal place of business], herein referred to as guarantor. This guarantee is made on behalf of our subsidiary [owner or operator] of [business address], to any and all third parties who have sustained or may sustain bodily injury or property damage caused by [sudden and/or nonsudden] accidental occurrences arising from operation of the facility(ies) covered by this guarantee.

RECITALS

1. Guarantor meets or exceeds the financial test criteria and agrees to comply with the reporting requirements for guarantors as specified in 40 CFR 264.147(g) and 265.147(g).

2. [Owner or operator] owns or operates the following hazardous waste management facility(ies) covered by this guarantee: [List for each facility: EPA Identification Number, name, and address; and if guarantor is incorporated outside the United States list the name and address of the guarantor's registered agent in each State.] This corporate guarantee satisfies RCRA third-party liability requirements for [insert "sudden" or "nonsudden" or "both sudden and nonsudden"] accidental occurrences in above-named owner or operator facilities for coverage in the amount of [insert dollar amount] for each occurrence and [insert dollar amount] annual aggregate.

3. For value received from [owner or operator], guarantor guarantees to any and all third parties who have sustained or may sustain bodily injury or property damage caused by [sudden and/or nonsudden] accidental occurrences arising from operations of the facility(ies) covered by this guarantee that in the event that [owner or operator] fails to satisfy a judgment or award based on a determination of liability for bodily injury or property damage to third parties caused by [sudden and/or nonsudden] accidental occurrences, arising from the operation of the above-named facilities, or fails to pay an amount agreed to in settlement of a claim arising from or alleged to arise from such injury or damage, the guarantor will satisfy such judgment(s), award(s) or settlement agreement(s) up to the limits of coverage identified above.

4. Such obligation does not apply to any of the following:

(a) Bodily injury or property damage for which [insert owner or operator] is obligated to pay damages by reason of the assumption of liability in a contract or agreement. This exclusion does not apply to liability for damages that [insert owner or operator] would be obligated to pay in the absnce of the contract or agreement.

(b) Any obligation of [insert owner or operator] under a workers' compensation, disability benefits, or unemployment compensation law or any similar law.

(c) Bodily injury to:

(1) An employee of [insert owner or operator] arising from, and in the course of, employment by [insert owner or operator]; or

(2) The spouse, child, parent, brother or sister of that employee as a consequence of, or arising from, and in the course of employment by [insert owner or operator]. This exclusion applies:

(A) Whether [insert owner or operator] may be liable as an employer or in any other capacity; and

(B) To any obligation to share damages with or repay another person who must pay damages because of the injury to persons identified in paragraphs (1) and (2).

(d) Bodily injury or property damage arising out of the ownership, maintenance, use, or entrustment to others of any aircraft, motor vehicle or watercraft.

(e) Property damage to:

(1) Any property owned, rented, or occupied by [insert owner or operator];

(2) Premises that are sold, given away or abandoned by [insert owner or operator] if the property damage arises out of any part of those premises;

(3) Property loaned to [insert owner or operator];

(4) Personal property in the care, custody or control of [insert owner or operator];

(5) That particular part of real property on which [insert owner or operator] or any contractors or subcontractors working directly or indirectly on behalf of [insert owner or operator] are performing operations, if the property damage arises out of these operations.

5. Guarantor agrees that if, at the end of any fiscal year before termination of this guarantee, the guarantor fails to meet the financial test criteria, guarantor shall send within 90 days, by certified mail, notice to the EPA Regional Administrator[s] for the Region[s] in which the facility[ies] is[are] located and to [owner or operator] that he intends to provide alternate liability coverage as specified in 40 CFR 264.147 and 265.147, as applicable, in the name of [owner or operator]. Within 120 days after the end of such fiscal year, the guarantor shall establish such liability coverage unless [owner or operator] has done so.

6. The guarantor agrees to notify the EPA Regional Administrator by certified mail of a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code, naming guarantor as debtor, within 10 days after commencement of the proceeding.

7. Guarantor agrees that within 30 days after being notified by an EPA Regional Administrator of a determination that guarantor no longer meets the financial test criteria or that he is disallowed from continuing as a guarantor, he shall establish alternate liability coverage as specified in 40 CFR 264.147 or 265.147 in the name of [owner or operator], unless [owner or operator] has done so.

8. Guarantor reserves the right to modify this agreement to take into account amendment or modification of the liability requirements set by 40 CFR 264.147 and 265.147, provided that such modification shall become effective only if a Regional Administrator does not disapprove the modification within 30 days of receipt of notification of the modification.

9. Guarantor agrees to remain bound under this guarantee for so long as [owner or operator] must comply with the applicable requirements of 40 CFR 264.147 and 265.147 for the above-listed facility(ies), except as provided in paragraph 9 of this agreement.

10. [Insert the following language if the guarantor is (a) a direct or higher-tier corporate parent, or (b) a firm whose parent corporation is also the parent corporation of the owner or operator]:

Guarantor may terminate this guarantee by sending notice by certified mail to the EPA Regional Administrator(s) for the Region(s) in which the facility(ies) is(are) located and to [owner or operator], provided that this guarantee may not be terminated unless and until [the owner or operator] obtains, and the EPA Regional Administrator(s) approve(s), alternate liability coverage complying with 40 CFR 264.147 and/or 265.147.

[Insert the following language if the guarantor is a firm qualifying as a guarantor due to its "substantial business relationship" with the owner or operator]:

Guarantor may terminate this guarantee 120 days following receipt of notification, through certified mail, by the EPA Regional Administrator(s) for the Region(s) in which the facility(ies) is(are) located and by [the owner or operator].

11. Guarantor hereby expressly waives notice of acceptance of this guarantee by any party.

12. Guarantor agrees that this guarantee is in addition to and does not affect any other responsibility or liability of the guarantor with respect to the covered facilities.

13. The Guarantor shall satisfy a third-party liability claim only on receipt of one of the following documents:

(a) Certification from the Principal and the third-party claimant(s) that the liability claim should be paid. The certification must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

CERTIFICATION OF VALID CLAIM

The undersigned, as parties [insert Principal] and [insert name and address of third-party claimant(s)], hereby certify that the claim of bodily injury and/or property damage cuased by a [sudden or nonsudden] accidental occurrence arising from operating [Principal's] hazardous waste treatment, storage, or disposal facility should be paid in the amount of $[ ].

[Signatures]
Principal

(Notary) Date

[Signatures]
Claimant(s)

(Notary) Date

(b) A valid final court order establishing a judgment against the Principal for bodily injury or property damage caused by sudden or nonsudden accidental occurrences arising from the operation of the Principal's facility or group of facilities.

14. In the event of combination of this guarantee with another mechanism to meet liability requirements, this guarantee will be considered [insert "primary" or "excess"] coverage.

I hereby certify that the wording of the guarantee is identical to the wording specified in 40 CFR 264.151(h)(2) as such regula-

tions were constituted on the date shown immediately below.

Effective date: ——————————————

[Name of guarantor]
[Authorized signature for guarantor]
[Name of person signing]
[Title of person signing]
Signature of witness of notary:

——————————————————————

(i) A hazardous waste facility liability endorsement as required in § 264.147 or § 265.147 must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

HAZARDOUS WASTE FACILITY LIABILITY ENDORSEMENT

1. This endorsement certifies that the policy to which the endorsement is attached provides liability insurance covering bodily injury and property damage in connection with the insured's obligation to demonstrate financial responsibility under 40 CFR 264.147 or 265.147. The coverage applies at [list EPA Identification Number, name, and address for each facility] for [insert "sudden accidental occurrences," "nonsudden accidental occurrences," or "sudden and nonsudden accidental occurrences"; if coverage is for multiple facilities and the coverage is different for different facilities, indicate which facilities are insured for sudden accidental occurrences, which are insured for nonsudden accidental occurrences, and which are insured for both]. The limits of liability are [insert the dollar amount of the "each occurrence" and "annual aggregate" limits of the Insurer's liability], exclusive of legal defense costs.

2. The insurance afforded with respect to such occurrences is subject to all of the terms and conditions of the policy; provided, however, that any provisions of the policy inconsistent with subsections (a) through (e) of this Paragraph 2 are hereby amended to conform with subsections (a) through (e):

(a) Bankruptcy or insolvency of the insured shall not relieve the Insurer of its obligations under the policy to which this endorsement is attached.

(b) The Insurer is liable for the payment of amounts within any deductible applicable to the policy, with a right of reimbursement by the insured for any such payment made by the Insurer. This provision does not apply with respect to that amount of any deductible for which coverage is demonstrated as specified in 40 CFR 264.147(f) or 265.147(f).

(c) Whenever requested by a Regional Administrator of the U.S. Environmental Protection Agency (EPA), the Insurer agrees to furnish to the Regional Administrator a signed duplicate original of the policy and all endorsements.

(d) Cancellation of this endorsement, whether by the Insurer, the insured, a parent corporation providing insurance coverage for its subsidiary, or by a firm having an insurable interest in and obtaining liability insurance on behalf of the owner or operator of the hazardous waste management facility, will be effective only upon written notice and only after the expiration of 60 days after a copy of such written notice is received by the Regional Administrator(s) of the EPA Region(s) in which the facility(ies) is(are) located.

(e) Any other termination of this endorsement will be effective only upon written notice and only after the expiration of thirty (30) days after a copy of such written notice is received by the Regional Administrator(s) of the EPA Region(s) in which the facility(ies) is (are) located.

Attached to and forming part of policy No. ——— issued by [name of Insurer], herein called the Insurer, of [address of Insurer] to [name of insured] of [address] this — day of ———, 19—. The effective date of said policy is — day of ———, 19—.

I hereby certify that the wording of this endorsement is identical to the wording specified in 40 CFR 264.151(i) as such regulation was constituted on the date first above written, and that the Insurer is licensed to transact the business of insurance, or eligible to provide insurance as an excess or surplus lines insurer, in one or more States.

[Signature of Authorized Representative of Insurer]
[Type name]
[Title], Authorized Representive of [name of Insurer]
[Address of Representative]

(j) A certificate of liability insurance as required in § 264.147 or § 265.147 must be worded as follows, except that the instructions in brackets are to be replaced with the relevant information and the brackets deleted:

HAZARDOUS WASTE FACILITY CERTIFICATE OF LIABILITY INSURANCE

1. [Name of Insurer], (the "Insurer"), of [address of Insurer] hereby certifies that it has issued liability insurance covering bodily injury and property damage to [name of insured], (the "insured"), of [address of insured] in connection with the insured's obligation to demonstrate financial responsibility under 40 CFR 264.147 or 265.147. The coverage applies at [list EPA Identification Number, name, and address for each facility] for [insert "sudden acci-

dental occurrences," "nonsudden accidental occurrences," or "sudden and nonsudden accidental occurrences"; if coverage is for multiple facilities and the coverage is different for different facilities, indicate which facilities are insured for sudden accidental occurrences, which are insured for nonsudden accidental occurrences, and which are insured for both]. The limits of liability are [insert the dollar amount of the "each occurrence" and "annual aggregate" limits of the Insurer's liability], exclusive of legal defense costs. The coverage is provided under policy number ———, issued on [date]. The effective date of said policy is [date].

2. The Insurer further certifies the following with respect to the insurance described in Paragraph 1:

(a) Bankruptcy or insolvency of the insured shall not relieve the Insurer of its obligations under the policy.

(b) The Insurer is liable for the payment of amounts within any deductible applicable to the policy, with a right of reimbursement by the insured for any such payment made by the Insurer. This provision does not apply with respect to that amount of any deductible for which coverage is demonstrated as specified in 40 CFR 264.147(f) or 265.147(f).

(c) Whenever requested by a Regional Administrator of the U.S. Environmental Protection Agency (EPA), the Insurer agrees to furnish to the Regional Administrator a signed duplicate original of the policy and all endorsements.

(d) Cancellation of the insurance, whether by the insurer, the insured, a parent corportation providing insurance coverage for its subsidiary, or by a firm having an insurable interest in and obtaining liability insurance on behalf of the owner or operator of the hazardous waste management facility, will be effective only upon written notice and only after the expiration of 60 days after a copy of such written notice is received by the Regional Administrator(s) of the EPA Region(s) in which the facility(ies) is(are) located.

(e) Any other termination of the insurance will be effective only upon written notice and only after the expiration of thirty (30) days after a copy of such written notice is received by the Regional Administrator(s) of the EPA Region(s) in which the facility(ies) is (are) located.

I hereby certify that the wording of this instrument is identical to the wording specified in 40 CFR 264.151(j) as such regulation was constituted on the date first above written, and that the Insurer is licensed to transact the business of insurance, or eligible to provide insurance as an excess or surplus lines insurer, in one or more States.

[Signature of authorized representative of Insurer]
[Type name]
[Title], Authorized Representative of [name of Insurer]
[Address of Representative]

(k) A letter of credit, as specified in § 264.147(h) or § 265.147(h) of this chapter, must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

IRREVOCABLE STANDBY LETTER OF CREDIT

Name and Address of Issuing Institution
Regional Administrator(s)
Region(s)
U.S. Environmental Protection Agency

Dear Sir or Madam: We hereby establish our Irrevocable Standby Letter of Credit No. _____ in the favor of any and all third-party liability claimants, at the request and for the account of [owner's or operator's name and address] for third-party liability awards or settlements up to [in words] U.S. dollars $_____ per occurrence and the annual aggregate amount of [in words] U.S. dollars $_____, for sudden accidental occurrences and/or for third-party liability awards or settlements up to the amount of [in words] U.S. dollars $_____ per occurrence, and the annual aggregate amount of [in words] U.S. dollars $_____, for nonsudden accidental occurrences available upon presentation of a sight draft, bearing reference to this letter of credit No. _____, and (1) a signed certificate reading as follows:

CERTIFICATION OF VALID CLAIM

The undersigned, as parties [insert principal] and [insert name and address of third-party claimants], hereby certify that the claim of bodily injury [and/or] property damage caused by a [sudden or nonsudden] accidental occurrence arising from operations of [principal's] hazardous waste treatment, storage, or disposal facility should be paid in the amount of $_____. We hereby certify that the claim does not apply to any of the following:

(a) Bodily injury or property damage for which [insert principal] is obligated to pay damages by reason of the assumption of liability in a contract or agreement. This exclusion does not apply to liability for damages that [insert principal] would be obligated to pay in the absence of the contract or agreement.

(b) Any obligation of [insert principal] under a workers' compensation, disability benefits, or unemployment compensation law or any similar law.

(c) Bodily injury to:

(1) An employee of [insert principal] arising from, and in the course of, employment by [insert principal]; or

(2) The spouse, child, parent, brother or sister of that employee as a consequence of, or arising from, and in the course of employment by [insert principal].

This exclusion applies:

(A) Whether [insert principal] may be liable as an employer or in any other capacity; and

(B) To any obligation to share damages with or repay another person who must pay damages because of the injury to persons identified in paragraphs (1) and (2).

(d) Bodily injury or property damage arising out of the ownership, maintenance, use, or entrustment to others of any aircraft, motor vehicle or watercraft.

(e) Property damage to:

(1) Any property owned, rented, or occupied by [insert principal];

(2) Premises that are sold, given away or abandoned by [insert principal] if the property damage arises out of any part of those premises;

(3) Property loaned to [insert principal];

(4) Personal property in the care, custody or control of [insert principal];

(5) That particular part of real property on which [insert principal] or any contractors or subcontractors working directly or indirectly on behalf of [insert principal] are performing operations, if the property damage arises out of these operations.

[Signatures]
Principal

[Signatures]
Claimant(s)

or (2) a valid final court order establishing a judgment against the principal for bodily injury or property damage caused by a sudden or nonsudden accidental occurrence arising from operation of the principal's facility or group of facilities.

This letter of credit is effective as of [date] and shall expire on [date at least one year later], but such expiration date shall be automatically extended for a period of [at least one year] on [date] and on each successive expiration date, unless, at least 120 days before the current expiration date, we notify you, the USEPA Regional Administrator for Region [Region #], and [owner's or operator's name] by certified mail that we have decided not to extend this letter of credit beyond the current expiration date.

Whenever this letter of credit is drawn on under and in compliance with the terms of this credit, we shall duly honor such draft upon presentation to us.

In the event that this letter of credit is used in combination with another mechanism for liability coverage, this letter of credit shall be considered [insert "primary" or "excess"] coverage.

We certify that the wording of this letter of credit is identical to the wording specified in 40 CFR 264.151(k) as such regulations were constituted on the date shown immediately below.

[Signature(s) and title(s) of official(s) of issuing institution]
[Date]

This credit is subject to [insert "the most recent edition of the Uniform Customs and Practice for Documentary Credits, published by the International Chamber of Commerce" or "the Uniform Commercial Code"].

(l) A surety bond, as specified in § 264.147(h) or § 265.147(h) of this chapter, must be worded as follows: except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

PAYMENT BOND

Surety Bond No. [Insert number]

Parties [Insert name and address of owner or operator], Principal, incorporated in [Insert State of incorporation] of [Insert city and State of principal place of business] and [Insert name and address of surety company(ies)], Surety Company(ies), of [Insert surety(ies) place of business].

EPA Identification Number, name, and address for each facility guaranteed by this bond: _____

	Sudden accidental occurrences	Nonsudden accidental occurrences
Penal Sum Per Occurrence	[insert amount]	[insert amount]
Annual Aggregate	[insert amount]	[insert amount]

Purpose: This is an agreement between the Surety(ies) and the Principal under which the Surety(ies), its(their) successors and assignees, agree to be responsible for the payment of claims against the Principal for bodily injury and/or property damage to third parties caused by ["sudden" and/or "nonsudden"] accidental occurrences arising from operations of the facility or group of facilities in the sums prescribed herein; subject to the governing provisions and the following conditions.

Governing Provisions:

(1) Section 3004 of the Resource Conservation and Recovery Act of 1976, as amended.

(2) Rules and regulations of the U.S. Environmental Protection Agency (EPA), particularly 40 CFR ["§ 264.147" or "§ 265.147"] (if applicable).

(3) Rules and regulations of the governing State agency (if applicable) [insert citation].

Conditions:

(1) The Principal is subject to the applicable governing provisions that require the

Principal to have and maintain liability coverage for bodily injury and property damage to third parties caused by ["sudden" and/or "nonsudden"] accidental occurrences arising from operations of the facility or group of facilities. Such obligation does not apply to any of the following:

(a) Bodily injury or property damage for which [insert principal] is obligated to pay damages by reason of the assumption of liability in a contract or agreement. This exclusion does not apply to liability for damages that [insert principal] would be obligated to pay in the absence of the contract or agreement.

(b) Any obligation of [insert principal] under a workers' compensation, disability benefits, or unemployment compensation law or similar law.

(c) Bodily injury to:

(1) An employee of [insert principal] arising from, and in the course of, employment by [insert principal]; or

(2) The spouse, child, parent, brother or sister of that employee as a consequence of, or arising from, and in the course of employment by [insert principal]. This exclusion applies:

(A) Whether [insert principal] may be liable as an employer or in any other capacity; and

(B) To any obligation to share damages with or repay another person who must pay damages because of the injury to persons identified in paragraphs (1) and (2).

(d) Bodily injury or property damage arising out of the ownership, maintenance, use, or entrustment to others of any aircraft, motor vehicle or watercraft.

(e) Property damage to:

(1) Any property owned, rented, or occupied by [insert principal];

(2) Premises that are sold, given away or abandoned by [insert principal] if the property damage arises out of any part of those premises;

(3) Property loaned to [insert principal];

(4) Personal property in the care, custody or control of [insert principal];

(5) That particular part of real property on which [insert principal] or any contractors or subcontractors working directly or indirectly on behalf of [insert principal] are performing operations, if the property damage arises out of these operations.

(2) This bond assures that the Principal will satisfy valid third party liability claims, as described in condition 1.

(3) If the Principal fails to satisfy a valid third party liability claim, as described above, the Surety(ies) becomes liable on this bond obligation.

(4) The Surety(ies) shall satisfy a third party liability claim only upon the receipt of one of the following documents:

(a) Certification from the Principal and the third party claimant(s) that the liability claim should be paid. The certification must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

CERTIFICATION OF VALID CLAIM

The undersigned, as parties [insert name of Principal] and [insert name and address of third party claimant(s)], hereby certify that the claim of bodily injury and/or property damage caused by a [sudden or nonsudden] accidential occurrence arising from operating [Principal's] hazardous waste treatment, storage, or disposal facility should be paid in the amount of $[ ].

[Signature]
Principal

[Notary] Date

[Signature(s)]
Claimant(s)

[Notary] Date

or (b) A valid final court order establishing a judgment against the Principal for bodily injury or property damage caused by sudden or nonsudden accidental occurrences arising from the operation of the Principal's facility or group of facilities.

(5) In the event of combination of this bond with another mechanism for liability coverage, this bond will be considered [insert "primary" or "excess"] coverage.

(6) The liability of the Surety(ies) shall not be discharged by any payment or succession of payments hereunder, unless and until such payment or payments shall amount in the aggregate to the penal sum of the bond. In no event shall the obligation of the Surety(ies) hereunder exceed the amount of said annual aggregate penal sum, provided that the Surety(ies) furnish(es) notice to the Regional Administrator forthwith of all claims filed and payments made by the Surety(ies) under this bond.

(7) The Surety(ies) may cancel the bond by sending notice of cancellation by certified mail to the Principal and the USEPA Regional Administrator for Region [Region #], provided, however, that cancellation shall not occur during the 120 days beginning on the date of receipt of the notice of cancellation by the Principal and the Regional Administrator, as evidenced by the return receipt.

(8) The Principal may terminate this bond by sending written notice to the Surety(ies) and to the EPA Regional Administrator(s) of the EPA Region(s) in which the bonded facility(ies) is (are) located.

(9) The Surety(ies) hereby waive(s) notification of amendments to applicable laws, statutes, rules and regulations and agree(s) that no such amendment shall in any way alleviate its (their) obligation on this bond.

(10) This bond is effective from [insert date] (12:01 a.m., standard time, at the address of the Principal as stated herein) and shall continue in force until terminated as described above.

In Witness Whereof, the Principal and Surety(ies) have executed this Bond and have affixed their seals on the date set forth above.

The persons whose signatures appear below hereby certify that they are authorized to execute this surety bond on behalf of the Principal and Surety(ies) and that the wording of this surety bond is identical to the wording specified in 40 CFR 264.151(1), as such regulations were constituted on the date this bond was executed.

PRINCIPAL

[Signature(s)]
[Name(s)]
[Title(s)]
[Corporate Seal]

CORPORATE SURETY[IES]

[Name and address]
State of incorporation: ——————————
Liability Limit: $ ——————————
[Signature(s)]
[Name(s) and title(s)]
[Corporate seal]
[For every co-surety, provide signature(s), corporate seal, and other information in the same manner as for Surety above.]
Bond premium: $ ——————————

(m)(1) A trust agreement, as specified in § 264.147(j) or § 265.147(j) of this chapter, must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

TRUST AGREEMENT

Trust Agreement, the "Agreement," entered into as of [date] by and between [name of the owner or operator] a [name of State] [insert "corporation," "partnership," "association," or "proprietorship"], the "Grantor," and [name of corporate trustee], [insert, "incorporated in the State of _____" or "a national bank"], the "trustee."

Whereas, the United States Environmental Protection Agency, "EPA," an agency of the United States Government, has established certain regulations applicable to the Grantor, requiring that an owner or operator of a hazardous waste management facility or group of facilities must demonstrate financial responsibility for bodily injury and property damage to third parties caused by sudden accidental and/or nonsudden accidental occurrences arising from operations of the facility or group of facilities.

Whereas, the Grantor has elected to establish a trust to assure all or part of such financial responsibility for the facilities identified herein.

Whereas, the Grantor, acting through its duly authorized officers, has selected the Trustee to be the trustee under this agreement, and the Trustee is willing to act as trustee.

Now, therefore, the Grantor and the Trustee agree as follows:

Section 1. *Definitions.* As used in this Agreement:

(a) The term "Grantor" means the owner or operator who enters into this Agreement and any successors or assigns of the Grantor.

(b) The term "Trustee" means the Trustee who enters into this Agreement and any successor Trustee.

Section 2. *Identification of Facilities.* This agreement pertains to the facilities identified on attached schedule A [on schedule A, for each facility list the EPA Identification Number, name, and address of the facility(ies) and the amount of liability coverage, or portions thereof, if more than one instrument affords combined coverage as demonstrated by this Agreement].

Section 3. *Establishment of Fund.* The Grantor and the Trustee hereby establish a trust fund, hereinafter the "Fund," for the benefit of any and all third parties injured or damaged by [sudden and/or nonsudden] accidental occurrences arising from operation of the facility(ies) covered by this guarantee, in the amounts of _____ [up to $1 million] per occurrence and _____ [up to $2 million] annual aggregate for sudden accidental occurrences and _____ [up to $3 million] per occurrence and _____ [up to $6 million] annual aggregate for nonsudden occurrences, except that the Fund is not established for the benefit of third parties for the following:

(a) Bodily injury or property damage for which [insert Grantor] is obligated to pay damages by reason of the assumption of liability in a contract or agreement. This exclusion does not apply to liability for damages that [insert Grantor] would be obligated to pay in the absence of the contract or agreement.

(b) Any obligation of [insert Grantor] under a workers' compensation, disability benefits, or unemployment compensation law or any similar law.

(c) Bodily injury to:

(1) An employee of [insert Grantor] arising from, and in the course of, employment by [insert Grantor]; or

(2) The spouse, child, parent, brother or sister of that employee as a consequence of, or arising from, and in the course of employment by [insert Grantor].

This exclusion applies:

(A) Whether [insert Grantor] may be liable as an employer or in any other capacity; and

(B) To any obligation to share damages with or repay another person who must pay damages because of the injury to persons identified in paragraphs (1) and (2).

(d) Bodily injury or property damage arising out of the ownership, maintenance, use, or entrustment to others of any aircraft, motor vehicle or watercraft.

(e) Property damage to:

(1) Any property owned, rented, or occupied by [insert Grantor];

(2) Premises that are sold, given away or abandoned by [insert Grantor] if the property damage arises out of any part of those premises;

(3) Property loaned to [insert Grantor];

(4) Personal property in the care, custody or control of [insert Grantor];

(5) That particular part of real property on which [insert Grantor] or any contractors or subcontractors working directly or indirectly on behalf of [insert Grantor] are performing operations, if the property damage arises out of these operations.

In the event of combination with another mechanism for liability coverage, the fund shall be considered [insert "primary" or "excess"] coverage.

The Fund is established initially as consisting of the property, which is acceptable to the Trustee, described in Schedule B attached hereto. Such property and any other property subsequently transferred to the Trustee is referred to as the Fund, together with all earnings and profits thereon, less any payments or distributions made by the Trustee pursuant to this Agreement. The Fund shall be held by the Trustee, IN TRUST, as hereinafter provided. The Trustee shall not be responsible nor shall it undertake any responsibility for the amount or adequacy of, nor any duty to collect from the Grantor, any payments necessary to discharge any liabilities of the Grantor established by EPA.

Section 4. *Payment for Bodily Injury or Property Damage.* The Trustee shall satisfy a third party liability claim by making payments from the Fund only upon receipt of one of the following documents:

(a) Certification from the Grantor and the third party claimant(s) that the liability claim should be paid. The certification must be worded as follows, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted:

CERTIFICATION OF VALID CLAIM

The undersigned, as parties [insert Grantor] and [insert name and address of third party claimant(s)], hereby certify that the claim of bodily injury and/or property damage caused by a [sudden or nonsudden] accidental occurrence arising from operating [Grantor's] hazardous waste treatment, storage, or disposal facility should be paid in the amount of $[ ].

[Signatures]
Grantor

[Signatures]
Claimant(s)

(b) A valid final court order establishing a judgment against the Grantor for bodily injury or property damage caused by sudden or nonsudden accidental occurrences arising from the operation of the Grantor's facility or group of facilities.

Section 5. *Payments Comprising the Fund.* Payments made to the Trustee for the Fund shall consist of cash or securities acceptable to the Trustee.

Section 6. *Trustee Management.* The Trustee shall invest and reinvest the principal and income, in accordance with general investment policies and guidelines which the Grantor may communicate in writing to the Trustee from time to time, subject, however, to the provisions of this section. In investing, reinvesting, exchanging, selling, and managing the Fund, the Trustee shall discharge his duties with respect to the trust fund solely in the interest of the beneficiary and with the care, skill, prudence, and diligence under the circumstance then prevailing which persons of prudence, acting in a like capacity and familiar with such matters, would use in the conduct of an enterprise of a like character and with like aims; *except that:*

(i) Securities or other obligations of the Grantor, or any other owner or operator of the facilities, or any of their affiliates as defined in the Investment Company Act of 1940, as amended, 15 U.S.C. 80a-2.(a), shall not be acquired or *held* unless they are securities or other obligations of the Federal or a State government;

(ii) The Trustee is authorized to invest the Fund in time or demand deposits of the Trustee, to the extent insured by an agency of the Federal or State government; and

(iii) The Trustee is authorized to hold cash awaiting investment or distribution uninvested for a reasonable time and without liability for the payment of interest thereon.

Section 7. *Commingling and Investment.* The Trustee is expressly authorized in its discretion:

(a) To transfer from time to time any or all of the assets of the Fund to any common commingled, or collective trust fund created by the Trustee in which the fund is eligible to participate, subject to all of the provisions thereof, to be commingled with the assets of other trusts participating therein; and

(b) To purchase shares in any investment company registered under the Investment Company Act of 1940, 15 U.S.C. 81a-1 et seq., including one which may be created, managed, underwritten, or to which investment advice is rendered or the shares of which are sold by the Trustee. The Trustee may vote such shares in its discretion.

Section 8. *Express Powers of Trustee.* Without in any way limiting the powers and discretions conferred upon the Trustee by the other provisions of this Agreement or by law, the Trustee is expressly authorized and empowered:

(a) To sell, exchange, convey, transfer, or otherwise dispose of any property held by it, by public or private sale. No person dealing with the Trustee shall be bound to see to the application of the purchase money or to inquire into the validity or expediency of any such sale or other disposition;

(b) To make, execute, acknowledge, and deliver any and all documents of transfer and conveyance and any and all other instruments that may be necessary or appropriate to carry out the powers herein granted;

(c) To register any securities held in the Fund in its own name or in the name of a nominee and to hold any security in bearer form or in book entry, or to combine certificates representing such securities with certificates of the same issue held by the Trustee in other fiduciary capacities, or to deposit or arrange for the deposit of such securities in a qualified central depositary even though, when so deposited, such securities may be merged and held in bulk in the name of the nominee of such depositary with other securities deposited therein by another person, or to deposit or arrange for the deposit of any securities issued by the United States Government, or any agency or instrumentality thereof, with a Federal Reserve bank, but the books and records of the Trustee shall at all times show that all such securities are part of the Fund;

(d) To deposit any cash in the Fund in interest-bearing accounts maintained or savings certificates issued by the Trustee, in its separate corporate capacity, or in any other banking institution affiliated with the Trustee, to the extent insured by an agency of the Federal or State government; and

(e) To compromise or otherwise adjust all claims in favor of or against the Fund.

Section 9. *Taxes and Expenses.* All taxes of any kind that may be assessed or levied against or in respect of the Fund and all brokerage commissions incurred by the Fund shall be paid from the Fund. All other expenses incurred by the Trustee in connection with the administration of this Trust, including fees for legal services rendered to the Trustee, the compensation of the Trustee to the extent not paid directly by the Grantor, and all other proper charges and disbursements of the Trustee shall be paid from the Fund.

Section 10. *Annual Valuations.* The Trustee shall annually, at least 30 days prior to the anniversary date of establishment of the Fund, furnish to the Grantor and to the appropriate EPA Regional Administrator a statement confirming the value of the Trust. Any securities in the Fund shall be valued at market value as of no more than 60 days prior to the anniversary date of establishment of the Fund. The failure of the Grantor to object in writing to the Trustee within 90 days after the statement has been furnished to the Grantor and the EPA Regional Administrator shall constitute a conclusively binding assent by the Grantor barring the Grantor from asserting any claim or liability against the Trustee with respect to matters disclosed in the statement.

Section 11. *Advice of Counsel.* The Trustee may from time to time consult with counsel, who may be counsel to the Grantor with respect to any question arising as to the construction of this Agreement or any action to be taken hereunder. The Trustee shall be fully protected, to the extent permitted by law, in acting upon the advice of counsel.

Section 12. *Trustee Compensation.* The Trustee shall be entitled to reasonable compensation for its services as agreed upon in writing from time to time with the Grantor.

Section 13. *Successor Trustee.* The Trustee may resign or the Grantor may replace the Trustee, but such resignation or replacement shall not be effective until the Grantor has appointed a successor trustee and this successor accepts the appointment. The successor trustee shall have the same powers and duties as those conferred upon the Trustee hereunder. Upon the successor trustee's acceptance of the appointment, the Trustee shall assign, transfer, and pay over to the successor trustee the funds and properties then constituting the Fund. If for any reason the Grantor cannot or does not act in the event of the resignation of the Trustee, the Trustee may apply to a court of competent jurisdiction for the appointment of a successor trustee or for instructions. The successor trustee shall specify the date on which it assumes administration of the trust in a writing sent to the Grantor, the EPA Regional Administrator, and the present Trustee by certified mail 10 days before such change becomes effective. Any expenses incurred by the Trustee as a result of any of the acts contemplated by this section shall be paid as provided in Section 9.

Section 14. *Instructions to the Trustee.* All orders, requests, and instructions by the Grantor to the Trustee shall be in writing, signed by such persons as are designated in the attached Exhibit A or such other desig-

nees as the Grantor may designate by amendments to Exhibit A. The Trustee shall be fully protected in acting without inquiry in accordance with the Grantor's orders, requests, and instructions. All orders, requests, and instructions by the EPA Regional Administrator to the Trustee shall be in writing, signed by the EPA Regional Administrators of the Regions in which the facilities are located, or their designees, and the Trustee shall act and shall be fully protected in acting in accordance with such orders, requests, and instructions. The Trustee shall have the right to assume, in the absence of written notice to the contrary, that no event constituting a change or a termination of the authority of any person to act on behalf of the Grantor or EPA hereunder has occurred. The Trustee shall have no duty to act in the absence of such orders, requests, and instructions from the Grantor and/or EPA, except as provided for herein.

Section 15. *Notice of Nonpayment.* If a payment for bodily injury or property damage is made under Section 4 of this trust, the Trustee shall notify the Grantor of such payment and the amount(s) thereof within five (5) working days. The Grantor shall, on or before the anniversary date of the establishment of the Fund following such notice, either make payments to the Trustee in amounts sufficient to cause the trust to return to its value immediately prior to the payment of claims under Section 4, or shall provide written proof to the Trustee that other financial assurance for liability coverage has been obtained equalling the amount necessary to return the trust to its value prior to the payment of claims. If the Grantor does not either make payments to the Trustee or provide the Trustee with such proof, the Trustee shall within 10 working days after the anniversary date of the establishment of the Fund provide a written notice of nonpayment to the EPA Regional Administrator.

Section 16. *Amendment of Agreement.* This Agreement may be amended by an instrument in writing executed by the Grantor, the Trustee, and the appropriate EPA Regional Administrator, or by the Trustee and the appropriate EPA Regional Administrator if the Grantor ceases to exist.

Section 17. *Irrevocability and Termination.* Subject to the right of the parties to amend this Agreement as provided in Section 16, this Trust shall be irrevocable and shall continue until terminated at the written agreement of the Grantor, the Trustee, and the EPA Regional Administrator, or by the Trustee and the EPA Regional Administrator, if the Grantor ceases to exist. Upon termination of the Trust, all remaining trust property, less final trust administration expenses, shall be delivered to the Grantor.

The Regional Administrator will agree to termination of the Trust when the owner or operator substitutes alternate financial assurance as specified in this section.

Section 18. *Immunity and Indemnification.* The Trustee shall not incur personal liability of any nature in connection with any act or omission, made in good faith, in the administration of this Trust, or in carrying out any directions by the Grantor or the EPA Regional Administrator issued in accordance with this Agreement. The Trustee shall be indemnified and saved harmless by the Grantor or from the Trust Fund, or both, from and against any personal liability to which the Trustee may be subjected by reason of any act or conduct in its official capacity, including all expenses reasonably incurred in its defense in the event the Grantor fails to provide such defense.

Section 19. *Choice of Law.* This Agreement shall be administered, construed, and enforced according to the laws of the State of [enter name of State].

Section 20. *Interpretation.* As used in this Agreement, words in the singular include the plural and words in the plural include the singular. The descriptive headings for each section of this Agreement shall not affect the interpretation or the legal efficacy of this Agreement.

In Witness Whereof the parties have caused this Agreement to be executed by their respective officers duly authorized and their corporate seals to be hereunto affixed and attested as of the date first above written. The parties below certify that the wording of this Agreement is identical to the wording specified in 40 CFR 264.151(m) as such regulations were constituted on the date first above written.

[Signature of Grantor]

[Title]

Attest:

[Title]

[Seal]

[Signature of Trustee]

Attest:

[Title]

[Seal]

(2) The following is an example of the certification of acknowledgement which must accompany the trust agreement for a trust fund as specified in §§ 264.147(j) or 265.147(j) of this chapter. State requirements may differ on the proper content of this acknowledgement.

State of ——————————————

County of ——————————————

On this [date], before me personally came [owner or operator] to me known, who, being by me duly sworn, did depose and say

that she/he resides at [address], that she/he is [title] of [corporation], the corporation described in and which executed the above instrument; that she/he knows the seal of said corporation; that the seal affixed to such instrument is such corporate seal; that it was so affixed by order of the Board of Directors of said corporation, and that she/he signed her/his name thereto by like order.

[Signature of Notary Public]

(Approved by the Office of Management and Budget under control number 2000-0445, for paragraphs (g), (i), and (j))

[47 FR 15059, Apr. 7, 1982, as amended at 47 FR 16556, Apr. 16, 1982; 47 FR 17989, Apr. 27, 1982; 47 FR 19995, May 10, 1982; 47 FR 28627, July 1, 1982; 51 FR 16450, May 2, 1986; 51 FR 25354, July 11, 1986; 52 FR 44320, Nov. 18, 1987; 53 FR 33952, Sept. 1, 1988]

Subpart I—Use and Management of Containers

SOURCE: 46 FR 2866, Jan. 12, 1981, unless otherwise noted.

§ 264.170 Applicability.

The regulations in this subpart apply to owners and operators of all hazardous waste facilities that store containers of hazardous waste, except as § 264.1 provides otherwise.

[*Comment:* Under § 261.7 and § 261.33(c), if a hazardous waste is emptied from a container the residue remaining in the container is not considered a hazardous waste if the container is "empty" as defined in § 261.7. In that event, management of the container is exempt from the requirements of this subpart.]

§ 264.171 Condition of containers.

If a container holding hazardous waste is not in good condition (e.g., severe rusting, apparent structural defects) or if it begins to leak, the owner or operator must transfer the hazardous waste from this container to a container that is in good condition or manage the waste in some other way that complies with the requirements of this part.

§ 264.172 Compatibility of waste with containers.

The owner or operator must use a container made of or lined with materials which will not react with, and are otherwise compatible with, the hazardous waste to be stored, so that the ability of the container to contain the waste is not impaired.

§ 264.173 Management of containers.

(a) A container holding hazardous waste must always be closed during storage, except when it is necessary to add or remove waste.

(b) A container holding hazardous waste must not be opened, handled, or stored in a manner which may rupture the container or cause it to leak.

[*Comment:* Reuse of containers in transportation is governed by U.S. Department of Transportation regulations including those set forth in 49 CFR 173.28.]

§ 264.174 Inspections.

At least weekly, the owner or operator must inspect areas where containers are stored, looking for leaking containers and for deterioration of containers and the containment system caused by corrosion or other factors.

[*Comment:* See §§ 264.15(c) and 264.171 for remedial action required if deterioration or leaks are detected.]

§ 264.175 Containment.

(a) Container storage areas must have a containment system that is designed and operated in accordance with paragraph (b) of this section, except as otherwise provided by paragraph (c) of this section.

(b) A containment system must be designed and operated as follows:

(1) A base must underly the containers which is free of cracks or gaps and is sufficiently impervious to contain leaks, spills, and accumulated precipitation until the collected material is detected and removed;

(2) The base must be sloped or the containment system must be otherwise designed and operated to drain and remove liquids resulting from leaks, spills, or precipitation, unless the containers are elevated or are otherwise protected from contact with accumulated liquids;

(3) The containment system must have sufficient capacity to contain 10% of the volume of containers or the volume of the largest container, whichever is greater. Containers that

do not contain free liquids need not be considered in this determination;

(4) Run-on into the containment system must be prevented unless the collection system has sufficient excess capacity in addition to that required in paragraph (b)(3) of this section to contain any run-on which might enter the system; and

(5) Spilled or leaked waste and accumulated precipitation must be removed from the sump or collection area in as timely a manner as is necessary to prevent overflow of the collection system.

[*Comment:* If the collected material is a hazardous waste under Part 261 of this Chapter, it must be managed as a hazardous waste in accordance with all applicable requirements of Parts 262 through 266 of this chapter. If the collected material is discharged through a point source to waters of the United States, it is subject to the requirements of section 402 of the Clean Water Act, as amended.]

(c) Storage areas that store containers holding only wastes that do not contain free liquids need not have a containment system defined by paragraph (b) of this section, except as provided by paragraph (d) of this section or provided that:

(1) The storage area is sloped or is otherwise designed and operated to drain and remove liquid resulting from precipitation, or

(2) The containers are elevated or are otherwise protected from contact with accumulated liquid.

(d) Storage areas that store containers holding the wastes listed below that do not contain free liquids must have a containment system defined by paragraph (b) of this section:

(1) FO20, FO21, FO22, FO23, FO26, and FO27.

(2) [Reserved]

[46 FR 55112, Nov. 6, 1981, as amended at 50 FR 2003, Jan. 14, 1985]

§ 264.176 Special requirements for ignitable or reactive waste.

Containers holding ignitable or reactive waste must be located at least 15 meters (50 feet) from the facility's property line.

[*Comment:* See § 264.17(a) for additional requirements.]

§ 264.177 Special requirements for incompatible wastes.

(a) Incompatible wastes, or incompatible wastes and materials (see Appendix V for examples), must not be placed in the same container, unless § 264.17(b) is complied with.

(b) Hazardous waste must not be placed in an unwashed container that previously held an incompatible waste or material.

[*Comment:* As required by § 264.13, the waste analysis plan must include analyses needed to comply with § 264.177. Also, § 264.17(c) requires wastes analyses, trial tests or other documentation to assure compliance with § 264.17(b). As required by § 264.73, the owner or operator must place the results of each waste analysis and trial test, and any documented information, in the operating record of the facility.]

(c) A storage container holding a hazardous waste that is incompatible with any waste or other materials stored nearby in other containers, piles, open tanks, or surface impoundments must be separated from the other materials or protected from them by means of a dike, berm, wall, or other device.

[*Comment:* The purpose of this section is to prevent fires, explosions, gaseous emission, leaching, or other discharge of hazardous waste or hazardous waste constituents which could result from the mixing of incompatible wastes or materials if containers break or leak.]

§ 264.178 Closure.

At closure, all hazardous waste and hazardous waste residues must be removed from the containment system. Remaining containers, liners, bases, and soil containing or contaminated with hazardous waste or hazardous waste residues must be decontaminated or removed.

[*Comment:* At closure, as throughout the operating period, unless the owner or operator can demonstrate in accordance with § 261.3(d) of this chapter that the solid waste removed from the containment system is not a hazardous waste, the owner or operator becomes a generator of hazardous waste and must manage it in accordance with all applicable requirements of Parts 262 through 266 of this chapter].

Subpart J—Tank Systems

SOURCE: 51 FR 25472, July 14, 1986, unless otherwise noted.

§ 264.190 Applicability.

The requirements of this Subpart apply to owners and operators of facilities that use tank systems for storing or treating hazardous waste except as otherwise provided in paragraphs (a) and (b) of this section or in § 264.1 of this part.

(a) Tank systems that are used to store or treat hazardous waste which contains no free liquids and are situated inside a building with an impermeable floor are exempted from the requirements in § 264.193. To demonstrate the absence or presence of free liquids in the stored/treated waste, EPA Method 9095 (Paint Filter Liquids Test) as described in "Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods" (EPA Publication No. SW-846) must be used.

(b) Tank systems, including sumps, as defined in § 260.10, that serve as part of a secondary containment system to collect or contain releases of hazardous wastes are exempted from the requirements in § 264.193(a).

(Information collection requirement contained in paragraph (a) was approved by the Office of Management and Budget under control number 2050-0050)

[51 FR 25472, July 14, 1986; 51 FR 29430, Aug. 15, 1986, as amended at 53 FR 34086, Sept. 2, 1988]

§ 264.191 Assessment of existing tank system's integrity.

(a) For each existing tank system that does not have secondary containment meeting the requirements of § 264.193, the owner or operator must determine that the tank system is not leaking or is unfit for use. Except as provided in paragraph (c) of this section, the owner or operator must obtain and keep on file at the facility a written assessment reviewed and certified by an independent, qualified registered professional engineer, in accordance with § 270.11(d), that attests to the tank system's integrity by January 12, 1988.

(b) This assessment must determine that the tank system is adequately designed and has sufficient structural strength and compatibility with the waste(s) to be stored or treated, to ensure that it will not collapse, rupture, or fail. At a minimum, this assessment must consider the following:

(1) Design standard(s), if available, according to which the tank and ancillary equipment were constructed;

(2) Hazardous characteristics of the waste(s) that have been and will be handled;

(3) Existing corrosion protection measures;

(4) Documented age of the tank system, if available (otherwise, an estimate of the age); and

(5) Results of a leak test, internal inspection, or other tank integrity examination such that:

(i) For non-enterable underground tanks, the assessment must include a leak test that is capable of taking into account the effects of temperature variations, tank end deflection, vapor pockets, and high water table effects, and

(ii) For other than non-enterable underground tanks and for ancillary equipment, this assessment must include either a leak test, as described above, or other integrity examination, that is certified by an independent, qualified, registered professional engineer in accordance with § 270.11(d), that addresses cracks, leaks, corrosion, and erosion.

[NOTE: The practices described in the American Petroleum Institute (API) Publication, Guide for Inspection of Refinery Equipment, Chapter XIII, "Atmospheric and Low-Pressure Storage Tanks," 4th edition, 1981, may be used, where applicable, as guidelines in conducting other than a leak test.]

(c) Tank systems that store or treat materials that become hazardous wastes subsequent to July 14, 1986, must conduct this assessment within 12 months after the date that the waste becomes a hazardous waste.

(d) If, as a result of the assessment conducted in accordance with paragraph (a), a tank system is found to be leaking or unfit for use, the owner or operator must comply with the requirements of § 264.196.

(Information collection requirements contained in paragraphs (a) through (d) were approved by the Office of Management and Budget under control number 2050-0050)

[51 FR 25472, July 14, 1986; 51 FR 29430, Aug. 15, 1986]

§ 264.192 Design and installation of new tank systems or components.

(a) Owners or operators of new tank systems or components must obtain and submit to the Regional Administrator, at time of submittal of Part B information, a written assessment, reviewed and certified by an independent, qualified registered professional engineer, in accordance with § 270.11(d), attesting that the tank system has sufficient structural integrity and is acceptable for the storing and treating of hazardous waste. The assessment must show that the foundation, structural support, seams, connections, and pressure controls (if applicable) are adequately designed and that the tank system has sufficient structural strength, compatibility with the waste(s) to be stored or treated, and corrosion protection to ensure that it will not collapse, rupture, or fail. This assessment, which will be used by the Regional Administrator to review and approve or disapprove the acceptability of the tank system design, must include, at a minimum, the following information:

(1) Design standard(s) according to which tank(s) and/or the ancillary equipment are constructed;

(2) Hazardous characteristics of the waste(s) to be handled;

(3) For new tank systems or components in which the external shell of a metal tank or any external metal component of the tank system will be in contact with the soil or with water, a determination by a corrosion expert of:

(i) Factors affecting the potential for corrosion, including but not limited to:

(A) Soil moisture content;

(B) Soil pH;

(C) Soil sulfides level;

(D) Soil resistivity;

(E) Structure to soil potential;

(F) Influence of nearby underground metal structures (e.g., piping);

(G) Existence of stray electric current;

(H) Existing corrosion-protection measures (e.g., coating, cathodic protection), and

(ii) The type and degree of external corrosion protection that are needed to ensure the integrity of the tank system during the use of the tank system or component, consisting of one or more of the following:

(A) Corrosion-resistant materials of construction such as special alloys, fiberglass reinforced plastic, etc.;

(B) Corrosion-resistant coating (such as epoxy, fiberglass, etc.) with cathodic protection (e.g., impressed current or sacrificial anodes); and

(C) Electrical isolation devices such as insulating joints, flanges, etc.

[NOTE: The practices described in the National Association of Corrosion Engineers (NACE) standard, "Recommended Practice (RP-02-85)—Control of External Corrosion on Metallic Buried, Partially Buried, or Submerged Liquid Storage Systems," and the American Petroleum Institute (API) Publication 1632, "Cathodic Protection of Underground Petroleum Storage Tanks and Piping Systems," may be used, where applicable, as guidelines in providing corrosion protection for tank systems.]

(4) For underground tank system components that are likely to be adversely affected by vehicular traffic, a determination of design or operational measures that will protect the tank system against potential damage; and

(5) Design considerations to ensure that:

(i) Tank foundations will maintain the load of a full tank;

(ii) Tank systems will be anchored to prevent flotation or dislodgment where the tank system is placed in a saturated zone, or is located within a seismic fault zone subject to the standards of § 264.18(a); and

(iii) Tank systems will withstand the effects of frost heave.

(b) The owner or operator of a new tank system must ensure that proper handling procedures are adhered to in order to prevent damage to the system during installation. Prior to covering, enclosing, or placing a new tank system or component in use, an independent, qualified installation inspector or an independent, qualified, regis-

tered professional engineer, either of whom is trained and experienced in the proper installation of tank systems or components, must inspect the system for the presence of any of the following items:

(1) Weld breaks;

(2) Punctures;

(3) Scrapes of protective coatings;

(4) Cracks;

(5) Corrosion;

(6) Other structural damage or inadequate construction/installation.

All discrepancies must be remedied before the tank system is covered, enclosed, or placed in use.

(c) New tank systems or components that are placed underground and that are backfilled must be provided with a backfill material that is a noncorrosive, porous, homogeneous substance and that is installed so that the backfill is placed completely around the tank and compacted to ensure that the tank and piping are fully and uniformly supported.

(d) All new tanks and ancillary equipment must be tested for tightness prior to being covered, enclosed, or placed in use. If a tank system is found not to be tight, all repairs necessary to remedy the leak(s) in the system must be performed prior to the tank system being covered, enclosed, or placed into use.

(e) Ancillary equipment must be supported and protected against physical damage and excessive stress due to settlement, vibration, expansion, or contraction.

[NOTE: The piping system installation procedures described in American Petroleum Institute (API) Publication 1615 (November 1979), "Installation of Underground Petroleum Storage Systems," or ANSI Standard B31.3, "Petroleum Refinery Piping," and ANSI Standard B31.4 "Liquid Petroleum Transportation Piping System," may be used, where applicable, as guidelines for proper installation of piping systems.]

(f) The owner or operator must provide the type and degree of corrosion protection recommended by an independent corrosion expert, based on the information provided under paragraph (a)(3) of this section, or other corrosion protection if the Regional Administrator believes other corrosion protection is necessary to ensure the integrity of the tank system during use of the tank system. The installation of a corrosion protection system that is field fabricated must be supervised by an independent corrosion expert to ensure proper installation.

(g) The owner or operator must obtain and keep on file at the facility written statements by those persons required to certify the design of the tank system and supervise the installation of the tank system in accordance with the requirements of paragraphs (b) through (f) of this section, that attest that the tank system was properly designed and installed and that repairs, pursuant to paragraphs (b) and (d) of this section, were performed. These written statements must also include the certification statement as required in § 270.11(d) of this chapter.

(Information collection requirements contained in paragraphs (a) and (g) were approved by the Office of Management and Budget under control number 2050-0050)

[51 FR 25472, July 14, 1986; 51 FR 29430, Aug. 15, 1986]

§ 264.193 Containment and detection of releases.

(a) In order to prevent the release of hazardous waste or hazardous constituents to the environment, secondary containment that meets the requirements of this section must be provided (except as provided in paragraphs (f) and (g) of this section):

(1) For all new tank systems or components, prior to their being put into service;

(2) For all existing tank systems used to store or treat EPA Hazardous Waste Nos. F020, F021, F022, F023, F026, and F027, within two years after January 12, 1987;

(3) For those existing tank systems of known and documented age, within two years after January 12, 1987 or when the tank system has reached 15 years of age, whichever comes later;

(4) For those existing tank systems for which the age cannot be documented, within eight years of January 12, 1987; but if the age of the facility is greater than seven years, secondary containment must be provided by the time the facility reaches 15 years of

age, or within two years of January 12, 1987, whichever comes later; and

(5) For tank systems that store or treat materials that become hazardous wastes subsequent to January 12, 1987, within the time intervals required in paragraphs (a)(1) through (a)(4) of this section, except that the date that a material becomes a hazardous waste must be used in place of January 12, 1987.

(b) Secondary containment systems must be:

(1) Designed, installed, and operated to prevent any migration of wastes or accumulated liquid out of the system to the soil, ground water, or surface water at any time during the use of the tank system; and

(2) Capable of detecting and collecting releases and accumulated liquids until the collected material is removed.

(c) To meet the requirements of paragraph (b) of this section, secondary containment systems must be at a minimum:

(1) Constructed of or lined with materials that are compatible with the wastes(s) to be placed in the tank system and must have sufficient strength and thickness to prevent failure owing to pressure gradients (including static head and external hydrological forces), physical contact with the waste to which it is exposed, climatic conditions, and the stress of daily operation (including stresses from nearby vehicular traffic).

(2) Placed on a foundation or base capable of providing support to the secondary containment system, resistance to pressure gradients above and below the system, and capable of preventing failure due to settlement, compression, or uplift;

(3) Provided with a leak-detection system that is designed and operated so that it will detect the failure of either the primary or secondary containment structure or the presence of any release of hazardous waste or accumulated liquid in the secondary containment system within 24 hours, or at the earliest practicable time if the owner or operator can demonstrate to the Regional Administrator that existing detection technologies or site conditions will not allow detection of a release within 24 hours; and

(4) Sloped or otherwise designed or operated to drain and remove liquids resulting from leaks, spills, or precipitation. Spilled or leaked waste and accumulated precipitation must be removed from the secondary containment system within 24 hours, or in as timely a manner as is possible to prevent harm to human health and the environment, if the owner or operator can demonstrate to the Regional Administrator that removal of the released waste or accumulated precipitation cannot be accomplished within 24 hours.

[NOTE: If the collected material is a hazardous waste under Part 261 of this chapter, it is subject to management as a hazardous waste in accordance with all applicable requirements of Parts 262 through 265 of this chapter. If the collected material is discharged through a point source to waters of the United States, it is subject to the requirements of sections 301, 304, and 402 of the Clean Water Act, as amended. If discharged to a Publicly Owned Treatment Works (POTW), it is subject to the requirements of section 307 of the Clean Water Act, as amended. If the collected material is released to the environment, it may be subject to the reporting requirements of 40 CFR Part 302.]

(d) Secondary containment for tanks must include one or more of the following devices:

(1) A liner (external to the tank);

(2) A vault;

(3) A double-walled tank; or

(4) An equivalent device as approved by the Regional Administrator

(e) In addition to the requirements of paragraphs (b), (c), and (d) of this section, secondary containment systems must satisfy the following requirements:

(1) External liner systems must be:

(i) Designed or operated to contain 100 percent of the capacity of the largest tank within its boundary;

(ii) Designed or operated to prevent run-on or infiltration of precipitation into the secondary containment system unless the collection system has sufficient excess capacity to contain run-on or infiltration. Such additional capacity must be sufficient to

contain precipitation from a 25-year, 24-hour rainfall event.

(iii) Free of cracks or gaps; and

(iv) Designed and installed to surround the tank completely and to cover all surrounding earth likely to come into contact with the waste if the waste is released from the tank(s) (i.e., capable of preventing lateral as well as vertical migration of the waste).

(2) Vault systems must be:

(i) Designed or operated to contain 100 percent of the capacity of the largest tank within its boundary;

(ii) Designed or operated to prevent run-on or infiltration of precipitation into the secondary containment system unless the collection system has sufficient excess capacity to contain run-on or infiltration. Such additional capacity must be sufficient to contain precipitation from a 25-year, 24-hour rainfall event:

(iii) Constructed with chemical-resistant water stops in place at all joints (if any):

(iv) Provided with an impermeable interior coating or lining that is compatible with the stored waste and that will prevent migration of waste into the concrete;

(v) Provided with a means to protect against the formation of and ignition of vapors within the vault, if the waste being stored or treated:

(A) Meets the definition of ignitable waste under § 262.21 of this chapter; or

(B) Meets the definition of reactive waste under § 262.21 of this chapter, and may form an ignitable or explosive vapor.

(vi) Provided with an exterior moisture barrier or be otherwise designed or operated to prevent migration of moisture into the vault if the vault is subject to hydraulic pressure.

(3) Double-walled tanks must be:

(i) Designed as an integral structure (i.e., an inner tank completely enveloped within an outer shell) so that any release from the inner tank is contained by the outer shell.

(ii) Protected, if constructed of metal, from both corrosion of the primary tank interior and of the external surface of the outer shell: and

(iii) Provided with a built-in continuous leak detection system capable of detecting a release within 24 hours, or at the earliest practicable time, if the owner or operator can demonstrate to the Regional Administrator, and the Regional Administrator concludes, that the existing detection technology or site conditions would not allow detection of a release within 24 hours.

[NOTE: The provisions outlined in the Steel Tank Institute's (STI) "Standard for Dual Wall Underground Steel Storage Tanks" may be used as guidelines for aspects of the design of underground steel double-walled tanks.]

(f) Ancillary equipment must be provided with secondary containment (e.g., trench, jacketing, double-walled piping) that meets the requirements of paragraphs (b) and (c) of this section except for:

(1) Aboveground piping (exclusive of flanges, joints, valves, and other connections) that are visually inspected for leaks on a daily basis;

(2) Welded flanges, welded joints, and welded connections, that are visually inspected for leaks on a daily basis;

(3) Sealless or magnetic coupling pumps and sealless valves, that are visually inspected for leaks on a daily basis; and

(4) Pressurized aboveground piping systems with automatic shut-off devices (e.g., excess flow check valves, flow metering shutdown devices, loss of pressure actuated shut-off devices) that are visually inspected for leaks on a daily basis.

(g) The owner or operator may obtain a variance from the requirements of this section if the Regional Administrator finds, as a result of a demonstration by the owner or operator that alternative design and operating practices, together with location characteristics, will prevent the migration of any hazardous waste or hazardous constituents into the ground water; or surface water at least as effectively as secondary containment during the active life of the tank system *or* that in the event of a release that does migrate to ground water or surface water, no substantial present or potential hazard will be

posed to human health or the environment. New underground tank systems may not, per a demonstration in accordance with paragraph (g)(2) of this section, be exempted from the secondary containment requirements of this section.

(1) In deciding whether to grant a variance based on a demonstration of equivalent protection of ground water and surface water, the Regional Administrator will consider:

(i) The nature and quantity of the wastes;

(ii) The proposed alternate design and operation;

(iii) The hydrogeologic setting of the facility, including the thickness of soils present between the tank system and ground water, and

(iv) All other factors that would influence the quality and mobility of the hazardous constituents and the potential for them to migrate to ground water or surface water

(2) In deciding whether to grant a variance based on a demonstration of no substantial present or potential hazard, the Regional Administrator will consider:

(i) The potential adverse effects on ground water, surface water, and land quality taking into account:

(A) The physical and chemical characteristics of the waste in the tank system, including its potential for migration.

(B) The hydrogeological characteristics of the facility and surrounding land,

(C) The potential for health risks caused by human exposure to waste constituents,

(D) The potential for damage to wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents, and

(E) The persistence and permanence of the potential adverse effects;

(ii) The potential adverse effects of a release on ground-water quality, taking into account:

(A) The quantity and quality of ground water and the direction of ground-water flow,

(B) The proximity and withdrawal rates of ground-water users,

(C) The current and future uses of ground water in the area, and

(D) The existing quality of ground water, including other sources of contamination and their cumulative impact on the ground-water quality;

(iii) The potential adverse effects of a release on surface water quality, taking into account:

(A) The quantity and quality of ground water and the direction of ground-water flow,

(B) The patterns of rainfall in the region,

(C) The proximity of the tank system to surface waters,

(D) The current and future uses of surface waters in the area and any water quality standards established for those surface waters, and

(E) The existing quality of surface water, including other sources of contamination and the cumulative impact on surface-water quality; and

(iv) The potential adverse effects of a release on the land surrounding the tank system, taking into account:

(A) The patterns of rainfall in the region, and

(B) The current and future uses of the surrounding land.

(3) The owner or operator of a tank system, for which a variance from secondary containment had been granted in accordance with the requirements of paragraph (g)(1) of this section, at which a release of hazardous waste has occurred from the primary tank system but has not migrated beyond the zone of engineering control (as established in the variance), must:

(i) Comply with the requirements of § 264.196, except paragraph (d), and

(ii) Decontaminate or remove contaminated soil to the extent necessary to:

(A) Enable the tank system for which the variance was granted to resume operation with the capability for the detection of releases at least equivalent to the capability it had prior to the release; and

(B) Prevent the migration of hazardous waste or hazardous constituents to ground water or surface water; and

(iii) If contaminated soil cannot be removed or decontaminated in accordance with paragraph (g)(3)(ii) of this section, comply with the requirement of § 264.197(b).

(4) The owner or operator of a tank system, for which a variance from secondary containment had been granted in accordance with the requirements of paragraph (g)(1) of this section, at which a release of hazardous waste has occurred from the primary tank system and has migrated beyond the zone of engineering control (as established in the variance), must:

(i) Comply with the requirements of § 264.196 (a), (b), (c), and (d); and

(ii) Prevent the migration of hazardous waste or hazardous constituents to ground water or surface water, if possible, and decontaminate or remove contaminated soil. If contaminated soil cannot be decontaminated or removed or if ground water has been contaminated, the owner or operator must comply with the requirements of § 264.197(b); and

(iii) If repairing, replacing, or reinstalling the tank system, provide secondary containment in accordance with the requirements of paragraphs (a) through (f) of this section or reapply for a variance from secondary containment and meet the requirements for new tank systems in § 264.192 if the tank system is replaced. The owner or operator must comply with these requirements even if contaminated soil can be decontaminated or removed and ground water or surface water has not been contaminated.

(h) The following procedures must be followed in order to request a variance from secondary containment:

(1) The Regional Administrator must be notified in writing by the owner or operator that he intends to conduct and submit a demonstration for a variance from secondary containment as allowed in paragraph (g) according to the following schedule:

(i) For existing tank systems, at least 24 months prior to the date that secondary containment must be provided in accordance with paragraph (a) of this section.

(ii) For new tank systems, at least 30 days prior to entering into a contract for installation.

(2) As part of the notification, the owner or operator must also submit to the Regional Administrator a description of the steps necessary to conduct the demonstration and a timetable for completing each of the steps. The demonstration must address each of the factors listed in paragraph (g)(1) or paragraph (g)(2) of this section;

(3) The demonstration for a variance must be completed within 180 days after notifying the Regional Administrator of an intent to conduct the demonstration; and

(4) If a variance is granted under this paragraph, the Regional Administrator will require the permittee to construct and operate the tank system in the manner that was demonstrated to meet the requirements for the variance.

(i) All tank systems, until such time as secondary containment that meets the requirements of this section is provided, must comply with the following:

(1) For non-enterable underground tanks, a leak test that meets the requirements of § 264.191(b)(5) or other tank integrity method, as approved or required by the Regional Administrator, must be conducted at least annually.

(2) For other than non-enterable underground tanks, the owner or operator must either conduct a leak test as in paragraph (i)(1) of this section or develop a schedule and procedure for an assessment of the overall condition of the tank system by an independent, qualified registered professional engineer. The schedule and procedure must be adequate to detect obvious cracks, leaks, and corrosion or erosion that may lead to cracks and leaks. The owner or operator must remove the stored waste from the tank, if necessary, to allow the condition of all internal tank surfaces to be assessed. The frequency of these assessments must be based on the material of construction of the tank and its ancillary equipment, the age of the system, the type of corrosion or erosion protection used, the rate of corrosion or erosion observed during the previous inspection, and the characteristics of the waste being stored or treated.

(3) For ancillary equipment, a leak test or other integrity assessment as approved by the Regional Administrator must be conducted at least annually.

[NOTE: The practices described in the American Petroleum Institute (API) Publication Guide for Inspection of Refinery Equipment, Chapter XIII, "Atmospheric and Low-Pressure Storage Tanks," 4th edition, 1981, may be used, where applicable, as guidelines for assessing the overall condition of the tank system.]

(4) The owner or operator must maintain on file at the facility a record of the results of the assessments conducted in accordance with paragraphs (i)(1) through (i)(3) of this section.

(5) If a tank system or component is found to be leaking or unfit for use as a result of the leak test or assessment in paragraphs (i)(1) through (i)(3) of this section, the owner or operator must comply with the requirements of § 264.196.

(Information collection requirements contained in paragraphs (c), (d), (e), (g), (h), and (i) were approved by the Office of Management and Budget under control number 2050-0050)

[51 FR 25472, July 14, 1986; 51 FR 29430, Aug. 15, 1986, as amended at 53 FR 34086, Sept. 2, 1988]

§ 264.194 General operating requirements.

(a) Hazardous wastes or treatment reagents must not be placed in a tank system if they could cause the tank, its ancillary equipment, or the containment system to rupture, leak, corrode, or otherwise fail.

(b) The owner or operator must use appropriate controls and practices to prevent spills and overflows from tank or containment systems. These include at a minimum:

(1) Spill prevention controls (e.g., check valves, dry disconnect couplings);

(2) Overfill prevention controls (e.g., level sensing devices, high level alarms, automatic feed cutoff, or bypass to a standby tank); and

(3) Maintenance of sufficient freeboard in uncovered tanks to prevent overtopping by wave or wind action or by precipitation.

(c) The owner or operator must comply with the requirements of § 264.196 if a leak or spill occurs in the tank system.

(Information collection requirements contained in paragraph (c) were approved by the Office of Management and Budget under control number 2050-0050)

§ 264.195 Inspections.

(a) The owner or operator must develop and follow a schedule and procedure for inspecting overfill controls.

(b) The owner or operator must inspect at least once each operating day:

(1) Aboveground portions of the tank system, if any, to detect corrosion or releases of waste;

(2) Data gathered from monitoring and leak detection equipment (e.g., pressure or temperature gauges, monitoring wells) to ensure that the tank system is being operated according to its design; and

(3) The construction materials and the area immediately surrounding the externally accessible portion of the tank system, including the secondary containment system (e.g., dikes) to detect erosion or signs of releases of hazardous waste (e.g., wet spots, dead vegetation).

[NOTE: Section 264.15(c) requires the owner or operator to remedy any deterioration or malfunction he finds. Section 264.196 requires the owner or operator to notify the Regional Administrator within 24 hours of confirming a leak. Also, 40 CFR Part 302 may require the owner or operator to notify the National Response Center of a release.]

(c) The owner or operator must inspect cathodic protection systems, if present, according to, at a minimum, the following schedule to ensure that they are functioning properly:

(1) The proper operation of the cathodic protection system must be confirmed within six months after initial installation and annually thereafter; and

(2) All sources of impressed current must be inspected and/or tested, as appropriate, at least bimonthly (i.e., every other month).

[NOTE: The practices described in the National Association of Corrosion Engineers (NACE) standard, "Recommended Practice (RP-02-85)—Control of External Corrosion on Metallic Buried, Partially Buried, or Submerged Liquid Storage Systems," and the American Petroleum Institute (API) Publication 1632, "Cathodic Protection of Underground Petroleum Storage Tanks and Piping Systems," may be used, where appli-

cable, as guidelines in maintaining and inspecting cathodic protection systems.]

(d) The owner or operator must document in the operating record of the facility an inspection of those items in paragraphs (a) through (c) of this section.

(Information collection requirements contained in paragraph (a) and (d) were approved by the Office of Management and Budget under control number 2050-0050)

§ 264.196 Response to leaks or spills and disposition of leaking or unfit-for-use tank systems.

A tank system or secondary containment system from which there has been a leak or spill, or which is unfit for use, must be removed from service immediately, and the owner or operator must satisfy the following requirements:

(a) *Cessation of use; prevent flow or addition of wastes.* The owner or operator must immediately stop the flow of hazardous waste into the tank system or secondary containment system and inspect the system to determine the cause of the release.

(b) *Removal of waste from tank system or secondary containment system.* (1) If the release was from the tank system, the owner/operator must, within 24 hours after detection of the leak or, if the owner/operator demonstrates that it is not possible, at the earliest practicable time, remove as much of the waste as is necessary to prevent further release of hazardous waste to the environment and to allow inspection and repair of the tank system to be performed.

(2) If the material released was to a secondary containment system, all released materials must be removed within 24 hours or in as timely a manner as is possible to prevent harm to human health and the environment.

(c) *Containment of visible releases to the environment.* The owner/operator must immediately conduct a visual inspection of the release and, based upon that inspection:

(1) Prevent further migration of the leak or spill to soils or surface water; and

(2) Remove, and properly dispose of, any visible contamination of the soil or surface water.

(d) *Notifications, reports.* (1) Any release to the environment, except as provided in paragraph (d)(2) of this section, must be reported to the Regional Administrator within 24 hours of its detection. If the release has been reported pursuant to 40 CFR Part 302, that report will satisfy this requirement.

(2) A leak or spill of hazardous waste is exempted from the requirements of this paragraph if it is:

(i) Less than or equal to a quantity of one (1) pound, and

(ii) Immediately contained and cleaned up.

(3) Within 30 days of detection of a release to the environment, a report containing the following information must be submitted to the Regional Administrator:

(i) Likely route of migration of the release;

(ii) Characteristics of the surrounding soil (soil composition, geology, hydrogeology, climate);

(iii) Results of any monitoring or sampling conducted in connection with the release (if available). If sampling or monitoring data relating to the release are not available within 30 days, these data must be submitted to the Regional Administrator as soon as they become available.

(iv) Proximity to downgradient drinking water, surface water, and populated areas; and

(v) Description of response actions taken or planned.

(e) *Provision of secondary containment, repair, or closure.* (1) Unless the owner/operator satisfies the requirements of paragraphs (e)(2) through (4) of this section, the tank system must be closed in accordance with § 264.197.

(2) If the cause of the release was a spill that has not damaged the integrity of the system, the owner/operator may return the system to service as soon as the released waste is removed and repairs, if necessary, are made.

(3) If the cause of the release was a leak from the primary tank system into the secondary containment system, the system must be repaired

40-147 O—90——9

prior to returning the tank system to service.

(4) If the source of the release was a leak to the environment from a component of a tank system without secondary containment, the owner/operator must provide the component of the system from which the leak occurred with secondary containment that satisfies the requirements of § 264.193 before it can be returned to service, unless the source of the leak is an aboveground portion of a tank system that can be inspected visually. If the source is an aboveground component that can be inspected visually, the component must be repaired and may be returned to service without secondary containment as long as the requirements of paragraph (f) of this section are satisfied. If a component is replaced to comply with the requirements of this subparagraph, that component must satisfy the requirements for new tank systems or components in §§ 264.192 and 264.193. Additionally, if a leak has occurred in any portion of a tank system component that is not readily accessible for visual inspection (e.g., the bottom of an inground or onground tank), the entire component must be provided with secondary containment in accordance with § 264.193 prior to being returned to use.

(f) *Certification of major repairs.* If the owner/operator has repaired a tank system in accordance with paragraph (e) of this section, and the repair has been extensive (e.g., installation of an internal liner; repair of a ruptured primary containment or secondary containment vessel), the tank system must not be returned to service unless the owner/operator has obtained a certification by an independent, qualified, registered, professional engineer in accordance with § 270.11(d) that the repaired system is capable of handling hazardous wastes without release for the intended life of the system. This certification must be submitted to the Regional Administrator within seven days after returning the tank system to use.

[NOTE: The Regional Administrator may, on the basis of any information received that there is or has been a release of hazardous waste or hazardous constituents into the environment, issue an order under RCRA section 3004(v), 3008(h), or 7003(a) requiring corrective action or such other response as deemed necessary to protect human health or the environment.]

[NOTE: See § 264.15(c) for the requirements necessary to remedy a failure. Also, 40 CFR Part 302 may require the owner or operator to notify the National Response Center of certain releases.]

(Information collection requirements contained in paragraphs (d), (e), and (f) were approved by the Office of Management and Budget under control number 2050-0050)

[51 FR 25472, July 14, 1986; 51 FR 29430, Aug. 15, 1986, as amended at 53 FR 34086, Sept. 2, 1988]

§ 264.197 Closure and post-closure care.

(a) At closure of a tank system, the owner or operator must remove or decontaminate all waste residues, contaminated containment system components (liners, etc.), contaminated soils, and structures and equipment contaminated with waste, and manage them as hazardous waste, unless § 261.3(d) of this Chapter applies. The closure plan, closure activities, cost estimates for closure, and financial responsibility for tank systems must meet all of the requirements specified in Subparts G and H of this Part.

(b) If the owner or operator demonstrates that not all contaminated soils can be practicably removed or decontaminated as required in paragraph (a) of this section, then the owner or operator must close the tank system and perform post-closure care in accordance with the closure and post-closure care requirements that apply to landfills (§ 264.310). In addition, for the purposes of closure, post-closure, and financial responsibility, such a tank system is then considered to be a landfill, and the owner or operator must meet all of the requirements for landfills specified in Subparts G and H of this part.

(c) If an owner or operator has a tank system that does not have secondary containment that meets the requirements of § 264.193 (b) through (f) and has not been granted a variance from the secondary containment requirements in accordance with § 264.193(g), then:

(1) The closure plan for the tank system must include both a plan for

complying with paragraph (a) of this section and a contingent plan for complying with paragraph (b) of this section.

(2) A contingent post-closure plan for complying with paragraph (b) of this section must be prepared and submitted as part of the permit application.

(3) The cost estimates calculated for closure and post-closure care must reflect the costs of complying with the contingent closure plan and the contingent post-closure plan, if those costs are greater than the costs of complying with the closure plan prepared for the expected closure under paragraph (a) of this section.

(4) Financial assurance must be based on the cost estimates in paragraph (c)(3) of this section.

(5) For the purposes of the contingent closure and post-closure plans, such a tank system is considered to be a landfill, and the contingent plans must meet all of the closure, post-closure, and financial responsibility requirements for landfills under Subparts G and H of this Part.

(Information collection requirements contained in paragraphs (a)-(c) were approved by the Office of Management and Budget under control number 2050-0050)

[51 FR 25472, July 14, 1986; 51 FR 29430, Aug. 15, 1986]

§ 264.198 Special requirements for ignitable or reactive wastes.

(a) Ignitable or reactive waste must not be placed in tank systems, unless:

(1) The waste is treated, rendered, or mixed before or immediately after placement in the tank system so that:

(i) The resulting waste, mixture, or dissolved material no longer meets the definition of ignitable or reactive waste under §§ 261.21 or 261.23 of this Chapter, and

(ii) Section 264.17(b) is complied with; or

(2) The waste is stored or treated in such a way that it is protected from any material or conditions that may cause the waste to ignite or react; or

(3) The tank system is used solely for emergencies.

(b) The owner or operator of a facility where ignitable or reactive waste is stored or treated in a tank must comply with the requirements for the maintenance of protective distances between the waste management area and any public ways, streets, alleys, or an adjoining property line that can be built upon as required in Tables 2-1 through 2-6 of the National Fire Protection Association's "Flammable and Combustible Liquids Code," (1977 or 1981), (incorporated by reference, see § 260.11).

§ 264.199 Special requirements for incompatible wastes.

(a) Incompatible wastes, or incompatible wastes and materials, must not be placed in the same tank system, unless § 264.17(b) is complied with.

(b) Hazardous waste must not be placed in a tank system that has not been decontaminated and that previously held an incompatible waste or material, unless § 264.17(b) is complied with.

Subpart K—Surface Impoundments

SOURCE: 47 FR 32357, July 26, 1982, unless otherwise noted.

§ 264.220 Applicability.

The regulations in this subpart apply to owners and operators of facilities that use surface impoundments to treat, store, or dispose of hazardous waste except as § 264.1 provides otherwise.

§ 264.221 Design and operating requirements.

(a) Any surface impoundment that is not covered by paragraph (c) of this section or § 265.221 of this chapter must have a liner for all portions of the impoundment (except for existing portions of such impoundments). The liner must be designed, constructed, and installed to prevent any migration of wastes out of the impoundment to the adjacent subsurface soil or ground water or surface water at any time during the active life (including the closure period) of the impoundment. The liner may be constructed of materials that may allow wastes to migrate into the liner (but not into the adjacent subsurface soil or ground water or surface water) during the active life

of the facility, provided that the impoundment is closed in accordance with § 264.228(a)(1). For impoundments that will be closed in accordance with § 264.228(a)(2), the liner must be constructed of materials that can prevent wastes from migrating into the liner during the active life of the facility. The liner must be:

(1) Constructed of materials that have appropriate chemical properties and sufficient strength and thickness to prevent failure due to pressure gradients (including static head and external hydrogeologic forces), physical contact with the waste or leachate to which they are exposed, climatic conditions, the stress of installation, and the stress of daily operation;

(2) Placed upon a foundation or base capable of providing support to the liner and resistance to pressure gradients above and below the liner to prevent failure of the liner due to settlement, compression, or uplift; and

(3) Installed to cover all surrounding earth likely to be in contact with the waste or leachate.

(b) The owner or operator will be exempted from the requirements of paragraph (a) of this section if the Regional Administrator finds, based on a demonstration by the owner or operator, that alternate design and operating practices, together with location characteristics, will prevent the migration of any hazardous constituents (see § 264.93) into the ground water or surface water at any future time. In deciding whether to grant an exemption, the Regional Administrator will consider:

(1) The nature and quantity of the wastes;

(2) The proposed alternate design and operation;

(3) The hydrogeologic setting of the facility, including the attenuative capacity and thickness of the liners and soils present between the impoundment and ground water or surface water; and

(4) All other factors which would influence the quality and mobility of the leachate produced and the potential for it to migrate to ground water or surface water.

(c) The owner or operator of each new surface impoundment, each new surface impoundment unit at an existing facility, each replacement of an existing surface impoundment unit, and each lateral expansion of an existing surface impoundment unit, must install two or more liners and leachate collection system between such liners. The liners and leachate collection system must protect human health and the environment. The requirements of this paragraph shall apply with respect to all waste received after insurance of the permit for units where the part B of the permit application is received by the Regional Administrator after November 8, 1984. The requirement for the installation of two or more liners in this paragraph may be satisfied by the installation of a top liner designed, operated, and constructed of materials to prevent the migration of any constituent into such liner during the period such facility remains in operation (including any post-closure monitoring period), and a lower liner designed, operated, and constructed to prevent the migration of any constituent through such liner during such period. For the purpose of the preceding sentence, a lower liner shall be deemed to satisfy such requirement if it is constructed of at least a 3-foot thick layer of recompacted clay or other natural material with a permeability of no more than 1×10^{-7} centimeter per second.

(d) Paragraph (c) of this section will not apply if the owner or operator demonstrates to the Regional Administrator, and the Regional Administrator finds for such surface impoundment, that alternative design and operating practices, together with location characteristics, will prevent the migration of any hazardous constituent into the ground water or surface water at least as effectively as such liners and leachate collection systems.

(e) The double liner requirement set forth in paragraph (c) of this section may be waived by the Regional Administrator for any monofill, if:

(1) The monofill contains only hazardous wastes from foundry furnace emission controls or metal casting molding sand, and such wastes do not contain constituents which would render the wastes hazardous for reasons other than the EP toxicity char-

acteristics in § 261.24 of this chapter; and

(2)(i)(A) The monofill has at least one liner for which there is no evidence that such liner is leaking. For the purposes of this paragraph, the term "liner" means a liner designed, constructed, installed, and operated to prevent hazardous waste from passing into the liner at any time during the active life of the facility, or a liner designed, constructed, installed, and operated to prevent hazardous waste from migrating beyond the liner to adjacent subsurface soil, ground water, or surface water at any time during the active life of the facility. In the case of any surface impoundment which has been exempted from the requirements of paragraph (c) of this section on the basis of a liner designed, constructed, installed, and operated to prevent hazardous waste from passing beyond the liner, at the closure of such impoundment, the owner or operator must remove or decontaminate all waste residues, all contaminated liner material, and contaminated soil to the extent practicable. If all contaminated soil is not removed or decontaminated, the owner or operator of such impoundment will comply with appropriate post-closure requirements, including but not limited to ground-water monitoring and corrective action;

(B) The monofill is located more than one-quarter mile from an underground source of drinking water (as that term is defined in § 144.3 of this chapter); and

(C) The monofill is in compliance with generally applicable groundwater monitoring requrements for facilities with permits under RCRA section 3005(c); or

(ii) The owner or operator demonstrates that the monofill is located, designed and operated so as to assure that there will be no migration of any hazardous constituent into ground water or surface water at any future time.

(f) A surface impoundment must be designed, constructed, maintained, and operated to prevent overtopping resulting from normal or abnormal operations; overfilling; wind and wave action; rainfall; run-on; malfunctions of level controllers, alarms, and other equipment; and human error.

(g) A surface impoundment must have dikes that are designed, constructed, and maintained with sufficient structural integrity to prevent massive failure of the dikes. In ensuring structural integrity, it must not be presumed that the liner system will function without leakage during the active life of the unit.

(h) The Regional Administrator will specify in the permit all design and operating practices that are necessary to ensure that the requirements of this section are satisfied.

(Approved by the Office of Management and Budget under control number 2050-0007)

[47 FR 32357, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985; 50 FR 28747, July 15, 1985; 55 FR 19263, May 9, 1990]

§§ 264.222—264.225 [Reserved]

§ 264.226 Monitoring and inspection.

(a) During construction and installation, liners (except in the case of existing portions of surface impoundments exempt from § 264.221(a)) and cover systems (e.g., membranes, sheets, or coatings) must be inspected for uniformity, damage, and imperfections (e.g., holes, cracks, thin spots, or foreign materials). Immediately after construction or installation:

(1) Synthetic liners and covers must be inspected to ensure tight seams and joints and the absence of tears, punctures, or blisters; and

(2) Soil-based and admixed liners and covers must be inspected for imperfections including lenses, cracks, channels, root holes, or other structural non-uniformities that may cause an increase in the permeability of the liner or cover.

(b) While a surface impoundment is in operation, it must be inspected weekly and after storms to detect evidence of any of the following:

(1) Deterioration, malfunctions, or improper operation of overtopping control systems;

(2) Sudden drops in the level of the impoundment's contents; and

(3) Severe erosion or other signs of deterioration in dikes or other containment devices.

(c) Prior to the issuance of a permit, and after any extended period of time (at least six months) during which the impoundment was not in service, the owner or operator must obtain a certification from a qualified engineer that the impoundment's dike, including that portion of any dike which provides freeboard, has structural integrity. The certification must establish, in particular, that the dike:

(1) Will withstand the stress of the pressure exerted by the types and amounts of wastes to be placed in the impoundment; and

(2) Will not fail due to scouring or piping, without dependence on any liner system included in the surface impoundment construction.

(Approved by the Office of Management and Budget under control number 2050-0007)

[47 FR 32357, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985; 50 FR 28748, July 15, 1985]

§ 264.227 Emergency repairs; contingency plans.

(a) A surface impoundment must be removed from service in accordance with paragraph (b) of this section when:

(1) The level of liquids in the impoundment suddenly drops and the drop is not known to be caused by changes in the flows into or out of the impoundment; or

(2) The dike leaks.

(b) When a surface impoundment must be removed from service as required by paragraph (a) of this section, the owner or operator must:

(1) Immediately shut off the flow or stop the addition of wastes into the impoundment;

(2) Immediately contain any surface leakage which has occurred or is occurring;

(3) Immediately stop the leak;

(4) Take any other necessary steps to stop or prevent catastrophic failure;

(5) If a leak cannot be stopped by any other means, empty the impoundment; and

(6) Notify the Regional Administrator of the problem in writing within seven days after detecting the problem.

(c) As part of the contingency plan required in Subpart D of this part, the owner or operator must specify a procedure for complying with the requirements of paragraph (b) of this section.

(d) No surface impoundment that has been removed from service in accordance with the requirements of this section may be restored to service unless the portion of the impoundment which was failing is repaired and the following steps are taken:

(1) If the impoundment was removed from service as the result of actual or imminent dike failure, the dike's structural integrity must be recertified in accordance with § 264.226(c).

(2) If the impoundment was removed from service as the result of a sudden drop in the liquid level, then:

(i) For any existing portion of the impoundment, a liner must be installed in compliance with § 264.221(a); and

(ii) For any other portion of the impoundment, the repaired liner system must be certified by a qualified engineer as meeting the design specifications approved in the permit.

(e) A surface impoundment that has been removed from service in accordance with the requirements of this section and that is not being repaired must be closed in accordance with the provisions of § 264.228.

[47 FR 32357, July 26, 1982, as amended at 50 FR 28748, July 15, 1985]

§ 264.228 Closure and post-closure care.

(a) At closure, the owner or operator must:

(1) Remove or decontaminate all waste residues, contaminated containment system components (liners, etc.), contaminated subsoils, and structures and equipment contaminated with waste and leachate, and manage them as hazardous waste unless § 261.3(d) of this chapter applies; or

(2)(i) Eliminate free liquids by removing liquid wastes or solidifying the remaining wastes and waste residues;

(ii) Stabilize remaining wastes to a bearing capacity sufficient to support final cover; and

(iii) Cover the surface impoundment with a final cover designed and constructed to:

(A) Provide long-term minimization of the migration of liquids through the closed impoundment;

(B) Function with minimum maintenance;

(C) Promote drainage and minimize erosion or abrasion of the final cover;

(D) Accommodate settling and subsidence so that the cover's integrity is maintained; and

(E) Have a permeability less than or equal to the permeability of any bottom liner system or natural subsoils present.

(b) If some waste residues or contaminated materials are left in place at final closure, the owner or operator must comply with all post-closure requirements contained in §§ 264.117 through 264.120, including maintenance and monitoring throughout the post-closure care period (specified in the permit under § 264.117). The owner or operator must:

(1) Maintain the integrity and effectiveness of the final cover, including making repairs to the cap as necessary to correct the effects of settling, subsidence, erosion, or other events;

(2) Maintain and monitor the ground-water monitoring system and comply with all other applicable requirements of Subpart F of this part; and

(3) Prevent run-on and run-off from eroding or otherwise damaging the final cover.

(c)(1) If an owner or operator plans to close a surface impoundment in accordance with paragraph (a)(1) of this section, and the impoundment does not comply with the liner requirements of § 264.221(a) and is not exempt from them in accordance with § 264.221(b), then:

(i) The closure plan for the impoundment under § 264.112 must include both a plan for complying with paragraph (a)(1) of this section and a contingent plan for complying with paragraph (a)(2) of this section in case not all contaminated subsoils can be practicably removed at closure; and

(ii) The owner or operator must prepare a contingent post-closure plan under § 264.118 for complying with paragraph (b) of this section in case not all contaminated subsoils can be practicably removed at closure.

(2) The cost estimates calculated under §§ 264.142 and 264.144 for closure and post-closure care of an impoundment subject to this paragraph must include the cost of complying with the contingent closure plan and the contingent post-closure plan, but are not required to include the cost of expected closure under paragraph (a)(1) of this section.

[47 FR 32357, July 26, 1982, as amended at 50 FR 28748, July 15, 1985]

§ 264.229 Special requirements for ignitable or reactive waste.

Ignitable or reactive waste must not be placed in a surface impoundment, unless the waste and impoundment satisfy all applicable requirements of 40 CFR part 268, and:

(a) The waste is treated, rendered, or mixed before or immediately after placement in the impoundment so that:

(1) The resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under § 261.21 or § 261.23 of this chapter; and

(2) Section 264.17(b) is complied with; or

(b) The waste is managed in such a way that it is protected from any material or conditions which may cause it to ignite or react; or

(c) The surface impoundment is used solely for emergencies.

[47 FR 32357, July 26, 1982, as amended at 55 FR 22685, June 1, 1990]

§ 264.230 Special requirements for incompatible wastes.

Incompatible wastes, or incompatible wastes and materials, (see Appendix V of this part for examples) must not be placed in the same surface impoundment, unless § 264.17(b) is complied with.

§ 264.231 Special requirements for hazardous wastes FO20, FO21, FO22, FO23, FO26, and FO27.

(a) Hazardous Wastes FO20, FO21, FO22, FO23, FO26, and FO27 must not be placed in a surface impound-

ment unless the owner or operator operates the surface impoundment in accordance with a management plan for these wastes that is approved by the Regional Administrator pursuant to the standards set out in this paragraph, and in accord with all other applicable requirements of this part. The factors to be considered are:

(1) The volume, physical, and chemical characteristics of the wastes, including their potential to migrate through soil or to volatilize or escape into the atmosphere;

(2) The attenuative properties of underlying and surrounding soils or other materials;

(3) The mobilizing properties of other materials co-disposed with these wastes; and

(4) The effectiveness of additional treatment, design, or monitoring techniques.

(b) The Regional Administrator may determine that additional design, operating, and monitoring requirements are necessary for surface impoundments managing hazardous wastes FO20, FO21, FO22, FO23, FO26, and FO27 in order to reduce the possibility of migration of these wastes to ground water, surface water, or air so as to protect human health and the environment.

[50 FR 2004, Jan. 14, 1985]

Subpart L—Waste Piles

SOURCE: 47 FR 32359, July 26, 1982, unless otherwise noted.

§ 264.250 Applicability.

(a) The regulations in this subpart apply to owners and operators of facilities that store or treat hazardous waste in piles, except as § 264.1 provides otherwise.

(b) The regulations in this subpart do not apply to owners or operators of waste piles that are closed with wastes left in place. Such waste piles are subject to regulation under Subpart N of this part (Landfills).

(c) The owner or operator of any waste pile that is inside or under a structure that provides protection from precipitation so that neither runoff nor leachate is generated is not subject to regulation under § 264.251 or under Subpart F of this part, provided that:

(1) Liquids or materials containing free liquids are not placed in the pile;

(2) The pile is protected from surface water run-on by the structure or in some other manner;

(3) The pile is designed and operated to control dispersal of the waste by wind, where necessary, by means other than wetting; and

(4) The pile will not generate leachate through decomposition or other reactions.

§ 264.251 Design and operating requirements.

(a) A waste pile (except for an existing portion of a waste pile) must have:

(1) A liner that is designed, constructed, and installed to prevent any migration of wastes out of the pile into the adjacent subsurface soil or ground water or surface water at any time during the active life (including the closure period) of the waste pile. The liner may be constructed of materials that may allow waste to migrate into the liner itself (but not into the adjacent subsurface soil or ground water or surface water) during the active life of the facility. The liner must be:

(i) Constructed of materials that have appropriate chemical properties and sufficient strength and thickness to prevent failure due to pressure gradients (including static head and external hydrogeologic forces), physical contact with the waste or leachate to which they are exposed, climatic conditions, the stress of installation, and the stress of daily operation;

(ii) Placed upon a foundation or base capable of providing support to the liner and resistance to pressure gradients above and below the liner to prevent failure of the liner due to settlement, compression, or uplift; and

(iii) Installed to cover all surrounding earth likely to be in contact with the waste or leachate; and

(2) A leachate collection and removal system immediately above the liner that is designed, constructed, maintained, and operated to collect and remove leachate from the pile. The Regional Administrator will specify

design and operating conditions in the permit to ensure that the leachate depth over the liner does not exceed 30 cm (one foot). The leachate collection and removal system must be:

(i) Constructed of materials that are:

(A) Chemically resistent to the waste managed in the pile and the leachate expected to be generated; and

(B) Of sufficient strength and thickness to prevent collapse under the pressures exerted by overlaying wastes, waste cover materials, and by any equipment used at the pile; and

(ii) Designed and operated to function without clogging through the scheduled closure of the waste pile.

(b) The owner or operator will be exempted from the requirements of paragraph (a) of this section, if the Regional Administrator finds, based on a demonstration by the owner or operator, that alternate design and operating practices, together with location characteristics, will prevent the migration of any hazardous constituents (see § 264.93) into the ground water or surface water at any future time. In deciding whether to grant an exemption, the Regional Administrator will consider:

(1) The nature and quantity of the wastes;

(2) The proposed alternate design and operation;

(3) The hydrogeologic setting of the facility, including attenuative capacity and thickness of the liners and soils present between the pile and ground water or surface water; and

(4) All other factors which would influence the quality and mobility of the leachate produced and the potential for it to migrate to ground water or surface water.

(c) The owner or operator must design, construct, operate, and maintain a run-on control system capable of preventing flow onto the active portion of the pile during peak discharge from at least a 25-year storm.

(d) The owner or operator must design, construct, operate, and maintain a run-off management system to collect and control at least the water volume resulting from a 24-hour, 25-year storm.

(e) Collection and holding facilities (e.g., tanks or basins) associated with run-on and run-off control systems must be emptied or otherwise managed expeditiously after storms to maintain design capacity of the system.

(f) If the pile contains any particulate matter which may be subject to wind dispersal, the owner or operator must cover or otherwise manage the pile to control wind dispersal.

(g) The Regional Administrator will specify in the permit all design and operating practices that are necessary to ensure that the requirements of this section are satisfied.

(Approved by the Office of Management and Budget under control number 2050-0007)

[47 FR 32359, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985]

§§ 264.252—264.253 [Reserved]

§ 264.254 Monitoring and inspection.

(a) During construction or installation, liners (except in the case of existing portions of piles exempt from § 264.251(a)) and cover systems (*e.g.*, membranes, sheets, or coatings) must be inspected for uniformity, damage, and imperfections (*e.g.*, holes, cracks, thin spots, or foreign materials). Immediately after construction or installation:

(1) Synthetic liners and covers must be inspected to ensure tight seams and joints and the absence of tears, punctures, or blisters; and

(2) Soil-based and admixed liners and covers must be inspected for imperfections including lenses, cracks, channels, root holes, or other structural non-uniformities that may cause an increase in the permeability of the liner or cover.

(b) While a waste pile is in operation, it must be inspected weekly and after storms to detect evidence of any of the following:

(1) Deterioration, malfunctions, or improper operation of run-on and run-off control systems;

(2) Proper functioning of wind dispersal control systems, where present; and

(3) The presence of leachate in and proper functioning of leachate collec-

tion and removal systems, where present.

(Approved by the Office of Management and Budget under control number 2050-0007)

[47 FR 32359, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985; 50 FR 28748, July 15, 1985]

§ 264.255 [Reserved]

§ 264.256 Special requirements for ignitable or reactive waste.

Ignitable or reactive waste must not be place in a waste pile unless the waste and waste pile satisfy all applicable requirements of 40 CFR part 268, and:

(a) The waste is treated, rendered, or mixed before or immediately after placement in the pile so that:

(1) The resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under § 261.21 or § 261.23 of this chapter; and

(2) Section 264.17(b) is complied with; or

(b) The waste is managed in such a way that it is protected from any material or conditions which may cause it to ignite or react.

[47 FR 32359, July 26, 1982, as amended at 55 FR 22685, June 1, 1990]

§ 264.257 Special requirements for incompatible wastes.

(a) Incompatible wastes, or incompatible wastes and materials, (see Appendix V of this part for examples) must not be placed in the same pile, unless § 264.17(b) is complied with.

(b) A pile of hazardous waste that is incompatible with any waste or other material stored nearby in containers, other piles, open tanks, or surface impoundments must be separated from the other materials, or protected from them by means of a dike, berm, wall, or other device.

(c) Hazardous waste must not be piled on the same base where incompatible wastes or materials were previously piled, unless the base has been decontaminated sufficiently to ensure compliance with § 264.17(b).

§ 264.258 Closure and post-closure care.

(a) At closure, the owner or operator must remove or decontaminate all waste residues, contaminated containment system components (liners, etc.), contaminated subsoils, and structures and equipment contaminated with waste and leachate, and manage them as hazardous waste unless § 261.3(d) of this chapter applies.

(b) If, after removing or decontaminating all residues and making all reasonable efforts to effect removal or decontamination of contaminated components, subsoils, structures, and equipment as required in paragraph (a) of this section, the owner or operator finds that not all contaminated subsoils can be practicably removed or decontaminated, he must close the facility and perform post-closure care in accordance with the closure and post-closure care requirements that apply to landfills (§ 264.310).

(c)(1) The owner or operator of a waste pile that does not comply with the liner requirements of § 264.251(a)(1) and is not exempt from them in accordance with § 264.250(c) or § 264.251(b), must:

(i) Include in the closure plan for the pile under § 264.112 both a plan for complying with paragraph (a) of this section and a contingent plan for complying with paragraph (b) of this section in case not all contaminated subsoils can be practicably removed at closure; and

(ii) Prepare a contingent post-closure plan under § 264.118 for complying with paragraph (b) of this section in case not all contaminated subsoils can be practicably removed at closure.

(2) The cost estimates calculated under §§ 264.142 and 264.144 for closure and post-closure care of a pile subject to this paragraph must include the cost of complying with the contingent closure plan and the contingent post-closure plan, but are not required to include the cost of expected closure under paragraph (a) of this section.

§ 264.259 Special requirements for hazardous wastes FO20, FO21, FO22, FO23, FO26, and FO27.

(a) Hazardous Wastes FO20, FO21, FO22, FO23, FO26, and FO27 must

not be placed in waste piles that are not enclosed (as defined in § 264.250(c)) unless the owner or operator operates the waste pile in accordance with a management plan for these wastes that is approved by the Regional Administrator pursuant to the standards set out in this paragraph, and in accord with all other applicable requirements of this part. The factors to be considered are:

(1) The volume, physical, and chemical characteristics of the wastes, including their potential to migrate through soil or to volatilize or escape into the atmosphere;

(2) The attenuative properties of underlying and surrounding soils or other materials;

(3) The mobilizing properties of other materials co-disposed with these wastes; and

(4) The effectiveness of additional treatment, design, or monitoring techniques.

(b) The Regional Administrator may determine that additional design, operating, and monitoring requirements are necessary for piles managing hazardous wastes FO20, FO21, FO22, FO23, FO26, and, FO27 in order to reduce the possibility of migration of these wastes to ground water, surface water, or air so as to protect human health and the environment.

[50 FR 2004, Jan. 14, 1985]

Subpart M—Land Treatment

SOURCE: 47 FR 32361, July 26, 1982, unless otherwise noted.

§ 264.270 Applicability.

The regulations in this subpart apply to owners and operators of facilities that treat or dispose of hazardous waste in land treatment units, except as § 264.1 provides otherwise.

§ 264.271 Treatment program.

(a) An owner or operator subject to this subpart must establish a land treatment program that is designed to ensure that hazardous constituents placed in or on the treatment zone are degraded, transformed, or immobilized within the treatment zone. The Regional Administrator will specify in the facility permit the elements of the treatment program, including:

(1) The wastes that are capable of being treated at the unit based on a demonstration under § 264.272;

(2) Design measures and operating practices necessary to maximize the success of degradation, transformation, and immobilization processes in the treatment zone in accordance with § 264.273(a); and

(3) Unsaturated zone monitoring provisions meeting the requirements of § 264.278.

(b) The Regional Administrator will specify in the facility permit the hazardous constituents that must be degraded, transformed, or immobilized under this subpart. Hazardous constituents are constituents identified in Appendix VIII of Part 261 of this chapter that are reasonably expected to be in, or derived from, waste placed in or on the treatment zone.

(c) The Regional Administrator will specify the vertical and horizontal dimensions of the treatment zone in the facility permit. The treatment zone is the portion of the unsaturated zone below and including the land surface in which the owner or operator intends to maintain the conditions necessary for effective degradation, transformation, or immobilization of hazardous constituents. The maximum depth of the treatment zone must be:

(1) No more than 1.5 meters (5 feet) from the initial soil surface; and

(2) More than 1 meter (3 feet) above the seasonal high water table.

(Approved by the Office of Management and Budget under control number 2050-0007)

[47 FR 32361, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985]

§ 264.272 Treatment demonstration.

(a) For each waste that will be applied to the treatment zone, the owner or operator must demonstrate, prior to application of the waste, that hazardous constituents in the waste can be completely degraded, transformed, or immobilized in the treatment zone.

(b) In making this demonstration, the owner or operator may use field tests, laboratory analyses, available data, or, in the case of existing units,

operating data. If the owner or operator intends to conduct field tests or laboratory analyses in order to make the demonstration required under paragraph (a) of this section, he must obtain a treatment or disposal permit under § 270.63. The Regional Administrator will specify in this permit the testing, analytical, design, and operating requirements (including the duration of the tests and analyses, and, in the case of field tests, the horizontal and vertical dimensions of the treatment zone, monitoring procedures, closure and clean-up activities) necessary to meet the requirements in paragraph (c) of this section.

(c) Any field test or laboratory analysis conducted in order to make a demonstration under paragraph (a) of this section must:

(1) Accurately simulate the characteristics and operating conditions for the proposed land treatment unit including:

(i) The characteristics of the waste (including the presence of Appendix VIII of Part 261 of this chapter constituents);

(ii) The climate in the area;

(iii) The topography of the surrounding area;

(iv) The characteristics of the soil in the treatment zone (including depth); and

(v) The operating practices to be used at the unit.

(2) Be likely to show that hazardous constituents in the waste to be tested will be completely degraded, transformed, or immobilized in the treatment zone of the proposed land treatment unit; and

(3) Be conducted in a manner that protects human health and the environment considering:

(i) The characteristics of the waste to be tested;

(ii) The operating and monitoring measures taken during the course of the test;

(iii) The duration of the test;

(iv) The volume of waste used in the test;

(v) In the case of field tests, the potential for migration of hazardous constituents to ground water or surface water.

[47 FR 32361, July 26, 1982, as amended at 48 FR 14294, Apr. 1, 1983]

§ 264.273 Design and operating requirements.

The Regional Administrator will specify in the facility permit how the owner or operator will design, construct, operate, and maintain the land treatment unit in compliance with this section.

(a) The owner or operator must design, construct, operate, and maintain the unit to maximize the degradation, transformation, and immobilization of hazardous constituents in the treatment zone. The owner or operator must design, construct, operate, and maintain the unit in accord with all design and operating conditions that were used in the treatment demonstration under § 264.272. At a minimum, the Regional Administrator will specify the following in the facility permit:

(1) The rate and method of waste application to the treatment zone;

(2) Measures to control soil pH;

(3) Measures to enhance microbial or chemical reactions (*e.g.*, fertilization, tilling); and

(4) Measures to control the moisture content of the treatment zone.

(b) The owner or operator must design, construct, operate, and maintain the treatment zone to minimize run-off of hazardous constituents during the active life of the land treatment unit.

(c) The owner or operator must design, construct, operate, and maintain a run-on control system capable of preventing flow onto the treatment zone during peak discharge from at least a 25-year storm.

(d) The owner or operator must design, construct, operate, and maintain a run-off management system to collect and control at least the water volume resulting from a 24-hour, 25-year storm.

(e) Collection and holding facilities (*e.g.*, tanks or basins) associated with run-on and run-off control systems must be emptied or otherwise managed expeditiously after storms to maintain the design capacity of the system.

(f) If the treatment zone contains particulate matter which may be subject to wind dispersal, the owner or operator must manage the unit to control wind dispersal.

(g) The owner or operator must inspect the unit weekly and after storms to detect evidence of:

(1) Deterioration, malfunctions, or improper operation of run-on and run-off control systems; and

(2) Improper functioning of wind dispersal control measures.

(Approved by the Office of Management and Budget under control number 2050-0007)

[47 FR 32361, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985]

§§ 264.274—264.275 [Reserved]

§ 264.276 Food-chain crops.

The Regional Administrator may allow the growth of food-chain crops in or on the treatment zone only if the owner or operator satisfies the conditions of this section. The Regional Administrator will specify in the facility permit the specific food-chain crops which may be grown.

(a)(1) The owner or operator must demonstrate that there is no substantial risk to human health caused by the growth of such crops in or on the treatment zone by demonstrating, prior to the planting of such crops, that hazardous constituents other than cadmium:

(i) Will not be transferred to the food or feed portions of the crop by plant uptake or direct contact, and will not otherwise be ingested by food-chain animals (*e.g.*, by grazing); or

(ii) Will not occur in greater concentrations in or on the food or feed portions of crops grown on the treatment zone than in or on identical portions of the same crops grown on untreated soils under similar conditions in the same region.

(2) The owner or operator must make the demonstration required under this paragraph prior to the planting of crops at the facility for all constituents identified in Appendix VIII of Part 261 of this chapter that are reasonably expected to be in, or derived from, waste placed in or on the treatment zone.

(3) In making a demonstration under this paragraph, the owner or operator may use field tests, greenhouse studies, available data, or, in the case of existing units, operating data, and must:

(i) Base the demonstration on conditions similar to those present in the treatment zone, including soil characteristics (*e.g.*, pH, cation exchange capacity), specific wastes, application rates, application methods, and crops to be grown; and

(ii) Describe the procedures used in conducting any tests, including the sample selection criteria, sample size, analytical methods, and statistical procedures.

(4) If the owner or operator intends to conduct field tests or greenhouse studies in order to make the demonstration required under this paragraph, he must obtain a permit for conducting such activities.

(b) The owner or operator must comply with the following conditions if cadmium is contained in wastes applied to the treatment zone:

(1)(i) The pH of the waste and soil mixture must be 6.5 or greater at the time of each waste application, except for waste containing cadmium at concentrations of 2 mg/kg (dry weight) or less;

(ii) The annual application of cadmium from waste must not exceed 0.5 kilograms per hectare (kg/ha) on land used for production of tobacco, leafy vegetables, or root crops grown for human consumption. For other food-chain crops, the annual cadmium application rate must not exceed:

Time period	Annual Cd application rate (kilograms per hectare)
Present to June 30, 1984	2.0
July 1, 1984 to December 31, 1986	1.25
Beginning January 1, 1987	0.5

(iii) The cumulative application of cadmium from waste must not exceed 5 kg/ha if the waste and soil mixture has a pH of less than 6.5; and

(iv) If the waste and soil mixture has a pH of 6.5 or greater or is maintained at a pH of 6.5 or greater during crop growth, the cumulative application of cadmium from waste must not exceed: 5 kg/ha if soil cation exchange capacity (CEC) is less than 5 meq/100g; 10 kg/ha if soil CEC is 5-15 meq/100g; and 20 kg/ha if soil CEC is greater than 15 meq/100g; or

(2)(i) Animal feed must be the only food-chain crop produced;

(ii) The pH of the waste and soil mixture must be 6.5 or greater at the time of waste application or at the time the crop is planted, whichever occurs later, and this pH level must be maintained whenever food-chain crops are grown;

(iii) There must be an operating plan which demonstrates how the animal feed will be distributed to preclude ingestion by humans. The operating plan must describe the measures to be taken to safeguard against possible health hazards from cadmium entering the food chain, which may result from alternative land uses; and

(iv) Future property owners must be notified by a stipulation in the land record or property deed which states that the property has received waste at high cadmium application rates and that food-chain crops must not be grown except in compliance with paragraph (b)(2) of this section.

§ 264.277 [Reserved]

§ 264.278 Unsaturated zone monitoring.

An owner or operator subject to this subpart must establish an unsaturated zone monitoring program to discharge the following responsibilities:

(a) The owner or operator must monitor the soil and soil-pore liquid to determine whether hazardous constituents migrate out of the treatment zone.

(1) The Regional Administrator will specify the hazardous constituents to be monitored in the facility permit. The hazardous constituents to be monitored are those specified under § 264.271(b).

(2) The Regional Administrator may require monitoring for principal hazardous constituents (PHCs) in lieu of the constituents specified under § 264.271(b). PHCs are hazardous constituents contained in the wastes to be applied at the unit that are the most difficult to treat, considering the combined effects of degradation, transformation, and immobilization. The Regional Administrator will establish PHCs if he finds, based on waste analyses, treatment demonstrations, or other data, that effective degradation, transformation, or immobilization of the PHCs will assure treatment at at least equivalent levels for the other hazardous constituents in the wastes.

(b) The owner or operator must install an unsaturated zone monitoring system that includes soil monitoring using soil cores and soil-pore liquid monitoring using devices such as lysimeters. The unsaturated zone monitoring system must consist of a sufficient number of sampling points at appropriate locations and depths to yield samples that:

(1) Represent the quality of background soil-pore liquid quality and the chemical make-up of soil that has not been affected by leakage from the treatment zone; and

(2) Indicate the quality of soil-pore liquid and the chemical make-up of the soil below the treatment zone.

(c) The owner or operator must establish a background value for each hazardous constituent to be monitored under paragraph (a) of this section. The permit will specify the background values for each constituent or specify the procedures to be used to calculate the background values.

(1) Background soil values may be based on a one-time sampling at a background plot having characteristics similar to those of the treatment zone.

(2) Background soil-pore liquid values must be based on at least quarterly sampling for one year at a background plot having characteristics similar to those of the treatment zone.

(3) The owner or operator must express all background values in a form necessary for the determination of statistically significant increases under paragraph (f) of this section.

(4) In taking samples used in the determination of all background values, the owner or operator must use an unsaturated zone monitoring system that

complies with paragraph (b)(1) of this section.

(d) The owner or operator must conduct soil monitoring and soil-pore liquid monitoring immediately below the treatment zone. The Regional Administrator will specify the frequency and timing of soil and soil-pore liquid monitoring in the facility permit after considering the frequency, timing, and rate of waste application, and the soil permeability. The owner or operator must express the results of soil and soil-pore liquid monitoring in a form necessary for the determination of statistically significant increases under paragraph (f) of this section.

(e) The owner or operator must use consistent sampling and analysis procedures that are designed to ensure sampling results that provide a reliable indication of soil-pore liquid quality and the chemical make-up of the soil below the treatment zone. At a minimum, the owner or operator must implement procedures and techniques for:

(1) Sample collection;

(2) Sample preservation and shipment;

(3) Analytical procedures; and

(4) Chain of custody control.

(f) The owner or operator must determine whether there is a statistically significant change over background values for any hazardous constituent to be monitored under paragraph (a) of this section below the treatment zone each time he conducts soil monitoring and soil-pore liquid monitoring under paragraph (d) of this section.

(1) In determining whether a statistically significant increase has occurred, the owner or operator must compare the value of each constituent, as determined under paragraph (d) of this section, to the background value for that constituent according to the statistical procedure specified in the facility permit under this paragraph.

(2) The owner or operator must determine whether there has been a statistically significant increase below the treatment zone within a reasonable time period after completion of sampling. The Regional Administrator will specify that time period in the facility permit after considering the complexity of the statistical test and the availability of laboratory facilities to perform the analysis of soil and soil-pore liquid samples.

(3) The owner or operator must determine whether there is a statistically significant increase below the treatment zone using a statistical procedure that provides reasonable confidence that migration from the treatment zone will be identified. The Regional Administrator will specify a statistical procedure in the facility permit that he finds:

(i) Is appropriate for the distribution of the data used to establish background values; and

(ii) Provides a reasonable balance between the probability of falsely identifying migration from the treatment zone and the probability of failing to identify real migration from the treatment zone.

(g) If the owner or operator determines, pursuant to paragraph (f) of this section, that there is a statistically significant increase of hazardous constituents below the treatment zone, he must:

(1) Notify the Regional Administrator of this finding in writing within seven days. The notification must indicate what constituents have shown statistically significant increases.

(2) Within 90 days, submit to the Regional Administrator an application for a permit modification to modify the operating practices at the facility in order to maximize the success of degradation, transformation, or immobilization processes in the treatment zone.

(h) If the owner or operator determines, pursuant to paragraph (f) of this section, that there is a statistically significant increase of hazardous constituents below the treatment zone, he may demonstrate that a source other than regulated units caused the increase or that the increase resulted from an error in sampling, analysis, or evaluation. While the owner or operator may make a demonstration under this paragraph in addition to, or in lieu of, submitting a permit modification application under paragraph (g)(2) of this section, he is not relieved of the requirement to submit a permit modification application within the time specified in paragraph (g)(2) of

this section unless the demonstration made under this paragraph successfully shows that a source other than regulated units caused the increase or that the increase resulted from an error in sampling, analysis, or evaluation. In making a demonstration under this paragraph, the owner or operator must:

(1) Notify the Regional Administrator in writing within seven days of determining a statistically significant increase below the treatment zone that he intends to make a determination under this paragraph;

(2) Within 90 days, submit a report to the Regional Administrator demonstrating that a source other than the regulated units caused the increase or that the increase resulted from error in sampling, analysis, or evaluation;

(3) Within 90 days, submit to the Regional Administrator an application for a permit modification to make any appropriate changes to the unsaturated zone monitoring program at the facility; and

(4) Continue to monitor in accordance with the unsaturated zone monitoring program established under this section.

(Approved by the Office of Management and Budget under control number 2050-0038)

[47 FR 32361, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985]

§ 264.279 Recordkeeping.

The owner or operator must include hazardous waste application dates and rates in the operating record required under § 264.73.

(Approved by the Office of Management and Budget under control number 2050-0007)

[47 FR 32361, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985]

§ 264.280 Closure and post-closure care.

(a) During the closure period the owner or operator must:

(1) Continue all operations (including pH control) necessary to maximize degradation, transformation, or immobilization of hazardous constituents within the treatment zone as required under § 264.273(a), except to the extent such measures are inconsistent with paragraph (a)(8) of this section.

(2) Continue all operations in the treatment zone to minimize run-off of hazardous constituents as required under § 264.273(b);

(3) Maintain the run-on control system required under § 264.273(c);

(4) Maintain the run-off management system required under § 264.273(d);

(5) Control wind dispersal of hazardous waste if required under § 264.273(f);

(6) Continue to comply with any prohibitions or conditions concerning growth of food-chain crops under § 264.276;

(7) Continue unsaturated zone monitoring in compliance with § 264.278, except that soil-pore liquid monitoring may be terminated 90 days after the last application of waste to the treatment zone; and

(8) Establish a vegetative cover on the portion of the facility being closed at such time that the cover will not substantially impede degradation, transformation, or immobilization of hazardous constituents in the treatment zone. The vegetative cover must be capable of maintaining growth without extensive maintenance.

(b) For the purpose of complying with § 264.115, when closure is completed the owner or operator may submit to the Regional Administrator certification by an independent qualified soil scientist, in lieu of an independent registered professional engineer, that the facility has been closed in accordance with the specifications in the approved closure plan.

(c) During the post-closure care period the owner or operator must:

(1) Continue all operations (including pH control) necessary to enhance degradation and transformation and sustain immobilization of hazardous constituents in the treatment zone to the extent that such measures are consistent with other post-closure care activities;

(2) Maintain a vegetative cover over closed portions of the facility;

(3) Maintain the run-on control system required under § 264.273(c);

(4) Maintain the run-off management system required under § 264.273(d);

(5) Control wind dispersal of hazardous waste if required under § 264.273(f);

(6) Continue to comply with any prohibitions or conditions concerning growth of food-chain crops under § 264.276; and

(7) Continue unsaturated zone monitoring in compliance with § 264.278, expect that soil-pore liquid monitoring may be terminated 90 days after the last application of waste to the treatment zone.

(d) The owner or operator is not subject to regulation under paragraphs (a)(8) and (c) of this section if the Regional Administrator finds that the level of hazardous constituents in the treatment zone soil does not exceed the background value of those constituents by an amount that is statistically significant when using the test specified in paragraph (d)(3) of this section. The owner or operator may submit such a demonstration to the Regional Administrator at any time during the closure of post-closure care periods. For the purposes of this paragraph:

(1) The owner or operator must establish background soil values and determine whether there is a statistically significant increase over those values for all hazardous constituents specified in the facility permit under § 264.271 (b).

(i) Background soil values may be based on a one-time sampling of a background plot having characteristics similar to those of the treatment zone.

(ii) The owner or operator must express background values and values for hazardous constituents in the treatment zone in a form necessary for the determination of statistically significant increases under paragraph (d)(3) of this section.

(2) In taking samples used in the determination of background and treatment zone values, the owner or operator must take samples at a sufficient number of sampling points and at appropriate locations and depths to yield samples that represent the chemical make-up of soil that has not been affected by leakage from the treatment zone and the soil within the treatment zone, respectively.

(3) In determining whether a statistically significant increase has occurred, the owner or operator must compare the value of each constituent in the treatment zone to the background value for that constituent using a statistical procedure that provides reasonable confidence that constituent presence in the treatment zone will be identified. The owner or operator must use a statistical procedure that:

(i) Is appropriate for the distribution of the data used to establish background values; and

(ii) Provides a reasonable balance between the probability of falsely identifying hazardous constituent presence in the treatment zone and the probability of failing to identify real presence in the treatment zone.

(e) The owner or operator is not subject to regulation under Subpart F of this chapter if the Regional Administrator finds that the owner or operator satisfies paragraph (d) of this section and if unsaturated zone monitoring under § 264.278 indicates that hazardous constituents have not migrated beyond the treatment zone during the active life of the land treatment unit.

§ 264.281 Special requirements for ignitable or reactive waste.

The owner or operator must not apply ignitable or reactive waste to the treatment zone unless the waste and the treatment zone meet all applicable requirements of 40 CFR part 268, and:

(a) The waste is immediately incorporated into the soil so that:

(1) The resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under § 261.21 or § 261.23 of this chapter; and

(2) Section 264.17(b) is complied with; or

(b) The waste is managed in such a way that it is protected from any material or conditions which may cause it to ignite or react.

[47 FR 32361, July 26, 1982, as amended at 55 FR 22685, June 1, 1990]

§ 264.282 Special requirements for incompatible wastes.

The owner or operator must not place incompatible wastes, or incompatible wastes and materials (see Appendix V of this part for examples), in or on the same treatment zone, unless § 264.17(b) is complied with.

§ 264.283 Special requirements for hazardous wastes FO20, FO21, FO22, FO23, FO26, and FO27.

(a) Hazardous Wastes FO20, FO21, FO22, FO23, FO26 and, FO27 must not be placed in a land treatment unit unless the owner or operator operates the facility in accordance with a management plan for these wastes that is approved by the Regional Administrator pursuant to the standards set out in this paragraph, and in accord with all other applicable requirements of this part. The factors to be considered are:

(1) The volume, physical, and chemical characteristics of the wastes, including their potential to migrate through soil or to volatilize or escape into the atmosphere;

(2) The attenuative properties of underlying and surrounding soils or other materials;

(3) The mobilizing properties of other materials co-disposed with these wastes; and

(4) The effectiveness of additional treatment, design, or monitoring techniques.

(b) The Regional Administrator may determine that additional design, operating, and monitoring requirements are necessary for land treatment facilities managing hazardous wastes FO20, FO21, FO22, FO23, FO26, and FO27 in order to reduce the possibility of migration of these wastes to ground water, surface water, or air so as to protect human health and the environment.

[50 FR 2004, Jan. 14, 1985]

Subpart N—Landfills

SOURCE: 47 FR 32365, July 26, 1982, unless otherwise noted.

§ 264.300 Applicability.

The regulations in this subpart apply to owners and operators of facilities that dispose of hazardous waste in landfills, except as § 264.1 provides otherwise.

§ 264.301 Design and operating requirements.

(a) Any landfill that is not covered by paragraph (c) of this section or § 265.301(a) of this chapter must have a liner system for all portions of the landfill (except for existing portions of such landfill). The liner system must have:

(1) A liner that is designed, constructed, and installed to prevent any migration of wastes out of the landfill to the adjacent subsurface soil or ground water or surface water at anytime during the active life (including the closure period) of the landfill. The liner must be constructed of materials that prevent wastes from passing into the liner during the active life of the facility. The liner must be:

(i) Constructed of materials that have appropriate chemical properties and sufficient strength and thickness to prevent failure due to pressure gradients (including static head and external hydrogeologic forces), physical contact with the waste or leachate to which they are exposed, climatic conditions, the stress of installation, and the stress of daily operation;

(ii) Placed upon a foundation or base capable of providing support to the liner and resistance to pressure gradients above and below the liner to prevent failure of the liner due to settlement, compression, or uplift; and

(iii) Installed to cover all surrounding earth likely to be in contact with the waste or leachate; and

(2) A leachate collection and removal system immediately above the liner that is designed, constructed, maintained, and operated to collect and remove leachate from the landfill. The Regional Administrator will specify design and operating conditions in the permit to ensure that the leachate depth over the liner does not exceed 30 cm (one foot). The leachate collection and removal system must be:

(i) Constructed of materials that are:

(A) Chemically resistant to the waste managed in the landfill and the leachate expected to be generated; and

(B) Of sufficient strength and thickness to prevent collapse under the pressures exerted by overlying wastes, waste cover materials, and by any equipment used at the landfill; and

(ii) Designed and operated to function without clogging through the scheduled closure of the landfill.

(b) The owner or operator will be exempted from the requirements of paragraph (a) of this section if the Regional Administrator finds, based on a demonstration by the owner or operator, that alternative design and operating practices, together with location characteristics, will prevent the migration of any hazardous constituents (see § 264.93) into the ground water or surface water at any future time. In deciding whether to grant an exemption, the Regional Administrator will consider:

(1) The nature and quantity of the wastes;

(2) The proposed alternate design and operation;

(3) The hydrogeologic setting of the facility, including the attenuative capacity and thickness of the liners and soils present between the landfill and ground water or surface water; and

(4) All other factors which would influence the quality and mobility of the leachate produced and the potential for it to migrate to ground water or surface water.

(c) The owner or operator of each new landfill, each new landfill unit at an existing facility, each replacement of an existing landfill unit, and each lateral expansion of an existing landfill unit, must install two or more liners and a leachate collection system above and between the liners. The liners and leachate collection systems must protect human health and the environment. The requirements of this paragraph shall apply with respect to all waste received after issuance of the permit for units where the part B of the permit application is received by the Regional Administrator after November 8, 1984. The requirement for the installation of two or more liners in this paragraph may be satisfied by the installation of a top liner designed, operated, and constructed of materials to prevent the migration of any constituent into such liner during the period such facility remains in operation (including any post-closure monitoring period), and a lower liner designed, operated, and constructed to prevent the migration of any constituent through such liner during such period. For the purpose of the preceding sentence, a lower liner shall be deemed to satisfy such requirement if it is constructed of at least a 3-foot thick layer of recompacted clay or other natural material with a permeability of no more than 1×10^{-7} centimeter per second.

(d) Paragraph (c) of this section will not apply if the owner or operator demonstrates to the Regional Administrator, and the Regional Administrator finds for such landfill, that alternative design and operating practices, together with location characteristics, will prevent the migration of any hazardous constituent into the ground water or surface water at least as effectively as such liners and leachate collection systems.

(e) The double liner requirement set forth in paragraph (c) of this section may be waived by the Regional Administrator for any monofill, if:

(1) The monofill contains only hazardous wastes from foundry furnace emission controls or metal casting molding sand, and such wastes do not contain constituents which would render the wastes hazardous for reasons other than the Toxicity Characteristic in § 261.24 of this chapter, with EPA Hazardous Waste Numbers D004 through D017; and

(2)(i)(A) The monofill has at least one liner for which there is no evidence that such liner is leaking;

(B) The monofill is located more than one-quarter mile from an underground source of drinking water (as that term is defined in § 144.3 of this chapter); and

(C) The monofill is in compliance with generally applicable groundwater monitoring requirements for facilities with permits under RCRA 3005(c); or

(ii) The owner or operator demonstrates that the monofill is located, designed and operated so as to assure

that there will be no migration of any hazardous constituent into ground water or surface water at any future time.

(f) The owner or operator must design, construct, operate, and maintain a run-on control system capable of preventing flow onto the active portion of the landfill during peak discharge from at least a 25-year storm.

(g) The owner or operator must design, construct, operate, and maintain a run-off management system to collect and control at least the water volume resulting from a 24-hour, 25-year storm.

(h) Collection and holding facilities (e.g., tanks or basins) associated with run-on and run-off control systems must be emptied or otherwise managed expeditiously after storms to maintain design capacity of the system.

(i) If the landfill contains any particulate matter which may be subject to wind dispersal, the owner or operator must cover or otherwise manage the landfill to control wind dispersal.

(j) The Regional Administrator will specify in the permit all design and operating practices that are necessary to ensure that the requirements of this section are satisfied.

(k) Any permit under RCRA 3005(c) which is issued for a landfill located within the State of Alabama shall require the installation of two or more liners and a leachate collection system above and between such liners, notwithstanding any other provision of RCRA.

(Approved by the Office of Management and Budget under control number 2050-0007)

[47 FR 32365, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985; 50 FR 28748, July 15, 1985; 55 FR 11875, Mar. 29, 1990; 55 FR 19264, May 9, 1990]

EFFECTIVE DATE NOTE: At 55 FR 11875, Mar. 29, 1990, § 264.301 paragraph (e)(1) was revised, effective September 25, 1990. For the convenience of the user, the superseded text is set forth below:

§ 264.301 Design and operating requirements.

* * * * *

(e)* * *

(1) The monofill contains only hazardous wastes from foundry furnace emission controls or metal casting molding sand, and such wastes do not contain constituents which would render the wastes hazardous for reasons other than the EP toxicity characteristics in § 261.24 of this chapter; and

* * * * *

§ 264.302 [Reserved]

§ 264.303 Monitoring and inspection.

(a) During construction or installation, liners (except in the case of existing portions of landfills exempt from § 264.301(a)) and cover systems (e.g., membranes, sheets, or coatings) must be inspected for uniformity, damage, and imperfections (*e.g.*, holes, cracks, thin spots, or foreign materials). Immediately after construction or installation:

(1) Synthetic liners and covers must be inspected to ensure tight seams and joints and the absence of tears, punctures, or blisters; and

(2) Soil-based and admixed liners and covers must be inspected for imperfections including lenses, cracks, channels, root holes, or other structural non-uniformities that may cause an increase in the permeability of the liner or cover.

(b) While a landfill is in operation, it must be inspected weekly and after storms to detect evidence of any of the following:

(1) Deterioration, malfunctions, or improper operation of run-on and run-off control systems;

(2) Proper functioning of wind dispersal control systems, where present; and

(3) The presence of leachate in and proper functioning of leachate collection and removal systems, where present.

[47 FR 32365, July 26, 1982, as amended at 50 FR 28748, July 15, 1985]

§§ 264.304—264.308 [Reserved]

§ 264.309 Surveying and recordkeeping.

The owner or operator of a landfill must maintain the following items in the operating record required under § 264.73:

(a) On a map, the exact location and dimensions, including depth, of each cell with respect to permanently surveyed benchmarks; and

(b) The contents of each cell and the approximate location of each hazardous waste type within each cell.

(Approved by the Office of Management and Budget under control number 2050-0007)

[47 FR 32365, July 26, 1982, as amended at 50 FR 4514, Jan. 31, 1985]

§ 264.310 Closure and post-closure care.

(a) At final closure of the landfill or upon closure of any cell, the owner or operator must cover the landfill or cell with a final cover designed and constructed to:

(1) Provide long-term minimization of migration of liquids through the closed landfill;

(2) Function with minimum maintenance;

(3) Promote drainage and minimize erosion or abrasion of the cover;

(4) Accommodate settling and subsidence so that the cover's integrity is maintained; and

(5) Have a permeability less than or equal to the permeability of any bottom liner system or natural subsoils present.

(b) After final closure, the owner or operator must comply with all post-closure requirements contained in §§ 264.117 through 264.120, including maintenance and monitoring throughout the post-closure care period (specified in the permit under § 264.117). The owner or operator must:

(1) Maintain the integrity and effectiveness of the final cover, including making repairs to the cap as necessary to correct the effects of settling, subsidence, erosion, or other events;

(2) Continue to operate the leachate collection and removal system until leachate is no longer detected;

(3) Maintain and monitor the ground-water monitoring system and comply with all other applicable requirements of Subpart F of this part;

(4) Prevent run-on and run-off from eroding or otherwise damaging the final cover; and

(5) Protect and maintain surveyed benchmarks used in complying with § 264.309.

[47 FR 32365, July 26, 1982, as amended at 50 FR 28748, July 15, 1985]

§ 264.311 [Reserved]

§ 264.312 Special requirements for ignitable or reactive waste.

(a) Except as provided in paragraph (b) of this section, and in § 264.316, ignitable or reactive waste must not be placed in a landfill, unless the waste and landfill meet all applicable requirements of part 268, and:

(1) The resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under § 261.21 or § 261.23 of this chapter; and

(2) Section 264.17(b) is complied with.

(b) Except for prohibited wastes which remain subject to treatment standards in subpart D of part 268, ignitable wastes in containers may be landfilled without meeting the requirements of paragraph (a) of this section, provided that the wastes are disposed of in such a way that they are protected from any material or conditions which may cause them to ignite. At a minimum, ignitable wastes must be disposed of in non-leaking containers which are carefully handled and placed so as to avoid heat, sparks, rupture, or any other condition that might cause ignition of the wastes; must be covered daily with soil or other non-combustible material to minimize the potential for ignition of the wastes; and must not be disposed of in cells that contain or will contain other wastes which may generate heat sufficient to cause ignition of the waste.

[47 FR 32365, July 26, 1982, as amended at 55 FR 22685, June 1, 1990]

§ 264.313 Special requirements for incompatible wastes.

Incompatible wastes, or incompatible wastes and materials, (see Appendix V of this part for examples) must not be placed in the same landfill cell, unless § 264.17(b) is complied with.

§ 264.314 Special requirements for bulk and containerized liquids.

(a) Bulk or non-containerized liquid waste or waste containing free liquids may be placed in a landfill prior to May 8, 1985 only if:

(1) The landfill has a liner and leachate collection and removal system that meet the requirements of § 264.301(a); or

(2) Before disposal, the liquid waste or waste containing free liquids is treated or stabilized, chemically or physically (e.g., by mixing with an absorbent solid), so that free liquids are no longer present.

(b) Effective May 8, 1985, the placement of bulk or non-containerized liquid hazardous waste or hazardous waste containing free liquids (whether or not absorbents have been added) in any landfill is prohibited.

(c) To demonstrate the absence or presence of free liquids in either a containerized or a bulk waste, the following test must be used: Method 9095 (Paint Filter Liquids Test) as described in "Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods." [EPA Publication No. SW-846].

(d) Containers holding free liquids must not be placed in a landfill unless:

(1) All free-standing liquid: (i) has been removed by decanting, or other methods; (ii) has been mixed with absorbent or solidified so that free-standing liquid is no longer observed; or (iii) has been otherwise eliminated; or

(2) The container is very small, such as an ampule; or

(3) The container is designed to hold free liquids for use other than storage, such as a battery or capacitor; or

(4) The container is a lab pack as defined in § 264.316 and is disposed of in accordance with § 264.316.

(e) Effective November 8, 1985, the placement of any liquid which is not a hazardous waste in a landfill is prohibited unless the owner or operator of such landfill demonstrates to the Regional Administrator, or the Regional Administrator determines, that:

(1) The only reasonably available alternative to the placement in such landfill is placement in a landfill or unlined surface impoundment, whether or not permitted or operating under interim status, which contains, or may reasonably be anticipated to contain, hazardous waste; and

(2) Placement in such owner or operator's landfill will not present a risk of contamination of any underground source of drinking water (as that term is defined in § 144.3 of this chapter.)

(Approved by the Office of Management and Budget under control number 2050-0037)

[47 FR 32365, July 26, 1982, as amended at 50 FR 18374, Apr. 30, 1985; 50 FR 28748, July 15, 1985]

§ 264.315 Special requirements for containers.

Unless they are very small, such as an ampule, containers must be either:

(a) At least 90 percent full when placed in the landfill; or

(b) Crushed, shredded, or similarly reduced in volume to the maximum practical extent before burial in the landfill.

§ 264.316 Disposal of small containers of hazardous waste in overpacked drums (lab packs).

Small containers of hazardous waste in overpacked drums (lab packs) may be placed in a landfill if the following requirements are met:

(a) Hazardous waste must be packaged in non-leaking inside containers. The inside containers must be of a design and constructed of a material that will not react dangerously with, be decomposed by, or be ignited by the contained waste. Inside containers must be tightly and securely sealed. The inside containers must be of the size and type specified in the Department of Transportation (DOT) hazardous materials regulations (49 CFR Parts 173, 178, and 179), if those regulations specify a particular inside container for the waste.

(b) The inside containers must be overpacked in an open head DOT-specification metal shipping container (49 CFR Parts 178 and 179) of no more than 416-liter (110 gallon) capacity and surrounded by, at a minimum, a sufficient quantity of absorbent material to completely absorb all of the liquid contents of the inside containers. The metal outer container must

be full after packing with inside containers and absorbent material.

(c) The absorbent material used must not be capable of reacting dangerously with, being decomposed by, or being ignited by the contents of the inside containers in accordance with § 264.17(b).

(d) Incompatible wastes, as defined in § 260.10 of this chapter, must not be placed in the same outside container.

(e) Reactive wastes, other than cyanide- or sulfide-bearing waste as defined in § 261.23(a)(5) of this chapter, must be treated or rendered non-reactive prior to packaging in accordance with paragraphs (a) through (d) of this section. Cyanide- and sulfide-bearing reactive waste may be packed in accordance with paragraphs (a) through (d) of this section without first being treated or rendered non-reactive.

(f) Such disposal is in compliance with the requirements of Part 268. Persons who incinerate lab packs according to the requirements in 40 CFR 268.42(c)(1) may use fiber drums in place of metal outer containers. Such fiber drums must meet the DOT specifications in 49 CFR 173.12 and be overpacked according to the requirements in paragraph (b) of this section.

[47 FR 32365, July 26, 1982, as amended at 55 FR 22685, June 1, 1990]

§ 264.317 Special requirements for hazardous wastes FO20, FO21, FO22, FO23, FO26, and FO27.

(a) Hazardous Wastes FO20, FO21, FO22, FO23, FO26, and FO27 must not be placed in a landfills unless the owner or operator operates the landfill in accord with a management plan for these wastes that is approved by the Regional Administrator pursuant to the standards set out in this paragraph, and in accord with all other applicable requirements of this part. The factors to be considered are:

(1) The volume, physical, and chemical characteristics of the wastes, including their potential to migrate through the soil or to volatilize or escape into the atmosphere;

(2) The attenuative properties of underlying and surrounding soils or other materials;

(3) The mobilizing properties of other materials co-disposed with these wastes; and

(4) The effectiveness of additional treatment, design, or monitoring requirements.

(b) The Regional Administrator may determine that additional design, operating, and monitoring requirements are necessary for landfills managing hazardous wastes FO20, FO21, FO22, FO23, FO26, and FO27 in order to reduce the possibility of migration of these wastes to ground water, surface water, or air so as to protect human health and the environment.

[50 FR 2004, Jan. 14, 1985]

Subpart O—Incinerators

§ 264.340 Applicability.

(a) The regulations in this subpart apply to owners or operators of facilities that incinerate hazardous waste, except as § 264.1 provides otherwise. The following facility owners or operators are considered to incinerate hazardous waste:

(1) Owners or operators of hazardous waste incinerators (as defined in § 260.10 of this chapter); and

(2) Owners or operators who burn hazardous waste in boilers or in industrial furnaces in order to destroy them, or who burn hazardous waste in boilers or in industrial furnaces for any recycling purpose and elect to be regulated under this subpart.

(b) After consideration of the waste analysis included with Part B of the permit application, the Regional Administrator, in establishing the permit conditions, must exempt the applicant from all requirements of this subpart except § 264.341 (Waste analysis) and § 264.351 (Closure),

(1) If the Regional Administrator finds that the waste to be burned is:

(i) Listed as a hazardous waste in Part 261, Subpart D, of this chapter solely because it is ignitable (Hazard Code I), corrosive (Hazard Code C), or both; or

(ii) Listed as a hazardous waste in Part 261, Subpart D, of this chapter solely because it is reactive (Hazard Code R) for characteristics other than those listed in § 261.23(a) (4) and (5),

and will not be burned when other hazardous wastes are present in the combustion zone; or

(iii) A hazardous waste solely because it possesses the characteristic of ignitability, corrosivity, or both, as determined by the test for characteristics of hazardous wastes under Part 261, Subpart C, of this chapter; or

(iv) A hazardous waste solely because it possesses any of the reactivity characteristics described by § 261.23(a)(1), (2), (3), (6), (7), and (8) of this chapter, and will not be burned when other hazardous wastes are present in the combustion zone; and

(2) If the waste analysis shows that the waste contains none of the hazardous constituents listed in Part 261, Appendix VIII, of this chapter, which would reasonably be expected to be in the waste.

(c) If the waste to be burned is one which is described by paragraphs (b)(1)(i), (ii), (iii), or (iv) of this section and contains insignificant concentrations of the hazardous constituents listed in Part 261, Appendix VIII, of this chapter, then the Regional Administrator may, in establishing permit conditions, exempt the applicant from all requirements of this subpart, except § 264.341 (Waste analysis) and § 264.351 (Closure), after consideration of the waste analysis included with Part B of the permit application, unless the Regional Administrator finds that the waste will pose a threat to human health and the environment when burned in an incinerator.

(d) The owner or operator of an incinerator may conduct trial burns subject only to the requirements of § 270.62 of this chapter (Short term and incinerator permits).

[46 FR 7678, Jan. 23, 1981, as amended at 47 FR 27532, June 24, 1982; 48 FR 14295, Apr. 1, 1983; 50 FR 665, Jan. 4, 1985; 50 FR 49203, Nov. 29, 1985]

§ 264.341 Waste analysis.

(a) As a portion of the trial burn plan required by § 270.62 of this chapter, or with Part B of the permit application, the owner or operator must have included an analysis of the waste feed sufficient to provide all information required by § 270.62(b) or § 270.19 of this chapter. Owners or operators of new hazardous waste incinerators must provide the information required by § 270.62(c) or § 270.19 of this chapter to the greatest extent possible.

(b) Throughout normal operation the owner or operator must conduct sufficient waste analysis to verify that waste feed to the incinerator is within the physical and chemical composition limits specified in his permit (under § 264.345(b)).

(Approved by the Office of Management and Budget under control number 2050-0002)

[46 FR 7678, Jan. 23, 1981, as amended at 47 FR 27532, June 24, 1982; 48 FR 14295, Apr. 1, 1983; 48 FR 30115, June 30, 1983; 50 FR 4514, Jan. 31, 1985]

§ 264.342 Principal organic hazardous constituents (POHCs).

(a) Principal Organic Hazardous Constituents (POHCs) in the waste feed must be treated to the extent required by the performance standard of § 264.343.

(b)(1) One or more POHCs will be specified in the facility's permit, from among those constituents listed in Part 261, Appendix VIII of this chapter, for each waste feed to be burned. This specification will be based on the degree of difficulty of incineration of the organic constituents in the waste and on their concentration or mass in the waste feed, considering the results of waste analyses and trial burns or alternative data submitted with Part B of the facility's permit application. Organic constituents which represent the greatest degree of difficulty of incineration will be those most likely to be designated as POHCs. Constituents are more likely to be designated as POHCs if they are present in large quantities or concentrations in the waste.

(2) Trial POHCs will be designated for performance of trial burns in accordance with the procedure specified in § 270.62 of this chapter for obtaining trial burn permits.

[46 FR 7678, Jan. 23, 1981, as amended at 48 FR 14295, Apr. 1, 1983]

§ 264.343 Performance standards.

An incinerator burning hazardous waste must be designed, constructed,

and maintained so that, when operated in accordance with operating requirements specified under § 264.345, it will meet the following performance standards:

(a)(1) Except as provided in paragraph (a)(2) of this section, an incinerator burning hazardous waste must achieve a destruction and removal efficiency (DRE) of 99.99% for each principal organic hazardous constituent (POHC) designated (under § 264.342) in its permit for each waste feed. DRE is determined for each POHC from the following equation:

$$DRE = \frac{(W_{in} - W_{out})}{W_{in}} \times 100\%$$

where:

W_{in} = mass feed rate of one principal organic hazardous constituent (POHC) in the waste stream feeding the incinerator

and

W_{out} = mass emission rate of the same POHC present in exhaust emissions prior to release to the atmosphere.

(2) An incinerator burning hazardous wastes FO20, FO21, FO22, FO23, FO26, or FO27 must achieve a destruction and removal efficiency (DRE) of 99.9999% for each principal organic hazardous constituent (POHC) designated (under § 264.342) in its permit. This performance must be demonstrated on POHCs that are more difficult to incinerate than tetra-, penta-, and hexachlorodibenzo-*p*-dioxins and dibenzofurans. DRE is determined for each POHC from the equation in § 264.343(a)(1). In addition, the owner or operator of the incinerator must notify the Regional Administrator of his intent to incinerate hazardous wastes FO20, FO21, FO22, FO23, FO26, or FO27.

(b) An incinerator burning hazardous waste and producing stack emissions of more than 1.8 kilograms per hour (4 pounds per hour) of hydrogen chloride (HCl) must control HCl emissions such that the rate of emission is no greater than the larger of either 1.8 kilograms per hour or 1% of the HCl in the stack gas prior to entering any pollution control equipment.

(c) An incinerator burning hazardous waste must not emit particulate matter in excess of 180 milligrams per dry standard cubic meter (0.08 grains per dry standard cubic foot) when corrected for the amount of oxygen in the stack gas according to the formula:

$$P_c = P_m \times \frac{14}{21 - Y}$$

Where P_c is the corrected concentration of particulate matter, P_m is the measured concentration of particulate matter, and Y is the measured concentration of oxygen in the stack gas, using the Orsat method for oxygen analysis of dry flue gas, presented in Part 60, Appendix A (Method 3), of this chapter. This correction procedure is to be used by all hazardous waste incinerators except those operating under conditions of oxygen enrichment. For these facilities, the Regional Administrator will select an appropriate correction procedure, to be specified in the facility permit.

(d) For purposes of permit enforcement, compliance with the operating requirements specified in the permit (under § 264.345) will be regarded as compliance with this section. However, evidence that compliance with those permit conditions is insufficient to ensure compliance with the performance requirements of this section may be "information" justifying modification, revocation, or reissuance of a permit under § 270.41 of this chapter.

[46 FR 7678, Jan. 23, 1981, as amended at 47 FR 27532, June 24, 1982; 48 FR 14295, Apr. 1, 1983; 50 FR 2005, Jan. 14, 1985]

§ 264.344 Hazardous waste incinerator permits.

(a) The owner or operator of a hazardous waste incinerator may burn only wastes specified in his permit and only under operating conditions specified for those wastes under § 264.345, except:

(1) In approved trial burns under § 270.62 of this chapter; or

(2) Under exemptions created by § 264.340.

(b) Other hazardous wastes may be burned only after operating conditions have been specified in a new permit or a permit modification as applicable. Operating requirements for new wastes may be be based on either trial burn results or alternative data included with Part B of a permit application under § 270.19 of this chapter.

(c) The permit for a new hazardous waste incinerator must establish appropriate conditions for each of the applicable requirements of this subpart, including but not limited to allowable waste feeds and operating conditions necessary to meet the requirements of § 264.345, sufficient to comply with the following standards:

(1) For the period beginning with initial introduction of hazardous waste to the incinerator and ending with initiation of the trial burn, and only for the minimum time required to establish operating conditions required in paragraph (c)(2) of this section, not to exceed a duration of 720 hours operating time for treatment of hazardous waste, the operating requirements must be those most likely to ensure compliance with the performance standards of § 264.343, based on the Regional Administrator's engineering judgment. The Regional Administrator may extend the duration of this period once for up to 720 additional hours when good cause for the extension is demonstrated by the applicant.

(2) For the duration of the trial burn, the operating requirements must be sufficient to demonstrate compliance with the performance standards of § 264.343 and must be in accordance with the approved trial burn plan;

(3) For the period immediately following completion of the trial burn, and only for the minimum period sufficient to allow sample analysis, data computation, and submission of the trial burn results by the applicant, and review of the trial burn results and modification of the facility permit by the Regional Administrator, the operating requirements must be those most likely to ensure compliance with the performance standards of § 264.343, based on the Regional Administrator's engineering judgement.

(4) For the remaining duration of the permit, the operating requirements must be those demonstrated, in a trial burn or by alternative data specified in § 270.19(c) of this chapter, as sufficient to ensure compliance with the performance standards of § 264.343.

(Approved by the Office of Management and Budget under control number 2050-0002)

[46 FR 7678, Jan. 23, 1981, as amended at 47 FR 27532, June 24, 1982; 48 FR 14295, Apr. 1, 1983; 50 FR 4514, Jan. 31, 1985]

§ 264.345 Operating requirements.

(a) An incinerator must be operated in accordance with operating requirements specified in the permit. These will be specified on a case-by-case basis as those demonstrated (in a trial burn or in alternative data as specified in § 264.344(b) and included with Part B of a facility's permit application) to be sufficient to comply with the performance standards of § 264.343.

(b) Each set of operating requirements will specify the composition of the waste feed (including acceptable variations in the physical or chemical properties of the waste feed which will not affect compliance with the performance requirement of § 264.343) to which the operating requirements apply. For each such waste feed, the permit will specify acceptable operating limits including the following conditions:

(1) Carbon monoxide (CO) level in the stack exhaust gas;

(2) Waste feed rate;

(3) Combustion temperature;

(4) An appropriate indicator of combustion gas velocity;

(5) Allowable variations in incinerator system design or operating procedures; and

(6) Such other operating requirements as are necessary to ensure that the performance standards of § 264.343 are met.

(c) During start-up and shut-down of an incinerator, hazardous waste (except wastes exempted in accordance with § 264.340) must not be fed into the incinerator unless the incinerator is operating within the conditions

of operation (temperature, air feed rate, etc.) specified in the permit.

(d) Fugitive emissions from the combustion zone must be controlled by:

(1) Keeping the combustion zone totally sealed against fugitive emissions; or

(2) Maintaining a combustion zone pressure lower than atmospheric pressure; or

(3) An alternate means of control demonstrated (with Part B of the permit application) to provide fugitive emissions control equivalent to maintenance of combustion zone pressure lower than atmospheric pressure.

(e) An incinerator must be operated with a functioning system to automatically cut off waste feed to the incinerator when operating conditions deviate from limits established under paragraph (a) of this section.

(f) An incinerator must cease operation when changes in waste feed, incinerator design, or operating conditions exceed limits designated in its permit.

(Approved by the Office of Management and Budget under control number 2050-0002)

[46 FR 7678, Jan. 23, 1981, as amended at 47 FR 27532, June 24, 1982; 50 FR 4514, Jan. 31, 1985]

§ 264.346 [Reserved]

§ 264.347 Monitoring and inspections.

(a) The owner or operator must conduct, as a minimum, the following monitoring while incinerating hazardous waste:

(1) Combustion temperature, waste feed rate, and the indicator of combustion gas velocity specified in the facility permit must be monitored on a continuous basis.

(2) CO must be monitored on a continuous basis at a point in the incinerator downstream of the combustion zone and prior to release to the atmosphere.

(3) Upon request by the Regional Administrator, sampling and analysis of the waste and exhaust emissions must be conducted to verify that the operating requirements established in the permit achieve the performance standards of § 264.343.

(b) The incinerator and associated equipment (pumps, valves, conveyors, pipes, etc.) must be subjected to thorough visual inspection, at least daily, for leaks, spills, fugitive emissions, and signs of tampering.

(c) The emergency waste feed cutoff system and associated alarms must be tested at least weekly to verify operability, unless the applicant demonstrates to the Regional Administrator that weekly inspections will unduly restrict or upset operations and that less frequent inspection will be adequate. At a minimum, operational testing must be conducted at least monthly.

(d) This monitoring and inspection data must be recorded and the records must be placed in the operating log required by § 264.73.

(Approved by the Office of Management and Budget under control number 2050-0002)

[46 FR 7678, Jan. 23, 1981, as amended at 47 FR 27533, June 24, 1982; 50 FR 4514, Jan. 31, 1985]

§§ 264.348—264.350 [Reserved]

§ 264.351 Closure.

At closure the owner or operator must remove all hazardous waste and hazardous waste residues (including, but not limited to, ash, scrubber waters, and scrubber sludges) from the incinerator site.

[*Comment:* At closure, as throughout the operating period, unless the owner or operator can demonstrate, in accordance with § 261.3(d) of this chapter, that the residue removed from the incinerator is not a hazardous waste, the owner or operator becomes a generator of hazardous waste and must manage it in accordance with applicable requirements of Parts 262 through 266 of this chapter.]

[46 FR 7678, Jan. 23, 1981]

Subparts P–W [Reserved]

Subpart X—Miscellaneous Units

SOURCE: 52 FR 46964, Dec. 10, 1987, unless otherwise noted.

§ 264.600 Applicability.

The requirements in this subpart apply to owners and operators of facilities that treat, store, or dispose of

hazardous waste in miscellanenous units, except as § 264.1 provide otherwise.

§ 264.601 Environmental performance standards.

A miscellaneous unit must be located, designed, constructed, operated, maintained, and closed in a manner that will ensure protection of human health and the environment. Permits for miscellaneous units are to contain such terms and provisions as necessary to protect human health and the environment, including, but not limited to, as appropriate, design and operating requirements, detection and monitoring requirements, and requirements for responses to releases of hazardous waste or hazardous constituents from the unit. Permit terms and provisions shall include those requirements of Subparts I through 0 of this part, Part 270, and Part 146 that are appropriate for the miscellaneous unit being permitted. Protection of human health and the environment includes, but is not limited to:

(a) Prevention of any releases that may have adverse effects on human heath or the environment due to migration of waste constituents in the ground water or subsurface environment, considering:

(1) The volume and physical and chemical characteristics of the waste in the unit, including its potential for migration through soil, liners, or other containing structures;

(2) The hydrologic and geologic characteristics of the unit and the surrounding area;

(3) The existing quality of ground water, including other sources of contamination and their cumulative impact on the ground water;

(4) The quantity and direction of ground-water flow;

(5) The proximity to and withdrawal rates of current and potential ground-water users;

(6) The patterns of land use in the region;

(7) The potential for deposition or migration of waste constituents into subsurface physical structures, and into the root zone of food-chain crops and other vegetation;

(8) The potential for health risks caused by human exposure to waste constituents; and

(9) The potential for damage to domestic animals, wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents;

(b) Prevention of any releases that may have adverse effects on human health or the environment due to migration of waste constituents in surface water, or wetlands or on the soil surface considering:

(1) The volume and physical and chemical characteristics of the waste in the unit;

(2) The effectiveness and reliability of containing, confining, and collecting systems and structures in preventing migration;

(3) The hydrologic characteristics of the unit and the surrounding area, including the topography of the land around the unit;

(4) The patterns of precipitation in the region;

(5) The quantity, quality, and direction of ground-water flow;

(6) The proximity of the unit to surface waters;

(7) The current and potential uses of nearby surface waters and any water quality standards established for those surface waters;

(8) The existing quality of surface waters and surface soils, including other sources of contamination and their cumulative impact on surface waters and surface soils;

(9) The patterns of land use in the region;

(10) The potential for health risks caused by human exposure to waste constituents; and

(11) The potential for damage to domestic animals, wildlife, crops, vegetation, and physical structures caused by exposure to waste constitutents.

(c) Prevention of any release that may have adverse effects on human health or the environment due to migration of waste constituents in the air, considering:

(1) The volume and physical and chemical characteristics of the waste in the unit, including its potential for the emission and dispersal of gases, aerosols and particulates;

(2) The effectiveness and reliability of systems and structures to reduce or prevent emissions of hazardous constituents to the air;

(3) The operating characteristics of the unit;

(4) The atmospheric, metorologic, and topographic characteristics of the unit and the surrounding area;

(5) The existing quality of the air, including other sources of contamination and their cumulative impact on the air;

(6) The potential for health risks caused by human exposure to waste constituents; and

(7) The potential for damage to domestic animals, wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents.

§ 264.602 Monitoring, analysis, inspection, response, reporting, and corrective action.

Monitoring, testing, analytical data, inspections, response, and reporting procedures and frequencies must ensure compliance with §§ 264.601, 264.15, 264.33, 264.75, 264.76, 264,77, and 264.101 as well as meet any additional requirements needed to protect human health and the environment as specified in the permit.

§ 264.603 Post-closure care.

A miscellaneous unit that is a disposal unit must be maintained in a manner that complies with § 264.601 during the post-closure care period. In addition, if a treatment or storage unit has contaminated soils or ground water that cannot be completely removed or decontaminated during closure, then that unit must also meet the requirements of § 264.601 during post-closure care. The post-closure plan under § 264.118 must specify the procedures that will be used to satisfy this requirement.

Subparts Y—Z [Reserved]

Subpart AA—Air Emission Standards for Process Vents

SOURCE: 55 FR 25494, June 21, 1990, unless otherwise noted.

EFFECTIVE DATE NOTE: At 55 FR 25494, June 21, 1990, §§ 264.1030 through 264.1049 (Subpart AA) were added, effective December 21, 1990.

§ 264.1030 Applicability.

(a) The regulations in this subpart apply to owners and operators of facilities that treat, store, or dispose of hazardous wastes (except as provided in § 2641).

(b) Except for §§ 264.1034(d) and 264.1035(e), this subpart applies to process vents associated with distillation, fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operations that manage hazardous wastes with organic concentrations of at least 10-ppmw, if these operations are conducted in:

(1) Units that are subject to the permitting requirements of part 270, or

(2) Hazardous waste recycling units that are located on hazardous waste management facilities otherwise subject to the permitting requirements of part 270.

(c) If the owner or operator of process vents subject to the requirements of §§ 264.1032 through 264.1036 has received a permit under section 3005 of RCRA prior to December 21, 1990 the requirements of §§ 264.1032 through 264.1036 must be incorporated when the permit is reissued under § 124.15 or reviewed under § 270.50.

[NOTE: The requirements of §§ 264.1032 through 264.1036 apply to process vents on hazardous waste recycling units previously exempt under paragraph 261.6(c)(1). Other exemptions under §§ 261.4, 262.34, and 264.1(g) are not affected by these requirements.]

§ 264.1031 Definitions.

As used in this subpart, all terms not defined herein shall have the meaning given them in the Act and parts 260–266.

Air stripping operation is a desorption operation employed to transfer one or more volatile components from a liquid mixture into a gas (air) either with or without the application of heat to the liquid. Packed towers, spray towers, and bubble-cap, sieve, or valve-type plate towers are among the process configurations used for contacting the air and a liquid.

Bottoms receiver means a container or tank used to receive and collect the heavier bottoms fractions of the distil-

lation feed stream that remain in the liquid phase.

Closed-vent system means a system that is not open to the atmosphere and that is composed of piping, connections, and, if necessary, flow-inducing devices that transport gas or vapor from a piece or pieces of equipment to a control device.

Condenser means a heat-transfer device that reduces a thermodynamic fluid from its vapor phase to its liquid phase.

Connector means flanged, screwed, welded, or other joined fittings used to connect two pipelines or a pipeline and a piece of equipment. For the purposes of reporting and recordkeeping, connector means flanged fittings that are not covered by insulation or other materials that prevent location of the fittings.

Continuous recorder means a data-recording device recording an instantaneous data value at least once every 15 minutes.

Control device means an enclosed combustion device, vapor recovery system, or flare. Any device the primary function of which is the recovery or capture of solvents or other organics for use, reuse, or sale (e.g., a primary condenser on a solvent recovery unit) is not a control device.

Control device shutdown means the cessation of operation of a control device for any purpose.

Distillate receiver means a container or tank used to receive and collect liquid material (condensed) from the overhead condenser of a distillation unit and from which the condensed liquid is pumped to larger storage tanks or other process units.

Distillation operation means an operation, either batch or continuous, separating one or more feed stream(s) into two or more exit streams, each exit stream having component concentrations different from those in the feed stream(s). The separation is achieved by the redistribution of the components between the liquid and vapor phase as they approach equilibrium within the distillation unit.

Double block and bleed system means two block valves connected in series with a bleed valve or line that can vent the line between the two block valves.

Equipment means each valve, pump, compressor, pressure relief device, sampling connection system, open-ended valve or line, or flange, and any control devices or systems required by this subpart.

Flame zone means the portion of the combustion chamber in a boiler occupied by the flame envelope.

Flow indicator means a device that indicates whether gas flow is present in a vent stream.

First attempt at repair means to take rapid action for the purpose of stopping or reducing leakage of organic material to the atmosphere using best practices.

Fractionation operation means a distillation operation or method used to separate a mixture of several volatile components of different boiling points in successive stages, each stage removing from the mixture some proportion of one of the components.

Hazardous waste management unit shutdown means a work practice or operational procedure that stops operation of a hazardous waste management unit or part of a hazardous waste management unit. An unscheduled work practice or operational procedure that stops operation of a hazardous waste management unit or part of a hazardous waste management unit for less than 24 hours is not a hazardous waste management unit shutdown. The use of spare equipment and technically feasible bypassing of equipment without stopping operation are not hazardous waste management unit shutdowns.

Hot well means a container for collecting condensate as in a steam condenser serving a vacuum-jet or steam-jet ejector.

In gas/vapor service means that the piece of equipment contains or contacts a hazardous waste stream that is in the gaseous state at operating conditions.

In heavy liquid service means that the piece of equipment is not in gas/vapor service or in light liquid service.

In light liquid service means that the piece of equipment contains or contacts a waste stream where the vapor pressure of one or more of the components in the stream is greater than 0.3 kilopascals (kPa) at 20 °C, the

total concentration of the pure components having a vapor pressure greater than 0.3 kPa at 20 °C is equal to or greater than 20 percent by weight, and the fluid is a liquid at operating conditions.

In situ sampling systems means nonextractive samplers or in-line samplers.

In vacuum service means that equipment is operating at an internal pressure that is at least 5 kPa below ambient pressure.

Malfunction means any sudden failure of a control device or a hazardous waste management unit or failure of a hazardous waste management unit to operate in a normal or usual manner, so that organic emissions are increased.

Open-ended valve or line means any valve, except pressure relief valves, having one side of the valve seat in contact with process fluid and one side open to the atmosphere, either directly or through open piping.

Pressure release means the emission of materials resulting from the system pressure being greater than the set pressure of the pressure relief device.

Process heater means a device that transfers heat liberated by burning fuel to fluids contained in tubes, including all fluids except water that are heated to produce steam.

Process vent means any open-ended pipe or stack that is vented to the atmosphere either directly, through a vacuum-producing system, or through a tank (e.g., distillate receiver, condenser, bottoms receiver, surge control tank, separator tank, or hot well) associated with hazardous waste distillation, fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operations.

Repaired means that equipment is adjusted, or otherwise altered, to eliminate a leak.

Sensor means a device that measures a physical quantity or the change in a physical quantity, such as temperature, pressure, flow rate, pH, or liquid level.

Separator tank means a device used for separation of two immiscible liquids.

Solvent extraction operation means an operation or method of separation in which a solid or solution is contacted with a liquid solvent (the two being mutually insoluble) to preferentially dissolve and transfer one or more components into the solvent.

Startup means the setting in operation of a hazardous waste management unit or control device for any purpose.

Steam stripping operation means a distillation operation in which vaporization of the volatile constituents of a liquid mixture takes place by the introduction of steam directly into the charge.

Surge control tank means a large-sized pipe or storage reservoir sufficient to contain the surging liquid discharge of the process tank to which it is connected.

Thin-film evaporation operation means a distillation operation that employs a heating surface consisting of a large diameter tube that may be either straight or tapered, horizontal or vertical. Liquid is spread on the tube wall by a rotating assembly of blades that maintain a close clearance from the wall or actually ride on the film of liquid on the wall.

Vapor incinerator means any enclosed combustion device that is used for destroying organic compounds and does not extract energy in the form of steam or process heat.

Vented means discharged through an opening, typically an open-ended pipe or stack, allowing the passage of a stream of liquids, gases, or fumes into the atmosphere. The passage of liquids, gases, or fumes is caused by mechanical means such as compressors or vacuum-producing systems or by process-related means such as evaporation produced by heating and not caused by tank loading and unloading (working losses) or by natural means such as diurnal temperature changes.

§ 264.1032 Standards: Process vents.

(a) The owner or operator of a facility with process vents associated with distillation, fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operations managing hazardous wastes with organic concentrations of at least 10 ppmw shall either:

(1) Reduce total organic emissions from all affected process vents at the facility below 1.4 kg/h (3 lb/h) and 2.8 Mg/yr (3.1 tons/yr), or

(2) Reduce, by use of a control device, total organic emissions from all affected process vents at the facility by 95 weight percent.

(b) If the owner or operator installs a closed-vent system and control device to comply with the provisions of paragraph (a) of this section the closed-vent system and control device must meet the requirements of § 264.1033.

(c) Determinations of vent emissions and emission reductions or total organic compound concentrations achieved by add-on control devices may be based on engineering calculations or performance tests. If performance tests are used to determine vent emissions, emission reductions, or total organic compound concentrations achieved by add-on control devices, the performance tests must conform with the requirements of § 264.1034(c).

(d) When an owner or operator and the Regional Administrator do not agree on determinations of vent emissions and/or emission reductions or total organic compound concentrations achieved by add-on control devices based on engineering calculations, the procedures in § 264.1034(c) shall be used to resolve the disagreement.

§ 264.1033 Standards: Closed-vent systems and control devices.

(a)(1) Owners or operators of closed-vent systems and control devices used to comply with provisions of this part shall comply with the provisions of this section.

(2) The owner or operator of an existing facility who cannot install a closed-vent system and control device to comply with the provisions of this subpart on the effective date that the facility becomes subject to the provisions of this subpart must prepare an implementation schedule that includes dates by which the closed-vent system and control device will be installed and in operation. The controls must be installed as soon as possible, but the implementation schedule may allow up to 18 months after the effective date that the facility becomes subject to this subpart for installation and startup. All units that begin operation after December 21, 1990, must comply with the rules immediately (i.e., must have control devices installed and operating on startup of the affected unit); the 2-year implementation schedule does not apply to these units.

(b) A control device involving vapor recovery (e.g., a condenser or adsorber) shall be designed and operated to recover the organic vapors vented to it with an efficiency of 95 weight percent or greater unless the total organic emission limits of § 264.1032(a)(1) for all affected process vents can be attained at an efficiency less than 95 weight percent.

(c) An enclosed combustion device (e.g., a vapor incinerator, boiler, or process heater) shall be designed and operated to reduce the organic emissions vented to it by 95 weight percent or greater; to achieve a total organic compound concentration of 20 ppmv, expressed as the sum of the actual compounds, not carbon equivalents, on a dry basis corrected to 3 percent oxygen; or to provide a minimum residence time of 0.50 seconds at a minimum temperature of 760 °C. If a boiler or process heater is used as the control device, then the vent stream shall be introduced into the flame zone of the boiler or process heater.

(d)(1) A flare shall be designed for and operated with no visible emissions as determined by the methods specified in paragraph (e)(1) of this section, except for periods not to exceed a total of 5 minutes during any 2 consecutive hours.

(2) A flare shall be operated with a flame present at all times, as determined by the methods specified in paragraph (f)(2)(iii) of this section.

(3) A flare shall be used only if the net heating value of the gas being combusted is 11.2 MJ/scm (300 Btu/scf) or greater if the flare is steam-assisted or air-assisted; or if the net heating value of the gas being combusted is 7.45 MJ/scm (200 Btu/scf) or greater if the flare is nonassisted. The net heating value of the gas being combusted shall be determined by the methods specified in paragraph (e)(2) of this section.

(4)(i) A steam-assisted or nonassisted flare shall be designed for and operated with an exit velocity, as determined by the methods specified in paragraph (e)(3) of this section, less than 18.3 m/s (60 ft/s), except as provided in paragraphs (d)(4) (ii) and (iii) of this section.

(ii) A steam-assisted or nonassisted flare designed for and operated with an exit velocity, as determined by the methods specified in paragraph (e)(3) of this section, equal to or greater than 18.3 m/s (60 ft/s) but less than 122 m/s (400 ft/s) is allowed if the net heating value of the gas being combusted is greater than 37.3 MJ/scm (1,000 Btu/scf).

(iii) A steam-assisted or nonassisted flare designed for and operated with an exit velocity, as determined by the methods specified in paragraph (e)(3) of this section, less than the velocity, V_{max}, as determined by the method specified in paragraph (e)(4) of this section and less than 122 m/s (400 ft/s) is allowed.

(5) An air-assisted flare shall be designed and operated with an exit velocity less than the velocity, V_{max}, as determined by the method specified in paragraph (e)(5) of this section.

(6) A flare used to comply with this section shall be steam-assisted, air-assisted, or nonassisted.

(e)(1) Reference Method 22 in 40 CFR part 60 shall be used to determine the compliance of a flare with the visible emission provisions of this subpart. The observation period is 2 hours and shall be used according to Method 22.

(2) The net heating value of the gas being combusted in a flare shall be calculated using the following equation:

$$H_T = K \left[\sum_{i=1}^{n} C_i H_i \right]$$

where:

H_T = Net heating value of the sample, MJ/scm; where the net enthalpy per mole of offgas is based on combustion at 25 °C and 760 mm Hg, but the standard temperature for determining the volume corresponding to 1 mol is 20 °C;

K = Constant, 1.74×10^{-7} (1/ppm) (g mol/scm) (MJ/kcal) where standard temperature for (g mol/scm) is 20 °C;

C_i = Concentration of sample component i in ppm on a wet basis, as measured for organics by Reference Method 18 in 40 CFR part 60 and measured for hydrogen and carbon monoxide by ASTM D 1946-82 (incorporated by reference as specified in § 260.11); and

H_i = Net heat of combustion of sample component i, kcal/9 mol at 25 °C and 760 mm Hg. The heats of combustion may be determined using ASTM D 2382-83 (incorporated by reference as specified in § 260.11) if published values are not available or cannot be calculated.

(3) The actual exit velocity of a flare shall be determined by dividing the volumetric flow rate (in units of standard temperature and pressure), as determined by Reference Methods 2, 2A, 2C, or 2D in 40 CFR part 60 as appropriate, by the unobstructed (free) cross-sectional area of the flare tip.

(4) The maximum allowed velocity in m/s, V_{max}, for a flare complying with paragraph (d)(4)(iii) of this section shall be determined by the following equation:

$$\text{Log}_{10}(V_{max}) = (H_T + 28.8)/31.7$$

where:

28.8 = Constant,

31.7 = Constant,

H_T = The net heating value as determined in paragraph (e)(2) of this section.

(5) The maximum allowed velocity in m/s, V_{max}, for an air-assisted flare shall be determined by the following equation:

$$V_{max} = 8.706 + 0.7084\,(H_T)$$

where:

8.706 = Constant,

0.7084 = Constant,

H_T = The net heating value as determined in paragraph (e)(2) of this section.

(f) The owner or operator shall monitor and inspect each control device required to comply with this section to ensure proper operation and maintenance of the control device by implementing the following requirements:

(1) Install, calibrate, maintain, and operate according to the manufacturer's specifications a flow indicator that provides a record of vent stream flow from each affected process vent to the control device at least once every hour. The flow indicator sensor shall

49-147 O—90——10

be installed in the vent stream at the nearest feasible point to the control device inlet but before the point at which the vent streams are combined.

(2) Install, calibrate, maintain, and operate according to the manufacturer's specifications a device to continuously monitor control device operation as specified below:

(i) For a thermal vapor incinerator, a temperature monitoring device equipped with a continuous recorder. The device shall have an accuracy of ±1 percent of the temperature being monitored in °C or ±0.5 °C, whichever is greater. The temperature sensor shall be installed at a location in the combustion chamber downstream of the combustion zone.

(ii) For a catalytic vapor incinerator, a temperature monitoring device equipped with a continuous recorder. The device shall be capable of monitoring temperature at two locations and have an accuracy of ±1 percent of the temperature being monitored in °C or ±0.5 °C, whichever is greater. One temperature sensor shall be installed in the vent stream at the nearest feasible point to the catalyst bed inlet and a second temperature sensor shall be installed in the vent stream at the nearest feasible point to the catalyst bed outlet.

(iii) For a flare, a heat sensing monitoring device equipped with a continuous recorder that indicates the continuous ignition of the pilot flame.

(iv) For a boiler or process heater having a design heat input capacity less than 44 MW, a temperature monitoring device equipped with a continuous recorder. The device shall have an accuracy of ±1 percent of the temperature being monitored in °C or ±0.5 °C, whichever is greater. The temperature sensor shall be installed at a location in the furnace downstream of the combustion zone.

(v) For a boiler or process heater having a design heat input capacity greater than or equal to 44 MW, a monitoring device equipped with a continuous recorder to measure a parameter(s) that indicates good combustion operating practices are being used.

(vi) For a condenser, either:

(A) A monitoring device equipped with a continuous recorder to measure the concentration level of the organic compounds in the exhaust vent stream from the condenser, or

(B) A temperature monitoring device equipped with a continuous recorder. The device shall be capable of monitoring temperature at two locations and have an accuracy of ±1 percent of the temperature being monitored in °C or ±0.5 °C, whichever is greater. One temperature sensor shall be installed at a location in the exhaust vent stream from the condenser, and a second temperature sensor shall be installed at a location in the coolant fluid exiting the condenser.

(vii) For a carbon adsorption system that regenerates the carbon bed directly in the control device such as a fixed-bed carbon adsorber, either:

(A) A monitoring device equipped with a continuous recorder to measure the concentration level of the organic compounds in the exhaust vent stream from the carbon bed, or

(B) A monitoring device equipped with a continuous recorder to measure a parameter that indicates the carbon bed is regenerated on a regular, predetermined time cycle.

(3) Inspect the readings from each monitoring device required by paragraphs (1) and (2) of this section at least once each operating day to check control device operation and, if necessary, immediately implement the corrective measures necessary to ensure the control device operates in compliance with the requirements of this section.

(g) An owner or operator using a carbon adsorption system such as a fixed-bed carbon adsorber that regenerates the carbon bed directly onsite in the control device shall replace the existing carbon in the control device with fresh carbon at a regular, predetermined time interval that is no longer than the carbon service life established as a requirement of § 264.1035(b)(4)(iii)(F).

(h) An owner or operator using a carbon adsorption system such as a carbon canister that does not regenerate the carbon bed directly onsite in the control device shall replace the existing carbon in the control device

with fresh carbon on a regular basis by using one of the following procedures:

(1) Monitor the concentration level of the organic compounds in the exhaust vent stream from the carbon adsorption system on a regular schedule, and replace the existing carbon with fresh carbon immediately when carbon breakthrough is indicated. The monitoring frequency shall be daily or at an interval no greater than 20 percent of the time required to consume the total carbon working capacity established as a requirement of § 264.1035(b)(4)(iii)(G), whichever is longer.

(2) Replace the existing carbon with fresh carbon at a regular, predetermined time interval that is less than the design carbon replacement interval established as a requirement of § 264.1035(b)(4)(iii)(G).

(i) An alternative operational or process parameter may be monitored if it can be demonstrated that another parameter will ensure that the control device is operated in conformance with these standards and the control device's design specifications.

(j) An owner or operator of an affected facility seeking to comply with the provisions of this part by using a control device other than a thermal vapor incinerator, catalytic vapor incinerator, flare, boiler, process heater, condenser, or carbon adsorption system is required to develop documentation including sufficient information to describe the control device operation and identify the process parameter or parameters that indicate proper operation and maintenance of the control device.

(k)(1) Closed-vent systems shall be designed for and operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background and by visual inspections, as determined by the methods specified as § 264.1034(b).

(2) Closed-vent systems shall be monitored to determine compliance with this section during the initial leak detection monitoring, which shall be conducted by the date that the facility becomes subject to the provisions of this section, annually, and at other times as requested by the Regional Administrator.

(3) Detectable emissions, as indicated by an instrument reading greater than 500 ppm and visual inspections, shall be controlled as soon as practicable, but not later than 15 calendar days after the emission is detected.

(4) A first attempt at repair shall be made no later than 5 calendar days after the emission is detected.

(l) Closed-vent systems and control devices used to comply with provisions of this subpart shall be operated at all times when emissions may be vented to them.

§ 264.1034 Test methods and procedures.

(a) Each owner or operator subject to the provisions of this subpart shall comply with the test methods and procedures requirements provided in this section.

(b) When a closed-vent system is tested for compliance with no detectable emissions, as required in § 264.1033(k), the test shall comply with the following requirements:

(1) Monitoring shall comply with Reference Method 21 in 40 CFR part 60.

(2) The detection instrument shall meet the performance criteria of Reference Method 21.

(3) The instrument shall be calibrated before use on each day of its use by the procedures specified in Reference Method 21.

(4) Calibration gases shall be:

(i) Zero air (less than 10 ppm of hydrocarbon in air).

(ii) A mixture of methane or n-hexane and air at a concentration of approximately, but less than, 10,000 ppm methane or n-hexane.

(5) The background level shall be determined as set forth in Reference Method 21.

(6) The instrument probe shall be traversed around all potential leak interfaces as close to the interface as possible as described in Reference Method 21.

(7) The arithmetic difference between the maximum concentration indicated by the instrument and the background level is compared with 500 ppm for determining compliance.

(c) Performance tests to determine compliance with § 264.1032(a) and with the total organic compound concentration limit of § 264.1033(c) shall comply with the following:

(1) Performance tests to determine total organic compound concentrations and mass flow rates entering and exiting control devices shall be conducted and data reduced in accordance with the following reference methods and calculation procedures:

(i) Method 2 in 40 CFR part 60 for velocity and volumetric flow rate.

(ii) Method 18 in 40 CFR part 60 for organic content.

(iii) Each performance test shall consist of three separate runs; each run conducted for at least 1 hour under the conditions that exist when the hazardous waste management unit is operating at the highest load or capacity level reasonably expected to occur. For the purpose of determining total organic compound concentrations and mass flow rates, the average of results of all runs shall apply. The average shall be computed on a time-weighted basis.

(iv) Total organic mass flow rates shall be determined by the following equation:

$$E_h = Q_{2sd} \left\{ \sum_{i=1}^{n} C_i MW_i \right\} [0.0416] [10^{-6}]$$

where:

E_h = Total organic mass flow rate, kg/h;

Q_{sd} = Volumetric flow rate of gases entering or exiting control device, as determined by Method 2, dscm/h;

n = Number of organic compounds in the vent gas;

C_i = Organic concentration in ppm, dry basis, of compound i in the vent gas, as determined by Method 18;

MW_i = Molecular weight of organic compound i in the vent gas, kg/kg-mol;

0.0416 = Conversion factor for molar volume, kg-mol/m^3 (@ 293 K and 760 mm Hg);

10^{-6} = Conversion from ppm, ppm^{-1}.

(v) The annual total organic emission rate shall be determined by the following equation:

$$E_A = (E_h)(H)$$

where:

E_A = Total organic mass emission rate, kg/y;

E_h = Total organic mass flow rate for the process vent, kg/h;

H = Total annual hours of operations for the affected unit, h.

(vi) Total organic emissions from all affected process vents at the facility shall be determined by summing the hourly total organic mass emission rates (E_h as determined in paragraph (c)(1)(iv) of this section) and by summing the annual total organic mass emission rates (E_A, as determined in paragraph (c)(1)(v) of this section) for all affected process vents at the facility.

(2) The owner or operator shall record such process information as may be necessary to determine the conditions of the performance tests. Operations during periods of startup, shutdown, and malfunction shall not constitute representative conditions for the purpose of a performance test.

(3) The owner or operator of an affected facility shall provide, or cause to be provided, performance testing facilities as follows:

(i) Sampling ports adequate for the test methods specified in paragraph (c)(1) of this section.

(ii) Safe sampling platform(s).

(iii) Safe access to sampling platform(s).

(iv) Utilities for sampling and testing equipment.

(4) For the purpose of making compliance determinations, the time-weighted average of the results of the three runs shall apply. In the event that a sample is accidentally lost or conditions occur in which one of the three runs must be discontinued because of forced shutdown, failure of an irreplaceable portion of the sample train, extreme meteorological conditions, or other circumstances beyond the owner or operator's control, compliance may, upon the Regional Administrator's approval, be determined

using the average of the results of the two other runs.

(d) To show that a process vent associated with a hazardous waste distillation, fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operation is not subject to the requirements of this subpart, the owner or operator must make an initial determination that the time-weighted, annual average total organic concentration of the waste managed by the waste management unit is less than 10 ppmw using one of the following two methods:

(1) Direct measurement of the organic concentration of the waste using the following procedures:

(i) The owner or operator must take a minimum of four grab samples of waste for each waste stream managed in the affected unit under process conditions expected to cause the maximum waste organic concentration.

(ii) For waste generated onsite, the grab samples must be collected at a point before the waste is exposed to the atmosphere such as in an enclosed pipe or other closed system that is used to transfer the waste after generation to the first affected distillation, fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operation. For waste generated offsite, the grab samples must be collected at the inlet to the first waste management unit that receives the waste provided the waste has been transferred to the facility in a closed system such as a tank truck and the waste is not diluted or mixed with other waste.

(iii) Each sample shall be analyzed and the total organic concentration of the sample shall be computed using Method 9060 or 8240 of SW-846 (incorporated by reference under § 260.11).

(iv) The arithmetic mean of the results of the analyses of the four samples shall apply for each waste stream managed in the unit in determining the time-weighted, annual average total organic concentration of the waste. The time-weighted average is to be calculated using the annual quantity of each waste stream processed and the mean organic concentration of each waste stream managed in the unit.

(2) Using knowledge of the waste to determine that its total organic concentration is less than 10 ppmw. Documentation of the waste determination is required. Examples of documentation that shall be used to support a determination under this provision include production process information documenting that no organic compounds are used, information that the waste is generated by a process that is identical to a process at the same or another facility that has previously been demonstrated by direct measurement to generate a waste stream having a total organic content less than 10 ppmw, or prior speciation analysis results on the same waste stream where it can also be documented that no process changes have occurred since that analysis that could affect the waste total organic concentration.

(e) The determination that distillation, fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operations manage hazardous wastes with time-weighted, annual average total organic concentrations less than 10 ppmw shall be made as follows:

(1) By the effective date that the facility becomes subject to the provisions of this subpart or by the date when the waste is first managed in a waste management unit, whichever is later, and

(2) For continuously generated waste, annually, or

(3) Whenever there is a change in the waste being managed or a change in the process that generates or treats the waste.

(f) When an owner or operator and the Regional Administrator do not agree on whether a distillation, fractionation, thin-film evaporation, solvent extraction, or air or steam stripping operation manages a hazardous waste with organic concentrations of at least 10 ppmw based on knowledge of the waste, the procedures in Method 8240 may be used to resolve the dispute.

§ 264.1035 Recordkeeping requirements.

(a)(1) Each owner or operator subject to the provisions of this subpart

shall comply with the recordkeeping requirements of this section.

(2) An owner or operator of more than one hazardous waste management unit subject to the provisions of this subpart may comply with the recordkeeping requirements for these hazardous waste management units in one recordkeeping system if the system identifies each record by each hazardous waste management unit.

(b) Owners and operators must record the following information in the facility operating record:

(1) For facilities that comply with the provisions of § 264.1033(a)(2), an implementation schedule that includes dates by which the closed-vent system and control device will be installed and in operation. The schedule must also include a rationale of why the installation cannot be completed at an earlier date. The implementation schedule must be in the facility operating record by the effective date that the facility becomes subject to the provisions of this subpart.

(2) Up-to-date documentation of compliance with the process vent standards in § 264.1032, including:

(i) Information and data identifying all affected process vents, annual throughput and operating hours of each affected unit, estimated emission rates for each affected vent and for the overall facility (i.e., the total emissions for all affected vents at the facility), and the approximate location within the facility of each affected unit (e.g., identify the hazardous waste management units on a facility plot plan).

(ii) Information and data supporting determinations of vent emissions and emission reductions achieved by add-on control devices based on engineering calculations or source tests. For the purpose of determining compliance, determinations of vent emissions and emission reductions must be made using operating parameter values (e.g., temperatures, flow rates, or vent stream organic compounds and concentrations) that represent the conditions that result in maximum organic emissions, such as when the waste management unit is operating at the highest load or capacity level reasonably expected to occur. If the owner or operator takes any action (e.g., managing a waste of different composition or increasing operating hours of affected waste management units) that would result in an increase in total organic emissions from affected process vents at the facility, then a new determination is required.

(3) Where an owner or operator chooses to use test data to determine the organic removal efficiency or total organic compound concentration achieved by the control device, a performance test plan. The test plan must include:

(i) A description of how it is determined that the planned test is going to be conducted when the hazardous waste management unit is operating at the highest load or capacity level reasonably expected to occur. This shall include the estimated or design flow rate and organic content of each vent stream and define the acceptable operating ranges of key process and control device parameters during the test program.

(ii) A detailed engineering description of the closed-vent system and control device including:

(A) Manufacturer's name and model number of control device.

(B) Type of control device.

(C) Dimensions of the control device.

(D) Capacity.

(E) Construction materials.

(iii) A detailed description of sampling and monitoring procedures, including sampling and monitoring locations in the system, the equipment to be used, sampling and monitoring frequency, and planned analytical procedures for sample analysis.

(4) Documentation of compliance with § 264.1033 shall include the following information:

(i) A list of all information references and sources used in preparing the documentation.

(ii) Records including the dates of each compliance test required by § 264.1033(k).

(iii) If engineering calculations are used, a design analysis, specifications, drawings, schematics, and piping and instrumentation diagrams based on the appropriate sections of "APTI Course 415: Control of Gaseous Emissions" (incorporated by reference as

specified in § 260.11) or other engineering texts acceptable to the Regional Administrator that present basic control device design information. Documentation provided by the control device manufacturer or vendor that describes the control device design in accordance with paragraphs (b)(4)(iii)(A) through (b)(4)(iii)(G) of this section may be used to comply with this requirement. The design analysis shall address the vent stream characteristics and control device operation parameters as specified below.

(A) For a thermal vapor incinerator, the design analysis shall consider the vent stream composition, constituent concentrations, and flow rate. The design analysis shall also establish the design minimum and average temperature in the combustion zone and the combustion zone residence time.

(B) For a catalytic vapor incinerator, the design analysis shall consider the vent stream composition, constituent concentrations, and flow rate. The design analysis shall also establish the design minimum and average temperatures across the catalyst bed inlet and outlet.

(C) For a boiler or process heater, the design analysis shall consider the vent stream composition, constituent concentrations, and flow rate. The design analysis shall also establish the design minimum and average flame zone temperatures, combustion zone residence time, and description of method and location where the vent stream is introduced into the combustion zone.

(D) For a flare, the design analysis shall consider the vent stream composition, constituent concentrations, and flow rate. The design analysis shall also consider the requirements specified in § 264.1033(d).

(E) For a condenser, the design analysis shall consider the vent stream composition, constituent concentrations, flow rate, relative humidity, and temperature. The design analysis shall also establish the design outlet organic compound concentration level, design average temperature of the condenser exhaust vent stream, and design average temperatures of the coolant fluid at the condenser inlet and outlet.

(F) For a carbon adsorption system such as a fixed-bed adsorber that regenerates the carbon bed directly onsite in the control device, the design analysis shall consider the vent stream composition, constituent concentrations, flow rate, relative humidity, and temperature. The design analysis shall also establish the design exhaust vent stream organic compound concentration level, number and capacity of carbon beds, type and working capacity of activated carbon used for carbon beds, design total steam flow over the period of each complete carbon bed regeneration cycle, duration of the carbon bed steaming and cooling/drying cycles, design carbon bed temperature after regeneration, design carbon bed regeneration time, and design service life of carbon.

(G) For a carbon adsorption system such as a carbon canister that does not regenerate the carbon bed directly onsite in the control device, the design analysis shall consider the vent stream composition, constituent concentrations, flow rate, relative humidity, and temperature. The design analysis shall also establish the design outlet organic concentration level, capacity of carbon bed, type and working capacity of activated carbon used for carbon bed, and design carbon replacement interval based on the total carbon working capacity of the control device and source operating schedule.

(iv) A statement signed and dated by the owner or operator certifying that the operating parameters used in the design analysis reasonably represent the conditions that exist when the hazardous waste management unit is or would be operating at the highest load or capacity level reasonably expected to occur.

(v) A statement signed and dated by the owner or operator certifying that the control device is designed to operate at an efficiency of 95 percent or greater unless the total organic concentration limit of § 264.1032(a) is achieved at an efficiency less than 95 weight percent or the total organic emission limits of § 264.1032(a) for affected process vents at the facility can be attained by a control device involving vapor recovery at an efficiency less than 95 weight percent. A statement

provided by the control device manufacturer or vendor certifying that the control equipment meets the design specifications may be used to comply with this requirement.

(vi) If performance tests are used to demonstrate compliance, all test results.

(c) Design documentation and monitoring, operating, and inspection information for each closed-vent system and control device required to comply with the provisions of this part shall be recorded and kept up-to-date in the facility operating record. The information shall include:

(1) Description and date of each modification that is made to the closed-vent system or control device design.

(2) Identification of operating parameter, description of monitoring device, and diagram of monitoring sensor location or locations used to comply with § 264.1033 (f)(1) and (f)(2).

(3) Monitoring, operating, and inspection information required by paragraphs (f) through (k) of § 264.1033.

(4) Date, time, and duration of each period that occurs while the control device is operating when any monitored parameter exceeds the value established in the control device design analysis as specified below:

(i) For a thermal vapor incinerator designed to operate with a minimum residence time of 0.50 second at a minimum temperature of 760 °C. period when the combustion temperature is below 760 °C.

(ii) For a thermal vapor incinerator designed to operate with an organic emission reduction efficiency of 95 weight percent or greater period when the combustion zone temperature is more than 28 °C below the design average combustion zone temperature established as a requirement of paragraph (b)(4)(iii)(A) of this section.

(iii) For a catalytic vapor incinerator, period when:

(A) Temperature of the vent stream at the catalyst bed inlet is more than 28 °C below the average temperature of the inlet vent stream established as a requirement of paragraph (b)(4)(iii)(B) of this section, or

(B) Temperature difference across the catalyst bed is less than 80 percent of the design average temperature difference established as a requirement of paragraph (b)(4)(iii)(B) of this section.

(iv) For a boiler or process heater, period when:

(A) Flame zone temperature is more than 28 °C below the design average flame zone temperature established as a requirement of paragraph (b)(4)(iii)(C) of this section, or

(B) Position changes where the vent stream is introduced to the combustion zone from the location established as a requirement of paragraph (b)(4)(iii)(C) of this section.

(v) For a flare, period when the pilot flame is not ignited.

(vi) For a condenser that complies with § 264.1033(f)(2)(vi)(A), period when the organic compound concentration level or readings of organic compounds in the exhaust vent stream from the condenser are more than 20 percent greater than the design outlet organic compound concentration level established as a requirement of paragraph (b)(4)(iii)(E) of this section.

(vii) For a condenser that complies with § 264.1033(f)(2)(vi)(B), period when:

(A) Temperature of the exhaust vent stream from the condenser is more than 6 °C above the design average exhaust vent stream temperature established as a requirement of paragraph (b)(4)(iii)(E) of this section; or

(B) Temperature of the coolant fluid exiting the condenser is more than 6 °C above the design average coolant fluid temperature at the condenser outlet established as a requirement of paragraph (b)(4)(iii)(E) of this section.

(viii) For a carbon adsorption system such as a fixed-bed carbon adsorber that regenerates the carbon bed directly onsite in the control device and complies with § 264.1033(f)(2)(vii)(A), period when the organic compound concentration level or readings of organic compounds in the exhaust vent stream from the carbon bed are more than 20 percent greater than the design exhaust vent stream organic compound concentration level established as a requirement of paragraph (b)(4)(iii)(F) of this section.

(ix) For a carbon adsorption system such as a fixed-bed carbon adsorber that regenerates the carbon bed directly onsite in the control device and complies with § 264.1033(f)(2)(vii)(B), period when the vent stream continues to flow through the control device beyond the predetermined carbon bed regeneration time established as a requirement of paragraph (b)(4)(iii)(F) of this section.

(5) Explanation for each period recorded under paragraph (4) of the cause for control device operating parameter exceeding the design value and the measures implemented to correct the control device operation.

(6) For a carbon adsorption system operated subject to requirements specified in § 264.1033(g) or § 264.1033(h)(2), date when existing carbon in the control device is replaced with fresh carbon.

(7) For a carbon adsorption system operated subject to requirements specified in § 264.1033(h)(1), a log that records:

(i) Date and time when control device is monitored for carbon breakthrough and the monitoring device reading.

(ii) Date when existing carbon in the control device is replaced with fresh carbon.

(8) Date of each control device startup and shutdown.

(d) Records of the monitoring, operating, and inspection information required by paragraphs (c)(3)-(c)(8) of this section need be kept only 3 years.

(e) For a control device other than a thermal vapor incinerator, catalytic vapor incinerator, flare, boiler, process heater, condenser, or carbon adsorption system, the Regional Administrator will specify the appropriate recordkeeping requirements.

(f) Up-to-date information and data used to determine whether or not a process vent is subject to the requirements in § 264.1032 including supporting documentation as required by § 264.1034(d)(2) when application of the knowledge of the nature of the hazardous waste stream or the process by which it was produced is used, shall be recorded in a log that is kept in the facility operating record.

(Approved by the Office of Management and Budget under control number 2060-0195)

§ 264.1036 Reporting requirements.

(a) A semiannual report shall be submitted by owners and operators subject to the requirements of this subpart to the Regional Administrator by dates specified by the Regional Administrator. The report shall include the following information:

(1) The Environmental Protection Agency identification number, name, and address of the facility.

(2) For each month during the semiannual reporting period, dates when the control device exceeded or operated outside of the design specifications as defined in § 264.1035(c)(4) and as indicated by the control device monitoring required by § 264.1033(f) and such exceedances were not corrected within 24 hours, or that a flare operated with visible emissions as defined in § 264.1033(d) and as determined by Method 22 monitoring, the duration and cause of each exceedance or visible emissions, and any corrective measures taken.

(b) If, during the semiannual reporting period, the control device does not exceed or operate outside of the design specifications as defined in § 264.1035(c)(4) for more than 24 hours or a flare does not operate with visible emissions as defined in § 264.1033(d), a report to the Regional Administrator is not required.

(Approved by the Office of Management and Budget under control number 2060-0195)

§§ 264.1037—264.1049 [Reserved]

Subpart BB—Air Emission Standards for Equipment Leaks

SOURCE: 55 FR 25501, June 21, 1990, unless otherwise noted.

EFFECTIVE DATE NOTE: At 55 FR 25501, June 21, 1990, §§ 264.1050 through 264.1079 (Subpart BB) were added, effective December 21, 1990.

§ 264.1050 Applicability.

(a) The regulations in this subpart apply to owners and operators of fa-

cilities that treat, store, or dispose of hazardous wastes (except as provided in § 264.1).

(b) Except as provided in § 264.1064(k), this subpart applies to equipment that contains or contacts hazardous wastes with organic concentrations of at least 10 percent by weight that are managed in:

(1) Units that are subject to the permitting requirements of part 270, or

(2) Hazardous waste recycling units that are located on hazardous waste management facilities otherwise subject to the permitting requirements of part 270.

(c) If the owner or operator of equipment subject to the requirements of §§ 264.1052 through 264.1065 has received a permit under section 3005 of RCRA prior to December 21, 1990, the requirements of §§ 264.1052 through 264.1065 must be incorporated when the permit is reissued under § 124.15 or reviewed under § 270.50.

(d) Each piece of equipment to which this subpart applies shall be marked in such a manner that it can be distinguished readily from other pieces of equipment.

(e) Equipment that is in vacuum service is excluded from the requirements of § 264.1052 to § 264.1060 if it is identified as required in § 264.1064(g)(5).

[NOTE: The requirements of §§ 264.1052 through 264.1065 apply to equipment associated with hazardous waste recycling units previously exempt under § 261.6(c)(1). Other exemptions under §§ 261.4, 262.34, and 264.1(g) are not affected by these requirements.]

§ 264.1051 Definitions.

As used in this subpart, all terms shall have the meaning given them in § 264.1031, the Act, and parts 260-266.

§ 264.1052 Standards: Pumps in light liquid service.

(a)(1) Each pump in light liquid service shall be monitored monthly to detect leaks by the methods specified in § 264.1063(b), except as provided in paragraphs (d), (e), and (f) of this section.

(2) Each pump in light liquid service shall be checked by visual inspection each calendar week for indications of liquids dripping from the pump seal.

(b)(1) If a instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(2) If there are indications of liquids dripping from the pump seal, a leak is detected.

(c)(1) When a leak is detected, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in § 264.1059.

(2) A first attempt at repair (e.g., tightening the packing gland) shall be made no later than 5 calendar days after each leak is detected.

(d) Each pump equipped with a dual mechanical seal system that includes a barrier fluid system is exempt from the requirements of paragraph (a) of this section, *provided* the following requirements are met:

(1) Each dual mechanical seal system must be:

(i) Operated with the barrier fluid at a pressure that is at all times greater than the pump stuffing box pressure, or

(ii) Equipped with a barrier fluid degassing reservoir that is connected by a closed-vent system to a control device that complies with the requirements of § 264.1060, or

(iii) Equipped with a system that purges the barrier fluid into a hazardous waste stream with no detectable emissions to the atmosphere.

(2) The barrier fluid system must not be a hazardous waste with organic concentrations 10 percent or greater by weight.

(3) Each barrier fluid system must be equipped with a sensor that will detect failure of the seal system, the barrier fluid system, or both.

(4) Each pump must be checked by visual inspection, each calendar week, for indications of liquids dripping from the pump seals.

(5)(i) Each sensor as described in paragraph (d)(3) of this section must be checked daily or be equipped with an audible alarm that must be checked monthly to ensure that it is functioning properly.

(ii) The owner or operator must determine, based on design considerations and operating experience, a cri-

terion that indicates failure of the seal system, the barrier fluid system, or both.

(6)(i) If there are indications of liquids dripping from the pump seal or the sensor indicates failure of the seal system, the barrier fluid system, or both based on the criterion determined in paragraph (d)(5)(ii) of this section, a leak is detected.

(ii) When a leak is detected, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in § 264.1059.

(iii) A first attempt at repair (e.g., relapping the seal) shall be made no later than 5 calendar days after each leak is detected.

(e) Any pump that is designated, as described in § 264.1064(g)(2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of paragraphs (a), (c), and (d) of this section if the pump meets the following requirements:

(1) Must have no externally actuated shaft penetrating the pump housing.

(2) Must operate with no detectable emissions as indicated by an instrument reading of less than 500 ppm above background as measured by the methods specified in § 264.1063(c).

(3) Must be tested for compliance with paragraph (e)(2) of this section initially upon designation, annually, and at other times as requested by the Regional Administrator.

(f) If any pump is equipped with a closed-vent system capable of capturing and transporting any leakage from the seal or seals to a control device that complies with the requirements of § 264.1060, it is exempt from the requirements of paragraphs (a) through (e) of this section.

§ 264.1053 Standards: Compressors.

(a) Each compressor shall be equipped with a seal system that includes a barrier fluid system and that prevents leakage of total organic emissions to the atmosphere, except as provided in paragraphs (h) and (i) of this section.

(b) Each compressor seal system as required in paragraph (a) of this section shall be:

(1) Operated with the barrier fluid at a pressure that is at all times greater than the compressor stuffing box pressure, or

(2) Equipped with a barrier fluid system that is connected by a closed-vent system to a control device that complies with the requirements of § 264.1060, or

(3) Equipped with a system that purges the barrier fluid into a hazardous waste stream with no detectable emissions to atmosphere.

(c) The barrier fluid must not be a hazardous waste with organic concentrations 10 percent or greater by weight.

(d) Each barrier fluid system as described in paragraphs (a) through (c) of this section shall be equipped with a sensor that will detect failure of the seal system, barrier fluid system, or both.

(e)(1) Each sensor as required in paragraph (d) of this section shall be checked daily or shall be equipped with an audible alarm that must be checked monthly to ensure that it is functioning properly unless the compressor is located within the boundary of an unmanned plant site, in which case the sensor must be checked daily.

(2) The owner or operator shall determine, based on design considerations and operating experience, a criterion that indicates failure of the seal system, the barrier fluid system, or both.

(f) If the sensor indicates failure of the seal system, the barrier fluid system, or both based on the criterion determined under paragraph (e)(2) of this section, a leak is detected.

(g)(1) When a leak is detected, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in § 264.1059.

(2) A first attempt at repair (e.g., tightening the packing gland) shall be made no later than 5 calendar days after each leak is detected.

(h) A compressor is exempt from the requirements of paragraphs (a) and (b) of this section if it is equipped with a closed-vent system capable of captur-

ing and transporting any leakage from the seal to a control device that complies with the requirements of § 264.1060, except as provided in paragraph (i) of this section.

(i) Any compressor that is designated, as described in § 264.1064(g)(2), for no detectable emissions as indicated by an instrument reading of less than 500 ppm above background is exempt from the requirements of paragraphs (a) through (h) of this section if the compressor:

(1) Is determined to be operating with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as measured by the method specified in § 264.1063(c).

(2) Is tested for compliance with paragraph (i)(1) of this section initially upon designation, annually, and at other times as requested by the Regional Administrator.

§ 264.1054 Standards: Pressure relief devices in gas/vapor service.

(a) Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as measured by the method specified in § 264.1063(c).

(b)(1) After each pressure release, the pressure relief device shall be returned to a condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as soon as practicable, but no later than 5 calendar days after each pressure release, except as provided in § 264.1059.

(2) No later than 5 calendar days after the pressure release, the pressure relief device shall be monitored to confirm the condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as measured by the method specified in § 264.1063(c).

(c) Any pressure relief device that is equipped with a closed-vent system capable of capturing and transporting leakage from the pressure relief device to a control device as described in § 264.1060 is exempt from the requirements of paragraphs (a) and (b) of this section.

§ 264.1055 Standards: Sampling connecting systems.

(a) Each sampling connection system shall be equipped with a closed purge system or closed-vent system.

(b) Each closed-purge system or closed-vent system as required in paragraph (a) shall:

(1) Return the purged hazardous waste stream directly to the hazardous waste management process line with no detectable emissions to atmosphere, or

(2) Collect and recycle the purged hazardous waste stream with no detectable emissions to atmosphere, or

(3) Be designed and operated to capture and transport all the purged hazardous waste stream to a control device that complies with the requirements of § 264.1060.

(c) *In situ* sampling systems are exempt from the requirements of paragraphs (a) and (b) of this section.

§ 264.1056 Standards: Open-ended valves or lines.

(a)(1) Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve.

(2) The cap, blind flange, plug, or second valve shall seal the open end at all times except during operations requiring hazardous waste stream flow through the open-ended valve or line.

(b) Each open-ended valve or line equipped with a second valve shall be operated in a manner such that the valve on the hazardous waste stream end is closed before the second valve is closed.

(c) When a double block and bleed system is being used, the bleed valve or line may remain open during operations that require venting the line between the block valves but shall comply with paragraph (a) of this section at all other times.

§ 264.1057 Standards: Valves in gas/vapor service or in light liquid service.

(a) Each valve in gas/vapor or light liquid service shall be monitored monthly to detect leaks by the methods specified in § 264.1063(b) and shall

comply with paragraphs (b) through (e) of this section, except as provided in paragraphs (f), (g), and (h) of this section, and §§ 264.1061 and 264.1062.

(b) If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(c)(1) Any valve for which a leak is not detected for two successive months may be monitored the first month of every succeeding quarter, beginning with the next quarter, until a leak is detected.

(2) If a leak is detected, the valve shall be monitored monthly until a leak is not detected for two successive months.

(d)(1) When a leak is detected, it shall be repaired as soon as practicable, but no later than 15 calendar days after the leak is detected, except as provided in § 264.1059.

(2) A first attempt at repair shall be made no later than 5 calendar days after each leak is detected.

(e) First attempts at repair include, but are not limited to, the following best practices where practicable:

(1) Tightening of bonnet bolts.

(2) Replacement of bonnet bolts.

(3) Tightening of packing gland nuts.

(4) Injection of lubricant into lubricated packing.

(f) Any valve that is designated, as described in § 264.1064(g)(2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of paragraph (a) of this section if the valve:

(1) Has no external actuating mechanism in contact with the hazardous waste stream.

(2) Is operated with emissions less than 500 ppm above background as determined by the method specified in § 264.1063(c).

(3) Is tested for compliance with paragraph (f)(2) of this section initially upon designation, annually, and at other times as requested by the Regional Administrator.

(g) Any valve that is designated, as described in § 264.1064(h)(1), as an unsafe-to-monitor valve is exempt from the requirements of paragraph (a) of this section if:

(1) The owner or operator of the valve determines that the valve is unsafe to monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with paragraph (a) of this section.

(2) The owner or operator of the valve adheres to a written plan that requires monitoring of the valve as frequently as practicable during safe-to-monitor times.

(h) Any valve that is designated, as described in § 264.1064(h)(2), as a difficult-to-monitor valve is exempt from the requirements of paragraph (a) of this section if:

(1) The owner or operator of the valve determines that the valve cannot be monitored without elevating the monitoring personnel more than 2 meters above a support surface.

(2) The hazardous waste management unit within which the valve is located was in operation before June 21, 1990.

(3) The owner or operator of the valve follows a written plan that requires monitoring of the valve at least once per calendar year.

§ 264.1058 Standards: Pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and flanges and other connectors.

(a) Pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and flanges and other connectors shall be monitored within 5 days by the method specified in § 264.1063(b) if evidence of a potential leak is found by visual, audible, olfactory, or any other detection method.

(b) If an instrument reading of 10,000 ppm or greater is measured, a leak is detected.

(c)(1) When a leak is detected, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in § 264.1059.

(2) The first attempt at repair shall be made no later than 5 calendar days after each leak is detected.

88, E 260-85 (incorporated by reference under § 260.11);

(2) Method 9060 or 8240 of SW-846 (incorporated by reference under § 260.11); or

(3) Application of the knowledge of the nature of the hazardous waste stream or the process by which it was produced. Documentation of a waste determination by knowledge is required. Examples of documentation that shall be used to support a determination under this provision include production process information documenting that no organic compounds are used, information that the waste is generated by a process that is identical to a process at the same or another facility that has previously been demonstrated by direct measurement to have a total organic content less than 10 percent, or prior speciation analysis results on the same waste stream where it can also be documented that no process changes have occurred since that analysis that could affect the waste total organic concentration.

(e) If an owner or operator determines that a piece of equipment contains or contacts a hazardous waste with organic concentrations at least 10 percent by weight, the determination can be revised only after following the procedures in paragraph (d)(1) or (d)(2) of this section.

(f) When an owner or operator and the Regional Administrator do not agree on whether a piece of equipment contains or contacts a hazardous waste with organic concentrations at least 10 percent by weight, the procedures in paragraph (d)(1) or (d)(2) of this section can be used to resolve the dispute.

(g) Samples used in determining the percent organic content shall be representative of the highest total organic content hazardous waste that is expected to be contained in or contact the equipment.

(h) To determine if pumps or valves are in light liquid service, the vapor pressures of constituents may be obtained from standard reference texts or may be determined by ASTM D-2879-86 (incorporated by reference under § 260.11).

(i) Performance tests to determine if a control device achieves 95 weight percent organic emission reduction shall comply with the procedures of § 264.1034(c)(1) through (c)(4).

§ 264.1064 Recordkeeping requirements.

(a)(1) Each owner or operator subject to the provisions of this subpart shall comply with the recordkeeping requirements of this section.

(2) An owner or operator of more than one hazardous waste management unit subject to the provisions of this subpart may comply with the recordkeeping requirements for these hazardous waste management units in one recordkeeping system if the system identifies each record by each hazardous waste management unit.

(b) Owners and operators must record the following information in the facility operating record:

(1) For each piece of equipment to which Subpart BB of Part 264 applies:

(i) Equipment identification number and hazardous waste management unit identification.

(ii) Approximate locations within the facility (e.g., identify the hazardous waste management unit on a facility plot plan).

(iii) Type of equipment (e.g.. a pump or pipeline valve).

(iv) Percent-by-weight total organics in the hazardous waste stream at the equipment.

(v) Hazardous waste state at the equipment (e.g., gas/vapor or liquid).

(vi) Method of compliance with the standard (e.g., "monthly leak detection and repair" or "equipped with dual mechanical seals").

(2) For facilities that comply with the provisions of § 264.1033(a)(2), an implementation schedule as specified in § 264.1033(a)(2).

(3) Where an owner or operator chooses to use test data to demonstrate the organic removal efficiency or total organic compound concentration achieved by the control device, a performance test plan as specified in § 264.1035(b)(3).

(4) Documentation of compliance with § 264.1060, including the detailed design documentation or performance test results specified in § 264.1035(b)(4).

(c) When each leak is detected as specified in §§ 264.1052, 264.1053,

264.1057, and 264.1058, the following requirements apply:

(1) A weatherproof and readily visible identification, marked with the equipment identification number, the date evidence of a potential leak was found in accordance with § 264.1058(a), and the date the leak was detected, shall be attached to the leaking equipment.

(2) The identification on equipment, except on a valve, may be removed after it has been repaired.

(3) The identification on a valve may be removed after it has been monitored for 2 successive months as specified in §§ 264.1057(c) and no leak has been detected during those 2 months.

(d) When each leak is detected as specified in §§ 264.1052, 264.1053, 264.1057, and 264.1058, the following information shall be recorded in an inspection log and shall be kept in the facility operating record:

(1) The instrument and operator identification numbers and the equipment identification number.

(2) The date evidence of a potential leak was found in accordance with § 264.1058(a).

(3) The date the leak was detected and the dates of each attempt to repair the leak.

(4) Repair methods applied in each attempt to repair the leak.

(5) "Above 10,000" if the maximum instrument reading measured by the methods specified in § 264.1063(b) after each repair attempt is equal to or greater than 10,000 ppm.

(6) "Repair delayed" and the reason for the delay if a leak is not repaired within 15 calendar days after discovery of the leak.

(7) Documentation supporting the delay of repair of a valve in compliance with § 264.1059(c).

(8) The signature of the owner or operator (or designate) whose decision it was that repair could not be effected without a hazardous waste management unit shutdown.

(9) The expected date of successful repair of the leak if a leak is not repaired within 15 calendar days.

(10) The date of successful repair of the leak.

(e) Design documentation and monitoring, operating, and inspection information for each closed-vent system and control device required to comply with the provisions of § 264.1060 shall be recorded and kept up-to-date in the facility operating record as specified in § 264.1035(c). Design documentation is specified in § 264.1035 (c)(1) and (c)(2) and monitoring, operating, and inspection information in § 264.1035(c)(3)-(c)(8).

(f) For a control device other than a thermal vapor incinerator, catalytic vapor incinerator, flare, boiler, process heater, condenser, or carbon adsorption system, the Regional Administrator will specify the appropriate recordkeeping requirements.

(g) The following information pertaining to all equipment subject to the requirements in §§ 264.1052 through 264.1060 shall be recorded in a log that is kept in the facility operating record:

(1) A list of identification numbers for equipment (except welded fittings) subject to the requirements of this subpart.

(2)(i) A list of identification numbers for equipment that the owner or operator elects to designate for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, under the provisions of §§ 264.1052(e), 264.1053(i), and 264.1057(f).

(ii) The designation of this equipment as subject to the requirements of §§ 264.1052(e), 264.1053(i), or 264.1057(f) shall be signed by the owner or operator.

(3) A list of equipment identification numbers for pressure relief devices required to comply with § 264.1054(a).

(4)(i) The dates of each compliance test required in §§ 264.1052(e), 264.1053(i), 264.1054, and 264.1057(f).

(ii) The background level measured during each compliance test.

(iii) The maximum instrument reading measured at the equipment during each compliance test.

(5) A list of identification numbers for equipment in vacuum service.

(h) The following information pertaining to all valves subject to the requirements of § 264.1057 (g) and (h) shall be recorded in a log that is kept in the facility operating record:

(1) A list of identification numbers for valves that are designated as

unsafe to monitor, an explanation for each valve stating why the valve is unsafe to monitor, and the plan for monitoring each valve.

(2) A list of identification numbers for valves that are designated as difficult to monitor, an explanation for each valve stating why the valve is difficult to monitor, and the planned schedule for monitoring each valve.

(i) The following information shall be recorded in the facility operating record for valves complying with § 264.1062:

(1) A schedule of monitoring.

(2) The percent of valves found leaking during each monitoring period.

(j) The following information shall be recorded in a log that is kept in the facility operating record:

(1) Criteria required in § 264.1052(d)(5)(ii) and § 264.1053(e)(2) and an explanation of the design criteria.

(2) Any changes to these criteria and the reasons for the changes.

(k) The following information shall be recorded in a log that is kept in the facility operating record for use in determining exemptions as provided in the applicability section of this subpart and other specific subparts:

(1) An analysis determining the design capacity of the hazardous waste management unit.

(2) A statement listing the hazardous waste influent to and effluent from each hazardous waste management unit subject to the requirements in §§ 264.1052 through 264.1060 and an analysis determining whether these hazardous wastes are heavy liquids.

(3) An up-to-date analysis and the supporting information and data used to determine whether or not equipment is subject to the requirements in §§ 264.1052 through 264.1060. The record shall include supporting documentation as required by § 264.1063(d)(3) when application of the knowledge of the nature of the hazardous waste stream or the process by which it was produced is used. If the owner or operator takes any action (e.g., changing the process that produced the waste) that could result in an increase in the total organic content of the waste contained in or contacted by equipment determined not to be subject to the requirements in §§ 264.1052 through 264.1060, then a new determination is required.

(l) Records of the equipment leak information required by paragraph (d) of this section and the operating information required by paragraph (e) of this section need be kept only 3 years.

(m) The owner or operator of any facility that is subject to this subpart and to regulations at 40 CFR part 60, subpart VV, or 40 CFR part 61, subpart V, may elect to determine compliance with this subpart by documentation either pursuant to § 264.1064 of this subpart, or pursuant to those provisions of 40 CFR part 60 or 61, to the extent that the documentation under the regulation at 40 CFR part 60 or part 61 duplicates the documentation required under this subpart. The documentation under the regulation at 40 CFR part 60 or part 61 shall be kept with or made readily available with the facility operating record.

(Approved by the Office of Management and Budget under control number 2060-0195)

§ 264.1065 Reporting requirements.

(a) A semiannual report shall be submitted by owners and operators subject to the requirements of this subpart to the Regional Administrator by dates specified by the Regional Administrator. The report shall include the following information:

(1) The Environmental Protection Agency identification number, name, and address of the facility.

(2) For each month during the semiannual reporting period:

(i) The equipment identification number of each valve for which a leak was not repaired as required in § 264.1057(d).

(ii) The equipment identification number of each pump for which a leak was not repaired as required in § 264.1052 (c) and (d)(6).

(iii) The equipment identification number of each compressor for which a leak was not repaired as required in § 264.1053(g).

(3) Dates of hazardous waste management unit shutdowns that occurred within the semiannual reporting period.

(4) For each month during the semiannual reporting period, dates when the control device installed as required by § 264.1052, 264.1053, 264.1054, or 264.1055 exceeded or operated outside of the design specifications as defined in § 264.1064(e) and as indicated by the control device monitoring required by § 264.1060 and was not corrected within 24 hours, the duration and cause of each exceedance, and any corrective measures taken.

(b) If, during the semiannual reporting period, leaks from valves, pumps, and compressors are repaired as required in §§ 264.1057 (d), 264.1052 (c) and (d)(6), and 264.1053 (g), respectively, and the control device does not exceed or operate outside of the design specifications as defined in § 264.1064(e) for more than 24 hours, a report to the Regional Administrator is not required.

(Approved by the Office of Management and Budget under control number 2060-0195)

§§ 264.1066—264.1079 [Reserved]

Appendix I—Recordkeeping Instructions

The recordkeeping provisions of § 264.73 specify that an owner or operator must keep a written operating record at his facility. This appendix provides additional instructions for keeping *portions* of the operating record. See § 264.73(b) for additional recordkeeping requirements.

The following information must be recorded, as it becomes available, and maintained in the operating record until closure of the facility in the following manner:

Records of each hazardous waste received, treated, stored, or disposed of at the facility which include the following:

(1) A description by its common name and the EPA Hazardous Waste Number(s) from Part 261 of this chapter which apply to the waste. The waste description also must include the waste's physical form, i.e., liquid, sludge, solid, or contained gas. If the waste is not listed in Part 261, Subpart D, of this chapter, the description also must include the process that produced it (for example, solid filter cake from production of ----, EPA Hazardous Waste Number W051).

Each hazardous waste listed in Part 261, Subpart D, of this chapter, and each hazardous waste characteristic defined in Part 261, Subpart C, of this chapter, has a four-digit EPA Hazardous Waste Number assigned to it. This number must be used for recordkeeping and reporting purposes. Where a hazardous waste contains more than one listed hazardous waste, or where more than one hazardous waste characteristic applies to the waste, the waste description must include all applicable EPA Hazardous Waste Numbers.

(2) The estimated or manifest-reported weight, or volume and density, where applicable, in one of the units of measure specified in Table 1;

Table 1

Unit of measure	Symbol [1]	Density
Pounds	P	
Short tons (2000 lbs)	T	
Gallons (U.S.)	G	P/G
Cubic yards	Y	T/Y
Kilograms	K	
Tonnes (1000 kg)	M	
Liters	L	K/L
Cubic meters	C	M/C

[1] Single digit symbols are used here for data processing purposes.

(3) The method(s) (by handling code(s) as specified in Table 2) and date(s) of treatment, storage, or disposal.

Table 2—Handling Codes for Treatment, Storage, and Disposal Methods

Enter the handling code(s) listed below that most closely represents the technique(s) used at the facility to treat, store, or dispose of each quantity of hazardous waste received.

1. Storage
   - S01 Container (barrel, drum, etc.)
   - S02 Tank
   - S03 Waste pile
   - S04 Surface impoundment
   - S05 Other (specify)
2. Treatment
   - (a) Thermal Treatment
   - T06 Liquid injection incinerator
   - T07 Rotary kiln incinerator
   - T08 Fluidized bed incinerator
   - T09 Multiple hearth incinerator
   - T10 Infrared furnace incinerator
   - T11 Molten salt destructor
   - T12 Pyrolysis
   - T13 Wet Air oxidation
   - T14 Calcination
   - T15 Microwave discharge
   - T16 Cement kiln
   - T17 Lime kiln
   - T18 Other (specify)
   - (b) Chemical Treatment
   - T19 Absorption mound
   - T20 Absorption field
   - T21 Chemical fixation
   - T22 Chemical oxidation
   - T23 Chemical precipitation

T24 Chemical reduction
T25 Chlorination
T26 Chlorinolysis
T27 Cyanide destruction
T28 Degradation
T29 Detoxification
T30 Ion exchange
T31 Neutralization
T32 Ozonation
T33 Photolysis
T34 Other (specify)
(c) Physical Treatment
(1) Separation of components
T35 Centrifugation
T36 Clarification
T37 Coagulation
T38 Decanting
T39 Encapsulation
T40 Filtration
T41 Flocculation
T42 Flotation
T43 Foaming
T44 Sedimentation
T45 Thickening
T46 Ultrafiltration
T47 Other (specify)
(2) Removal of Specific Components
T48 Absorption-molecular sieve
T49 Activated carbon
T50 Blending
T51 Catalysis
T52 Crystallization
T53 Dialysis
T54 Distillation
T55 Electrodialysis
T56 Electrolysis
T57 Evaporation
T58 High gradient magnetic separation
T59 Leaching
T60 Liquid ion exchange
T61 Liquid-liquid extraction
T62 Reverse osmosis
T63 Solvent recovery
T64 Stripping
T65 Sand filter
T66 Other (specify)
(d) Biological Treatment
T67 Activated sludge
T68 Aerobic lagoon
T69 Aerobic tank
T70 Anaerobic lagoon
T71 Composting
T72 Septic tank
T73 Spray irrigation
T74 Thickening filter
T75 Tricking filter
T76 Waste stabilization pond
T77 Other (specify)
T78-79 [Reserved]
3. Disposal
D80 Underground injection
D81 Landfill
D82 Land treatment
D83 Ocean disposal
D84 Surface impoundment (to be closed as a landfill)
D85 Other (specify)

APPENDICES II—III [RESERVED]

APPENDIX IV—COCHRAN'S APPROXIMATION TO THE BEHRENS-FISHER STUDENTS' T-TEST

Using all the available background data (n_b readings), calculate the background mean (X_b) and background variance (s_b^2). For the single monitoring well under investigation (n_m reading), calculate the monitoring mean (X_m) and monitoring variance (s_m^2).

For any set of data ($X_1, X_2, \ldots, X_n$) the mean is calculated by:

$$\bar{X} = \frac{X_1 + X_2 t \ldots + X_n}{n}$$

and the variance is calculated by:

$$s^2 = \frac{(X_1 - \bar{X})^2 + (X_2 - \bar{X})^2 t \ldots + (X_n - \bar{X})^2}{n-1}$$

where "n" denotes the number of observations in the set of data.

The t-test uses these data summary measures to calculate a t-statistic (t^*) and a comparison t-statistic (t_c). The t^* value is compared to the t_c value and a conclusion reached as to whether there has been a statistically significant change in any indicator parameter.

The t-statistic for all parameters except pH and similar monitoring parameters is:

$$t^* = \frac{X_m - \bar{X}_B}{\sqrt{\frac{S_m^2}{n_m} + \frac{S_b^2}{n_b}}}$$

If the value of this t-statistic is negative then there is no significant difference between the monitoring data and background data. It should be noted that significantly small negative values may be indicative of a failure of the assumption made for test validity or errors have been made in collecting the background data.

The t-statistic (t_c), against which t^* will be compared, necessitates finding t_b and t_m from standard (one-tailed) tables where,

t_b = t-tables with ($n_b - 1$) degrees of freedom, at the 0.05 level of significance.

t_m = t-tables with ($n_m - 1$) degrees of freedom, at the 0.05 level of significance.

Finally, the special weightings W_b and W_m are defined as:

$$W_B = \frac{s_b^2}{n_b} \quad \text{and} \quad W_m = \frac{s_m^2}{n_m}$$

and so the comparison t-statistic is:

$$t_c = \frac{W_b t_b + W_m t_m}{W_b + W_m}$$

The t-statistic (t^*) is now compared with the comparison t-statistic (t_c) using the following decision-rule:

If *t^* is equal to or larger than* t_c, then conclude that there most likely *has been a significant increase* in this specific parameter.

If *t^* is less than* t_c, then conclude that most likely *there has not been a change* in this specific parameter.

The t-statistic for testing pH and similar monitoring parameters is constructed in the same manner as previously described except the negative sign (if any) is discarded and the caveat concerning the negative value is ignored. The standard (two-tailed) tables are used in the construction t_c for pH and similar monitoring parameters.

If t^* is equal to or larger than t_c, then conclude that there most likely *has been a significant increase* (if the initial t^* had been negative, this would imply a significant decrease). If t^* is less than t_c, then conclude that there most likely has been no change.

A further discussion of the test may be found in *Statistical Methods* (6th Edition, Section 4.14) by G. W. Snedecor and W. G. Cochran, or *Principles and Procedures of Statistics* (1st Edition, Section 5.8) by R. G. D. Steel and J. H. Torrie.

STANDARD T-TABLES 0.05 LEVEL OF SIGNIFICANCE

Degrees of freedom	t-values (one-tail)	t-values (two-tail)
1	6.314	12.706
2	2.920	4.303
3	2.353	3.182
4	2.132	2.776
5	2.015	2.571
6	1.943	2.447
7	1.895	2.365
8	1.860	2.306
9	1.833	2.262
10	1.812	2.228
11	1.796	2.201
12	1.782	2.179
13	1.771	2.160
14	1.761	2.145
15	1.753	2.131
16	1.746	2.120
17	1.740	2.110
18	1.734	2.101
19	1.729	2.093

STANDARD T-TABLES 0.05 LEVEL OF SIGNIFICANCE—Continued

Degrees of freedom	t-values (one-tail)	t-values (two-tail)
20	1.725	2.086
21	1.721	2.080
22	1.717	2.074
23	1.714	2.069
24	1.711	2.064
25	1.708	2.060
30	1.697	2.042
40	1.684	2.021

Adopted from Table III of "*Statistical Tables for Biological, Agricultural, and Medical Research*" (1947, R. A. Fisher and F. Yates).

[47 FR 32367, July 26, 1982]

APPENDIX V—EXAMPLES OF POTENTIALLY INCOMPATIBLE WASTE

Many hazardous wastes, when mixed with other waste or materials at a hazardous waste facility, can produce effects which are harmful to human health and the environment, such as (1) heat or pressure, (2) fire or explosion, (3) violent reaction, (4) toxic dusts, mists, fumes, or gases, or (5) flammable fumes or gases.

Below are examples of potentially incompatible wastes, waste components, and materials, along with the harmful consequences which result from mixing materials in one group with materials in another group. The list is intended as a guide to owners or operators of treatment, storage, and disposal facilities, and to enforcement and permit granting officials, to indicate the need for special precautions when managing these potentially incompatible waste materials or components.

This list is not intended to be exhaustive. An owner or operator must, as the regulations require, adequately analyze his wastes so that he can avoid creating uncontrolled substances or reactions of the type listed below, whether they are listed below or not.

It is possible for potentially incompatible wastes to be mixed in a way that precludes a reaction (e.g., adding acid to water rather than water to acid) or that neutralizes them (e.g., a strong acid mixed with a strong base), or that controls substances produced (e.g., by generating flammable gases in a closed tank equipped so that ignition cannot occur, and burning the gases in an incinerator).

In the lists below, the mixing of a Group A material with a Group B material may have the potential consequence as noted.

GROUP 1-A

Acetylene sludge

Alkaline caustic liquids
Alkaline cleaner
Alkaline corrosive liquids
Alkaline corrosive battery fluid
Caustic wastewater
Lime sludge and other corrosive alkalies
Lime wastewater
Lime and water
Spent caustic

GROUP 1-B

Acid sludge
Acid and water
Battery acid
Chemical cleaners
Electrolyte, acid
Etching acid liquid or solvent
Pickling liquor and other corrosive acids
Spent acid
Spent mixed acid
Spent sulfuric acid

Potential consequences: Heat generation; violent reaction.

GROUP 2-A

Aluminum
Beryllium
Calcium
Lithium
Magnesium
Potassium
Sodium
Zinc powder
Other reactive metals and metal hydrides

GROUP 2-B

Any waste in Group 1-A or 1-B

Potential consequences: Fire or explosion; generation of flammable hydrogen gas.

GROUP 3-A

Alcohols
Water

GROUP 3-B

Any concentrated waste in Groups 1-A or 1-B
Calcium
Lithium
Metal hydrides
Potassium
SO_2Cl_2, $SOCl_2$, PCl_3, CH_3SiCl_3
Other water-reactive waste

Potential consequences: Fire, explosion, or heat generation; generation of flammable or toxic gases.

GROUP 4-A

Alcohols
Aldehydes
Halogenated hydrocarbons
Nitrated hydrocarbons
Unsaturated hydrocarbons
Other reactive organic compounds and solvents

GROUP 4-B

Concentrated Group 1-A or 1-B wastes
Group 2-A wastes

Potential consequences: Fire, explosion, or violent reaction.

GROUP 5-A

Spent cyanide and sulfide solutions

GROUP 5-B

Group 1-B wastes

Potential consequences: Generation of toxic hydrogen cyanide or hydrogen sulfide gas.

GROUP 6-A

Chlorates
Chlorine
Chlorites
Chromic acid
Hypochlorites
Nitrates
Nitric acid, fuming
Perchlorates
Permanganates
Peroxides
Other strong oxidizers

GROUP 6-B

Acetic acid and other organic acids
Concentrated mineral acids
Group 2-A wastes
Group 4-A wastes
Other flammable and combustible wastes

Potential consequences: Fire, explosion, or violent reaction.

Source: "Law, Regulations, and Guidelines for Handling of Hazardous Waste." California Department of Health, February 1975.

[46 FR 2872, Jan. 12, 1981]

APPENDIX VI—POLITICAL JURISDICTIONS[1] IN WHICH COMPLIANCE WITH § 264.18(a) MUST BE DEMONSTRATED

ALASKA

Aleutian Islands
Anchorage
Bethel
Bristol Bay
Cordova-Valdez
Fairbanks-Fort Yukon
Juneau
Kenai-Cook Inlet
Ketchikan-Prince of Wales
Kodiak
Lynn Canal-Icy Straits

[1] These include counties, city-county consolidations, and independent cities. In the case of Alaska, the political jurisdictions are election districts, and, in the case of Hawaii, the political jurisdiction listed is the island of Hawaii.

Aleutian Islands
Anchorage
Bethel
Bristol Bay
Cordova-Valdez
Fairbanks-Fort Yukon
Juneau
Kenai-Cook Inlet
Ketchikan-Prince of Wales
Kodiak
Lynn Canal-Icy Straits
Palmer-Wasilla-Talkeena
Seward
Sitka
Wade Hampton
Wrangell Petersburg
Yukon-Kuskokwim

ARIZONA

Cochise
Graham
Greenlee
Yuma

CALIFORNIA

All

COLORADO

Archuleta
Conejos
Hinsdale
Mineral
Rio Grande
Saguache

HAWAII

Hawaii

IDAHO

Bannock
Bear Lake
Bingham
Bonneville
Caribou
Cassia
Clark
Franklin
Fremont
Jefferson
Madison
Oneida
Power
Teton

MONTANA

Beaverhead
Broadwater
Cascade
Deer Lodge
Flathead
Gallatin
Granite
Jefferson
Lake
Lewis and Clark
Madison
Meagher
Missoula
Park
Powell
Sanders
Silver Bow
Stillwater
Sweet Grass
Teton
Wheatland

NEVADA

All

NEW MEXICO

Bernalillo
Catron
Grant
Hidalgo
Los Alamos
Rio Arriba
Sandoval
Sante Fe
Sierra
Socorro
Taos
Torrance
Valencia

UTAH

Beaver
Box Elder
Cache
Carbon
Davis
Duchesne
Emery
Garfield
Iron
Juab
Millard
Morgan
Piute
Rich
Salt Lake
Sanpete
Sevier
Summit
Tooele
Utah
Wasatch
Washington
Wayne
Weber

WASHINGTON

Chelan
Clallam
Clark
Cowlitz
Douglas
Ferry
Grant
Grays Harbor
Jefferson
King
Kitsap
Kittitas
Lewis
Mason
Okanogan
Pacific
Pierce
San Juan Islands
Skagit
Skamania
Snohomish
Thurston
Wahkiakum
Whatcom
Yakima

WYOMING

Fremont
Lincoln
Park
Sublette
Teton
Uinta
Yellowstone National Park

[46 FR 57285, Nov. 23, 1981; 47 FR 953, Jan. 8, 1982]

APPENDICES VII—VIII [RESERVED]

APPENDIX IX—GROUND-WATER MONITORING LIST [1]

GROUND-WATER MONITORING LIST [1]

Common name [2]	CAS RN [3]	Chemical abstracts service index name [4]	Suggested methods [5]	PQL (μg/L) [6]
Acenaphthene	83-32-9	Acenaphthylene, 1,2-dihydro-	8100	200
			8270	10
Acenaphthylene	208-96-8	Acenaphthylene	8100	200
			8270	10
Acetone	67-64-1	2-Propanone	8240	100
Acetophenone	98-86-2	Ethanone, 1-phenyl-	8270	10
Acetonitrile; Methyl cyanide	75-05-8	Acetonitrile	8015	100
2-Acetylaminofluorene; 2-AAF	53-96-3	Acetamide, N-9H-fluoren-2-yl-	8270	10
Acrolein	107-02-8	2-Propenal	8030	5
			8240	5
Acrylonitrile	107-13-1	2-Propenenitrile	8030	5
			8240	5
Aldrin	309-00-2	1,4:5,8-Dimethanonaphthalene, 1,2,3,4,10,10-hexachloro- 1,4,4a,5,8,8a-hexahydro-(1α,4α,4aβ,5α,8α,8aβ)-	8080	0.05
			8270	10
Allyl chloride	107-05-1	1-Propene, 3-chloro-	8010	5
			8240	100
4-Aminobiphenyl	92-67-1	[1,1'-Biphenyl]-4-amine	8270	10
Aniline	62-53-3	Benzenamine	8270	10
Anthracene	120-12-7	Anthracene	8100	200
			8270	10
Antimony	(Total)	Antimony	6010	300
			7040	2,000
			7041	30
Aramite	140-57-8	Sulfurous acid, 2-chloroethyl 2-[4-(1,1-dimethylethyl)phenoxy]-1-methylethyl ester.	8270	10
Arsenic	(Total)	Arsenic	6010	500
			7060	10
			7061	20
Barium	(Total)	Barium	6010	20
			7080	1,000
Benzene	71-43-2	Benzene	8020	2
			8240	5
Benzo[a]anthracene; Benzanthracene.	56-55-3	Benz[a]anthracene	8100	200
			8270	10
Benzo[b]fluoranthene	205-99-2	Benz[e]acephenanthrylene	8100	200
			8270	10
Benzo[k]fluoranthene	207-08-9	Benzo[k]fluoranthene	8100	200
			8270	10
Benzo[ghi]perylene	191-24-2	Benzo[ghi]perylene	8100	200
			8270	10
Benzo[a]pyrene	50-32-8	Benzo[a]pyrene	8100	200
			8270	10
Benzyl alcohol	100-51-6	Benzenemethanol	8270	20
Beryllium	(Total)	Beryllium	6010	3
			7090	50
			7091	2
alpha-BHC	319-84-6	Cyclohexane, 1,2,3,4,5,6-hexachloro-,(1α,2α,3β,4α,5β,6β)-	8080	0.05
			8250	10
beta-BHC	319-85-7	Cyclohexane, 1,2,3,4,5,6-hexachloro-,(1α,2β,3α,4β,5α,6β)-	8080	0.05
			8250	40
delta-BHC	319-86-8	Cyclohexane, 1,2,3,4,5,6-hexachloro-,(1α,2α,3α,4β,5α,6β)-	8080	0.1
			8250	30
gamma-BHC; Lindane	58-89-9	Cyclohexane, 1,2,3,4,5,6-hexachloro-,(1α,2α,3β,4α,5α,6β)-	8080	0.05
			8250	10
Bis(2-chloroethoxy)methane	111-91-1	Ethane, 1,1'-[methylenebis (oxy)]bis[2-chloro-	8270	10
Bis(2-chloroethyl)ether	111-44-4	Ethane, 1,1'-oxybis[2-chloro-	8270	10
Bis(2-chloro-1-methylethyl) ether; 2,2'-Di- chlorodiisopropyl ether.	108-60-1	Propane, 2,2'-oxybis[1-chloro-	8010	100
			8270	10
Bis(2-ethylhexyl) phthalate	117-81-7	1,2-Benzenedicarboxylic acid, bis(2-ethylhexyl)ester.	8060	20
			8270	10
Bromodichloromethane	75-27-4	Methane, bromodichloro-	8010	1
			8240	5

GROUND-WATER MONITORING LIST [1]—Continued

Common name [2]	CAS RN [3]	Chemical abstracts service index name [4]	Suggested methods [5]	PQL (µg/L) [6]
Bromoform; Tribromomethane	75-25-2	Methane, tribromo-	8010	2
			8240	5
4-Bromophenyl phenyl ether	101-55-3	Benzene, 1-bromo-4-phenoxy-	8270	10
Butyl benzyl phthalate; Benzyl butyl phthalate	85-68-7	1,2-Benzenedicarboxylic acid, butyl phenylmethyl ester.	8060	5
			8270	10
Cadmium	(Total)	Cadmium	6010	40
			7130	50
			7131	1
Carbon disulfide	75-15-0	Carbon disulfide	8240	5
Carbon tetrachloride	56-23-5	Methane, tetrachloro-	8010	1
			8240	5
Chlordane	57-74-9	4,7-Methano-1H-indene, 1,2,4,5,6,7,8,8-octachloro-2,3,3a,4,7,7a-hexahydro-.	8080	0.1
			8250	10
p-Chloroaniline	106-47-8	Benzenamine, 4-chloro-	8270	20
Chlorobenzene	108-90-7	Benzene, chloro-	8010	2
			8020	2
			8240	5
Chlorobenzilate	510-15-6	Benzeneacetic acid, 4-chloro-α-(4-chlorophenyl)-α-hydroxy-, ethyl ester.	8270	10
p-Chloro-m-cresol	59-50-7	Phenol, 4-chloro-3-methyl-	8040	5
			8270	20
Chloroethane; Ethyl chloride	75-00-3	Ethane, chloro-	8010	5
			8240	10
Chloroform	67-66-3	Methane, trichloro-	8010	0.5
			8240	5
2-Chloronaphthalene	91-58-7	Naphthalene, 2-chloro-	8120	10
			8270	10
2-Chlorophenol	95-57-8	Phenol, 2-chloro-	8040	5
			8270	10
4-Chlorophenyl phenyl ether	7005-72-3	Benzene, 1-chloro-4-phenoxy-	8270	10
Chloroprene	126-99-8	1,3-Butadiene, 2-chloro-	8010	50
			8240	5
Chromium	(Total)	Chromium	6010	70
			7190	500
			7191	10
Chrysene	218-01-9	Chrysene	8100	200
			8270	10
Cobalt	(Total)	Cobalt	6010	70
			7200	500
			7201	10
Copper	(Total)	Copper	6010	60
			7210	200
m-Cresol	108-39-4	Phenol, 3-methyl-	8270	10
o-Cresol	95-48-7	Phenol, 2-methyl-	8270	10
p-Cresol	106-44-5	Phenol, 4-methyl-	8270	10
Cyanide	57-12-5	Cyanide	9010	40
2,4-D; 2,4-Dichlorophenoxyacetic acid.	94-75-7	Acetic acid, (2,4-dichlorophenoxy)-	8150	10
4,4'-DDD	72-54-8	Benzene 1,1'-(2,2-dichloroethylidene)bis[4-chloro-	8080	0.1
			8270	10
4,4'-DDE	72-55-9	Benzene, 1,1'-(dichloroethenylidene)bis[4-chloro-	8080	0.05
			8270	10
4,4'-DDT	50-29-3	Benzene, 1,1'-(2,2,2-trichloroethylidene)bis[4-chloro-.	8080	0.1
			8270	10
Diallate	2303-16-4	Carbamothioic acid, bis(1-methylethyl)- , S- (2,3-dichloro-2-propenyl) ester.	8270	10
Dibenz[a,h]anthracene	53-70-3	Dibenz[a,h]anthracene	8100	200
			8270	10
Dibenzofuran	132-64-9	Dibenzofuran	8270	10
Dibromochloromethane; Chlorodibromomethane	124-48-1	Methane, dibromochloro-	8010	1
			8240	5
1,2-Dibromo-3-chloropropane; DBCP.	96-12-8	Propane, 1,2-dibromo-3-chloro-	8010	100
			8240	5
			8270	10
1,2-Dibromoethane; Ethylene dibromide.	106-93-4	Ethane, 1,2-dibromo-	8010	10
			8240	5
Di-n-butyl phthalate	84-74-2	1,2-Benzenedicarboxylic acid, dibutyl ester	8060	5
			8270	10

GROUND-WATER MONITORING LIST [1]—Continued

Common name [2]	CAS RN [3]	Chemical abstracts service index name [4]	Suggested methods [5]	PQL (µg/L) [6]
o-Dichlorobenzene	95-50-1	Benzene, 1,2-dichloro-	8010	2
			8020	5
			8120	10
			8270	10
m-Dichlorobenzene	541-73-1	Benzene, 1,3-dichloro-	8010	5
			8020	5
			8120	10
			8270	10
p-Dichlorobenzene	106-46-7	Benzene, 1,4-dichloro-	8010	2
			8020	5
			8120	15
			8270	10
3,3'-Dichlorobenzidine	91-94-1	[1,1'-Biphenyl]-4,4'-diamine, 3,3'-dichloro-	8270	20
trans-1,4-Dichloro-2-butene	110-57-6	2-Butene, 1,4-dichloro-, (E)-	8240	5
Dichlorodifluoromethane	75-71-8	Methane, dichlorodifluoro-	8010	10
			8240	5
1,1-Dichloroethane	75-34-3	Ethane, 1,1-dichloro-	8010	1
			8240	5
1,2-Dichloroethane; Ethylene dichloride.	107-06-2	Ethane, 1,2-dichloro-	8010	0.5
			8240	5
1,1-Dichloroethylene; Vinylidene chloride.	75-35-4	Ethene, 1,1-dichloro-	8010	1
			8240	5
trans-1,2-Dichloroethylene	156-60-5	Ethene, 1,2-dichloro-, (E)-	8010	1
			8240	5
2,4-Dichlorophenol	120-83-2	Phenol, 2,4-dichloro-	8040	5
			8270	10
2,6-Dichlorophenol	87-65-0	Phenol, 2,6-dichloro-	8270	10
1,2-Dichloropropane	78-87-5	Propane, 1,2-dichloro-	8010	0.5
			8240	5
cis-1,3-Dichloropropene	10061-01-5	1-Propene, 1,3-dichloro-, (Z)-	8010	20
			8240	5
trans-1,3-Dichloropropene	10061-02-6	1-Propene, 1,3-dichloro-, (E)-	8010	5
			8240	5
Dieldrin	60-57-1	2,7:3,6-Dimethanonaphth[2,3-b]oxirene, 3,4,5,6,9,9-hexachloro-1a,2,2a,3,6,6a,7,7a-octahydro-, (1aα,2β,2aα,3β,6β,6aα,7β,7aα)-	8080	0.05
			8270	10
Diethyl phthalate	84-66-2	1,2-Benzenedicarboxylic acid, diethyl ester	8060	5
			8270	10
O,O-Diethyl O-2-pyrazinyl phosphorothioate; Thionazin	297-97-2	Phosphorothioic acid, O,O-diethyl O-pyrazinyl ester.	8270	10
Dimethoate	60-51-5	Phosphorodithioic acid, O,O-dimethyl S-[2-(methylamino)-2-oxoethyl] ester.	8270	10
p-(Dimethylamino)azobenzene	60-11-7	Benzenamine, N,N-dimethyl-4-(phenylazo)-	8270	10
7,12-Dimethylbenz[a]anthracene	57-97-6	Benz[a]anthracene, 7,12-dimethyl-	8270	10
3,3'-Dimethylbenzidine	119-93-7	[1,1'-Biphenyl]-4,4'-diamine, 3,3'-dimethyl-	8270	10
alpha, alpha-Dimethylphenethylamine.	122-09-8	Benzeneethanamine, α,α-dimethyl-	8270	10
2,4-Dimethylphenol	105-67-9	Phenol, 2,4-dimethyl-	8040	5
			8270	10
Dimethyl phthalate	131-11-3	1,2-Benzenedicarboxylic acid, dimethyl ester	8060	5
			8270	10
m-Dinitrobenzene	99-65-0	Benzene, 1,3-dinitro-	8270	10
4,6-Dinitro-o-cresol	534-52-1	Phenol, 2-methyl-4,6-dinitro-	8040	150
			8270	50
2,4-Dinitrophenol	51-28-5	Phenol, 2,4-dinitro-	8040	150
			8270	50
2,4-Dinitrotoluene	121-14-2	Benzene, 1-methyl-2,4-dinitro-	8090	0.2
			8270	10
2,6-Dinitrotoluene	606-20-2	Benzene, 2-methyl-1,3-dinitro-	8090	0.1
			8270	10
Dinoseb; DNBP; 2-sec-Butyl-4,6-dinitrophenol	88-85-7	Phenol, 2-(1-methylpropyl)-4,6-dinitro-	8150	1
			8270	10
Di-n-octyl phthalate	117-84-0	1,2-Benzenedicarboxylic acid, dioctyl ester	8060	30
			8270	10
1,4-Dioxane	123-91-1	1,4-Dioxane	8015	150
Diphenylamine	122-39-4	Benzenamine, N-phenyl-	8270	10
Disulfoton	298-04-4	Phosphorodithioic acid, O,O-diethyl S-[2-(ethylthio)ethyl]ester	8140	2
			8270	10

MODULE IV - TANKS

IV.A. MODULE HIGHLIGHTS

The tank system at the Safety-Kleen Farmington branch consists of two 12,000 gallon aboveground, vertical, cylindrical steel tanks and their ancillary pumps and piping. The tanks are enclosed within secondary containment provided by a concrete slab and wall with a capacity of 18,266 gallons. One of the two tanks contains new mineral spirits solvent awaiting distribution; the other contains spent solvent awaiting return to the Safety-Kleen recycle center in Denton, Texas. The tank containing the spent solvent is the only tank regulated by this Permit. The spent solvent is a hazardous waste because of the characteristic of ignitability and the possible characteristic of toxicity as measured by the Toxicity Characteristic Leaching Procedure.

Ancillary equipment to the waste solvent tank includes a return and fill station containing an enclosed metal cabinet which serves as a sump into which the contents of a drum of mineral spirits can be emptied, and containing a jet which recirculates the mineral spirits and cleans all the sediment out of the bottom of the drum. The spent solvent and sediment are then pumped into the spent solvent tank. The return and fill station has a roof and is equipped with concrete secondary containment with a capacity of 730 gallons. Piping to the tank from the return and fill station is iron, with welded joints. It is protected by secondary containment except for about five feet at the rear of the return and fill station (which must be inspected daily for leaks). The pump which provides clean solvent for filling drums is located within the secondary containment for the tanks, and all its associated piping is located within secondary containment. The connections for emptying the spent solvent tank and filling the clean solvent tank (from tanker trucks) are located within the secondary containment.

Based on an engineer's assessment of the system, the tanks were fabricated and installed in 1981.

IV.B. PERMITTED AND PROHIBITED WASTE IDENTIFICATION

IV.B.1. The Permittee may store a maximum total volume of 12,000 gallons of spent mineral spirits and associated bottom sludge [hazardous wastes on the basis of ignitability (D001) and possibly TCLP toxicity (D004, D005, D006, D007, D008, D009, D010, D011, D018, D019, D021, D022, D023, D024, D025, D026, D027, D028, D029, D030, D032, D033, D034, D035, D036, D037, D038, D039, D040, D041, D042, D043)] in one tank, as described and depicted in Permit Attachment E, subject to the terms of this Permit.

IV.B.2. The Permittee is prohibited from storing or treating any hazardous waste in tanks that is not identified in Permit Condition IV.B.1.

IV.C. SECONDARY CONTAINMENT

IV.C.1. The Permittee shall design, construct, and operate the secondary containment system in accordance with the detailed design plans and descriptions contained in Permit Attachment E. (HWMR-6, Pt. V, § 264.193(b)-(f))

IV.D. OPERATING REQUIREMENTS

IV.D.1. The Permittee shall not place hazardous wastes or any other materials in the tank system if they could cause the tank, its ancillary equipment, or a containment system to rupture, leak, corrode, or otherwise fail. (HWMR-6, Pt. V, § 264.194(a))

IV.D.2. The Permittee shall prevent spills and overflows from the tank or containment systems using the methods described in Permit Attachment E. (HWMR-6, Pt. V, § 264.194(b))

IV.E. RESPONSE TO LEAKS OR SPILLS

In the event of a leak or a spill from the tank system or from a secondary containment system, or if a system becomes unfit for continued use, the Permittee shall remove the system from service immediately and complete the following actions: (HWMR-6, Pt. V, § 264.196(a)-(f))

IV.E.1. Stop the flow of hazardous waste into the system and inspect the system to determine the cause of the release.

IV.E.2. Remove waste and accumulated precipitation from the system within 24 hours of the detection of the leak to prevent further release and to allow inspection and repair of the system. If the Permittee finds that it will be impossible to remove the waste and/or precipitation within 24 hours, the Permittee shall notify the Director and demonstrate that the longer time period is required.

If the collected material is a RCRA hazardous waste, it must be managed in accordance with all applicable requirements of HWMR-6, Parts III, IV, and V. The Permittee shall note that if the collected material is discharged through a point source to U.S. waters or to a publicly owned wastewater treatment facility, it is subject to requirements of the Clean Water Act. If the collected material is released to the environment, it may be subject to reporting under 40 CFR Part 302.

IV.E.3. Contain visible releases to the environment. The Permittee shall immediately conduct a visual inspection of all releases to the environment and based on that inspection: (1) prevent further migration of the leak or spill to soils or surface water and (2) remove and properly dispose of any visible contamination of the soil or surface water.

IV.E.4. Close the system in accordance with the Closure Plan, Permit Attachment G, unless the following actions are taken:

IV.E.4.a. For a release caused by a spill that has not damaged the integrity of the system, the Permittee shall remove the released waste and make any necessary repairs to fully restore the integrity of the system before returning the tank system to service.

IV.E.4.b. For a release caused by a leak from the primary tank system to the secondary containment system, the Permittee shall repair the primary system prior to returning it to service.

IV.E.4.c. For a release to the environment caused by a leak from the aboveground portion of the tank system that does not have secondary

containment, and can be visually inspected, the Permittee shall repair the tank system before returning it to service.

IV.E.4.d. If the Permittee replaces a component of the tank system to eliminate the leak, that component must satisfy the requirements for new tank systems or components in HWMR-6, Pt. V, § 264.192 and 264.193.

IV.E.5. For all major repairs to eliminate leaks or restore the integrity of the tank system, the Permittee must obtain a certification by an independent, qualified, registered professional engineer that the repaired system is capable of handling hazardous wastes without release for the intended life of the system before returning the system to service. Examples of major repairs are: installation of an internal liner, repair of a ruptured tank, or repair or replacement of a secondary containment vault.

IV.F. INSPECTION SCHEDULES AND PROCEDURES

IV.F.1. The Permittee shall inspect the tank systems, in accordance with the Inspection Schedule, Permit Attachment C, and shall complete the items in Permit Conditions IV.F.2. and IV.F.3. as part of those inspections:

IV.F.2. The Permittee shall inspect the overfill controls, in accordance with the schedule in Permit Attachment C. (HWMR-6, Pt. V, § 264.195(a))

IV.F.3. The Permittee shall inspect the following components of the tank system once each operating day: (HWMR-6, Pt. V, § 264.195(b))

IV.F.3.a. Aboveground portions of the tank system, if any, to detect corrosion or releases of waste;

IV.F.3.b. Data gathered from monitoring and leak detection equipment (e.g., level gauges) to ensure that the tank system is being operated according to its design;

IV.F.3.c. Construction materials and the area immediately surrounding the externally accessible portion of the tank system, including the secondary containment system, to detect erosion or signs of releases of

hazardous waste (e.g., wet spots, dead vegetation).

IV.F.4. The Permittee shall document compliance with Permit Conditions IV.F.2. through IV.F.4. and place this documentation in the operating record for the facility. (HWMR-6, Pt. V, § 264.195(d))

IV.G. RECORDKEEPING AND REPORTING

IV.G.1. The Permittee shall report to the Secretary, within 24 hours of detection, when a leak or spill occurs from the tank system or secondary containment system to the environment (HWMR-6, Pt. V, § 264.196(d)(1)). A leak or spill of one pound or less of hazardous waste, that is immediately contained and cleaned up, need not be reported (HWMR-6, Pt. V, § 264.196(d)(2)). Releases that are entirely contained within the secondary containment system need not be reported. If the Permittee has reported the release pursuant to 40 CFR Part 302, this report satisfies the requirements of this Permit Condition. (HWMR-6, Pt. V, § 264.196(d)(1))

IV.G.2. Within 30 days of detecting a release to the environment from the tank system or secondary containment system, the Permittee shall report the following information to the Regional Administrator: (HWMR-6, Pt. V, § 264.196(d)(3))

a. Likely route of migration of the release;

b. Characteristics of the surrounding soil (including soil composition, geology, hydrogeology, and climate);

c. Results of any monitoring or sampling conducted in connection with the release. If the Permittee finds it will be impossible to meet this time period, the Permittee should provide the Regional Administrator with a schedule of when the results will be available. This schedule must be provided before the required 30-day submittal period expires;

d. Proximity of downgradient drinking water, surface water, and populated areas; and

e. Description of response actions taken or planned.

IV.G.3. The Permittee shall submit to the Director all certifications of major repairs to correct leaks within seven days from returning the tank system to use. (HWMR-6, Pt. V, § 264.196(f))

IV.G.4. The Permittee shall keep on file at the facility the written assessment of the tank system's integrity. (HWMR-6, Pt. V, § 264.191(a))

IV.H. CLOSURE AND POST-CLOSURE CARE

IV.H.1. At closure of the tank system(s), the Permittee shall follow the procedures in the Closure Plan, Permit Attachment G, relating to tank system closure. (HWMR-6, Pt. V, § 264.197(a))

IV.H.2. If the Permittee demonstrates that all contaminated soils cannot practically be removed or decontaminated in accordance with the Closure Plan, the Permittee shall obtain a Post-Closure Care Permit.

IV.I. SPECIAL TANK PROVISIONS FOR IGNITABLE OR REACTIVE WASTES

IV.I.1. The Permittee shall not place ignitable or reactive waste in the tank system or in the secondary containment system, unless the procedures specified in Permit Attachment E are followed. (HWMR-6, Pt. V, § 264.198(a))

IV.I.2. The Permittee shall comply with the requirements for the maintenance of protective distances between the waste management area and any public ways, streets, alleys, or an adjoining property line that can be built upon, as required in Tables 2-1 through 2-6 of the National Fire Protection Association's "Flammable and Combustible Liquids Code" (1977 or 1981). (HWMR-6, Pt. V, § 264.198(b))

PERMIT ATTACHMENT A

WASTE ANALYSIS PLAN

A.1 DESCRIPTION OF WASTES

Four types of waste result from the servicing of Safety-Kleen customers and the maintenance of the service center. It should be noted that the solvents managed at this facility are only incompatible with strong oxidizers and reactive metals, none of which are present in the containers, container storage area, or the concrete sealant. The solvents are also compatible with one another.

A.1.1 Wastes Resulting From the Parts Washer Service

Spent mineral spirits solvent from parts washers is accumulated in a 12,000 gallon aboveground storage tank via the return and fill station. 16- and 30-gallon drums containing seven and twelve gallons of solvent, respectively, are poured into a drum-washer at the return and fill station which in turn empties into the tank. This waste handling method results in two types of mineral spirits waste:

a. Spent mineral spirits solvent--The spent mineral spirits solvent is removed from the tank by a tanker truck on a scheduled basis. About 5,000 gallons are removed every month. This waste is ignitable (D001) and TCLP toxic using the characteristic leaching procedures (D004, D005, D006, D007, D008, D009, D010, D011, D018, D019, D021, D022, D023, D024, D025, D026, D027, D028, D029, D030, D032, D033, D034, D035, D036, D037, D038, D039, D040, D041, D042, and D043).

b. Bottom sediment in the tank--Approximately once every two years, it is necessary to remove sediment and other heavy material from the bottom of the tank. A Safety-Kleen vacuum truck is used for this purpose and can collect up to 2,000 gallons of this waste for reclamation. The sediment is ignitable (D001) and toxic using the characteristic leaching procedure (D004, D005, D006, D007, D008, D009, D010, D011, D018, D019, D021, D022, D023, D024, D025, D026, D027, D028, D029, D030, D032, D033, D034, D035, D036, D037, D038, D039, D040, D041, D042, and D043).

Immersion cleaner remains in the drum in which it was originally used until it is received at the recycle center. Drums containing about four and one-half gallons of spent solvents are stacked two-high in the drum storage area of the warehouse. The immersion cleaner contains chlorinated solvents

(F002) and cresylic acid (F004). The immersion cleaner formula is toxic using the characteristic leaching procedure (D004, D005, D006, D007, D008, D009, D010, D011, D018, D019, D021, D022, D023, D024, D025, D026, D027, D028, D029, D030, D032, D033, D034, D035, D036, D037, D038, D039, D040, D041, D042, and D043). The drums are color-coded gray.

A.1.2 Wastes Resulting From the Dry Cleaner Service

Dry cleaning wastes consist of spent filter cartridges, powder residue from diatomaceous or other powder filter systems and still bottoms. These wastes are packaged on the customer's premises in black 16- and blue 30- and 20-gallon drums with blue lock rings. The drums are then palletized, stacked two-high and placed in the drum storage area of the warehouse. Approximately 95% of the dry cleaning solvent used is perchloroethylene, listed as F002 and toxic using the characteristic leaching procedure (D004, D005, D006, D007, D008, D009, D010, D011, D018, D019, D021, D022, D023, D024, D025, D026, D027, D028, D029, D030, D032, D033, D034, D035, D036, D037, D038, D039, D040, D041, D042, and D043). The remaining 5% is trichloro-trifluoroethane, listed as F002 and toxic using the characteristic leaching procedure (D004, D005, D006, D007, D008, D009, D010, D011, D018, D019, D021, D022, D023, D024, D025, D026, D027, D028, D029, D030, D032, D033, D034, D035, D036, D037, D038, D039, D040, D041, D042, and D043).

A.2 QUALITY CONTROL PROCEDURES

The used solvents are the primary feedstocks for the generation of Safety-Kleen solvent products. As a result, quality control of the spent solvents is necessary to ensure that reclamation occurs in the safest and most efficient manner possible. The service center collects spent solvents from about 400 customers, most of whom are small quantity generators, and about 5,000 drums containing recoverable solvents are returned to the service center each year for shipment to a reclaimer. With such large numbers of waste generators and waste shipments, performing detailed analyses at the service center is economically and logistically infeasible.

Furthermore, as discussed earlier in the Facility Description, all the materials collected at the service center are managed at all times in the closed loop system and are usually collected from a company with a single process. The composition and quality of these materials are known and Safety-Kleen's operating experiences have shown that the collected materials rarely deviate from company specifications. As an additional safeguard, Safety-Kleen personnel are instructed to inspect all materials before returning them to the service centers. This mode of operation has been proven to safeguard the recycling process and maintain a quality product.

In accordance with HWMR-6, Part V, 40 CFR Section 264.13(a)(3), however, Safety-Kleen will perform physical and chemical analyses of a waste stream when it is notified or has reason to believe that the process or operation generating the waste has changed, or when the result of inspection indicates that the waste collected does not match that designated. It is Safety-Kleen's practice that suspected non-conforming material must not be accepted until a full analysis has been done or the material must be rejected. If a container with questionable contents is returned to the service center, a sample will be taken and analysis will be performed at the recycle center according to the procedures outlined in Section A.3 of this Attachment (found on pages A-8 throught A-10 below). Pending the results of the analyses the branch manager will be notified of any contamination that may have occurred. Procedures to verify waste characteristics occur at several check points in the management of the solvent, as described below.

Safety-Kleen controls the use and management of its solvents by:

1. limiting the solvents stored to those compatible with one another and their containers.

2. limiting the uses of each type of solvent (for example, dry cleaning waste is <u>only</u> collected from dry cleaner shops);

3. determining the customer's type of business (i.e., his SIC code is recorded) and the purpose for which he will use the machine.

4. training customers to use the machines properly;

5. training employees to inspect spent solvent and determine whether it is acceptable;

6. indicating on the service document, <u>every</u> time waste is collected, whether the spent solvent meets Safety-Kleen's acceptance criteria (as outlined in Section A.2.1.b on pages A-6 through A-8 below).

7. marking each container with the customer's name, address and EPA I.D. number (if required). This information remains on containerized waste until it is accepted at the reclamation facility; and

8. keeping a record of each incoming and outgoing shipment in the operating log at each facility.

9. Waste shipments to the Denton Recycle Facility from the Farmington branch are not mixed with waste shipments from any other facility.

Safety-Kleen's customers sign a service document containing the following information:

a. the name, address and EPA I.D. number of the facility to which the waste is being shipped;

b. the customer's name, address and EPA I.D. number (if required); and

c. the description and amount of Safety-Kleen solvent waste generated.

In addition, each incoming and outgoing shipment is recorded in the facility's operating log.

If a waste is rejected at the time of service, the customer will be given a choice as to whether he will dispose of the waste himself or require Safety-Kleen's assistance. If he requests Safety-Kleen's assistance, a sample will be drawn using a Coliwasa tube and it will be analyzed for flash point and volatile organic compounds. If this analysis does not adequately define the constituents, additional analyses will be performed as necessary (e.g., for semi-volatile organic compounds, base-neutral compounds, PCBs, etc.). If the waste is acceptable at the branch, it will be relabeled and manifested appropriately and then managed with the other wastes. If it is not acceptable, it will either be: (a) managed on a 10-day transfer basis and manifested to a properly permitted reclamation or disposal facility, or (b) manifested and shipped directly to a properly permitted reclamation or disposal facility.

The recycle center located in Denton, Texas sends waste analyses to the service centers. As a mimimum, the analyses listed in Section A.3 of this Attachment will be performed on a sample drawn from each load of solvent originating at the Farmington branch (or at the frequency indicated in Section A.3). The results of these analyses will be sent to the Farmington branch as soon as they are available and will be maintained at the branch for at least the life of this Permit. If any sample of the waste solvent does not meet standard acceptance criteria, the recycle center will phone the branch manager and alert him to the situation before any processing is done. The branch manager has the right to refuse any further service to a business which has returned waste unable to meet acceptable criteria. If the particular acceptance criteria are not met, a determination will be made as to what processing technology is required. The

material is processed accordingly which may include transportation to another facility. Each truckload of spent mineral spirits, immersion cleaner, or dry cleaning waste comes from one identifiable Safety-Kleen facility. The recycle center and the branch facility have accurate up-to-date information on the waste constituents which are available in the event of a release.

A.2.1 Qualitative Waste Analysis

a. General Inspection Procedures

Safety-Kleen visually inspects each drum of waste when it is collected at the customer's location. Safety-Kleen examines the waste for volume, appearance, consistency and odor and is intimately familiar with the characteristics of the waste it receives. Based on the known waste characteristics, Safety-Kleen has established the specific acceptance criteria set forth below, to be used by Safety-Kleen personnel in their visual inspections. These acceptance criteria allow Safety-Kleen to ensure that the waste being picked up is not contaminated.

If a particular drum of waste does not meet the acceptance criteria, the Safety-Kleen service representative will either (1) sample the waste for testing at a Safety-Kleen laboratory, as described below, to determine whether the waste has been contaminated; or (2) reject the drum of waste. In the event the waste is not sampled, Safety-Kleen will notify the generator's State Agency that is authorized to implement the RCRA hazardous waste management program (or EPA if the RCRA program has not been delegated to the State).

If the waste is sampled for further analysis, the service representative will take a sample of the waste and then seal the drum and label it as hazardous waste. The drum is left with the customer pending the results of the laboratory tests. The laboratory testing involves analyzing the suspect waste for flash-point and the presence of volatile organic compounds using a modified EPA 8010 method (GC analysis). The costs of any sampling and testing performed as a result of the waste failing to meet the acceptance criteria, will be borne by the customer.

If the laboratory analysis reveals that the sampled waste is not contaminated, Safety-Kleen will accept the waste from the customer.

If the laboratory confirms that the waste is contaminated, the generator will be responsible for securing an alternate means of disposal. In the event the generator does not contract with

Safety-Kleen to arrange for the treatment or disposal of waste which is sampled and found to be contaminated, Safety-Kleen will provide the generator's State Agency that is authorized to implement the RCRA hazardous waste management program (or EPA if the RCRA program has not been delegated to the State) with the results of this additional quantitative testing.

b. Waste Specific Criteria

The following is a description of the specific acceptance criteria for each waste stream.

I. Spent Mineral Spirits Solvent

The acceptance criteria for determining by visual inspection whether spent mineral spirits solvent has been contaminated are volume, odor and color, the most significant of which is volume. Spent mineral spirits solvent is collected in 30 and 16 gallon drums which, if no additional material has been added to the waste, should not hold more than 19 and 10 gallons respectively. If the volume of waste in a given drum exceeds the specified level, the Safety-Kleen service representative will sample the waste for laboratory testing as described above, or will reject the waste.

In addition to the volume criterion, the odor of the spent solvent will clearly indicate whether the waste has been contaminated. Spent mineral spirits solvent has a very distinctive odor. The service representatives are expressly instructed not to deliberately sniff the waste. However, if the mineral spirits solvent has been contaminated the service representative would immediately notice a difference in the odor when he services the machine.

The spent mineral spirits solvent is also visually inspected for its color. Unused mineral spirits solvent has a greenish tint. As the solvent is used, it turns brown in color. The more it is used, the darker brown it becomes, until it is almost black. Therefore, if the spent solvent does not appear to be green, brown, or black, the service representative will sample the waste for possible contamination as described above, or will reject the waste.

II. Immersion Cleaner

Safety-Kleen is currently in the process of reformulating its immersion cleaner. Safety-Kleen believes that the new immersion cleaner is a hazardous waste under the Toxicity Characteristic Lenching Procedure.

A. Existing Immersion Cleaner

The criteria for the inspection of spent immersion cleaner are volume, color and physical state. There should be no more than 6 gallons of waste, a sample will be tested for contamination following the procedures described above or the waste will be rejected.

Unused immersion cleaner is amber in color. As the solvent is used, it turns brown in color. The more it is used, the darker brown it becomes, until it is almost black. Therefore, if the spent immersion cleaner does not appear to be amber, brown or black, the service representative will either sample the waste for possible contamination as described above, or reject the drum of waste.

The drum of spent immersion cleaner should contain two phases, an aqueous phase and a solvent phase. The aqueous phase should compose approximately 20% of the total volume of waste. If the waste is not separated into phases, or if the aqueous phase is greater than 20%, the service representative will either sample the waste for possible contamination as described above, or will reject the waste.

B. New Immersion Cleaner

In the event the new immersion cleaner is determined to be a hazardous waste, the acceptance criteria and respective descriptions will be the same as those for the existing immersion cleaner, with the exception of the physical state criterion. The new immersion cleaner waste will not have phases, therefore, this criterion is not applicable.

III. Dry Cleaner Wastes

Dry cleaner wastes consist of spent filter cartridges, powder residue and still bottoms.

A. Spent Filter Cartridges

Spent Filter cartridges are placed in either a 15 gallon ("split 30") drum which holds 3 cartridges or a 16 gallon drum which holds either 1 jumbo filter cartridge or 2 smaller filter cartridges. It is obvious to the service representative whether the items in the drums are filter cartridges.

The drums may also contain approximately one inch of liquid which should either be clear or have a light brownish tint. If the amount of the liquid is greater than approximately

one inch or if the liquid is a color other than light brown, the service representative will sample the waste for contamination in accordance with the procedures described above, or will reject the waste.

B. Powder Residue

The criteria for the acceptance of powder residue are consistency and color, the former being the more significant criterion of the two. A drum of powder residue should not contain any liquid. As the name implies, it will be dry or "powdery" to the touch. if there is any liquid in the drum, the waste will be sampled for contamination in accordance with the procedures described above, or the waste will be rejected.

The powder residue is also inspected for color and should appear to be grayish-black. If the residue is not grayish-black in color, the service representative will sample the waste for contamination in accordance with the procedures described above, or will reject the waste.

C. Still Bottoms

The criteria for the acceptance of dry cleaning still bottoms are consistency and color. The waste should have a highly viscous, tar-like consistency. If the consistency of the waste is too thin or if there is more than one inch of free liquid in the drum, the waste will be sampled for contamination in accordance with the procedures described above, or will be rejected.

In addition to consistency, the still bottom waste is inspected for color. The waste should appear dark brown or black in color. If the waste is a different color, a service representative will sample the waste for contamination in accordance with the procedures described above, or will reject the waste.

A.3 WASTE ANALYSES AT THE RECYCLE CENTER

Analyses performed at the Safety-Kleen recycle centers are undertaken to safeguard the recycling process and to assure the product quality. The following section summarizes the waste analyses practiced at the recycle center for the hazardous materials returned from the Farmington branch. For each shipment of each waste type stored at the branch, at least the following analyses must be performed and copies of the results must be maintained at the branch office for the life of this Permit:

Mineral Spirits

-Flash point (must be greater than 90 F.)

If either of these tests give unacceptable results, the Farmington branch manager will be notified immediately and the load will receive appropriate special handling. If the results are acceptable, the following tests will be performed:

-Volatile Organic Analysis, using U. S. EPA Methods 8010, 8015, 8020, and 8120, or approved equivalents
-Physical appearance
-Specific gravity
-pH
-Bottom sediment and water
-Distillation performance

If any of these tests yield unacceptable results or indicate solvent contamination outside the normal range, the branch manager will be notified immediately.

In addition to the tests listed above, which will be performed on a representative sample from every load, a full Toxicity Characteristic Leaching Procedure (TCLP) analysis for all 40 constituents will be performed on a representative sample of mineral spirits solvent from the Farmington branch at least once each calendar year.

Mineral Spirits Tank Bottom Sludge and Free Water

-Flash point (Must be greater than 90 F.)
-Analysis for content of lead, cadmium, and chromium.

As described above for mineral spirits solvent, a full TCLP analysis will be performed on a representative sample at least once each calendar year.

Immersion Cleaner Solvent

-Flash point

If either of these tests yields unacceptable results, the branch manager will be notified immediately and the load will receive appropriate special handling. If the results are acceptable, the following tests will be performed:

-Physical appearance
-Specific gravity
-pH
-Percentage of water
-Volatile Organic Analysis (using EPA methods 8010, 8015, 8020, 8120, or approved equivalents)

If any of these tests yield unacceptable results or indicate solvent contamination outside the normal range, the branch manager will be notified immediately.

As described above, a full TCLP test will be performed on a representative sample of immersion cleaner at least once each calendar year.

Dry Cleaning Solvent/Still Bottoms

-Physical appearance
-Volatile Organic Analysis (using EPA methods 8010, 8015, 8020, 8120, or approved equivalents)
-Specific Gravity
-pH

If any of these tests yield unacceptable results or indicate contamination outside the normal range, the branch manager will be notified immediately.

As described above, a full TCLP analysis will be performed on a representative sample of dry cleaning waste at least once each calendar year.

A.4 WASTE ANALYSIS PLAN UPDATE

This waste analysis plan will be modified when a new waste product is collected or when sampling and material management methods change. Revision of the plan is the responsibility of the Environment, Health and Safety Department at Safety-Kleen's Corporate Office in Elgin, Illinois.

A.5 LAND BAN NOTIFICATION/CERTIFICATION FORMS

In accordance with 40 CFR 268.7, Safety-Kleen will provide notification/certification for wastes banned from landfills as follows:

1. Printing the Notice language on manifests-such as for core-business customers to branch shipments; or

2. Special forms for each regularly handled waste types (e.g., MS, IC, perc, freon); or

3. A general form that must be completed for unique or non-standard waste streams. These wastes will only be handled on a transfer basis in accordance with 40 CFR 263.12.

The notice is required paperwork for all Safety-Kleen waste types. Shipments lacking the proper Notice will not be accepted

by any Safety-Kleen facility. When a shipment with the proper Notice is received, the notice is kept in the files of the receiving facility with the manifest or with the pre-print if a manifest is not used. A sample form is on page A-12 below.

A.6 OPERATING LOG

Safety-Kleen maintains an operating log on site which includes the following information as it becomes available:

1) A description and the quantity of each hazardous waste received, and the method and date of its storage as required by Pt. V. sec. 264, Appendix I;

2) The location of each hazardous waste within the facility and the quantity;

3) Records and results of waste analyses performed;

4) Summary reports and details of all incidents that require implementing the contingency plan;

5) Records and results of inspections;

6) Monitoring, testing or analytical data and corrective action where required;

7) For off-site facilities, Notices to generators as specified in HWMR-6, Pt. V, section 264.12(b);

8) All closure and post-closure cost estimates;

9) A certification by the permittee no less often than annually, that the permittee has a program in place to reduce the volume and toxicity of hazardous waste;

10) The land ban notices and requirements. These records are kept on file in the branch manager's office.

(See next page for sample land disposal restriction form)

NOTICE OF LAND DISPOSAL RESTRICTION OF WASTE

TO: Safety-Kleen Corp. (Designated Facility) EPA ID NO.: _____ (Designated Facility)

_____ (Address)

Option A: Under manifest number _____, of sales/service acknowledgement number _____, the generator noted below is shipping to you a waste determined to be restricted under 40 CFR Part 268. In accordance with 40 CFR 268.7, the generator hereby provides notice that the waste is restricted from land disposal. A copy of this form must be kept by the generator and facility for five (5) years from the date of waste shipment.

Option B: I am a small quantity generator (100-1,000 kg/mo). This notice covers all wastes shipped under the following Machine Placement and/or Customer Owned Machine Service (CMS) Contract(s): _____ A copy of this notice will be filed with the contract(s) for five (5) years beyond their termination.

(Check boxes that apply) Waste Name	EPA Waste Code	The Waste May Contain the following Restricted Constituents	Treatment Standard (mg/l) or Method
☐ Waste Petroleum Naphtha	0001	Ignitable liquid	incineration, fuel substitutions or recovery.
		Halogenated organic compounds (above 1000 mg/l) may include:	See individual standards per 40 CFR 268.41(a)
		-Methylene chloride	0.96
		-Tetrachloroethylene	0.05
		-Toluene	0.33
		-1,1,1 trichloroethane	0.41
		-Trichloroethylene	0.091
		-Xylene	0.15
☐ Waste Petroleum Naphtha (sludges from Safety-Kleen Service Center Operations)	0001, 0006, 0008	All of the above, plus: -Cadmium	0.14
		-Lead (low lead subcategory)	0.51
☐ Waste Compound Cleaning Liquid/ Immersion Cleaner	F002, F004	Cresylic Acid	0.75
		1,2-dichlorobenzene	0.125
		Methylene choloride	0.96
☐ Waste Perchloro-ethylene	F002	Tetrachloroethylene	0.05
☐ Waste Trichloro-trifluoroethane	F002	Trichlorotrifluoroethane	0.96
☐ Waste Trichloro-ethane	F002	Trichloroethane	0.41
☐ Waste Paint Related Material	F005, F003, 0001, 0006, 0008	Acetone	0.59
		Methyl Ethyl Ketone	0.75
		Methyl Isobutyl Ketone	0.33
		Toluene	0.33
		Xylene	0.15
		Cadmium	0.14
		Chromium	0.094
		Lead (low-lead subcategory)	0.51
		Ignitable liquid	incineration, fuel substitution or recovery

---

The constituent composition is based on knowledge of the waste (via Material Safety Data Sheets for the chemical(s) used, and the process which created the waste).

Generator Name: _____ EPA ID#: _____

Generator Signature: _____ Date: _____

Printed Name and Title of Representative: _____

PERMIT ATTACHMENT B

SECURITY MEASURES

The facility is secured with a six-foot high chain link fence topped by three strands of barbed wire. All access gates are locked when the facility is unoccupied. Warning signs in English and Spanish are placed on all sides of the fence stating "Danger - Unauthorized Personnel Keep Out" which are visible from twenty-five feet. Similar signs in Navajo will be in place no later than December 31, 1991. In addition, outdoor lights remain on at all times.

The office/warehouse building is secured with locks on all doors and warning signs are posted at all entrances to work and waste storage areas.

The tanks are inaccessible in that material can not be added to or removed from them without activating the pumps, the controls for which are inside the warehouse. The pumps are not activated unless mineral spirits product or waste is being added to or removed from the tanks by Safety-Kleen personnel. The container storage area is also locked unless occupied by Safety-Kleen personnel. As a result the tanks and container storage area are inaccessible except by Safety-Kleen personnel. In addition, warning signs are posted on the return and fill station.

PERMIT ATTACHMENT C

INSPECTION PROCEDURES

The branch (i.e., service center) manager or his designate is responsible for carrying out and documenting the facility inspection (Appendix E) on a daily basis. He must note any repairs that are needed and assure that they are completed. If he can not carry out the repairs himself, he must notify the Technical Services Department at Safety-Kleen's corporate headquarters and request assistance. Completion of repairs must also be noted on the Facility Inspection Record.

The regional manager is the supervisor of several branch managers in a geographic area. He must review the Facility Inspection Record on a quarterly basis to insure that they are properly completed and that any necessary repairs have been effected.

The facility inspection includes the following:

a. Tank inspections--At a minimum, the tanks holding the solvent product and spent solvent are inspected daily. The inspections include checks of the high level alarm and of the volume held in the tank. Sudden deviations in the solvent volumes will be investigated and their causes determined. If necessary, repairs must be initiated immediately. When the tank used to store spent solvent is 85% full, a pickup must be scheduled with the Solvent Control Department in Safety-Kleen's corporate headquarters. The solvent must not exceed 95% of the tank volume at any time.

   The secondary containment for the tanks must be checked for cracks or other deterioration. Any damage to tanks (such as rust or loose fixtures) or secondary containment must be noted and repairs initiated.

b. Solvent dispensing equipment--The solvent dispensing hose, connections and valves must be inspected for damage (such as cracks or leaks) and proper functioning on a daily basis. Any solvent in the hoses must be drained after use. The pumps, and all pipes and fittings must also be checked daily for damage and proper functioning. Any damage to the solvent dispensing equipment must be noted and repaired.

c. Drum storage areas--The drum storage area is inspected daily and the number and condition of the drums noted. The total volume of solvent (spent and unused combined) held in the

drum storage area must not exceed 4,464 gallons. The contents of any leaking or suspect drums must be placed in a drum of adequate integrity. Finally, the drums must be properly labeled and marked in accordance with U.S. DOT and New Mexico hazardous waste regulations. The secondary containment system must be inspected for deterioration or failure. If cracks, leaks, or abrasions of the chemical resistant concrete coating are detected, they must be repaired immediately.

d. Route vehicles--Each route vehicle must be inspected daily to insure the proper operation of its brakes, lights, turn signals, emergency flashers and wipers. In addition, at least the following safety equipment must be on board: sorbents, fire extinguisher, eye wash, first aid kit, reflector kits, rubber gloves, plastic aprons, and safety glasses. Any missing equipment must be replaced.

e. Return and Fill Station--The barrel washer (in the return and fill station) must be inspected daily for leaks and sediment buildup. Any leaks must be noted and repaired immediately and excess sediment must be removed. The loading dock around the barrel washer must be inspected daily for evidence of spills. If any evidence is found, it must be cleaned up immediately. The dry (trash) dumpster must be inspected at least weekly to insure that no liquids are being placed in it.

f. Safety equipment--The fire extinguishers must be checked weekly to insure that the units are charged and accessible. In addition, the operation of the eyewash must be confirmed weekly and the first aid kit and sorbents must be inspected weekly for adequate content and accessibility. A list of required emergency equipment is at the end of Permit Attachment F (the contingency plan).

g. Security--The operation of each outside light, gate and lock must be checked daily. In addition, the fence must be inspected for deterioration on a weekly basis.

PERMIT ATTACHMENT D

PERSONNEL TRAINING

ABSTRACT

OBJECTIVE: The purpose of training is to familiarize employees with environmental regulations, records and emergency procedures so they can perform their jobs in the safest and most efficient manner possible. The program is designed to ensure that facility personnel are able to respond effectively to emergencies by familiarizing them with emergency procedures, emergency equipment and emergency systems.

TIME OF TRAINING

JOB TITLE	Prior to Starting Work	On the Job	Annually	When Regulations and/or Procedures Change
Branch Manager	X		X	X
Branch Secretary		X	X	X
Sales Representative	X	X	X	X
Warehouseman		X	X	X

D.1 OUTLINE OF TRAINING PROGRAM

Each employee is trained to operate and maintain the facility safely, and to understand hazards unique to his job assignment. New branch managers must complete an introductory training program before starting their jobs, with annual review and update thereafter. All employees at the facility will have training that satisfies the requirements of HWMR-5, Pt. V, 40 CFR section 264.16. The regional environmental engineer directly trains new branch managers. The branch manager, in turn, trains his employees. An employee may not work in an unsupervised position until he or she has received proper training as outlined in this Permit Attachment.

D.2 ORGANIZATION STRUCTURE AND JOB DESCRIPTIONS

Environmental compliance and training of branch employees is the responsibility of the branch manager. The Environment, Health and Safety Department, in turn, provides a training program to be executed annually. Job descriptions for branch personnel are listed below.

D.2.1 Branch Manager

The branch manager is ultimately responsible for the operations at the service center. The sales representatives, secretary and warehouseman (if these positions are filled) report to the branch manager and he, in turn, must provide the training and materials necessary for the branch employees to execute their duties. With respect to environmental compliance, the branch manager must:

a. keep the service center clean and orderly;

b. execute or designate an employee to execute the daily inspection, keep a written log and remediate any problems;

c. know the potential hazards of the material and wastes handled on site;

d. identify potential spill and fire sources and be able to execute the contingency plan;

e. inform all employees of their environmental responsibilities;

f. act as emergency coordinator and notify the proper authorities during an emergency, remediate the situation to the best of his abilities, and submit necessary reports to the corporate office; and

g. maintain all environmental records (such as manifests, training records and spill reports) on file.

The branch manager is trained (see section D.3.1 below) sufficiently to be able to perform as a trainer himself, for his employees.

D.2.2 Environment, Health and Safety Department

Safety-Kleen's Environment, Health and Safety (EHS) Department operates out of the corporate office in Elgin, Illinois. Each regional environmental engineer who works in this department is responsible for compliance of the service centers in a given geographic area of the country. The EHS Department must:

a. provide a training program which addresses the requirements of environmental regulations and corporate policy;

b. notify the proper authorities, oversee remedial actions and submit a written report to the state after an emergency situation has occurred;

c. assure that environmental permits are submitted and updated as required;

d. manage any environmental compliance issues which exceed the resources available at the service center level; and

e. participate in training new branch managers.

D.3 DESCRIPTION OF THE TRAINING PROGRAM

Employee training is accomplished using classroom, videotape, written, and on-the-job methods. The EHS Department prepares a training program for employees and they must provide documentation that the program has been executed.

An employee is trained prior to starting or as soon as he or she begins working, depending on his or her position, and annually thereafter. New employees must be completely trained, as outlined below, within six months of starting work. An employee may not work in an unsupervised position until he or she has received the training outlined below for his or her position.

D.3.1 Training of New Branch Managers

New managers are trained for several weeks before they begin their new positions. This training is both in situ and classroom modes. While being trained at a designated "training facility", a new manager reviews all environmental records and learns the recordkeeping requirements. These records include: manifests, personnel records, training records, facility inspection records, and spill reports.

The training culminates in four weeks of training at his new facility, at least one day of which is devoted to environmental training with his regional environmental engineer. At least eight hours consists of an introduction to environmental law and a review of the Part B, including the Waste Analysis Plan, Preparedness and Prevention Plan, Contingency Plan, Training Plan and Closure Plan. Additional time is spent reviewing past environmental compliance at the branch manager's facility and regulations unique to his state are discussed as well.

D.3.2 Training of New Branch Secretaries

Branch secretaries are trained in the proper recordkeeping procedures as soon as they begin working for Safety-Kleen. While they are not usually responsible for preparing the documentation, they must check it for accuracy and completeness and then process or file it as required. Additional training is overseen by the branch manager and is done within six months of starting. It includes the items listed in the Introductory and Annual Training Topics for Branch Employees (beginning on page D - 5 below) which are explained in company-produced videotape presentations on emergency response, shipping documents (including manifests), drum labels and other safety and environmental compliance issues. In addition, the contingency plan must be reviewed with the branch manager within the first two weeks of the secretary starting work.

D.3.3 Training of New Sales Representatives

New sales representatives are trained at their facilities for two weeks during which they are introduced to manifests, facility inspection records and training records. A sales representative may also be trained as the designate for performing the facility inspection. Additional training is in the form of videotape presentations and a review of the contingency plan. The contingency plan must be reviewed with the branch manager before the sales representative formally begins his new position, and annually thereafter. All items listed in the Introductory and Annual Training Topics for Branch Employees (page D - 5 below) must be covered within six months of the sales representative's starting work.

D.3.4 Training of New Warehousemen

A warehouseman is trained to maintain the service center and assist the other branch employees in their tasks. He may be a designate for the facility inspection and must be trained by the branch manager as such. Within two weeks of the warehouseman's starting, the branch manager must review the contingency plan with him, and within six months he must review the items listed in the Introductory and Annual Training Topics for Branch Employees.

D.3.5 Annual Training

On an annual basis, employees are trained using a program prepared and updated annually by the EHS Department. The regional environmental engineer must insure that the program has been executed. It includes updates on environmental regulations, an in-depth review of the contingency plan and a review of RCRA inspection criteria.

All service center employees must annually review the items listed below as Introductory and Annual Topics for Branch Employees. This review is in the form of videotapes and a review and discussion of the storage facility permit application. In addition, periodic memoranda on changes in environmental regulations are issued by the EHS Department and must be read and discussed by all branch personnel.

D.4 TRAINING RECORDS

All training must be documented using the record form reproduced below on page D - 7. The records must be kept on file at the facility until closure. Employees may not work in unsupervised positions until the contingency plan has been reviewed and they understand emergency response procedures.

D.5 INTRODUCTORY AND ANNUAL TRAINING TOPICS FOR FACILITY EMPLOYEES

All employees will be completely trained in all the items listed below in this section within a maximum of six months of their starting date, and annually thereafter.

A. Environmental regulation update.

B. Part A of the permit application.

C. Waste Analysis Plan (including waste determination procedures as described in the waste analysis plan).

D. Preparedness and Prevention Plan, including Attachments B (Security), C (Inspection), and E (Waste management) of this Permit.

E. Contingency Plan and emergency procedures, including Attachment F of this Permit, with particular attention to:

a. Procedures for using, inspecting, repairing, and replacing emergency response equipment

b. Communications or alarm systems

c. Response to fires or explosions

d. Response to groundwater contamination incidents

e. Shutdown of operations.

F. Training requirements.

G. Closure plan.

H. Inspections.

I. Manifesting.

J. Spill simulations and spill reporting.

(See next page for example of training record form)

EHS TRAINING TOPIC LOG

Employee Name and No.: _____

Branch Location and No. _____

Date Hired: _____ Position: _____

Note: Employees may not work in unsupervised positions until they have received emergency response training. Employees must be completely trained, in all the items listed above, within six months of starting and annually thereafter.

Certification by the employee that training has been received obligates the employee to discharge his duties in accordance with the training provided. Failure to comply with the requirements established during the training program may result in civil or criminal penalties against the employee.

	TRAINING TOPIC*	DATE COMPLETED	SIGNATURE
1.	_____		
	_____	_____	_____
2.	_____		
	_____	_____	_____
3.	_____		
	_____	_____	_____
4.	_____		
	_____	_____	_____
5.	_____		
	_____	_____	_____
6.	_____		
	_____	_____	_____

* The training topic and training method should be described thoroughly. For example: "Safety Training Part III - Preventing Injuries and Illnesses (Videotape)", "Respirator Fit Testing and Training (written weekly training topic)", "Contingency Plan in Part B (reviewed with regional environmental engineer)", etc.

PERMIT ATTACHMENT E

WASTE HANDLING, PREPAREDNESS, AND PREVENTION PROCEDURES

E.1 WASTE MANAGEMENT PRACTICES

Spent mineral spirits solvent from parts washers is accumulated in a 12,000 gallon aboveground storage tank via the return and fill station. 16- and 30-gallon drums containing seven and twelve gallons of spent solvent, respectively, are poured into the drum washer in the return and fill station, and material in the drum washer is pumped into the storage tank for spent solvent. The return and fill station has secondary containment in the form of a 17'6" x 11'2" x 0.5' (730 gallons) concrete pan at its base. The total volume of waste and product will not exceed 10 times the secondary containment volume.

The container storage area in the warehouse is used only for the storage of (1) spent immersion cleaner and (2) dry cleaning wastes. The wastes are not mixed while on site and different wastes are segregated in color-coded drums to indicate their contents: immersion cleaner in gray 16-gallon drums, and dry cleaning waste in black 16- and blue 20- and 30-gallon drums with blue lock rings, or in lined boxes. While the wastes are not incompatible with one another, it is necessary to segregate them for inventory and quality control purposes. All containers are stored on pallets.

The drum storage area has secondary containment in the form of a six inch wide by four inch high steel reinforced concrete curb with a 12' x 2' x 2.5' (448.8 gallons) collection trench. No more than 4,464 gallons of liquid will be stored in the drum storage area at any time.

The containers will be stored in the configurations shown on the Floor Plan on page E - 8. At least two feet of aisle space will be maintained and the drums will be stored no more than two high. Containers in the drum storage areas will be placed on pallets and moved with a forklift or pallet jack.

E.2 FACILITY DESIGN

The Farmington service center was designed to minimize the possibility of spills or fires and to minimize the effects of any accidents which may occur. Specifications for the storage facilities, secondary containment and other equipment are on pages E - 7 through E - 11, and descriptions follow.

E.2.1 Tank Storage

The 12,000 gallon storage tank is 10'6" in diameter and 19' high. It is constructed of 3/16" thick (1/4" thick in the lower third of the tank) carbon steel painted white to reflect sunlight. The tanks are constructed in accordance with Underwriters Laboratories Standard 142 and they are located more than 15 feet from the property line, in accordance with National Fire Protection buffer zone requirements. The secondary containment for the tanks consists of a monolithically poured slab and concrete block dike wall, with steel reinforcement. The slab is six and the wall is eight inches thick. The secondary containment measures 37 feet by 22 feet by 3 feet, and holds 18,266 gallons. Two 12,000 gallon tanks are located within the containment; one for spent solvent and one for new solvent.

The tank is equipped with an aural (siren) and visual (strobe light) high level alarm system which will alert employees when the tank is approximately 600 gallons from being full.

The return and fill station is a concrete block structure with a metal roof, and the secondary containment is monolithically poured concrete. The drum washer is tight-piped to the tank, all piping is aboveground, and the joints are welded.

E.2.2 Drum Storage

The slab, curbing and collection trenches for the drum storage area in the warehouse are made of steel-reinforced concrete and the concrete has been poured so that no cracks or gaps exist between them. The curbing is four inches high and six inches wide and encompasses the storage area except where there is a trench. Steel grates cover the trench to facilitate the movement of drums across it. The concrete coating used on the floor and curbing is a chemical-resistant epoxy and urethane so as to be impermeable to leaks and spills. The solvents in storage are only incompatible with strong oxidizers and reactive metals, none of which are present in the base or sealants.

The immersion cleaner and dry cleaning wastes are compatible with the drums in which they are stored. Dry cleaning wastes are stored in black polyethylene and blue steel drums, both of which are DOT-approved containers. The drums have been treated with fluorine gas to be resistant to dry cleaning solvents and they are all placed on pallets (nine 16-gallon drums per pallet) to facilitate shipping and storage.

E.3 PLANT OPERATIONS--POTENTIAL SPILL AND FIRE SOURCES AND CONTROL PROCEDURES

Employees must perform their duties in the safest, most efficient manner possible and the service center has been equipped to facilitate these activities. Drums will be moved using a handcart and pallets using a forklift or pallet jack. A hoist is available at the branch to assist in the lifting of heavy items. Upon arrival at the service center, containers of spent solvent must immediately be added to the storage tank or placed in the drum storage areas. Open drums of solvent must not be left unattended. Below are descriptions of situations which can result in accidents and the precautions taken to prevent their occurrences.

E.3.1 Potential Minor Spill Sources

The following is a list of activities that have the potential for a minor (one that can be remediated without assistance from a clean up contractor) pollution incident:

a. Pouring of drummed solvent into the dumpster--As the 16- and 30-gallon drums are poured into the drum washer, solvent can splash out. Employee training emphasizes the importance of taking care in emptying the drums. The return and fill station is underlain by a concrete containment pan with a floor drain that can be pumped into the storage tank. This design will contain this type of spill.

b. Filling of drums with solvent product--A low pressure hose with an automatic shut-off valve, similar to those used at automotive service stations, is used to fill the drums with solvent. Leaking fittings, a damaged hose or carelessness could lead to the discharge of solvent outside of the drum. Manual emergency shut-off valves are on each hose, should the equipment not function properly. In addition, employee training emphasizes the importance of inspection, maintenance and reporting of conditions with pollution incident potential.

c. Moving of containers--When a container is moved, a potential exists for it to tip over. To minimize the potential for spillage of solvent, all containers must be maintained in an upright position and remain tightly covered while in storage or in transit.

d. Delivery truck transfers--The cargo must be secured in the route vehicle with straps before transport. Individual containers of solvent can tip over or be dropped when being moved on or off a delivery truck so transfers will be made using a handcart and a hoist, if necessary.

If a spill does occur, the amount of solvent in the containers is a quantity which can be collected with sorbent clay or pads. Any contaminated soil that results will be removed manually, drummed and shipped to a Safety-Kleen recycle center for proper disposal.

E.3.2 Potential Major Spill Sources

The following activities have the potential for a major (one for which remedial action will require assistance) pollution incident:

a. Overfilling of storage tanks--Both product and spent solvent tanks can be overfilled with a resulting discharge of solvent. A high level alarm and daily checks of tank volumes will prevent this type of incident.

b. Leaking pipelines--The pipelines and other equipment present a potential for leaks and resultant pollution. Regular inspection of this equipment and the solvent inventory will detect any leaks.

E.3.3 Potential Fire Sources

The following is a list of fire prevention and minimization measures:

a. All wastes and products are kept away from ignitable sources--
Personnel must confine smoking and open flames to remote areas, separate from any solvent (e.g., the office or locker room). The mineral spirits handling area and the aboveground storage tanks are separated from the warehouse building area to minimize the potential for a fire to spread or injury to personnel to occur.

b. Ignitable wastes are handled so that they do not:

1. become subject to extreme heat or pressure, fire or explosion, or a violent reaction--The mineral spirits waste is stored in a tank or in drums, none of which are near sources of extreme heat, fire, potential explosion sources or subject to violent reactions. The tanks are vented and the drums kept at room temperature to minimize the potential for pressure build up.

2. produce uncontrolled toxic mists, fumes, dusts or gases in quantities sufficient to threaten human health--The vapor

pressure of mineral spirits is low (2 mm) and it is reactive with strong oxidizers only. Toxic mists, fumes, dusts or gases will not form in quantities sufficient to threaten human health since strong oxidizers are not handled at this facility and the solvent vaporization will be minimal under normal working conditions.

3. produce uncontrolled fires or gases in quantities sufficient to pose a risk of fire or explosion--See 'a' above and 'c' below.

4. damage the structural integrity of the Safety-Kleen facility--The mineral spirits will not cause deterioration of the tank, drums or other structural components of the facility.

c. Adequate aisle space is maintained to allow the unobstructed movement of personnel, fire protection equipment, and decontamination equipment to any area of the facility operation in an emergency.

d. "No Smoking" signs are posted in areas where solvents are handled or stored.

e. Fire extinguishers must be checked once per month and tested by the fire extinguisher company once per year.

E.3.4 Tank Evaluation and Repair Plan

The product stored in the tanks at this facility is mineral spirits which is compatible with the carbon steel structure; in fact, mineral spirits is often used as a light hydrocarbon coating to prevent rusting of metal parts.

If, during the daily inspection, corrosion is noted, it will be removed and the tank repaired. If corrosion is significant and localized, the tank will be immediately taken out of service and repaired, (e.g., a patch welded over the corroded area). Should the corrosion of the vessel be extensive or if the tank is found to be leaking, the vessel will be immediately taken out of service and replaced. In the case of a tank which leaks outside of the dike, the facility's contingency plan will be initiated to insure the removal of any contaminated soil. Any extensive repairs to the tank system will be assessed and certified by an independent engineer before the system is returned to use.

E.3.5 External Factors

The design of the installation is such that a harmful spill

is highly unlikely to occur from most external factors. The storage tanks are inaccessible to non-Safety-Kleen personnel and the pump switches are located inside. Also, the drum storage areas are in buildings which are inaccessible to unauthorized personnel.

a. Vandalism - Only extreme vandalism would result in a solvent spill or fire. Responses to spills and fires are described in the contingency plan.

b. Strikes - A strike would not result in a solvent spill or fire.

c. Power failure - A power failure would not result in a spill or fire. Should a power failure occur, all activities requiring electricity will cease.

d. Flooding - The site elevation is above the projected 100-year flood plain; therefore, a 100-year flood will not affect the facility.

e. Storms or Cold Weather - The solvent return and fill station is roofed to eliminate the possibility of rain or snow entering the dumpsters. No opportunity is foreseen to affect the facility with snow, cold weather or storm water.

E.4 INTERNAL AND EXTERNAL COMMUNICATIONS AND ALARM SYSTEMS

Because the facility is small, internal communication within the building and the solvent return/fill area is accomplished by voice. An alarm is located on the loading dock which alerts another employee in the warehouse that there may be a problem. Telephones will be used to report a spill or a fire and to summon assistance from local and state emergency response agencies. An alarm system capable of alerting the occupant(s), if any, of the other part of the building of any emergency, will be installed by December 31, 1991. Branch managers have emergency phone numbers of local and state emergency response teams posted by each phone located in the sales office. Included in these phone numbers is the 24-hour telephone number which can be used to contact the Environment, Health, and Safety Department.

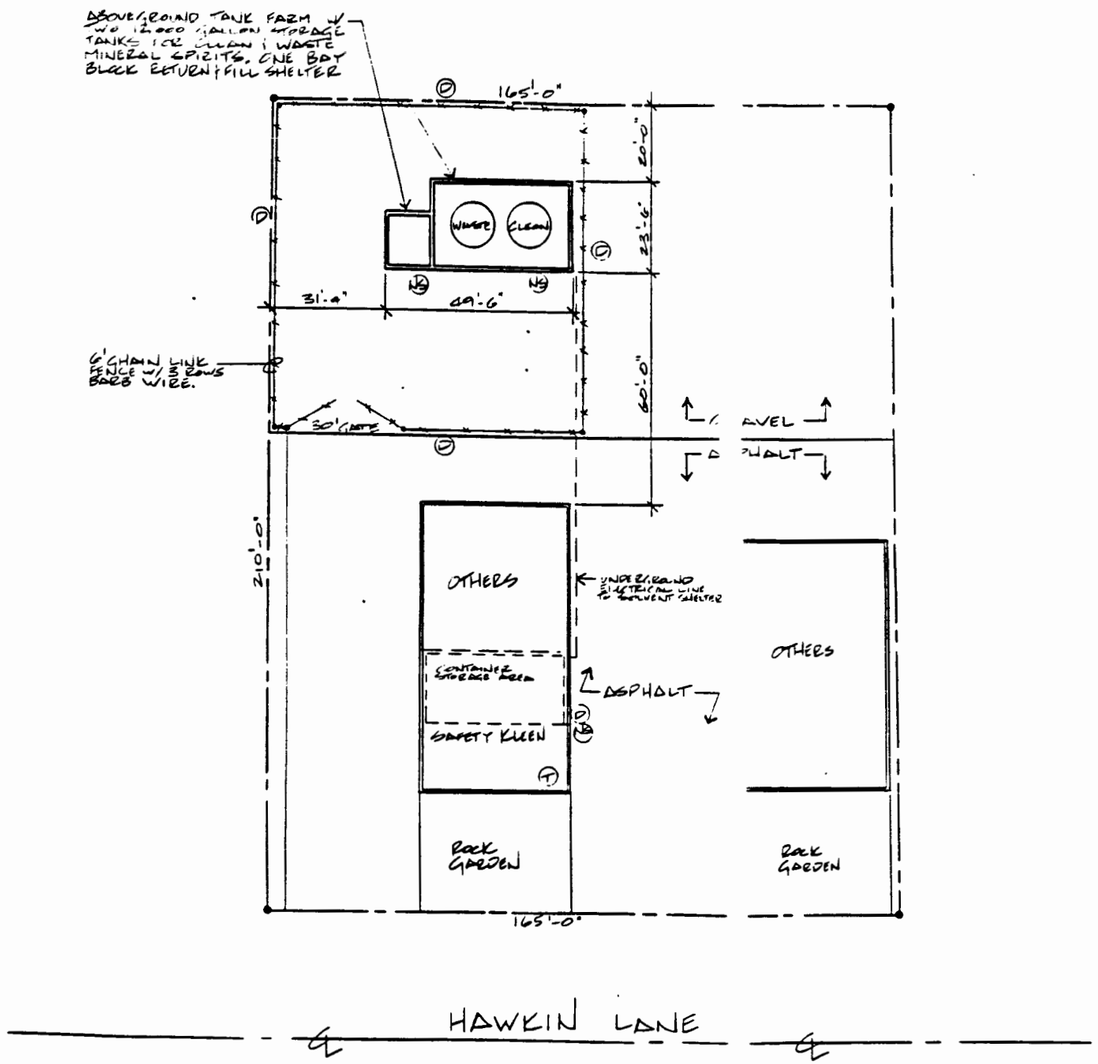

SITE PLAN

SCALE 1" = 20'

LEGEND:

- (T) = TELEPHONE
- (FE) = FIRE EXTINGUISHER (TYPICAL 5# ABC CLASS)
- (FA) = FIRST AID STATION
- (D) = "DANGER" SIGN
- (NS) = "NO SMOKING" SIGN
- (CR) = "CORROSIVE" SIGN

NEW — EXISTING

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO SAFETY-KLEEN CORP. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED EXCEPT BY SAFETY-KLEEN OR AS SAFETY KLEEN MAY AGREE IN WRITING

NO	DESCRIPTION	BY	CHK	APPR	DATE
1	REVISION FROM CGS PROVIDED INFO AS BUILT DATED 9/88	WEY			10/89

REVISIONS

TITLE: SITE PLAN 4200 HAWKIN LANE

SAFETY-KLEEN CORP.

SCALE	DRAWN	CHECKED	ENGINEERING APPR	OPERATION APPR	DATE
1"=20'	WEY				10/89

FARMINGTON, N.M. 7-008-21

DRAWING NO D13712

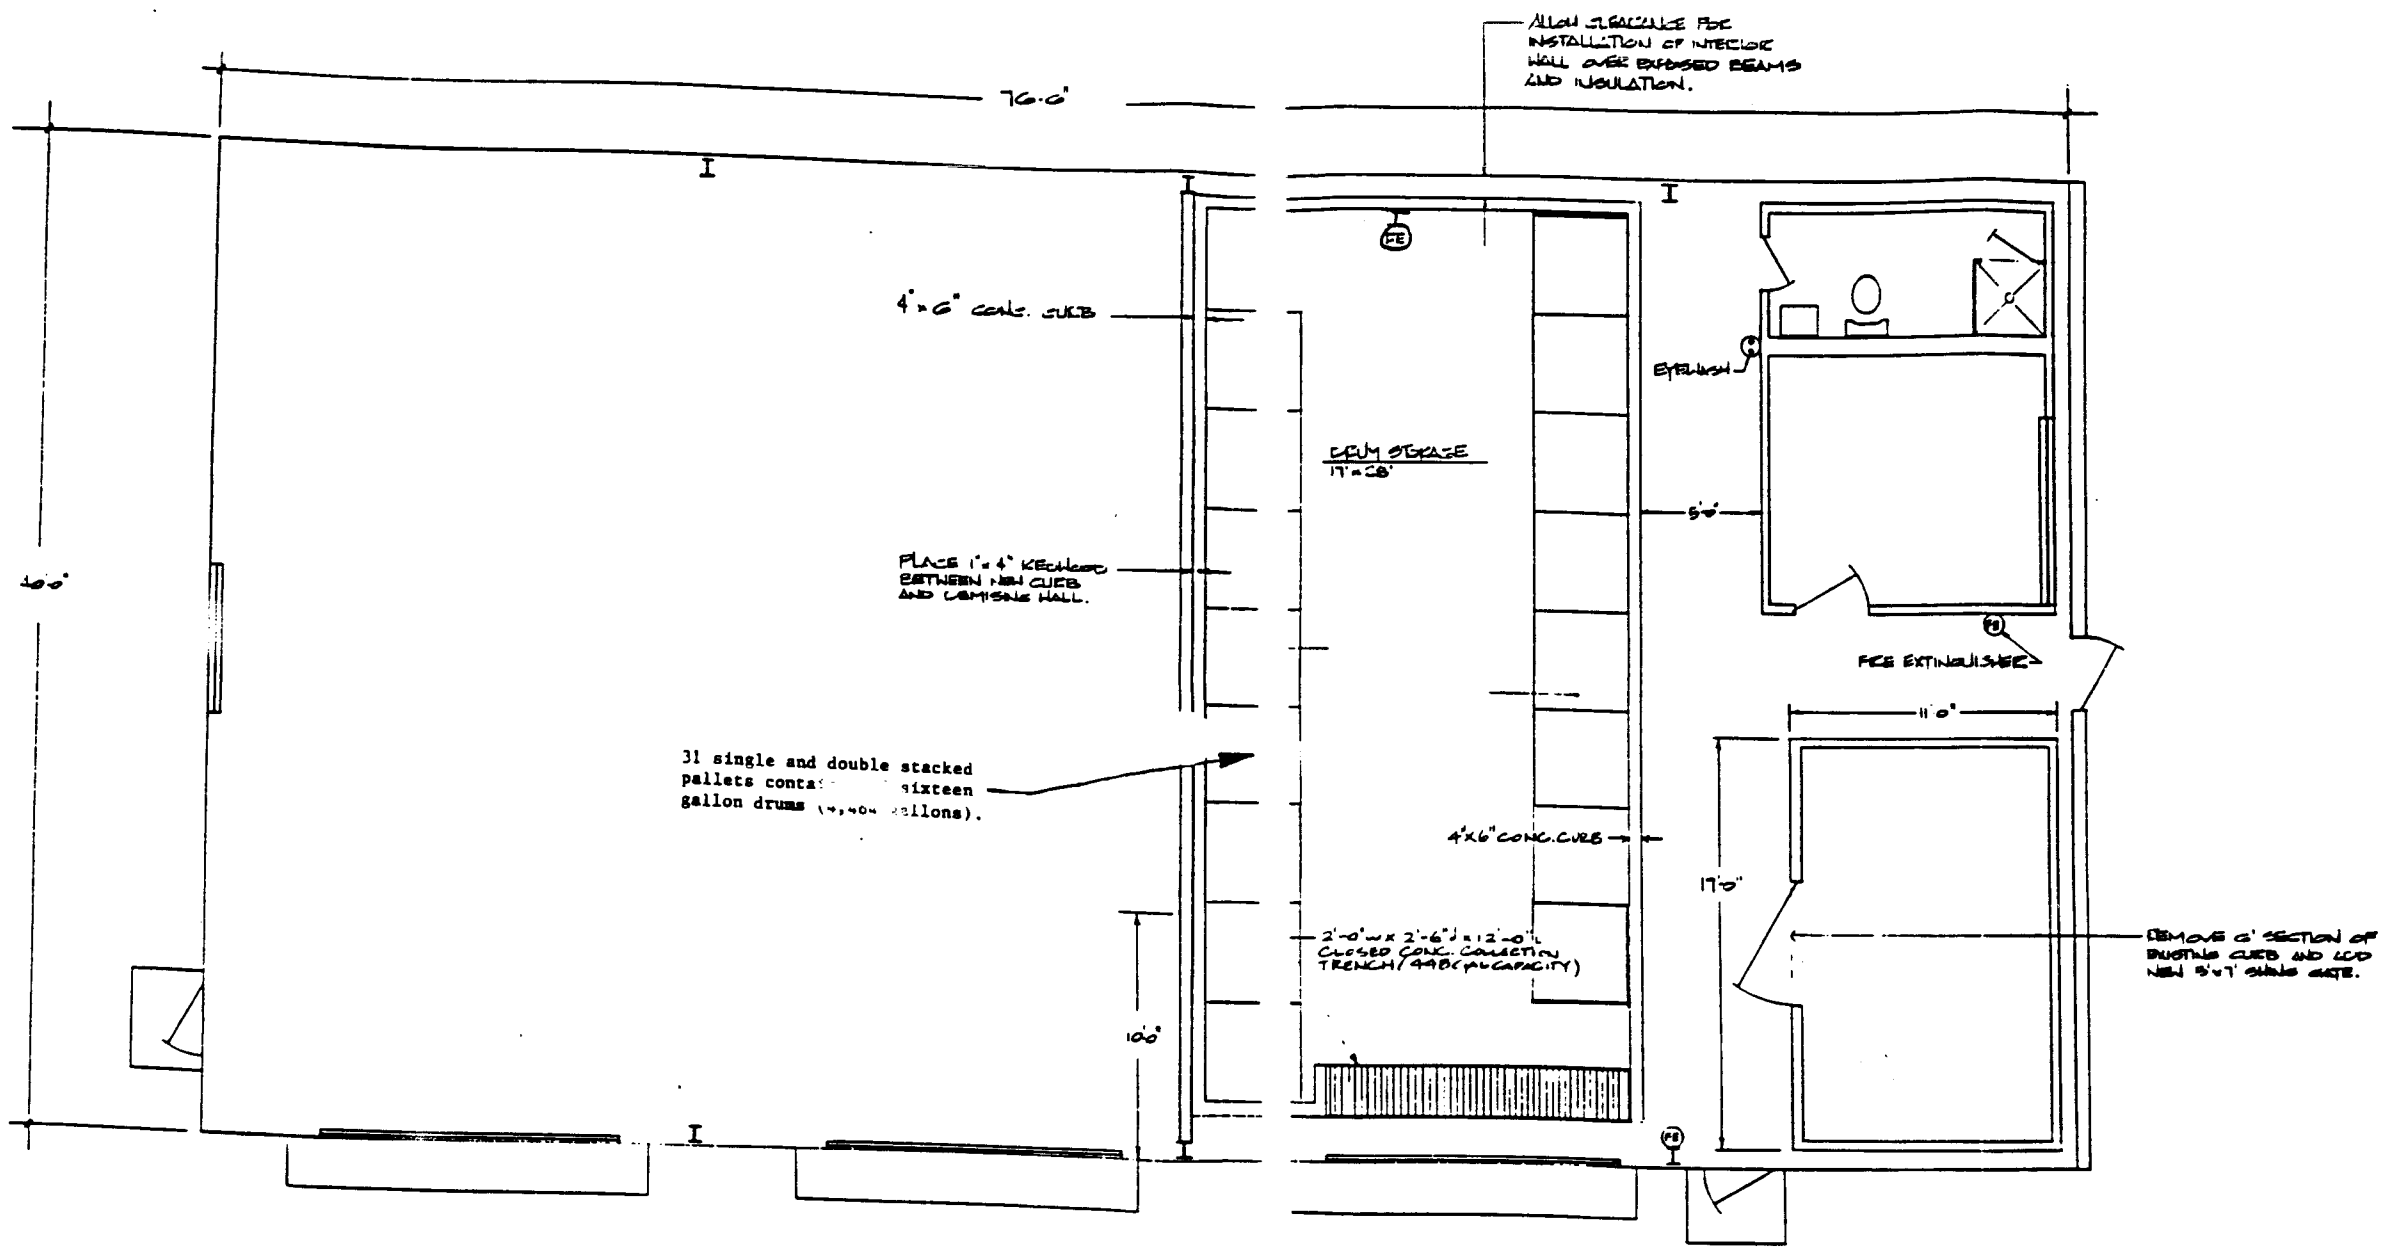

LEGEND:

- (T) (T) - TELEPHONE
- (FE) (FE) - FIRE EXTINGUISHER (TYPICAL 5# ABC CLASS)
- (FA) (FA) - FIRST AID STATION
- (D) (D) - "DANGER" SIGN
- (NS) (NS) - "NO SMOKING" SIGN
- (PC) (PC) - "CARCINOGENS" SIGN

NEW — EXISTING

SAINT-GOBAIN CORP.

FLOORPLAN SHOWING VARIOUS IMPROVEMENTS TO BUILDING

SCALE 1/4" = 1'-0"			
DATE 2-9-81	1 ADDED DRUM STORAGE IMPROVEMENTS	RJ	7-21-91
DRAWN JEY			
CHECKED			

SATELLITE BRANCH
FARMINGTON, N.M. (9008-21)

D10039

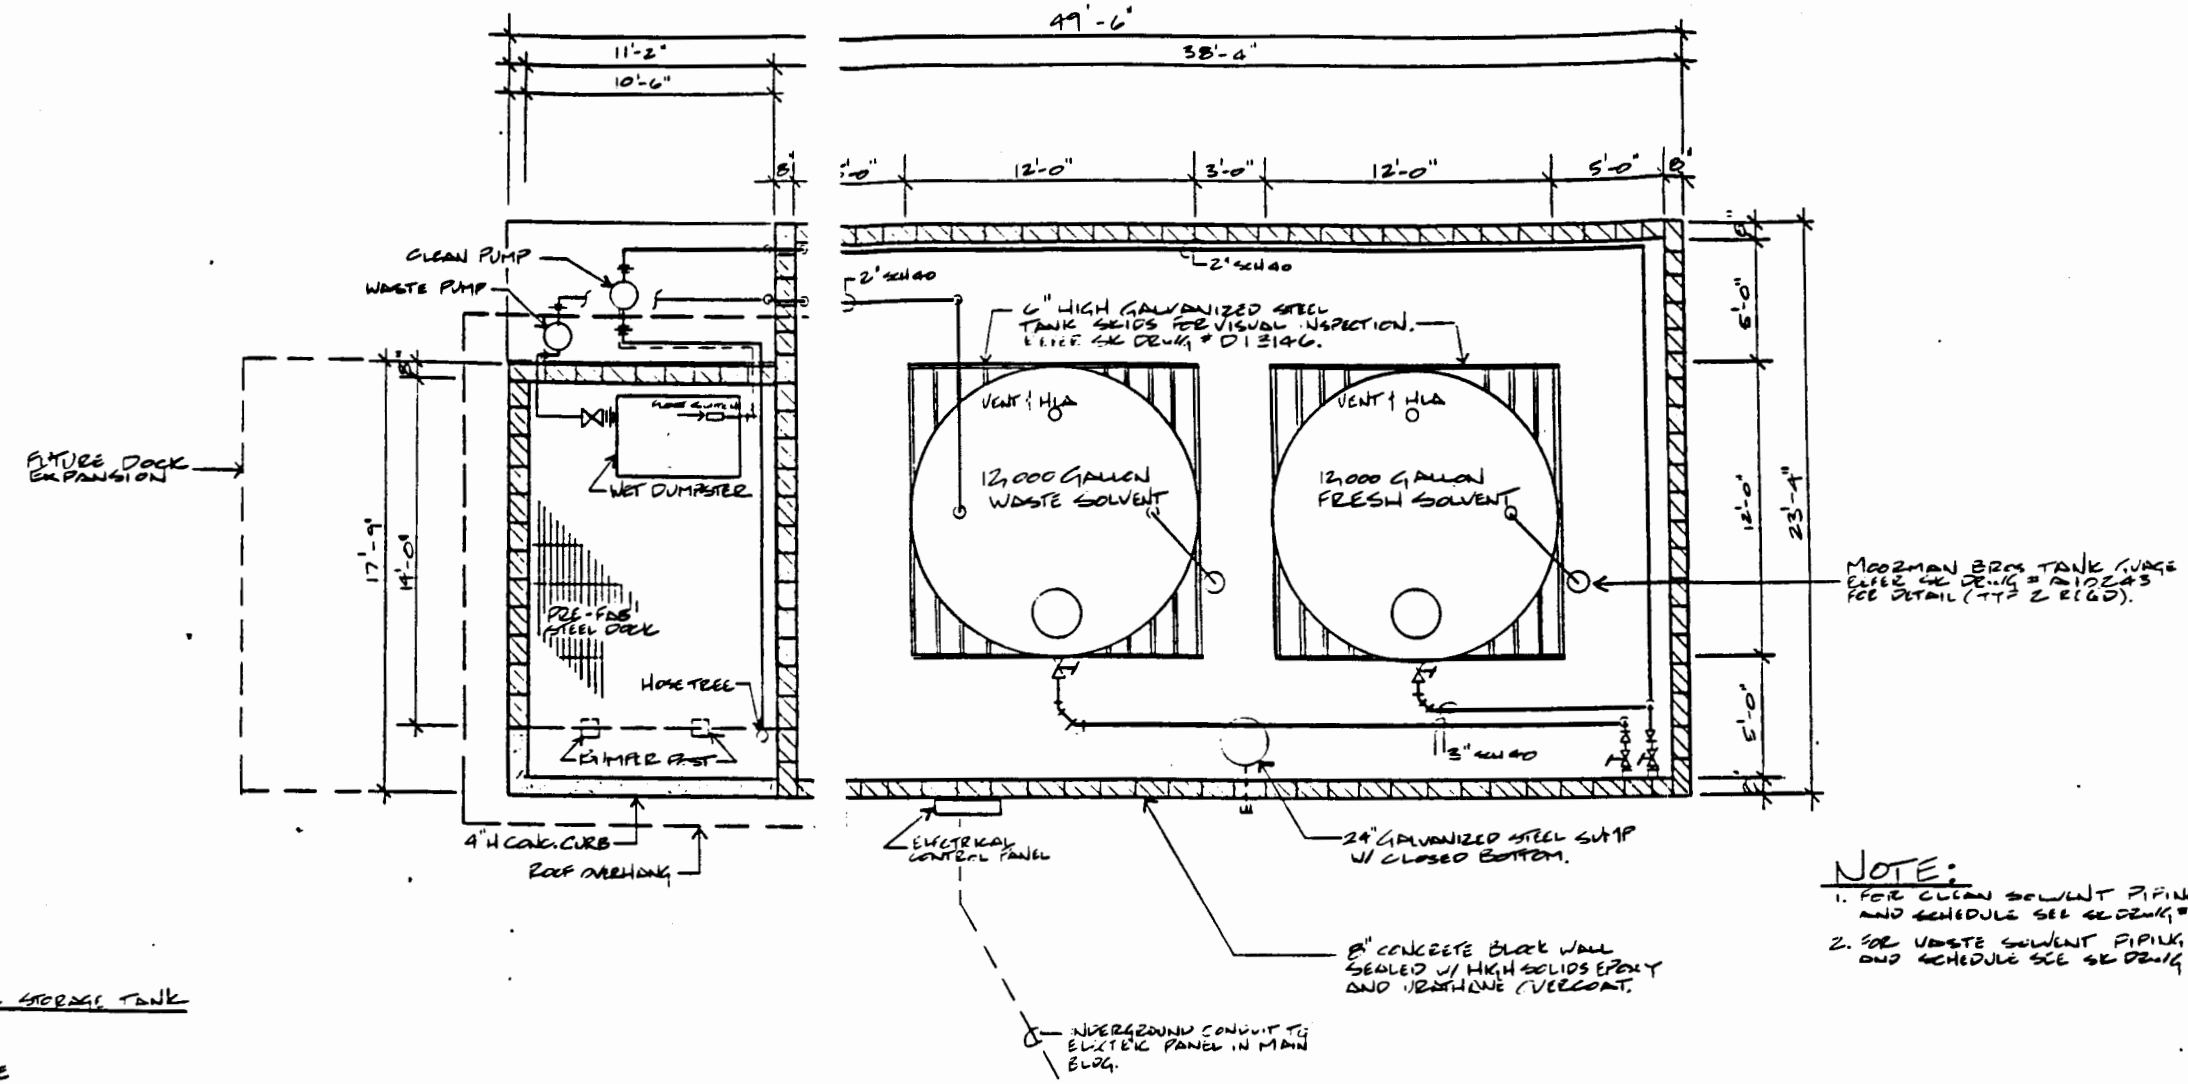

TANK FARM PLAN

SCALE = 1/4" = 1'-0"

NOTE:

1. FOR CLEAN SOLVENT PIPING DIAGRAM AND SCHEDULE SEE SK DRWG # D11123.
2. FOR WASTE SOLVENT PIPING DIAGRAM AND SCHEDULE SEE SK DRWG # D11124.

DIKE VOLUME CALCULATION: 12,000 GAL STORAGE TANK

FORMULAE USED:

$\pi r^2 H (7.48\ GAL/FT^3)$ = TANK DISPLACEMENT VOLUME
$LWH (7.48\ GAL/FT^3)$ = DIKE VOLUME

r (TANK RADIUS) = 6'-0"
L (DIKE LENGTH) = 37'-0"
W (DIKE WIDTH) = 22'-0"
H (DIKE HEIGHT) = 3'-0"

DIKE VOLUME: (37'-0")(22'-0")(3'-0")(7.48 GAL/FT³) :	18,266 GAL
VOLUME OF LARGEST TANK WITHIN THE DIKE AREA) :	-12,000 GAL
TANK DISPLACEMENT VOLUME: π(6'-0")²(2'-6")(7.48 GAL/FT³):	- 2,115 GAL
NOTE: TANK DISPLACEMENT ADJUSTED FOR TANK SKID.	
25 YEAR 24 HOUR PERIOD: 4.5" x DIKE AREA :	- 2,283 GAL
10% SAFETY FACTOR :	- 1,200 GAL
TOTAL EXCESS	668 GAL

LEGEND:

- (7) = TELEPHONE
- (12) = FIRE EXTINGUISHER (TYPICAL 5# ABC CL
- (22) = FIRST AID STATION
- (1) = "DANGER" SIGN
- (23) = "NO SMOKING" SIGN
- (24) = "CORROSIVE" SIGN

NEW — EXISTING

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO SAFETY-KLEEN CORP. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED EXCEPT BY SAFETY-KLEEN OR AS SAFETY-KLEEN MAY AGREE IN WRITING

NO	DESCRIPTION	BY	CHK	APPD	DATE
	REDRAWN FROM CGS SUPPLIED INFO. REVISED SK # D10238 & D10758	WEY			4/89

TITLE: TANK FARM PLAN

SAFETY-KLEEN CORP.
777 SOUTH WHEELING ROAD • WHEELING, ILLINOIS 60090 PHONE (708) 537-8900

SCALE	DRAWN	CHECKED	ENGINEERING APPR	OPERATION APPR	DATE
1/4" = 1'-0"	WEY				

FARMINGTON, N.M.
7-CCB-21

DRAWING NO: D15713 REV: 1

GENERAL NOTES

1. ALL STEEL SURFACES TO BE PREPARED IN ACCORDANCE WITH "STEEL STRUCTURE PAINTING COUNCIL"

   PRIOR TO PAINTING STEEL, REMOVE LOOSE RUST & MILL SCALE BY SANDBLASTING AND POWER TOOL WIRE BRUSHING AND GRINDING.

   AFTER SURFACE PREPARATION, APPLY (1) COAT OF WHITE OXIDE PAINT AND (2) COATS OF ALKYD BASE GLOSS WHITE STRUCTURAL ENAMEL, E.G. MOBIL 12-W-4. ALLOW PAINT TO DRY 16-24 HOURS BETWEEN COATS TO INSURE PROPER SEALING.
2. STEEL TUBE TO CONFORM TO ASTM # A500 (F_Y = 42 K.S.I.) ALL OTHER STEEL TO CONFORM TO ASTM # A 36
3. ALL WELDS TO BE E 70 ELECTRODES.
4. SKID SHOWN IS DESIGNED FOR THE FOLLOWING TANKS CONTAINING LIQUIDS HAVING A SPECIFIC GRAVITY OF LESS THAN 1.0 :
   A. 12,000 GALLON, 10'-6" DIAMETER
   B. 15,000 GALLON, 10'-6" DIAMETER

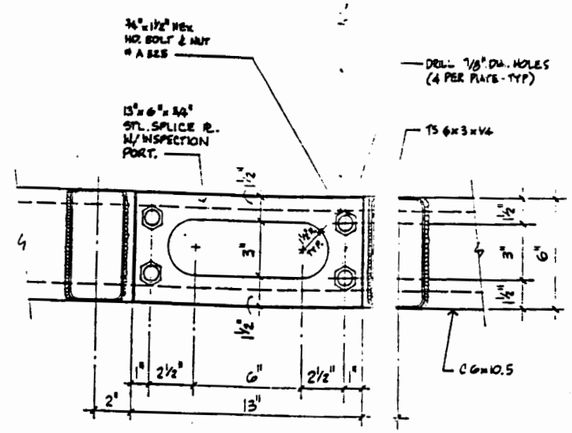

2 DETAIL
NTS

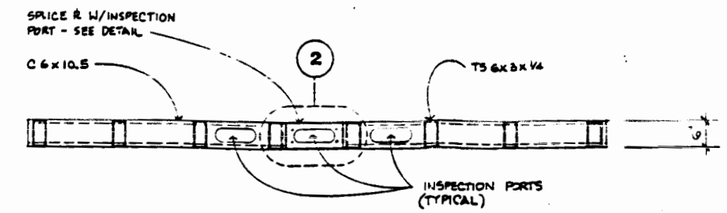

1 SECTION
SCALE : 3/4"=1'-0"



3 DETAIL
NTS



4 DETAIL
NTS

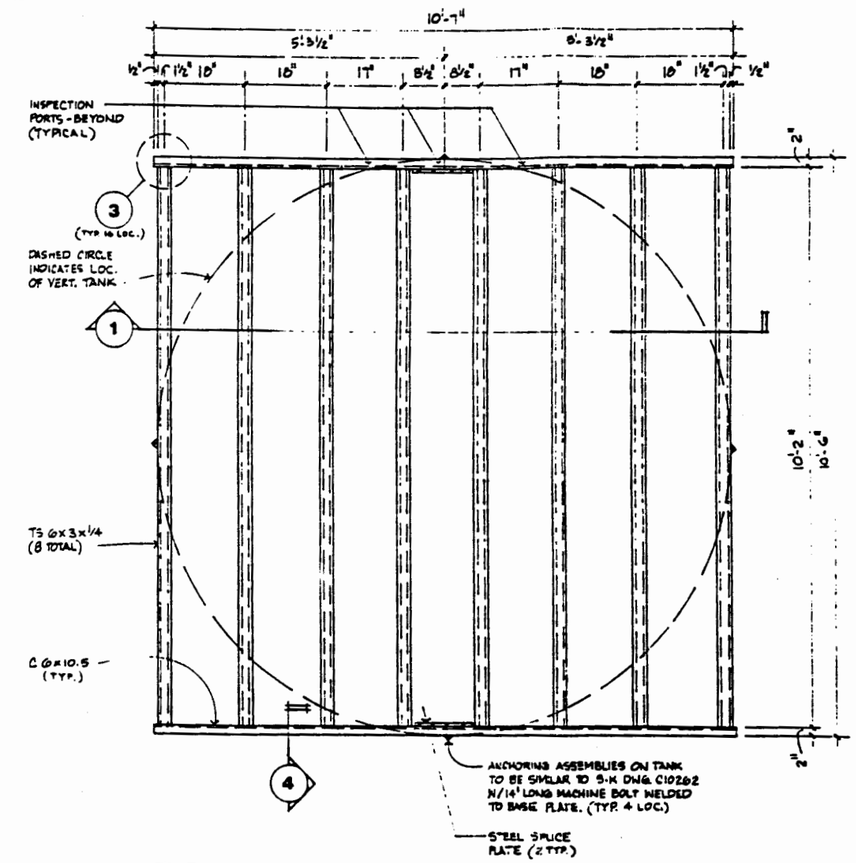

FLOOR PLAN
SCALE : 3/4"=1'-0"

safety-kleen corp.

TANK SKID

AS NOTED			
9-2-88	CHG. TANK SIZE	CD	7/20/89
CH			

FOR SERVICE CENTER BRANCH

D13146

ABOVEGROUND TANK INSTALLATIONS

(HORIZONTAL OR VERTICAL)

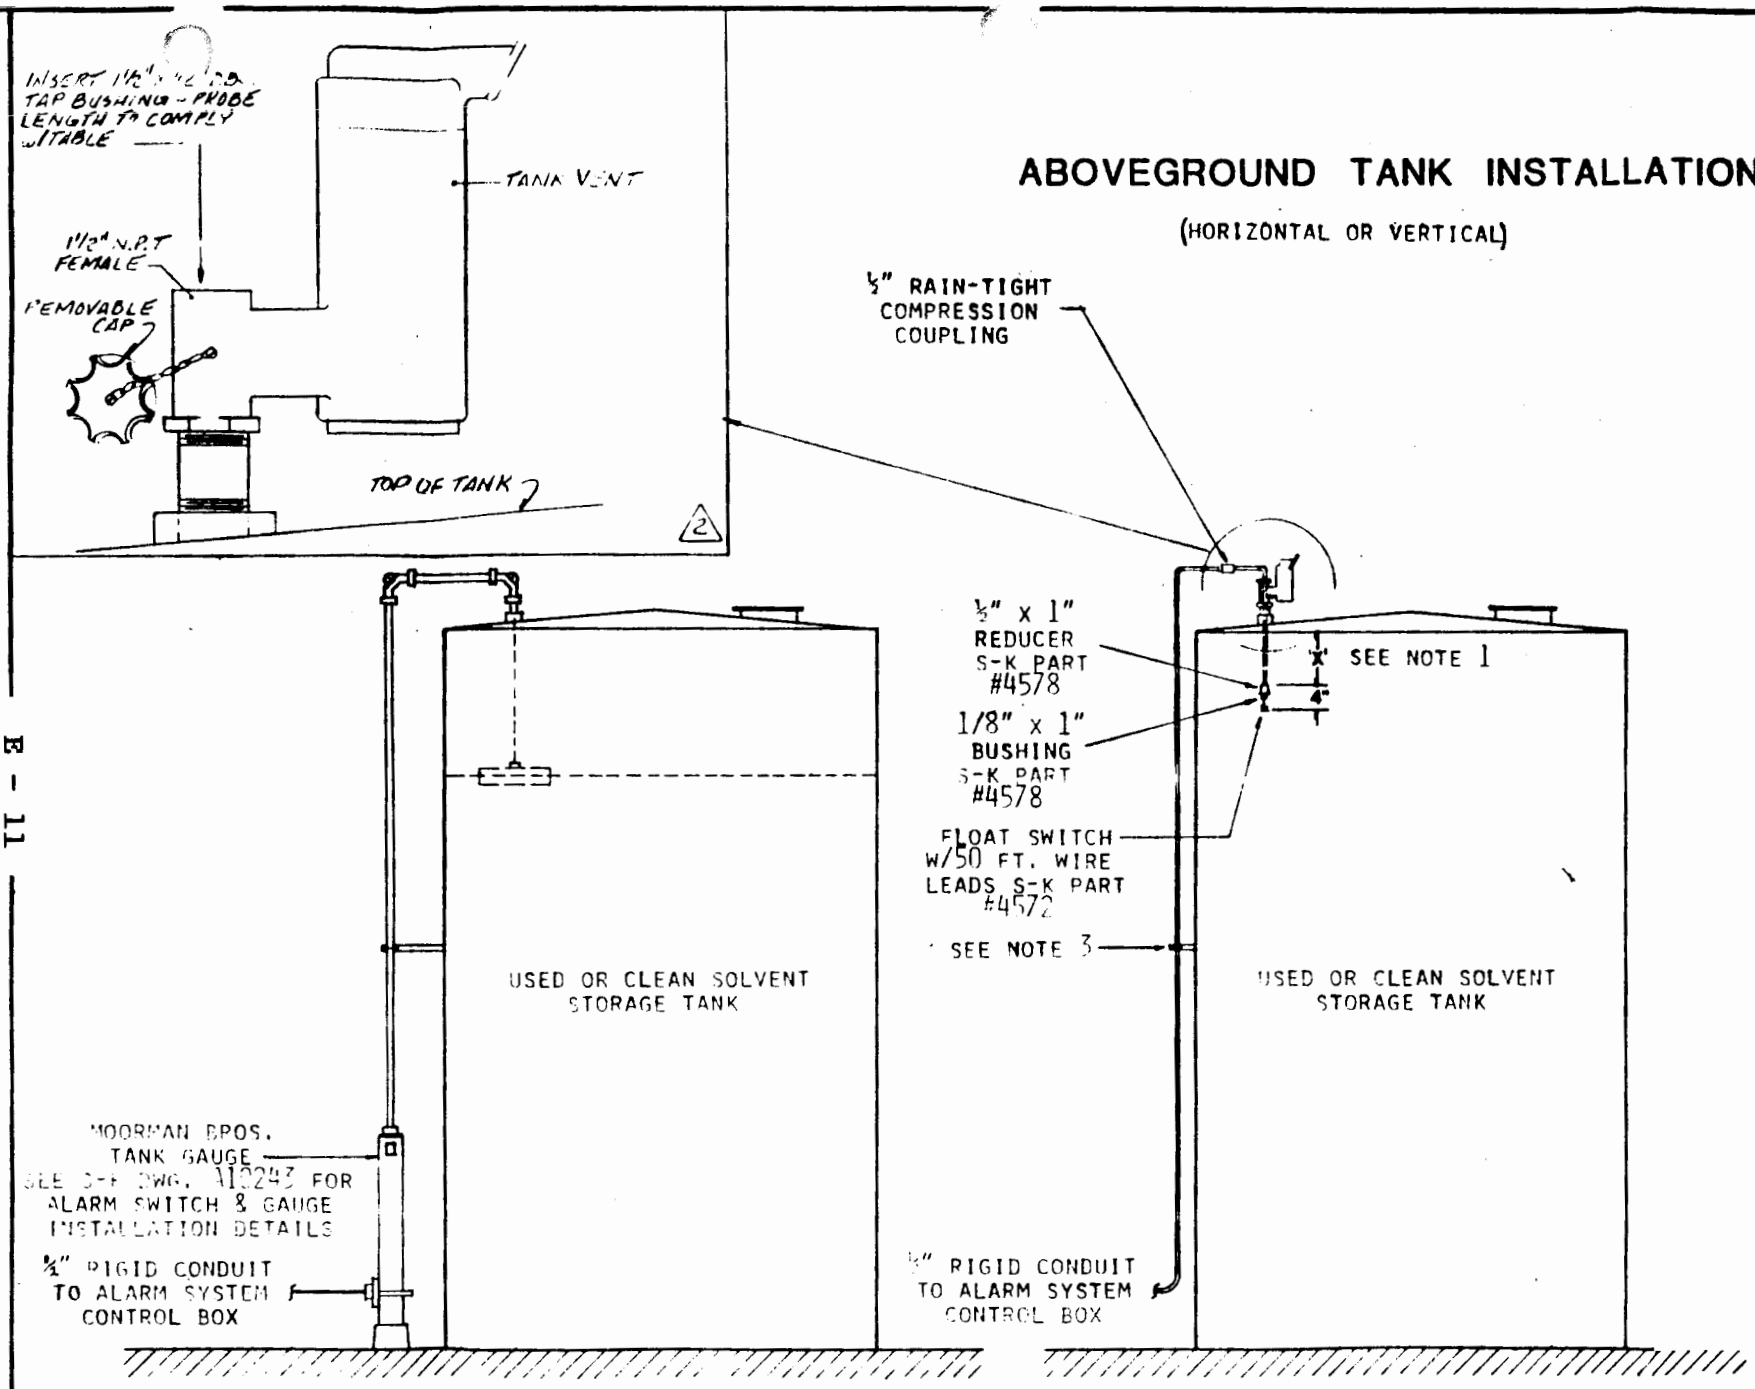

-OPTION 1-

-OPTION 2-

PERMIT ATTACHMENT F

CONTINGENCY PLAN

ABSTRACT

PURPOSE: This plan describes the proper action to be taken by employees during an emergency.

RESPONSIBILITIES: The emergency coordinator or his alternate is responsible for implementing the plan during an emergency.

EMERGENCY COORDINATOR: The branch manager is the emergency coordinator. The alternate emergency coordinator is the warehouseman.

EMERGENCY NOTIFICATIONS:

Farmington Police Department	505/327-0222
Farmington Fire Department	505/325-3501
San Juan County Regional Medical Center	505/325-5011
Environment, Health and Safety Department	708/888-4660
New Mexico Health and Environment Dept.	505/827-9329
Rinchem	505/345-3655

CONTINGENCY PLAN

Safety-Kleen Corp. (2-004-01)
4200 A Hawkins Rd.
Farmington, New Mexico 87401

F.1 PURPOSE

The contingency plan describes the actions to be taken by each employee in the event of a spill, fire, explosion, or other emergency. It includes the information necessary to address emergency situations efficiently and in such a manner as to prevent or minimize hazards to human health or the environment due to fire, explosion, or any other release of hazardous materials to the air, soil, surface water, or ground water.

The contingency plan is to be carried out immediately whenever there is a release of hazardous material which could threaten human health or the environment, implementing the procedures contained in this plan.

F.2 EMERGENCY COORDINATOR RESPONSIBILITIES

The emergency coordinator is responsible for implementing the contingency plan during an emergency; however, all employees must be familiar with the procedures in this plan and are responsible for proper implementation of the plan should the emergency coordinator or his alternate be unavailable. The branch manager is the emergency coordinator and the warehouseman is the alternate emergency coordinator.

The emergency coordinator and his alternate must be familiar with all aspects of this contingency plan, the operations and activities at the facility, the location and characteristics of materials handled, the location of all records within the facility and the facility layout. In addition, these coordinators have the authority to commit the resources necessary to carry out the contingency plan. Their home addresses and telephone numbers, as well as the office telephone number, are listed on page F -14 below. At least one employee will be at the facility or on call to respond to an emergency situation.

F.2.1 Responsibilities During an Emergency

Whenever there is an imminent or actual emergency situation, the emergency coordinator (or his alternate when the emergency coordinator is not available) must immediately:

a. activate the internal facility communication system to notify all facility personnel;

b. notify Safety-Kleen's Environment, Health and Safety Department using the 24-hour telephone number after working hours (708/888-4660); and

c. notify appropriate state or local agencies with designated response roles, if necessary.

Whenever there is a release, fire, or explosion, the emergency coordinator must immediately try to identify the character, exact source, amount, and extent of any contamination. Because of the limited number of materials being handled at the facility, he or she may do this by observation or by review of facility records. If necessary, outside laboratories may be contacted to perform chemical analysis.

Concurrently, the emergency coordinator must assess possible hazards to human health or the environment that may result from the release, fire, or explosion. This assessment must consider both direct and indirect effects of the release, fire, or explosion (e.g., the effects of any toxic, irritating, or asphyxiating gases that may be generated, or the effects of any hazardous run-off).

During an emergency, the emergency coordinator must take all measures necessary to ensure that fires, explosions, and releases do not occur, recur, or spread to other hazardous waste at the facility. These measures must include, where applicable, stopping processes and operations, collecting and containing released waste, and removing or isolating containers.

F.2.2 Remedial Action Responsibilities

If the environment has been contaminated or there is a potential for contamination as a result of a fire, explosion, or spill, the emergency coordinator must contact the Environment, Health and Safety Department to report the incident. All releases, fires, and explosions necessitate the implementation of this contingency plan. Any situation that has the potential for releasing solvent or solvent vapors or causing a fire or explosion must be addressed in accordance with this plan. Should there be any questions as to whether this plan should be implemented (i.e. a problem is suspected but cannot be confirmed) the EHS and/or Technical Services Department must be contacted and assistance requested. The treatment, storage and/or disposal of the recovered waste, contaminated soil or surface water that results must be arranged by Safety-Kleen and carried out as expeditiously as possible.

The emergency coordinator must ensure that, in the affected area(s) of the facility:

a. no substance that may be incompatible with the released material is brought on site until cleanup procedures are completed; and

b. all emergency equipment listed in the contingency plan is cleaned and fit for its intended use before operations are resumed.

F.2.3 Reporting Responsibilities

If the emergency coordinator determines that the facility has had a release that could threaten human health or the environment, the coordinator must report those findings as follows:

a. If the assessment indicates that evacuation of local areas may be advisable, the coordinator must immediately notify appropriate authorities.

b. The coordinator must immediately notify the Environment, Health and Safety Department. The department will notify the New Mexico Environmental Improvement Division (EID) of any spill or release of hazardous waste within 24 hours (except for spills of one pound or less that are immediately cleaned up). The department will report to the New Mexico Environmental Improvement Division (EID) the following:

(1) name and telephone number of notifier;

(2) name and address of facility;

(3) time and type of incident (e.g., release, fire);

(4) name and quantity of material(s) involved, to the extent known;

(5) the extent of injuries, if any; and

(6) the possible hazards to human health, or the environment outside the facility.

Safety-Kleen will notify the appropriate state and local authorities that the facility is in compliance with section F.2.2 before operations are resumed in the affected area(s) of the facility.

The emergency coordinator must document the time, date, and details of any incident that requires the implementation of the contingency plan. Within 15 days of the incident, Safety-Kleen will submit a written report on the incident to the New Mexico HED. The report will contain the information set out in Pt. V, Section 264.196(d)(3) and must include:

a. name, address, and telephone number of the owner or operator;

b. name, address, and telephone number of the facility;

c. date, time, and type of incident (e.g., fire, explosion);

d. name and quantity of material(s) involved;

e. the extent of injuries, if any;

f. an assessment of actual or potential hazards to human health or the environment, where this is applicable; and

g. estimated quantity and disposition of recovered material that results from the incident.

F.2.4 Chain of Command

Based on the emergency response procedures described above, the chain of command during an emergency is as follows:

a. The person who discovers/causes the spill reports to the emergency coordinator.

b. The emergency coordinator contacts the Environment, Health and Safety Dept.

c. The Environment, Health and Safety Department reports to the New Mexico Environmental Improvement Division.

F.2.5 Government Agencies and Local Authorities to Be Notified

During an emergency, the following government agencies and local authorities may be contacted:

Agency or Authority	Rationale
Police Department	Notify if there is imminent danger to human health.

Fire Department	Notify if there is a fire, explosion, uncontrolled spill, or other imminent danger.
Hospital	Notify if there are any injuries.
New Mexico EID	Report releases, fires, or explosions.
Rinchem	Call to assist with remedial action after a release.

Arrangements have been made to familiarize the police department, fire department and local emergency response teams with the layout of the facility, the properties of hazardous materials handled and associated hazards, locations where facility personnel normally work, entrances to and roads inside the facility, and possible evacuation routes. Arrangements have also been made to familiarize the local hospital with the types of injuries or illnesses which could result from fires, explosions, or releases at the facility.

F.3 EMERGENCY RESPONSE PROCEDURES

Response actions to be taken in specific emergency situations are described in the sections which follow.

F.3.1 Minor Spills

If a spill should occur while pouring spent solvent into a dumpster or filling drums with solvent product at the return and fill station, and it is contained in the secondary containment at the base of the return and fill station, remedial action will not be necessary. Should the spill occur outside the containment, different actions must be taken depending on whether the spill occurs on a paved or unpaved area:

a. If the solvent spills on a paved area, it must be collected with sorbent sheets and/or sorbent clay (such as "Oil Dry"). The sorbents will be collected, drummed and shipped to the Safety-Kleen recycle center for proper disposal.

b. If the solvent spills on an unpaved area, the free solvent must be collected with sorbent material. The sorbent material and any contaminated soil must be collected, drummed and shipped to a Safety-Kleen recycle center for proper disposal.

If a spill occurs while moving or delivering drums outside of the warehouse, the response actions described in 'a' and 'b' above must be followed. Spills inside the warehouse will be prevented from contaminating the environment by the concrete floor and the secondary containment. In the event of a spill indoors, the doors and windows should be opened to improve the ventilation in the confined area. If solvent is spilled in a non-explosion rated area or is flowing in such, insure that all sources of ignition (e.g., thermostats or light switches) are left in the same position (either on or off) as at the time of the spill. Then, following the instructions of the appropriate Material Safety Data Sheet, the worker will enter the area wearing rubber gloves, aprons, safety glasses, and/or a respirator, collect the liquid, drum it and return it to storage. An explosion proof area is one in which special wiring has been used. Only the return and fill station contains this type of wiring.

Cleanups are completed only when the workers have cleaned themselves and the emergency equipment with soap and water. All minor spills must be reported to the Environment, Health and Safety Department and the department will contact the New Mexico EID (if the spill is of a reportable quantity).

In the event a container needs emptying, a pump located on the facility will be used to remove the liquid and pump it to a new container. In the event liquid from a tank needs to be removed, tanker trucks will be used to remove the liquid and haul it to the recycle center. A wet/dry vacuum is present at the site to be used in the event of a minor spill. Sorbent pads can also be used to wipe up any minor spills.

F.3.2 Major Spills

Any spill which cannot be completely remediated using the methods described in 'a' and 'b' of section F.3.1 is a major spill. A major spill is usually the result of a vehicular accident, tank overfilling, equipment failure or a fire. Spilled material which escapes collection can contaminate soil, surface water, ground water, sanitary sewer systems and storm sewer systems. Emergency response to this type of spill should be as follows:

a. Assist any injured people.

b. Stop the flow of solvent, if possible.

c. Retain, contain or slow the flow of the solvent if it can not be stopped.

d. If solvent escapes containment efforts, immediately call the local Fire Department, and report to the emergency coordinator and the Environment, Health and Safety Department.

e. Immediately recover the spilled solvent to reduce property and environmental damage. Start recovery operations immediately.

The emergency coordinator shall report any incident as soon as possible to the Environment, Health and Safety Department using the 24-hour telephone number: 708/888-4660. If the Environment, Health and Safety Department does not respond within thirty minutes, the emergency coordinator shall call an emergency cleanup response contractor, if it is deemed necessary, and report the incident to the National Response Center (telephone: 800/424-8802) and New Mexico EID (telephone: 505/827-9329 - 24 hour number). Otherwise, the Environment, Health and Safety Department will contact the proper authorities.

The person reporting a spill should be prepared to give his name, position, company name, address and telephone number. The person reporting should also describe the material spilled and, if possible, some estimate of the amount, and the containment status and specify any equipment needed.

Contaminated material resulting from remedial actions for major spills, will usually be disposed of at a properly permitted treatment or disposal facility since the quantity of waste material will probably exceed the storage capacity of the Safety-Kleen recycle center.

Contaminated equipment resulting from remedial actions for spills must be cleaned and decontaminated. If it is a paved or metal surface, this can be done using a detergent solution. Every spill must be recorded on the Spill Report Telephone Log and reviewed with branch personnel to prevent similar spills from occurring in the future. A copy of this report is sent to the Environment, Health and Safety Department.

All rinsates and other residues from the cleanup of spills or releases, whether major or minor, will be containerized and treated as hazardous waste unless they have been analyzed and demonstrated not to be hazardous. They may not be disposed of onto the land unless they meet the relevant treatment standards specified in HWMR-5, Part VIII.

F.3.3 Fire Control Procedures

If a fire occurs, personnel must act quickly with the fire extinguisher to put out the fire before it spreads. If it can not be extinguished immediately and/or an explosion occurs, evacuate the facility and call the fire and police departments.

Vapors of mineral spirits exposed to a spark or open flame can flash at temperatures over 105° F. A mineral spirits fire can best be extinguished with foam. If foam is not available, sweeping the fire with water fog can cool it, directing the water spray to push the flames into a confined area, if possible. The flame should not be extinguished until the flow of the solvent has been stopped. Then attention should be directed immediately to extinguishing the flame.

Immersion cleaner (which is a mixture of chlorinated solvents, cresylic acid and an alkaline solution), and dry cleaning wastes are not flammable, but can produce phosgene gas and hydrochloric acid at very high temperatures (about 1200° F). The potential for the materials reaching a decomposition state is minimal; however, branch personnel and local authorities must be aware of the proper response, should a fire affect the drum storage areas:

a. Isolate the hazard area and deny entry to unauthorized personnel.

b. Stay upwind; keep out of low areas.

c. Ventilate closed spaces before entering them.

d. Wear positive pressure breathing apparatus and protective clothing.

e. Evacuate a 600-foot radius area endangered by the gas.

f. Cool the area and containers with water until well after the fire has been extinguished.

A fire in the drum storage area can best be extinguished by foam, water fog, or water spray.

Explosions may result in the spread of fire, unstable structures, and other hazardous conditions at the facility. Therefore, the site must not be re-entered until the fire department and Safety-Kleen's insurance company have determined it is safe to do so. Action must be taken to ensure that fires , explosions, or releases do not occur or reoccur. These include removing the source of the problem, repairing or remediating the source of the problem, coding areas subject to fires and explosions and replacing faulty equipment.

F.4 EVACUATION PLAN

Clearly marked exits exist in the warehouse and office area and employees are trained to be aware of all potential escape routes.

When an uncontrolled fire or release has occurred, all personnel are to be evacuated from the area and assemble across Hawkins Road to assure that all personnel are accounted for and out of the hazardous area. The fire department must be notified at the time of evacuation either from a safe on-site building or from a neighboring facility.

F.5 ARRANGEMENT WITH EMERGENCY RESPONSE CONTRACTORS

The emergency coordinator and his alternates have been trained using this contingency plan as well as in a classroom setting. They have references such as various state members at the corporate office and the Material Safety Data Sheets to help them make decisions during an emergency.

An emergency response contractor is identified on the Emergency Information Sheet (page F-14). This contractor will provide emergency assistance during a release and/or cleanup.

F.6 POLLUTION INCIDENT HISTORY

There are no records of a pollution incident having occurred at this facility.

F.7 IMPLEMENTATION SCHEDULE

Any discrepancies or deficiencies found during the routine inspection must be corrected expeditiously to insure that the problem does not lead to an environmental or human health hazard. Where a hazard is imminent or an accident has already occurred, remedial action must be taken immediately. The branch manager has the overall responsibility for remediating any discrepancies found during the routine inspection, and will consult with the corporate environmental and engineering staffs to design an implementation schedule for remedial action.

F.8 AVAILABILITY AND REVISION OF THE CONTINGENCY PLAN

This plan and all revisions to the plan are kept at the facility and regularly updated throughout the operating life of the facility. Copies of this document are provided to local authorities and organizations listed on the Emergency Information

Sheet (page F-14) and they may be called upon to provide emergency services. In addition, this plan and all revisions to the plan are made readily available to employees working at the facility. The plan is reviewed and updated, if necessary, whenever:

a. the facility permit is modified to allow new wastes to be stored or treated, or applicable regulations are revised;

b. the list or location of emergency equipment changes;

c. the facility changes in its design, construction, operation, maintenance, or other circumstances in a way that:

   (1) increases the potential for fires, explosions, or releases of hazardous constituents, or

   (2) changes the response necessary in an emergency;

d. the names, addresses, or phone numbers of emergency coordinators change;

e. the employee assigned to each emergency task changes; or

f. the plan fails when implemented in an emergency.

(See next page for emergency equipment list)

EMERGENCY EQUIPMENT LIST

Gloves - Three pairs of rubber or plastic gloves, adequate to resist any material stored at the facility, will be kept in the spill response kit. Two dozen more gloves will be kept in storage at the facility.

Safety Glasses or Face Mask - At least two pairs of safety glasses will be kept in the spill response kit. At least one pair of glasses will be kept at the solvent loading and unloading dock. A face mask will be provided if an employee prefers it. Safety glasses or a mask will be worn at all times while handling solvents.

Plastic Aprons - At least two aprons, adequate to resist any material stored at the facility, will be located in the spill response kit. At least one such apron will be located at the loading/unloading dock, and at least one will be on the route truck.

The spill response kit will be kept in an easily accessible location in the container storage area.

Eye Wash Stand - At least one emergency eyewash stand will be located in the container storage area, and access to it will be kept open at all times.

Shower - A shower, located in the facility restroom, will be kept fully operational at all times.

Fire Extinguishers - At least three ten-pound fire extinguishers will be located as shown on the floor plan on page E-8 of Attachment E. At least one five-pound fire extinguisher will be kept on the route truck.

Absorbent Material - At least one bale of spun polypropylene absorbent material, containing 100 36" x 36" sheets, or equivalent, will be located in the spill response kit. At least one such bale will be kept at the loading/unloading dock, and another will be kept on the route truck. At least two such bales will be kept in storage at the facility.

Emergency Communications - A telephone will be kept properly functioning at all times at the facility. An emergency telephone or alarm system will be maintained at the loading/unloading dock. An alarm system capable of alerting occupants of the other half of the building in the event of an emergency will be installed by December 31, 1991 and will be maintained in working order.

Overflow Alarm - Overflow alarms will be kept fully functional in all storage tanks. They will be set to activate at not more than 95% of tank capacity and will have both audible and visible alarm signals.

EMERGENCY INFORMATION

A. Facility Emergency Coordinator / Alternate Coordinator

	Facility Emergency Coordinator	Alternate Coordinator
Name:	Rick McDonald	Homer Manning
Home Address:	201 E. Gladden Farmington, NM 87401	P.O. Box 5801 Farmington, NM 87499
Telephone:	Office: 505/327-9070 Home: 505/326-3075	505/327-9070 505/325-1110

B. Emergency Notification Phone Number

a. Internal :

Safety-Kleen Environment, Health and Safety Department
24 Hour Emergency Number: 708/888-4660

b. External :

1. National Response Center
   24 Hour Emergency Number: 800/424-8802

2. New Mexico Health and Environment Dept.
   505/827-9329

C. Emergency Team to be Notified

	UNIT	TELEPHONE NUMBER
a.	Farmington Fire Dept.	505/327-0222
b.	Farmington Police Dept.	505/325-3501
c.	San Juan County Regional Medical Center	505/325-5011
d.	Rinchem	505/345-3655

PERMIT ATTACHMENT G

CLOSURE PLAN

ABSTRACT

LOCATION ADDRESS: Safety-Kleen Corp. (7-008-21)
4200 A Hawkins Road
Farmington, New Mexico 87401

U.S. EPA I.D. NO: NMD 980698849

WASTE UNITS TO UNDERGO CLOSURE:

a. Tank Storage - one 12,000 gallon aboveground storage tank

b. Drum Storage - an area of about 187 square feet with a storage capacity of 4,464 gallons.

c. Return and Fill Station - The location of this waste management unit is shown in the Site Plan. It can hold 375 gallons of waste.

The volumes shown above are the maximum amounts which will be stored at this facility.

CLOSURE PLAN

G.1 PURPOSE

The Farmington service center operates as a storage facility for hazardous wastes, and Safety-Kleen believes it is required that it be closed in accordance with the closure requirements of the New Mexico Hazardous Waste Management Regulations, Part V, Subpart G. Closure of the facility will be carried out in accordance with the steps outlined in this plan. Safety-Kleen will remove all hazardous wastes and residuals from the facility and will therefore eliminate the need for further maintenance and care. The expected year of closure for this facility is 2020. An outside contractor will be performing the closure clean up and sampling activities. The contractor will have worked with Safety-Kleen prior to clean up so we can be aware of their capabilities. A state licensed professional engineer will be on site periodically to certify the adequacy of the clean up activity.

G.2 ABOVEGROUND TANK AND ASSOCIATED PIPING

To safely clean and decommission the aboveground storage tank:

a. Remove the remaining material from the tank and return the materials to the Recycle Center for reclamation.

b. Provide access to the tank.

c. Rinse, scrape, and squeegee the tank interior, removing all residual waste material and rinsate.

d. Disconnect and decontaminate all appurtenant piping and pumping equipment.

e. Remove tank and appurtenant equipment and reuse or sell as scrap.

f. Clean and raze the diking and slab.

g. Backfill all excavations with clean fill material.

h. Transport and dispose of all waste material generated during the project.

G.2.1 Removal of Waste Material and Opening of the Tank

The contents of the tank must be removed using a pump, vacuum or similar equipment and then be shipped by tanker truck to a reclaimer.

To gain access to aboveground tanks, use the manway at the top of the tank. Depending on the type of opening and the condition of the equipment, a variety of tools may be used to open the manway. Care must be exercised to minimize spark generation when working on the tank.

Prior to entering the tank, personnel should have full face respiratory protection and protective clothing. Once the tanks have been opened, they must be provided with positive ventilation. The tanks will then be inspected to determine the approximate quantity and physical conditions of any remaining waste material.

G.2.2 Removal of Residual Waste and Cleaning of Tank

Before removing any residual waste from the tank, all piping and appurtenant equipment will be flushed with clean mineral spirits followed by a detergent solution.

The method used to remove the residual waste material from the tanks will depend on the physical properties and quantities of that material. Prior to any person entering the tank, an effort will be made to remove as much liquid and sediment as possible (see section G.2.1).

Subsequent to vacuuming the majority of the material from the tanks, it may be necessary to use a high pressure wash system using clean solvent and a detergent solution to rinse residual material from the walls, roof, and floor of the tank. The evacuated material and the rinse solution will be shipped to a reclaimer. The quantity of wash fluid used will be kept to a minimum in order to limit the amount of waste material.

Storage tanks are considered confined spaces (i.e. spaces open or closed having a limited means of egress in which poisonous gases or flammable vapors might accumulate or an oxygen deficiency might occur), and confined space entry requires special procedures:

a. Tanks are to be washed, neutralized and/or purged (where flammable atmosphere is present) prior to being entered.

b. Supply valves must be closed and tagged and bleeder valves left open; or supply piping should be disconnected.

c. Pumps or motors normally activated by automatic controls shall be operated manually to be sure they have been disconnected. Instrument power switches should be tagged "Off".

d. On tanks where flammable vapors may be present, all sources of ignition must be removed.

e. Under circumstances where "hot work" (welding, burning, grinding, etc.) is to be performed in or on the vessel, a test for combustible gases shall be taken. This is referred to as a "flash test". In all tank entering situations, an oxygen deficiency test shall also be performed prior to tank entry. Both flash test and oxygen deficiency test will be performed by the supervisor of the area in which the work is being done.

f. Under conditions where there exists a possibility (no matter how remote) of toxic vapors being present in the tank to be entered, the supervisor will arrange to have the air tested. The results of all tests will be displayed on site.

g. There must be a set of wristlets or a rescue harness and sufficient rope at the job site to effect a rescue. Any other rescue equipment considered necessary must also be on the job site.

h. Workers should wear rescue harnesses if entering a tank with a large enough opening to easily affect a rescue. In tanks with small openings, only wristlets may be used. In cases where there are agitator shafts, drums or other hazards in which the man's life-line would be entangled and the supervisor in charge feels that wearing the lifeline may entrap a man and increase the hazard, the wearing of a harness or wristlets may be eliminated.

i. A constant source of fresh air must be provided to insure a complete change of air every few minutes. In cases of short term entry for inspection or removal of objects, an air mask is recommended. In cases of long term entry the use of an air mover should be considered.

j. When a ladder is required to enter a tank, the ladder must be secured and not removed while anyone is in the vessel. In cases where a rigid ladder could become an obstacle, a chain ladder may be used.

k. Adequate illumination must be provided and a flashlight or other battery operated light must also be on hand to provide illumination for a safe exit in the event of an electrical power failure.

l. All electrical equipment to be used inside the tank must be in good repair and grounded.

m. Other people working in the immediate area will be informed of the work being done, and they must inform the watcher or supervisor immediately of any unusual occurrence which makes it necessary to evacuate the tank.

n. The Watcher or Standby Observer System must be implemented. It consists of the following:

(1). Workers inside a confined space must be under the constant observation of a fully instructed watcher.

(2). Before anyone enters the tank, the watcher will be instructed by the person in charge of the entry that an entry authorization must be obtained from the person in charge and a rescue harness or wristlets must be used on the job.

(3). The watcher must also know the location of the nearest telephone (with emergency numbers posted), eyewash and/or shower, fire extinguisher and oxygen inhalator. For all "hot work" inside a tank, the watcher must be instructed how to shut down the welding/burning equipment.

(4). As long as anyone is inside the vessel, the watcher must remain in continuous contact with the worker. HE IS NOT TO LEAVE THE JOB SITE EXCEPT TO REPORT AN EMERGENCY. He does not enter the tank until help is available.

(5). After being instructed in his responsibilities, the watcher will sign a form indicating his understanding.

o. All welding and burning equipment must be provided with a shutoff under the control of the watcher; and the watcher must be shown how to shut off the equipment if it becomes necessary. Welding and burning equipment will only be taken into a tank immediately prior to its use and must be removed from the tank immediately after the job is finished.

p. For all "hot work" inside a tank, a properly executed flame permit, if needed, must be displayed at the job site and standard welding and burning safety precautions will always be followed.

G.2.3 Removal of the Tank

To safely remove the tank :

a. Disconnect all appurtenant piping.

b. Disconnect all appurtenant pumping equipment.

c. The tanks and piping shall be removed and disposed of at a properly permitted landfill. The final rinsate must be sampled and analyzed for volatile organic compounds to determine the cleanliness of the tank and its piping. If any volatile organic compounds are present above detection limits, the washing and rinsing must be repeated until they are no longer detectable.

d. The dike will be cleaned and razed. It will be disposed of at a properly permitted landfill.

e. Sample and analyze for mineral spirits and TCLP contaminants (except pesticides) beneath the tankfarm. If any of the contaminants is present at greater than background levels, the situation will be confirmed with an extent of contamination soil study, and a modification will be made to this Permit to incorporate a remediation plan. The soil will be overexcavated or otherwise treated to eliminate the contamination. Soil samples will be collected and analyzed after cleanup to insure decontamination has been achieved.

f. Backfill the excavation with clean fill materials and grade to ground level.

G.3 DRUM STORAGE AREA IN WAREHOUSE

The drum storage area is used for the storage of drums of used immersion cleaner and dry cleaning waste. At closure, all the drums will be removed and transported to a reclaimer after proper packaging, labeling and manifesting. The contents of the drums will be reclaimed and the drums will be cleaned for reuse.

The concrete floor and spill containment sumps will be cleaned with a detergent solution and the final rinsate will be analyzed for volatile organic compounds, lead, chromium, and cadmium to determine the effectiveness of the cleaning. If lead, chromuim, cadmium, or any volatile organic compounds are present, the washing and rinsing must be repeated until they are no longer detectable or to levels agreed upon with the EID. If any cracks are present soil samples must be collected from beneath the cracks and analyzed for volatile organic compounds. If contamination is present, this Permit will be modified to incorporate a workplan to determine the extent of contamination and proper remedial action. Any other wastes generated in the closure process will be reclaimed or properly disposed of.

G.4 SOLVENT RETURN AND FILL STATION

The return and fill station is used to collect and return the used mineral spirits to the waste storage tank. Closure of the return and fill station will be made prior to the cleaning and removal of the storage tank. At closure, any sediment in the drum washer (or in any other parts of the tank system) will be removed and drummed, labeled, and manifested and then shipped to a reclaimer.

The drum washer and the dock area will be thoroughly rinsed with a detergent solution. The rinsate will be discharged through

the appurtenant piping system into the storage tank, which will be subjected to a separate closure procedure as described earlier. The final rinsate must be analyzed for lead, chromium, cadmium, and volatile organic compounds. If any are present above detection levels, the washing and rinsing must be repeated until they are no longer detectable. The clean drum washer and dock structure will be reused by Safety-Kleen or scrapped.

All rinsates or other residues generated during closure must be containerized and properly managed as hazardous wastes unless they have been analyzed and shown to be non-hazardous. They may not be disposed of on the land in any way unless they have been shown to meet the applicable treatment standards in HWMR-5, Pt. VIII (the Land Disposal Restrictions).

G.5 FACILITY CLOSURE SCHEDULE AND CERTIFICATION

Safety-Kleen will notify the Environmental Improvement Division (EID) at least 45 days in advance of known closure. Closure activities will begin within 30 days of receipt of the known last volume of hazardous waste. Within 90 days of receiving the known last volume of hazardous wastes, Safety-Kleen will remove all hazardous wastes from the site in accordance with the approved closure plan. The New Mexico Health and Environment Dept. may approve a longer period if Safety-Kleen demonstrates that the activities required to comply with this paragraph will, of necessity, take longer than 90 days to complete or if the following requirements are met:

a. the facility has the capacity to receive additional wastes;

b. there is a likelihood that a person other than Safety-Kleen will recommence operation of the site; and/or

c. closure of the facility is incompatible with continued operation of the site. In this case, Safety-Kleen will take all steps necessary to prevent threats to human health and the environment.

Safety-Kleen will complete closure activities in accordance with the approved closure plan and within 180 days after receiving the final volume of wastes.

When closure is completed, Safety-Kleen shall submit to the New Mexico Environmental Improvement Division certification, both by the operator and by an independent registered professional engineer, that the facility has been closed in accordance with the approved closure plan.

(See closure schedule table on following page)

CLOSURE SCHEDULE

Day	Activity to be completed by day indicated
-45	Notification of EID of intent to close
0	Receipt of last volume of hazardous waste
30	Closure activities must be in progress
90	All hazardous wastes must be removed from site
120	Decontamination complete for return and fill station
150	Decontamination complete for container storage building
180	Decontamination and all other closure activities complete for entire facility
240	Certification of closure received by EID

FARMINGTON, NEW MEXICO FACILITY
CLOSURE COST ESTIMATE

1. **TANK CLOSURE** - Open, remove contents of, clean, remove, and dispose of a 12,000-gallon aboveground storage tank.

Phase I - Remove Contents and Clean

1. Ship contents to a reclaimer.

Crew:	
2 Truck Dr. $17.56/hr. x 8 hrs. =	$ 281.28
2 Trucks $500 lump sum	500.00
Tank size = 12,000 gal. - 7,500 gal/truck = 2 trucks	
2 trucks x 300 miles x 1.75/mile =	1,050.00
Reclamation costs ($0.30/gal.)	3,600.00

2. Squeegie Clean Tank

Crew:	
1 Foreman $18.30/hr. x 24 hrs. =	439.20
1 Laborer ($17.00/hr. & $3.00/hr. hazard pay) x 24 hrs. =	480.00

3. Use of high pressure water for two days	800.00
4. Disposal and transportation of Wash Water (1,200 gallons @ $0.70/gallon) =	840.00
5. Transportation of wastewater 300 miles x $1.75/mile =	525.00
6. Test final rinsate (2 samples)	2,000.00
Total Phase I =	**$10,515.48**

Phase II - Remove and Dispose of Tank

1. Disconnect and Remove Appurtenant Equipment

Crew:	
1 Foreman $18.30/hr. x 8 hrs. =	$ 146.40
2 Laborers $17.00/hr. x 8 hrs. =	272.00

2. Torch Tank

Crew:

1 Foreman $18.30/hr. x 8 hrs. =		146.40
1 Laborer $17.00/hr. x 8 hrs.		136.00

3. Remove Tank

Crew:

1 Foreman	$18.30/hr. x 2 hrs. =	36.60
4 Laborers	$16.80/hr. x 2 hrs. =	134.40
1 Backhoe	$28.97/hr. x 2 hrs. =	57.94
Equipment	$200 Lump Sum =	200.00

Total Phase II = $1,130.00

Phase III - Concrete Demolition

1. Demolition of concrete pad	$ 750.00
2. Removal and disposal of concrete 200 cyd at $4.50/cyd	900.00

Total Phase III = $1,650.00

Phase IV - Backfilling, Regrading, Soil Testing

1. Test for soil contamination Collect and analyze 4 soil samples	$4,000.00

2. Regrading

Crew:

1 F.E. Loader	$27.38/hr. x 1 hr. =	27.38
Equipment	$200.00 lump sum =	200.00
Backfill	10 c.y. x $2.00 c.y. =	20.00

Total Phase IV = $4,247.00

Summary of Closure Cost for 12,000-gallon tank:

Phase I =	$10,515.00
Phase II =	1,130.00
Phase III =	1,650.00
Phase IV =	4,247.00
	$17,542.00

2. **CLOSURE OF DRUM STORAGE AREA** - Remove and return drums to a reclaimer, clean the drum storage areas, and dispose of wash water generated.

a.	2 Truck Dr. $17.56/hr. x 8 hrs.	$ 280.96
	2 Trucks - $ 500 lump sum	500.00
	Hauling: 2 loads x 300 miles x $1.75/mile =	1,050.00
b.	Clean drum storage areas	
	Crew:	
	1 Foreman $18.30/hr. x 10 hrs. =	183.00
	1 Laborer ($17.00/hr. & $3.00/hr. hazard pay) x 20 hrs. =	200.00
c.	Dispose of wash water 700 gallons x $0.70/gallon =	490.00
d.	Dispose of used solvents - 180 16-gallon drums x $30/drum =	5,400.00
e.	Testing rinsate for contamination 2 samples x $1,000.00 each	2,000.00
	Total Drum Storage Area Closure Cost =	**$ 13,074.00**

3. **CLOSURE OF RETURN AND FILL STATION** - Remove, package and dispose of sediment, clean the dumpster and dock area, remove dumpster and dock structure for reuse or scrap.

a.	1 Truck @ $250 lump sum each	$ 250.00
Hauling Cost =	300 miles x $1.75/mile	525.00
	1 Truck Dr. $17.56/hr. x 8 hrs.	140.48
	Crew:	
	1 Foreman $18.30/hr. x 8 hrs	146.40
	1 Laborer (17.00/hr. & $3.00/hr. hazard pay) x 8 hrs. =	160.00
b.	Clean Dumpster and Dock Areas	
	Crew:	
	1 Foreman $18.30/hr. x 8 hrs. =	146.40
	1 Laborer ($17.00/hr. & $3.00/hr. hazard pay) x 8 hrs. =	160.00
	Use of high pressure water for one day =	400.00

c. Disposal of wash water
200 gallons x $0.70/gallon = 140.00

d. Dispose of dumpster mud
15 55-gallon drums x $300/drum 4,500.00

e. Testing rinsate for contamination
2 samples x $1000 each = 2,000.00

f. Disassemble, and remove dumpsters and docks
Crew:
1 Foreman $18.30/hr. x 8 hrs. = 146.40
2 Laborers $17.00/hr. x 8 hrs. = 272.00
Equipment $ 5.20/hr. x 8 hrs. = 41.60

Total Dock Closure Cost = $9,028.00

4. **PE CERTIFICATION** = **$1,000.00**

5. **TOTAL CLOSURE COST:**

12,000-gallon tank =	$17,542.00
Drum storage area =	13,074.00
Return and fill station =	9,028.00
P.E. certification =	1,000.00
	$40,644.00

PERMIT ATTACHMENT H

PERMIT APPLICATION PART A

Please print or type with ELITE type (12 characters per inch) in the unshaded areas only

Form Approved. OMB No. 2050-0024 Expires [illegible]
GSA No. 0246-EPA-GT

For EPA Regional Use Only	EPA United States Environmental Protection Agency Washington, DC 20460	For State Use Only
Date Received Month Day Year	**Hazardous Waste Permit Application Part A** *(Read the Instructions before starting)*	

I. ID Number(s)

A. EPA ID Number	B. Secondary ID Number *(if applicable)*
NMD980698849	

II. Name of Facility

SAFETY-KLEEN CORP. (7-008-21)

III. Facility Location *(Physical address not P.O. Box or Route Number)*

A. Street: 4200A HAWKINS ROAD

Street *(continued)*:

City or Town	State	ZIP Code
FARMINGTON	NM	87409-

County Code *(if known)*	County Name
	SAN JUAN

B. Land Type	C. Geographic Location		D. Facility Existence Date
(enter code)	*LATITUDE (degrees, minutes, & seconds)*	*LONGITUDE (degrees, minutes, & seconds)*	Month Day Year
P	364420N	108141 1W	01011981

IV. Facility Mailing Address

Street or P.O. Box: 777 BIG TIMBER ROAD

City or Town	State	ZIP Code
ELGIN	IL	60123-

V. Facility Contact *(Person to be contacted regarding waste activities at facility)*

Name *(last)*	*(first)*
WACHSMUTH	ROBERT

Job Title	Phone Number *(area code and number)*
REG. ENV. ENGR.	708-697-8460

VI. Facility Contact Address *(See instructions)*

A. Contact Address Location	Mailing	B. Street or P.O. Box
	X	777 BIG TIMBER ROAD

City or Town	State	ZIP Code
ELGIN	IL	60123-

Please print or type with ELITE type (12 characters per inch) in the unshaded areas only

OSA No. 2246-EPA-07

EPA I.D. Number *(enter from page 1)*: NMD980698849

Secondary ID Number *(enter from page 1)*:

VII. Operator Information *(see instructions)*

Name of Operator: SAFETY-KLEEN CORP.

Street or P.O. Box: 777 BIG TIMBER ROAD

City or Town: ELGIN

State: IL

ZIP Code: 60123-

Phone Number *(area code and number)*: 708-697-8460

B. Operator Type: P

C. Change of Operator Indicator: Yes [ ] No [X]

Date Changed: Month / Day / Year

VIII. Facility Owner *(see instructions)*

A. Name of Facility's Legal Owner: COMET CORP.

Street or P.O. Box: 1215 BRENTWOOD

City or Town: FARMINGTON

State: NM

ZIP Code: 87401-

Phone Number *(area code and number)*: -

B. Owner Type: P

C. Change of Owner Indicator: Yes [ ] No [X]

Date Changed: Month / Day / Year

IX. SIC Codes *(4-digit, in order of significance)*

Primary		Secondary	
7389	(description) BUSINESS SERVICES, N.E.C.	5172	(description) PETROLEUM PRODUCT WHOLESALERS
Secondary		**Secondary**	
5084	(description) INDUSTRIAL MACHINERY & EQUIPMENT	5013	(description) AUTOMOTIVE PARTS & SUPPLIES

X. Other Environmental Permits *(see instructions)*

A. Permit Type *(enter code)*	B. Permit Number	C. Description

Please print or type with elite type. Characters beginning in the shaded areas of the

EPA I.D. Number (enter from page 1)	Secondary ID Number (enter from page 1)
NMD980698849	

XI. Nature of Business (provide a brief description)

THIS FACILITY INCLUDES A LOCAL SALES/SERVICE OFFICE AND ACCUMULATION/DISTRIBUTION WAREHOUSE AND TANKS FOR SPENT SOLVENTS AND ANTIFREEZE (WHICH ARE RECLAIMED BY SAFETY-KLEEN AT A DIFFERENT LOCATION) AND PRODUCTS (WHICH INCLUDE SMALL PARTS CLEANING EQUIPMENT, SOLVENTS, ANTIFREEZE, HAND CLEANER, FLOOR SOAP AND OTHER ALLIED PRODUCTS). SAFETY-KLEEN COLLECTS THE SPENT SOLVENT AND ANTIFREEZE FROM ITS CUSTOMERS ON A PERIODIC BASIS AND ACCUMULATES IT, EITHER IN A STORAGE TANK OR IN A CONTAINER STORAGE AREA. THE MAJORITY OF SAFETY-KLEEN'S CUSTOMERS ARE CONDITIONALLY EXEMPT SMALL QUANTITY GENERATORS. ONCE A SUFFICIENT QUANTITY OF SPENT MATERIAL IS COLLECTED, A TANKER TRUCK OR BOX TRAILER TRUCK IS DISPATCHED FROM A SAFETY-KLEEN RECLAMATION FACILITY TO COLLECT THE WASTE AND BRING IT TO THE RECLAMATION FACIILTY FOR ITS MANAGEMENT.

XII. Process - Codes and Design Capacities

A. **PROCESS CODE** - *Enter the code from the list of process codes below that best describes each process to be used at the facility. Twelve lines are provided for entering codes. If more lines are needed, attach a separate sheet of paper with the additional information. If a process will be used that is not included in the list of codes below, then describe the process (including its design capacity) in the space provided in item XIII.*

B. **PROCESS DESIGN CAPACITY** - *For each code entered in column A, enter the capacity of the process.*

1. **AMOUNT** -*Enter the amount. In a case where design capacity is not applicable (such as in a closure/post-closure or enforcement action) enter the total amount of waste for that process unit.*
2. **UNIT OF MEASURE** - *For each amount entered in column B(1), enter the code from the list of unit measure codes below that describes the unit of measure used. Only the units of measure that are listed below should be used.*

C. **PROCESS TOTAL NUMBER OF UNITS** - *Enter the total number of units used with the corresponding process code.*

PROCESS CODE	PROCESS	APPROPRIATE UNITS OF MEASURE FOR PROCESS DESIGN CAPACITY
	DISPOSAL:	
D79	INJECTION WELL	GALLONS; LITERS; GALLONS PER DAY; OR LITERS PER DAY
D80	LANDFILL	ACRE-FEET OR HECTARE-METER
D81	LAND APPLICATION	ACRES OR HECTARES
D82	OCEAN DISPOSAL	GALLONS PER DAY OR LITERS PER DAY
D83	SURFACE IMPOUNDMENT	GALLONS OR LITERS
	STORAGE:	
S01	CONTAINER (barrel, drum, etc.)	GALLONS OR LITERS
S02	TANK	GALLONS OR LITERS
S03	WASTE PILE	CUBIC YARDS OR CUBIC METERS
S04	SURFACE IMPOUNDMENT	GALLONS OR LITERS
	TREATMENT:	
T01	TANK	GALLONS PER DAY OR LITERS PER DAY
T02	SURFACE IMPOUNDMENT	GALLONS PER DAY OR LITERS PER DAY
T03	INCINERATOR	SHORT TONS PER HOUR; METRIC TONS PER HOUR; GALLONS PER HOUR; LITERS PER HOUR; OR BTU'S PER HOUR
T04	OTHER TREATMENT (Use for physical, chemical, thermal or biolgical treatment processes not occurring in tanks, surface impoundment or incinerators. Describe the processes in the space provided in item XIII.)	GALLONS PER DAY; LITERS PER DAY; POUNDS PER HOUR; SHORT TONS PER HOUR; KILOGRAMS PER HOUR; METRIC TONS PER DAY; METRIC TONS PER HOUR; OR SHORT TONS PER DAY

UNIT OF MEASURE	UNIT OF MEASURE CODE
GALLONS	G
GALLONS PER HOUR	E
GALLONS PER DAY	U
LITERS	L
LITERS PER HOUR	H
LITERS PER DAY	V
SHORT TONS PER HOUR	D
METRIC TONS PER HOUR	W
SHORT TONS PER DAY	N
METRIC TONS PER DAY	S
POUNDS PER HOUR	J
KILOGRAMS PER HOUR	R
CUBIC YARDS	Y
CUBIC METERS	C
ACRES	B
ACRE-FEET	A
HECTARES	Q
HECTARE-METER	F
BTU's PER HOUR	K

Please print or type with ELITE type (12 characters per inch) in the unshaded areas only

EPA I.D. Number (enter from page 1)	Secondary ID Number (enter from page 1)
NMD980698849	

XII. Process - Codes and Design Capacities (continued)

EXAMPLE FOR COMPLETING ITEM XII (shown in line numbers X-1 and X-2 below): A facility has two storage tanks, one tank can hold 200 gallons and the other can hold 400 gallons. The facility also has an incinerator that can burn up to 20 gallons per hour.

Line Number	A. PROCESS CODE (from list above)	B. PROCESS DESIGN CAPACITY 1. AMOUNT (specify)	B. 2. UNIT OF MEASURE (enter code)	C. PROCESS TOTAL NUMBER OF UNITS	FOR OFFICIAL USE ONLY
X 1	S 0 2	600	G	0 0 2	
X 2	T 0 3	20	E	0 0 1	
1	S 0 1	4,464	G	0 0 1	
2	S 0 2	12,000	G	0 0 1	
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					

NOTE: If you need to list more than 12 process codes, attach an additional sheet(s) with the information in the same format as above. Number the lines sequentially, taking into account any lines that will be used for additional treatment processes in Item XIII.

XIII. Additional Treatment Processes (follow instructions from Item XII)

Line Number (enter numbers in sequence with Item XII)	A. PROCESS CODE	B. TREATMENT PROCESS DESIGN CAPACITY 1. AMOUNT (specify)	B. 2. UNIT OF MEASURE (enter code)	C. PROCESS TOTAL NUMBER OF UNITS	D. DESCRIPTION OF PROCESS
	T 0 4				
	T 0 4				
	T 0 4				
	T 0 4				

Please print or type with ELITE type (12 characters per inch) in the unshaded areas only

Form Approved. OMB No. 2050-0039
GSA No. 0246-EPA-DT

EPA I.D. Number (enter from page 1)	Secondary ID Number (enter from page 1)
NMD980698849	

XIV. Description of Hazardous Wastes

A. EPA HAZARDOUS WASTE NUMBER - *Enter the four-digit number from 40 CFR, Part 261 Subpart D of each listed hazardous waste you will handle. For hazardous wastes which are not listed in 40 CFR, Part 261 Subpart D, enter the four-digit number(s) from 40 CFR, Part 261 Subpart C that describes the characteristics and/or the toxic contaminants of those hazardous wastes.*

B. ESTIMATED ANNUAL QUANTITY - *For each listed waste entered in column A estimate the quantity of that waste that will be handled on an annual basis. For each characteristic or toxic contaminant entered in column A estimate the total annual quantity of all the non-listed waste(s) that will be handled which possess that characteristic or contaminant.*

C. UNIT OF MEASURE - *For each quantity entered in column B enter the unit of measure code. Units of measure which must be used and the appropriate codes are:*

ENGLISH UNIT OF MEASURE	CODE	METRIC UNIT OF MEASURE	CODE
POUNDS	P	KILOGRAMS	K
TONS	T	METRIC TONS	M

If facility records use any other unit of measure for quantity, the units of measure must be converted into one of the required units of measure taking into account the appropriate density or specific gravity of the waste.

D. PROCESSES

1. **PROCESS CODES:**

For listed hazardous waste: For each listed hazardous waste entered in column A select the code(s) from the list of process codes contained in Item XII A. on page 3 to indicate how the waste will be stored, treated, and/or disposed of at the facility.

For non-listed hazardous waste: For each characteristic or toxic contaminant entered in column A, select the code(s) from the list of process codes contained in Item XII A. on page 3 to indicate all the processes that will be used to store, treat, and/or dispose of all the non-listed hazardous wastes that processes that characteristic or toxic contaminant.

NOTE: THREE SPACES ARE PROVIDED FOR ENTERING PROCESS CODES. IF MORE ARE NEEDED:

1. *Enter the first two as described above.*
2. *Enter "000" in the extreme right box of Item XIV-D(1).*
3. *Enter in the space provided on page 7, Item XIV-E, the line number and the additional code(s).*

2. **PROCESS DESCRIPTION:** *If a code is not listed for a process that will be used, describe the process in the space provided on the form (D.(2)).*

NOTE: HAZARDOUS WASTES DESCRIBED BY MORE THAN ONE EPA HAZARDOUS WASTE NUMBER - Hazardous wastes that can be described by more than one EPA Hazardous Waste Number shall be described on the form as follows:

1. *Select one of the EPA Hazardous Waste Numbers and enter it in column A. On the same line complete columns B, C, and D by estimating the total annual quantity of the waste and describing all the processes to be used to treat, store, and/or dispose of the waste.*
2. *In column A of the next line enter the other EPA Hazardous Waste Number that can be used to describe the waste. In column D(2) on that line enter "Included with above" and make no other entries on that line.*
3. *Repeat step 2 for each EPA Hazardous Waste Number that can be used to describe the hazardous waste.*

EXAMPLE FOR COMPLETING ITEM XIV (shown in line numbers X-1, X-2, X-3, and X-4 below) - A facility will treat and dispose of an estimated 900 pounds per year of chrome shavings from leather tanning and finishing operation. In addition, the facility will treat and dispose of three non-listed wastes. Two wastes are corrosive only and there will be an estimated 200 pounds per year of each waste. The other waste is corrosive and ignitable and there will be an estimated 100 pounds per year of that waste. Treatment will be in an incinerator and disposal will be in a landfill.

Line Number		A. EPA HAZARD WASTE NO. (enter code)				B. ESTIMATED ANNUAL QUANTITY OF WASTE	C. UNIT OF MEASURE (enter code)	D. PROCESS (1) PROCESS CODES (enter)									D. PROCESS (2) PROCESS DESCRIPTION (If a code is not entered in D(1))
X	1	K	0	5	4	900	P	T	0	3	D	8	0				
X	2	D	0	0	2	400	P	T	0	3	D	8	0				
X	3	D	0	0	1	100	P	T	0	3	D	8	0				
X	4	D	0	0	2												Included With Above

Please print or type with ELITE type (12 characters per inch) in the unshaded areas only

EPA I.D. Number (enter from page 1)	Secondary ID Number (enter from page 1)
NMD980698849	

XIV. Description of Hazardous Wastes (continued)

Line Number	A. EPA HAZARDOUS WASTE NO. (enter code)	B. ESTIMATED ANNUAL QUANTITY OF WASTE	C. UNIT OF MEASURE (enter code)	D. PROCESSES (1) PROCESS CODES (enter)	D. PROCESSES (2) PROCESS DESCRIPTION (If a code is not entered in D(1))
1	D001	5,180	T	S01 S02	
2	D004				INCLUDED WITH ABOVE
3	D005				INCLUDED WITH ABOVE
4	D006				INCLUDED WITH ABOVE
5	D007				INCLUDED WITH ABOVE
6	D008				INCLUDED WITH ABOVE
7	D009				INCLUDED WITH ABOVE
8	D010				INCLUDED WITH ABOVE
9	D011				INCLUDED WITH ABOVE
10	D018				INCLUDED WITH ABOVE
11	D019				INCLUDED WITH ABOVE
12	D021				INCLUDED WITH ABOVE
13	D022				INCLUDED WITH ABOVE
14	D023				INCLUDED WITH ABOVE
15	D024				INCLUDED WITH ABOVE
16	D025				INCLUDED WITH ABOVE
17	D026				INCLUDED WITH ABOVE
18	D027				INCLUDED WITH ABOVE
19	D028				INCLUDED WITH ABOVE
20	D029				INCLUDED WITH ABOVE
21	D030				INCLUDED WITH ABOVE
22	D032				INCLUDED WITH ABOVE
23	D033				INCLUDED WITH ABOVE
24	D034				INCLUDED WITH ABOVE
25	D035				INCLUDED WITH ABOVE
26	D036				INCLUDED WITH ABOVE
27	D037				INCLUDED WITH ABOVE
28	D038				INCLUDED WITH ABOVE
29	D039				INCLUDED WITH ABOVE
30	D040				INCLUDED WITH ABOVE
31	D041				INCLUDED WITH ABOVE
32	D042				INCLUDED WITH ABOVE
33	D043				INCLUDED WITH ABOVE

Please print or type with ELITE type (12 characters per inch) in the unshaded areas only

EPA I.D. Number (enter from page 1): MD980698849

Secondary ID Number (enter from page 1):

XIV. Description of Hazardous Wastes (continued)

Line Number	A. EPA HAZARDOUS WASTE NO. (enter code)	B. ESTIMATED ANNUAL QUANTITY OF WASTE	C. UNIT OF MEASURE (enter code)	D. PROCESSES (1) PROCESS CODES (enter)	D. PROCESSES (2) PROCESS DESCRIPTION (If a code is not entered in D(1))
1	F002	28	T	S01	
2	~~F003~~		~~T~~	~~S01~~	
3	~~F005~~				~~INCLUDED WITH ABOVE~~
4	F002	13	T	S01	
5	F004				INCLUDED WITH ABOVE
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					
31					
32					
33					

Please print or type with ELITE type (12 characters per inch) in the unshaded areas only

Form Approved. OMB No. 2050-0034 Expires 10-31-88

EPA I.D. Number (enter from page 1)	Secondary ID Number (enter from page 1)
NMD980698849	

XIV. Description of Hazardous Waste (continued)

E. USE THIS SPACE TO LIST ADDITIONAL PROCESS CODES FROM ITEM D(1) ON PAGE 6.

Line Number	Additional Process Codes (enter)

XV. Map

Attach to this application a topographic map of the area extending to at least one mile beyond property boundaries. The map must show the outline of the facility, the location of each of its existing and proposed intake and discharge structures, each of its hazardous waste treatment, storage, or disposal facilities, and each well where it injects fluids underground. Include all springs, rivers and other surface water bodies in this map area. See instructions for precise requirements.

XVI. Facility Drawing

All existing facilities must include a scale drawing of the facility (see instructions for more detail).

XVII. Photographs

All existing facilities must include photographs (aerial or ground-level) that clearly delineate all existing structures; existing storage, treatment and disposal areas; and sites of future storage, treatment or disposal areas (see instructions for more detail).

XVIII. Certification(s)

I certify under penalty of law that I have personally examined and am familiar with the information submitted in this and all attached documents, and that based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

Owner Signature	Date Signed

Name and Official Title (type or print)
COMET CORP.

Operator Signature	Date Signed
SCOTT E. FORE	9 13 90

Name and Official Title (type or print)
SCOTT E. FORE - VICE PRESIDENT, ENVIRONMENT, HEALTH AND SAFETY

XIX. Comments

The "F" waste streams listed on lines 1 and 4 on page 2 of 2 of Section XIV are also toxic characteristic. The waste codes listed on lines 2 through and including 33 on page 1 of 2 of Section XIV also apply to these wastes.

Submit completed form to the appropriate EPA Regional or State Office. (refer to instructions for more information)

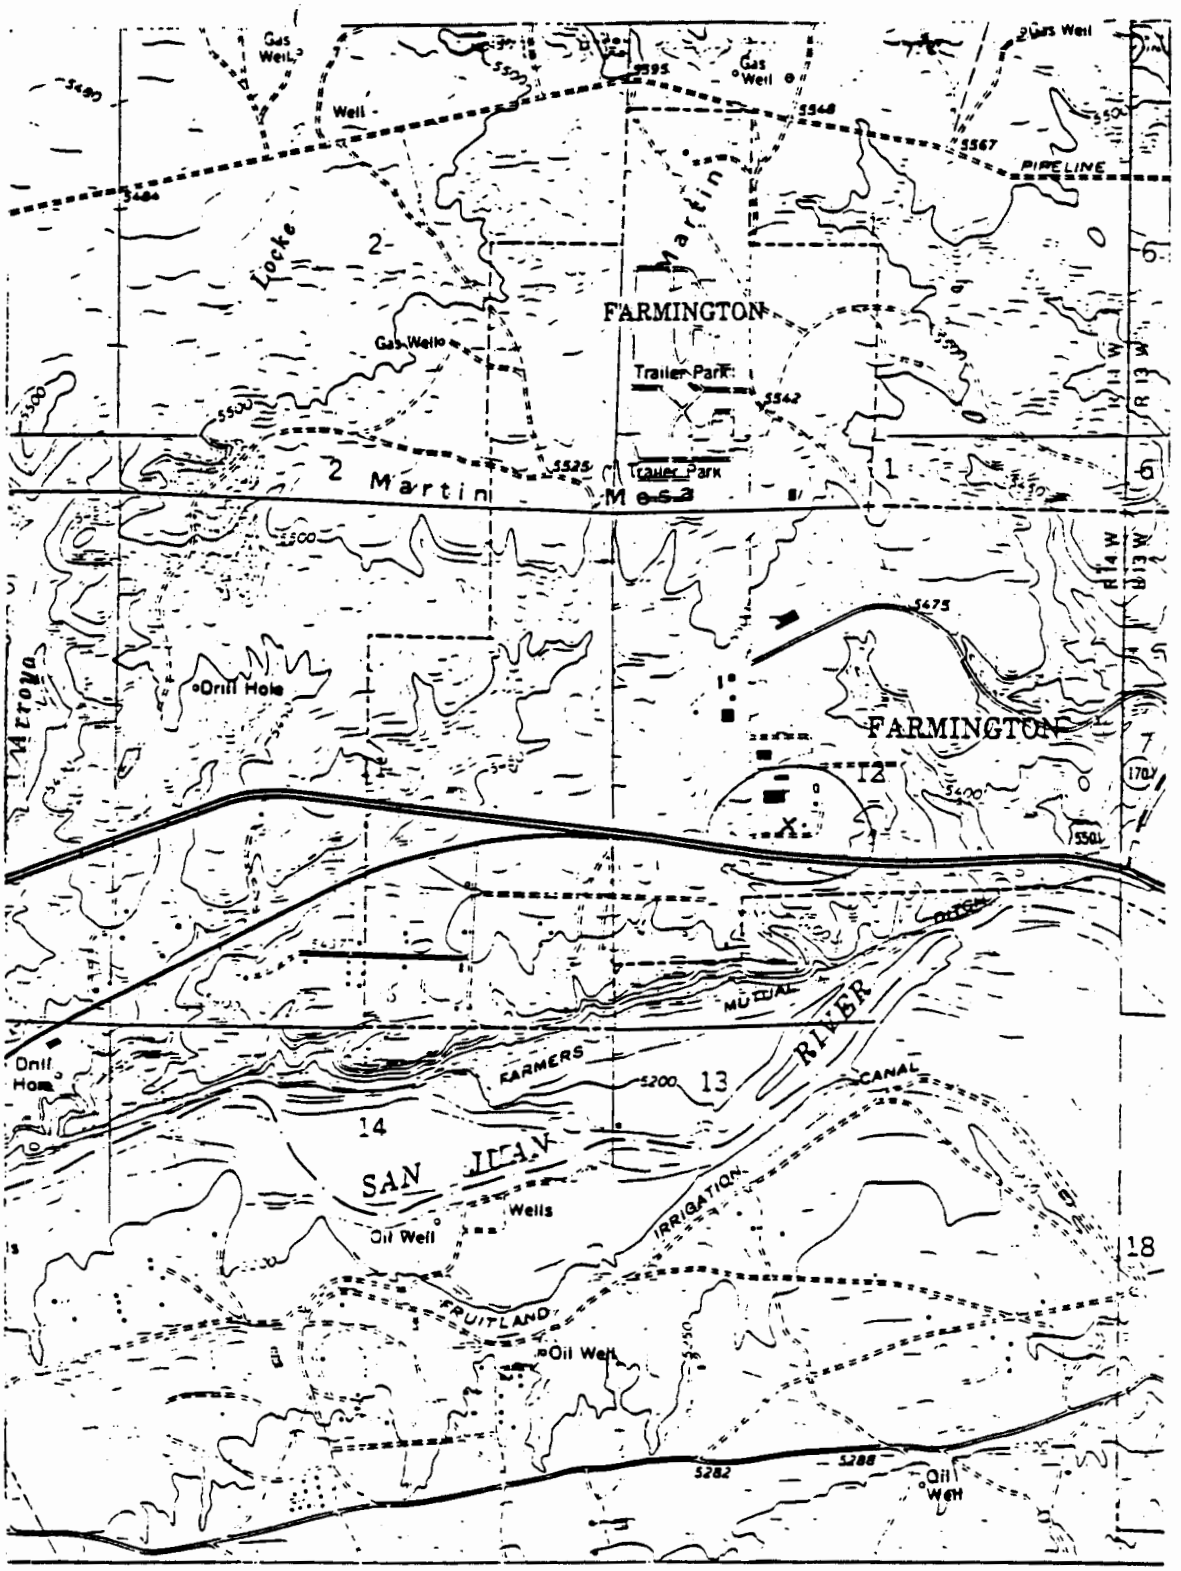

SCALE 1:24 000

1 ½ 0 1 MILE

1000 0 1000 2000 3000 4000 5000 6000 7000 FEET

1 .5 0 1 KILOMETER

CONTOUR INTERVAL 10 FEET
NATIONAL GEODETIC VERTICAL DATUM OF 1929

GN MN
1°36' 29 MILS
13° 231 MILS

YOUNGS LAKE QUADRANGLE
NEW MEXICO-SAN JUAN CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)

1963
PHOTOREVISED 1979
DMA 4357 IV SE-SERIES V881

KIRTLAND QUADRANGLE
NEW MEXICO-SAN JUAN CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)

1966
PHOTOREVISED 1979
DMA 4357 III NE-SERIES V881

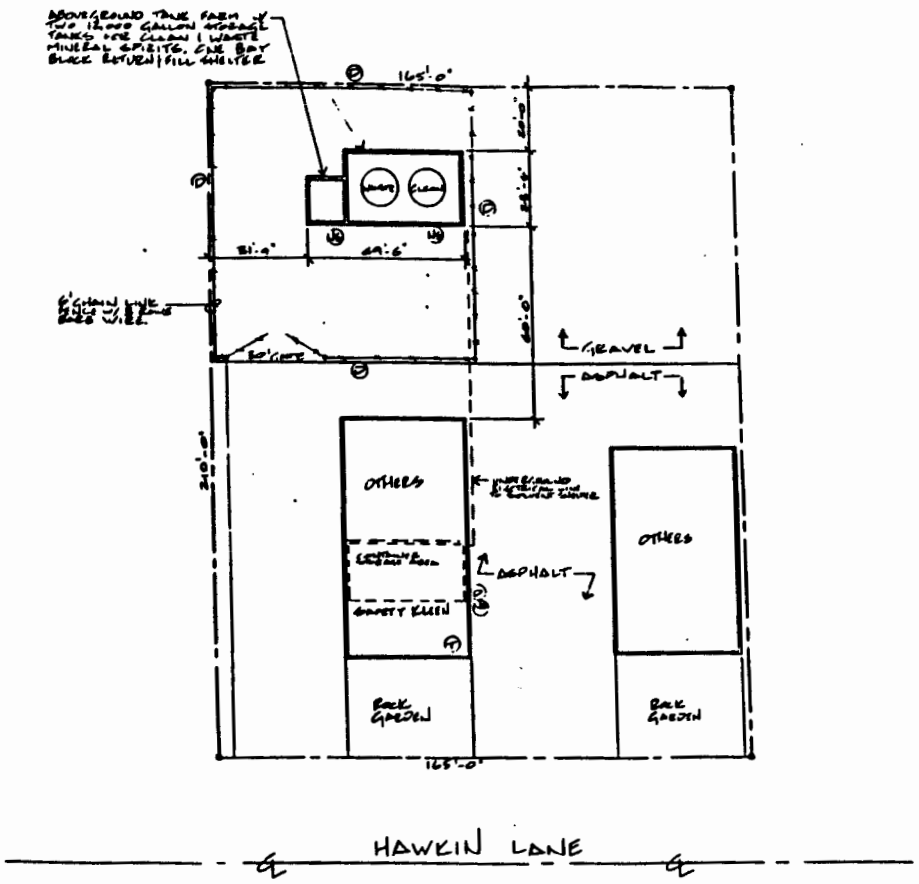

SITE PLAN

SCALE 1" = 20'

LEGEND:

- TELEPHONE
- FIRE DISTRIBUTOR (TYPICAL 5" SEE CLA
- FIRE AID STATION
- "BUMPER" SIGN
- "NO SMOKING" SIGN
- "CAUTION" SIGN

NEW — EXISTING

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO SAFETY-KLEEN CORP. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED EXCEPT BY SAFETY-KLEEN OR AS SAFETY-KLEEN MAY AGREE IN WRITING

1	REVISED INFO	KEY			10/89	1"=20'	KEY		1/9/87

SITE PLAN
4200 HAWKIN LANE

SAFETY-KLEEN CORP.

FARMINGTON, N.M.

7-000-21

D13712

1

PERMIT ATTACHMENT I

NEW MEXICO HAZARDOUS WASTE MANAGEMENT REGULATIONS (HWMR-6)

(SOME COPIES CONTAIN 40 CFR, PARTS 260-271)
(REVISION OF JULY 1, 1990)

FILED WITH
STATE RECORDS CENTER
FEB 11 AM 11:57

ENVIRONMENTAL IMPROVEMENT BOARD
1190 ST. FRANCIS DRIVE
SANTA FE, NEW MEXICO 87503

EIB/HWMR-6

HAZARDOUS WASTE MANAGEMENT REGULATIONS

PART I-HAZARDOUS WASTE MANAGEMENT SYSTEM - GENERAL

101. ADOPTION OF 40 CFR PART 260. Except as otherwise provided, the regulations of the United States Environmental Protection Agency set forth in 40 CFR Part 260, through July 1, 1990, are hereby incorporated as Part I of the New Mexico Hazardous Waste Management Regulations.

102. MODIFICATIONS AND EXCEPTIONS. The following modifications and exceptions are made to the incorporated federal regulations:

A. The following terms defined in 40 CFR Section 260.10 have the meanings set forth herein, in lieu of the meanings set forth in 40 CFR Section 260.10:

1. "Administrator" or "Regional Administrator" means the Director of the Environmental Improvement Division of the New Mexico Health and Environment Department, or his designee.

B. The following terms not defined in 40 CFR Section 260.10 have the meanings set forth herein:

1. "Act" or "RCRA" ("Resource Conservation Recovery Act" as amended) means the Hazardous Waste Act, Sections 74-4-1 through 74-4-13 NMSA 1978;

2. "Appropriate act or regulation" means the Hazardous Waste Act or the New Mexico Hazardous Waste Management Regulations, HWMR-6;

3. "Board" means the Environmental Improvement Board;

4. "CFR" means the Code of Federal Regulations;

5. "Division" means the Environmental Improvement Division of the New Mexico Health and Environment Department;

FILED WITH
STATE RECORDS CENTER
FEB 11 AM 11:57

6. "Environmental Protection Agency" or "EPA" shall be construed to mean the Environmental Improvement Division of the Health and Environmental Department except when used in the phrases "EPA hazardous waste number" and "EPA identification number", and in the definitions set forth in 40 CFR Section 260.10;

7. "Freedom of Information Act" or "FOIA" means Sections 14-2-1 through 14-2-3, 14-3A-1 through 14-3A-2, and 74-4-4.3.D NMSA 1978;

8. "Hazardous substance incident" means any emergency incident involving a chemical or chemicals, including but not limited to transportation wrecks, accidental spills or leaks, fires, or explosions, which incident creates the reasonable probability of injury to human health or property; and

9. "Subtitle C of RCRA" means the New Mexico Hazardous Waste Act, Sections 74-4-1 to 74-4-13 NMSA 1978.

C. The following provisions of 40 CFR Part 260 are omitted from Part 1 of these regulations:

1. Section 260.1(b)(6);

2. Section 260.22;

3. Section 260.30;

4. Section 260.31;

5. Section 260.32; and

6. Section 260.33.

D. Wherever there is any requirement in any of the federal regulations incorporated into these regulations to report an emergency situation, the requirement shall be construed to mean that the party required to report shall report the incident to the Division via the New Mexico 24-hour emergency response number, (505) 827-9329.

PART II - IDENTIFICATION AND LISTING OF HAZARDOUS WASTE

201. ADOPTION OF 40 CFR PART 261. The regulations of the United States Environmental Protection Agency set forth in 40 CFR Part 261, through July 1, 1990, are hereby incorporated as Part II of the New Mexico Hazardous Waste Management Regulations.

FILED WITH
STATE RECORDS CENTER
FEB 11 AM 11:58

PART III - STANDARDS APPLICABLE TO GENERATORS OF HAZARDOUS WASTE

301. ADOPTION OF 40 CFR PART 262. The regulations of the United States Environmental Protection Agency set forth in 40 CFR Part 262, through July 1, 1990, are hereby incorporated as Part III of the New Mexico Hazardous Waste Management Regulations.

PART IV - STANDARDS APPLICABLE TO TRANSPORTERS OF HAZARDOUS WASTE

401. ADOPTION OF 40 CFR PART 263. Except as otherwise provided, the regulations of the United States Environmental Protection Agency set forth in 40 CFR Part 263, through July 1, 1990, are hereby incorporated as Part IV of the New Mexico Hazardous Waste Management Regulations.

402. OMISSIONS. The following provisions of 40 CFR Part 263 are omitted from Part III of these regulations:

A. Section 263.20(e).

PART V - STANDARDS FOR OWNERS AND OPERATORS OF HAZARDOUS WASTE TREATMENT STORAGE, AND DISPOSAL FACILITIES

501. ADOPTION OF 40 CFR PART 264. Except as otherwise provided, the regulations of the United States Environmental Protection Agency set forth in 40 CFR Part 264, through July 1, 1990, are hereby incorporated as Part V of the New Mexico Hazardous Waste Management Regulations.

502. OMISSIONS. The following provisions of 40 CFR Part 264 are omitted from Part V of these regulations:

A. Section 264.149; and

B. Section 264.150.

PART VI - INTERIM STATUS STANDARDS FOR OWNERS AND OPERATORS OF HAZARDOUS WASTE TREATMENT STORAGE, and DISPOSAL FACILITIES

601. ADOPTION OF 40 CFR PART 265. Except as otherwise provided, the regulations of the United States Environmental Protection Agency set forth in 40 CFR Part 265 through July 1, 1990 are hereby

FILED WITH
STATE RECORDS CENTER
1991 FEB 11 AM 11:58

incorporated as Part VI of the New Mexico Hazardous Waste Regulations.

602. OMISSIONS. The following provisions of 40 CFR Part 265 are omitted from Part VI of these regulations.

A. Section 265.149; and

B. Section 265.150.

PART VII - STANDARDS FOR THE MANAGEMENT OF SPECIFIC HAZARDOUS WASTES AND SPECIFIC TYPES OF HAZARDOUS WASTE MANAGEMENT FACILITIES

701. ADOPTION OF 40 CFR PART 266. The regulations of the United States Environmental Protection Agency set forth in 40 CFR Part 266, through July 1, 1990, are hereby incorporated as Part VII of the New Mexico Hazardous Waste Management Regulations.

PART VIII - LAND DISPOSAL RESTRICTIONS

801. ADOPTION OF 40 CFR PART 268. The regulations of the United States Environmental Protection Agency set forth in 40 CFR Part 268 through July 1, 1990, are hereby incorporated as Part VIII of the New Mexico Hazardous Waste Management Regulations.

PART IX - THE HAZARDOUS WASTE PERMIT PROGRAM

901. ADOPTION OF 40 CFR PART 270. The regulations of the United States Environmental Protection Agency set forth in 40 CFR Part 270, through July 1, 1990, are hereby incorporated in Part IX of the New Mexico Hazardous Waste Management Regulations.

902. PERMITTING PROCEDURES.

A. Permit Issuance or Denial.

1. Once an application is complete, the Director shall prepare and issue either a Draft Permit or a Notice of Intent to Deny.

a. A Draft Permit shall contain all conditions, compliance schedules, monitoring requirements and technical standards for treatment, storage, and/or disposal provided for in 40 CFR Part 270.

FILED WITH
STATE RECORDS CENTER
2001 FEB 11 AM 11:58

b. A Notice of Intent to Deny shall state the Director's reasons for the intended denial.

2. Any Draft Permit or Notice of Intent to Deny prepared by the Division under Section 902.A.1 of these regulations shall be accompanied by a fact sheet and shall be based on the administrative file. Copies of the fact sheet shall be sent to the applicant; to any state or federal agency, as applicable; and, on request, to any other person.

3. The Director shall give public notice that a Draft Permit or a Notice of Intent to Deny has been prepared, and shall allow forty-five (45) days for review and public comment, including requests for public hearing.

4. If the Director issues a Draft Permit, and a timely written notice of opposition to the Draft Permit and a request for a public hearing is received, the Division, acting in conjunction with the applicant, will respond to the request in an attempt to resolve the issues giving rise to the opposition. If such issues are resolved to the satisfaction of the opponent, the opponent may withdraw the request for a public hearing.

5. No ruling shall be made on permit issuance or denial without an opportunity for a public hearing, at which all interested persons shall be given a reasonable chance to submit significant data, views or arguments orally or in writing and to examine witnesses testifying at the public hearing. A public hearing shall be scheduled if:

a. the Director issues a Notice of Intent to Deny, and a timely request for public hearing is received from the applicant;

b. the Director issues a Draft Permit, a timely request for public hearing is received from any person opposed to the granting of a permit, and such person does not subsequently withdraw the request pursuant to Section 902.A.4 of these regulations; or

c. the Director determines, no later than five (5) days following the end of the comment period specified in Section 902.A.3, that a public hearing should be held notwithstanding the absence of a timely request for a public hearing.

6. The comment period specified in Section 902.A.3 shall automatically be extended to the close of any public hearing.

FILED WITH
STATE RECORDS CENTER
1991 FEB 11 AM 11:58

7. The Director shall give due consideration and the weight he deems appropriate to all comments received during a public comment period and to all relevant facts and circumstances presented at any public hearing.

8. When ruling on permit issuance or denial, the Director may disapprove in whole or in part, or make reasonable conditions to any permit, if it appears that the permit applied for will not meet the requirements of these regulations.

9. At the time that any final permit decision is issued, the Director shall issue a response to comments. This response shall:

a. specify which provisions, if any, of the draft permit have been changed in the final permit decision, and the reasons for the change;

b. briefly describe and respond to all significant comments on the draft permit or the permit application raised during the public comment period, or during any hearing; and

c. be available to the public.

10. A final permit decision shall become effective thirty (30) days after notice of the decision has been served on the applicant, or such later time as the Director may specify. This provision shall not be construed to extend the time for appeal of a permit decision as provided by the Hazardous Waste Act.

11. The approval of a permit does not relieve any person from the responsibility of complying with applicable state or federal laws and regulations.

12. The Director shall notify the applicant by certified mail of any impending permit action and of any scheduled public hearing date.

B. Permit Modification, Suspension and Revocation.

1. The Director may modify, suspend, or revoke a permit issued pursuant to Section 902.B of these regulations for cause set forth in 40 CFR Part 270.

2. The Director may modify, suspend, revoke or terminate a permit upon his initiative, or if, after the Division's investigation of the facts and circumstances, pursuant to the request of any interested person, such permit action is deemed warranted.

FILED WITH
STATE RECORDS CENTER
FEB 11 AM 11:58

3. All requests for permit modification, suspension, revocation or termination shall be in writing and shall contain facts or reasons supporting the request.

4. If the Director decides that the request is not justified, the permittee will be notified in writing explaining the reason for denial. Denials of request for modification, revocation and reissuance, or termination are not subject to public notice, comment, or hearings.

5. If the Director tentatively decides to modify or revoke and reissue a permit under 40 CFR Section 270.41 or 40 CFR Section 270.42, a draft permit shall be prepared incorporating the proposed changes. The Director may request additional information and, in the case of a modified permit, may require the submission of an updated application. In the case of a revoked and reissued permit the Director shall require the submission of a new application.

6. In a permit modification under this section, only those conditions to be modified shall be considered when a new draft permit is prepared. All other aspects of the existing permit shall remain in effect for the duration of the unmodified permit. When a permit is revoked and reissued under this section, the entire permit is reopened just as if the permit had expired and were being reissued. During any revocation and reissuance proceeding the permittee shall comply with all conditions of the existing permit until a new final permit is reissued.

7. If the Director tentatively decides to terminate a permit under 40 CFR Section 270.43, a notice of intent to terminate shall be issued. A notice of intent to terminate is a type of draft permit which follows the same procedures as any draft permit under Section 902.A.

C. Public Notices.

1. Public notice of issuance of a Draft Permit or a Notice of Intent to Deny, and of any public hearing scheduled, shall be given by publication of a notice in a newspaper of general circulation in the area affected, broadcasts over local radio stations and by mailing a copy of the notice to the permit applicant, those individuals on the Division's mailing list of persons interested in hazardous waste permit actions, and to any units of local, state and federal government as may be applicable.

2. All public notices issued shall contain the following minimum information:

FILED WITH
STATE RECORDS CENTER
FEB 11 AM 11:58

a. The subject, the time and place of any scheduled hearing and the manner in which interested persons may present their views;

b. A brief description of the procedures by which requests for hearings may be made, unless already scheduled;

c. The name and address of the office processing the permit action for which notice is being given;

d. The name and address of the permittee or permit applicant, and, if different, of the facility or activity regulated by the permit;

e. A brief description of the business conducted at the facility or activity described in the permit application or the draft permit;

f. The name, address and telephone number of a person from whom interested persons may obtain further information; and

g. In addition, public notice of a scheduled public hearing shall also contain references to the dates of previous public notices relating to the permit.

D. Fact Sheet.

1. A fact sheet shall be prepared for every draft permit for a Hazardous Waste Management facility or activity. The fact sheet shall briefly set forth the principal facts and the significant factual legal, methodological and policy questions considered in preparing the draft permit.

2. The fact sheet shall include, when applicable:

a. A brief description of the type of facility or activity which is the subject of the draft permit;

b. The type and quantity of wastes which are proposed to be or are being treated, stored, disposed of, injected, emitted, or discharged.

c. A brief summary of the basis for the draft permit conditions including references to applicable statutory or regulatory provisions.

d. Reasons why any requested variance or alternative to require standards do or do not appear justified.

FILED WITH
STATE RECORDS CENTER
FEB 11 AM 11:58

e. A description of the procedures for reaching a final decision on the draft permit including:

(1) The beginning and ending dates of the comment period and the address where comments will be received;

(2) Procedures for requesting a hearing and the nature of that hearing; and

(3) Any other procedures by which the public may participate in the final decision.

f. Name and telephone number of a person to contact for additional information.

3. The fact sheet shall be available at the time the public notice is published.

E. Hearings.

1. Public notice of any public hearing shall be given at least thirty (30) days prior to the scheduled date of the hearing.

2. Hearings shall be held in Santa Fe or within any area of the state substantially affected by the proceedings as specified by the Director.

3. The Director may designate a hearing officer to take evidence at the hearing.

4. All hearings shall be recorded by a certified court reporter. A transcript will be furnished to all persons for review at the Division's main office. Costs of a copy of a transcript will be borne by those requesting such copies.

5. In hearings, the rules of civil procedures and the technical rules of evidence shall not apply, but the hearings shall be conducted so that all relevant views, arguments, and testimony are amply and fairly received without undue repetition.

a. Testimony for hearings on permit issuance or modification shall be presented in the following order:

(1) testimony by the applicant (such testimony is a prerequisite to the granting of the requested permit or modification);

FILED WITH
STATE RECORDS CENTER
1991 FEB 11 AM 11:58

(2) testimony by other persons (except the Division) supporting issuance or modification of the permit, in any reasonable order;

(3) testimony by persons (except the Division) opposed to issuance or modification of the permit, in any reasonable order;

(4) testimony by the Division; and

(5) rebuttal testimony, as appropriate.

b. Testimony for hearings on permit suspension or revocation shall be as follows:

(1) testimony by the Division;

(2) testimony by other persons supporting suspension or revocation of the permit, in any reasonable order;

(3) testimony by the permittee;

(4) testimony by other persons opposed to suspension or revocation of the permit, in any reasonable order; and

(5) rebuttal testimony, as appropriate.

c. In all hearings, cross examination of each witness shall be conducted by interested persons, in any reasonable order, immediately after that witness has testified.

6. The burden of proof at hearings shall be as follows:

a. For hearings on permit issuance or modification, the burden of proof shall be on the applicant or permittee.

b. For hearings on permit suspension or revocation, the burden of proof shall be on the Division.

F. Director's Decision.

1. Any person heard or represented at the hearing shall be given written notice of the action of the Director.

FILED WITH
STATE RECORDS CENTER
FEB 14 AM 11:58

2. The Director shall notify the applicant or permittee of his decision and the reasons therefor by certified mail.

G. Appeals. Appeal of the Director's decision shall be as provided by the Hazardous Waste Act.

1. The filing of an appeal does not act as a stay of any action required by the Director's decision.

2. The record on appeal shall include the transcript of the hearing, all related correspondence, any responses to comments, and all other information relied upon by the Director in deciding upon the permit action.

PART X - MISCELLANEOUS

1001. COMPLIANCE WITH OTHER REGULATIONS. Compliance with the Hazardous Waste Management Regulations does not relieve a person of the obligation to comply with other applicable state and federal regulations. If the United States Environmental Protection Agency should suspend any federal hazardous waste regulation having a direct counterpart in these regulations, the counterpart in these regulations shall be deemed suspended without any further action being taken.

1002. CONSTRUCTION. The Hazardous Waste Management Regulations shall be liberally construed to effectuate the purpose of the Act.

1003. REFERENCE TO 40 CFR PART 124. References to any provisions of 40 CFR Part 124 within the text of any other provision of 40 CFR as adopted by these regulations shall be construed to mean the corresponding provision of Section 902 of these regulations.

1004. SEVERABILITY. If any part or application of the Hazardous Waste Management Regulations is held invalid, the remainder, or its application to other situations or persons, shall not be affected.

1005. EFFECT OF STAY OR INVALIDATION OF INCORPORATED FEDERAL REGULATIONS. If any federal regulation incorporated by reference in the Hazardous Waste Management Regulations is stayed, invalidated, or otherwise rendered unenforceable by EPA, in whole or in part, by action of a federal court, such incorporated federal regulation shall be enforceable by the Division only to the extent it is enforceable by EPA.

1006. AMENDMENT OF PRIOR REGULATIONS. These regulations shall be construed as amendments to the Hazardous Waste Management Regulations, EIB/HWMR-5, filed September 30, 1988, as amended.

FILED WITH
STATE RECORDS CENTER
1991 FEB 11 AM 11:58

1007. SAVINGS CLAUSE. Amendment of EIB/HWMR-5 shall not affect any administrative or judicial enforcement action pending on the effective date of such amendment nor the validity of any permit issued pursuant to EIB/HWMR-5.

CHAPTER I—ENVIRONMENTAL PROTECTION AGENCY (Continued)

SUBCHAPTER I—SOLID WASTES (CONTINUED)

Part		*Page*
260	Hazardous waste management system: General	4
261	Identification and listing of hazardous waste	27
262	Standards applicable to generators of hazardous waste	123
263	Standards applicable to transporters of hazardous waste	141
264	Standards for owners and operators of hazardous waste treatment, storage, and disposal facilities	145
265	Interim status standards for owners and operators of hazardous waste treatment, storage, and disposal facilities	308
266	Standards for the management of specific hazardous wastes and specific types of hazardous waste management facilities	419
267	Interim standards for owners and operators of new hazardous waste land disposal facilities	427
268	Land disposal restrictions	435
270	EPA administered permit programs: The Hazardous Waste Permit Program	529
271	Requirements for authorization of State hazardous waste programs	584
272	Approved State hazardous waste management programs	618
280	Technical standards and corrective action requirements for owners and operators of underground storage tanks (UST)	637
281	Approval of state underground storage tank programs	689
282—299	[Reserved]	

SUBCHAPTER I—SOLID WASTES (Continued)

PART 260—HAZARDOUS WASTE MANAGEMENT SYSTEM: GENERAL

Subpart A—General

Sec.
260.1 Purpose, scope, and applicability.
260.2 Availability of information; confidentiality of information.
260.3 Use of number and gender.

Subpart B—Definitions

260.10 Definitions.
260.11 References.

Subpart C—Rulemaking Petitions

260.20 General.
260.21 Petitions for equivalent testing or analytical methods.
260.22 Petitions to amend Part 261 to exclude a waste produced at a particular facility.
260.30 Variances from classification as a solid waste.
260.31 Standards and criteria for variances from classification as a solid waste.
260.32 Variances to be classified as a boiler.
260.33 Procedures for variances from classification as a solid waste or to be classified as a boiler.
260.40 Additional regulation of certain hazardous waste recycling activities on a case-by-case basis.
260.41 Procedures for case-by-case regulation of hazardous waste recycling activities.

APPENDIX I—OVERVIEW OF SUBTITLE C REGULATIONS

AUTHORITY: 42 U.S.C. 6905, 6912(a), 6921-6927, 6930, 6934, 6935, 6937, 6938, 6939, and 6974.

SOURCE: 45 FR 33073, May 19, 1980, unless otherwise noted.

EDITORIAL NOTE: The reporting or recordkeeping provisions included in the final rule published at 47 FR 32274, July 26, 1982, will be submitted for approval to the Office of Management and Budget (OMB), and will not become effective until OMB approval has been obtained. EPA will publish a notice of the effective date of the reporting and recordkeeping provisions of this rule after it obtains OMB approval.

Subpart A—General

§ 260.1 Purpose, scope, and applicability.

(a) This part provides definitions of terms, general standards, and overview information applicable to Parts 260 through 265 and 268 of this chapter.

(b) In this part: (1) Section 260.2 sets forth the rules that EPA will use in making information it receives available to the public and sets forth the requirements that generators, transporters, or owners or operators of treatment, storage, or disposal facilities must follow to assert claims of business confidentiality with respect to information that is submitted to EPA under Parts 260 through 265 and 268 of this chapter.

(2) Section 260.3 establishes rules of grammatical construction for Parts 260 through 265 and 268 of this chapter.

(3) Section 260.10 defines terms which are used in Parts 260 through 265 and 268 of this chapter.

(4) Section 260.20 establishes procedures for petitioning EPA to amend, modify, or revoke any provision of Parts 260 through 265 and 268 of this chapter and establishes procedures governing EPA's action on such petitions.

(5) Section 260.21 establishes procedures for petitioning EPA to approve testing methods as equivalent to those prescribed in Parts 261, 264, or 265 of this chapter.

(6) Section 260.22 establishes procedures for petitioning EPA to amend Subpart D of Part 261 to exclude a waste from a particular facility.

[45 FR 33073, May 19, 1980, as amended at 51 FR 40636, Nov. 7, 1986]

§ 260.2 Availability of information; confidentiality of information.

(a) Any information provided to EPA under Parts 260 through 265 and 268 of this chapter will be made available to the public to the extent and in the manner authorized by the Freedom of Information Act, 5 U.S.C. section 552, section 3007(b) of RCRA and EPA regulations implementing the

Freedom of Information Act and section 3007(b), Part 2 of this chapter, as applicable.

(b) Any person who submits information to EPA in accordance with Parts 260 through 266 and 268 of this chapter may assert a claim of business confidentiality covering part or all of that information by following the procedures set forth in § 2.203(b) of this chapter. Information covered by such a claim will be disclosed by EPA only to the extent, and by means of the procedures, set forth in Part 2, Subpart B, of this chapter except that information required by § 262.53(a) which is submitted in notification of intent to export a hazardous waste will be provided to the Department of State and the appropriate authorities in a receiving country regardless of any claims of confidentiality. However, if no such claim accompanies the information when it is received by EPA, it may be made available to the public without further notice to the person submitting it.

[45 FR 33073, May 19, 1980, as amended at 51 FR 28682, Aug. 8, 1986; 51 FR 40636, Nov. 7, 1986]

§ 260.3 Use of number and gender.

As used in Parts 260 through 265 and 268 of this chapter:

(a) Words in the masculine gender also include the feminine and neuter genders; and

(b) Words in the singular include the plural; and

(c) Words in the plural include the singular.

[45 FR 33073, May 19, 1980, as amended at 51 FR 40636, Nov. 7, 1986]

Subpart B—Definitions

§ 260.10 Definitions.

When used in Parts 260 through 265 and 268 of this chapter, the following terms have the meanings given below:

Above ground tank means a device meeting the definition of "tank" in § 260.10 and that is situated in such a way that the entire surface area of the tank is completely above the plane of the adjacent surrounding surface and the entire surface area of the tank (including the tank bottom) is able to be visually inspected.

Act or *RCRA* means the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act of 1976, as amended, 42 U.S.C. section 6901 et seq.

Active life of a facility means the period from the initial receipt of hazardous waste at the facility until the Regional Administrator receives certification of final closure.

Active portion means that portion of a facility where treatment, storage, or disposal operations are being or have been conducted after the effective date of Part 261 of this chapter and which is not a closed portion. (See also "closed portion" and "inactive portion".)

Administrator means the Administrator of the Environmental Protection Agency, or his designee.

Ancillary equipment means any device including, but not limited to, such devices as piping, fittings, flanges, valves, and pumps, that is used to distribute, meter, or control the flow of hazardous waste from its point of generation to a storage or treatment tank(s), between hazardous waste storage and treatment tanks to a point of disposal onsite, or to a point of shipment for disposal off-site.

Aquifer means a geologic formation, group of formations, or part of a formation capable of yielding a significant amount of ground water to wells or springs.

Authorized representative means the person responsible for the overall operation of a facility or an operational unit (i.e., part of a facility), e.g., the plant manager, superintendent or person of equivalent responsibility.

Boiler means an enclosed device using controlled flame combustion and having the following characteristics:

(1)(i) The unit must have physical provisions for recovering and exporting thermal energy in the form of steam, heated fluids, or heated gases; and

(ii) The unit's combustion chamber and primary energy recovery sections(s) must be of integral design. To be of integral design, the combustion chamber and the primary energy recovery section(s) (such as waterwalls

and superheaters) must be physically formed into one manufactured or assembled unit. A unit in which the combustion chamber and the primary energy recovery section(s) are joined only by ducts or connections carrying flue gas is not integrally designed; however, secondary energy recovery equipment (such as economizers or air preheaters) need not be physically formed into the same unit as the combustion chamber and the primary energy recovery section. The following units are not precluded from being boilers solely because they are not of integral design: process heaters (units that transfer energy directly to a process stream), and fluidized bed combustion units; and

(iii) While in operation, the unit must maintain a thermal energy recovery efficiency of at least 60 percent, calculated in terms of the recovered energy compared with the thermal value of the fuel; and

(iv) The unit must export and utilize at least 75 percent of the recovered energy, calculated on an annual basis. In this calculation, no credit shall be given for recovered heat used internally in the same unit. (Examples of internal use are the preheating of fuel or combustion air, and the driving of induced or forced draft fans or feedwater pumps); or

(2) The unit is one which the Regional Administrator has determined, on a case-by-case basis, to be a boiler, after considering the standards in § 260.32.

Certification means a statement of professional opinion based upon knowledge and belief.

Closed portion means that portion of a facility which an owner or operator has closed in accordance with the approved facility closure plan and all applicable closure requirements. (See also "active portion" and "inactive portion".)

Component means either the tank or ancillary equipment of a tank system.

Confined aquifer means an aquifer bounded above and below by impermeable beds or by beds of distinctly lower permeability than that of the aquifer itself; an aquifer containing confined ground water.

Container means any portable device in which a material is stored, transported, treated, disposed of, or otherwise handled.

Contingency plan means a document setting out an organized, planned, and coordinated course of action to be followed in case of a fire, explosion, or release of hazardous waste or hazardous waste constituents which could threaten human health or the environment.

Corrosion expert means a person who, by reason of his knowledge of the physical sciences and the principles of engineering and mathematics, acquired by a professional education and related practical experience, is qualified to engage in the practice of corrosion control on buried or submerged metal piping systems and metal tanks. Such a person must be certified as being qualified by the National Association of Corrosion Engineers (NACE) or be a registered professional engineer who has certification or licensing that includes education and experience in corrosion control on buried or submerged metal piping systems and metal tanks.

Designated facility means a hazardous waste treatment, storage, or disposal facility which (1) has received a permit (or interim status) in accordance with the requirements of parts 270 and 124 of this chapter, (2) has received a permit (or interim status) from a State authorized in accordance with part 271 of this chapter, or (3) is regulated under § 261.6(c)(2) or subpart F of part 266 of this chapter, and (4) that has been designated on the manifest by the generator pursuant to § 260.20. If a waste is destined to a facility in an authorized State which has not yet obtained authorization to regulate that particular waste as hazardous, then the designated facility must be a facility allowed by the receiving State to accept such waste.

Dike means an embankment or ridge of either natural or man-made materials used to prevent the movement of liquids, sludges, solids, or other materials.

Discharge or *hazardous waste discharge* means the accidental or intentional spilling, leaking, pumping, pouring, emitting, emptying, or dumping of

hazardous waste into or on any land or water.

Disposal means the discharge, deposit, injection, dumping, spilling, leaking, or placing of any solid waste or hazardous waste into or on any land or water so that such solid waste or hazardous waste or any constituent thereof may enter the environment or be emitted into the air or discharged into any waters, including ground waters.

Disposal facility means a facility or part of a facility at which hazardous waste is intentionally placed into or on any land or water, and at which waste will remain after closure.

Elementary neutralization unit means a device which:

(1) Is used for neutralizing wastes that are hazardous only because they exhibit the corrosivity characteristic defined in § 261.22 of this chapter, or they are listed in Subpart D of Part 261 of the chapter only for this reason; and

(2) Meets the definition of tank, tank system, container, transport vehicle, or vessel in § 260.10 of this chapter.

EPA hazardous waste number means the number assigned by EPA to each hazardous waste listed in Part 261, Subpart D, of this chapter and to each characteristic identified in Part 261, Subpart C, of this chapter.

EPA identification number means the number assigned by EPA to each generator, transporter, and treatment, storage, or disposal facility.

EPA region means the states and territories found in any one of the following ten regions:

Region I—Maine, Vermont, New Hampshire, Massachusetts, Connecticut, and Rhode Island.

Region II—New York, New Jersey, Commonwealth of Puerto Rico, and the U.S. Virgin Islands.

Region III—Pennsylvania, Delaware, Maryland, West Virginia, Virginia, and the District of Columbia.

Region IV—Kentucky, Tennessee, North Carolina, Mississippi, Alabama, Georgia, South Carolina, and Florida.

Region V—Minnesota, Wisconsin, Illinois, Michigan, Indiana and Ohio.

Region VI—New Mexico, Oklahoma, Arkansas, Louisiana, and Texas.

Region VII—Nebraska, Kansas, Missouri, and Iowa.

Region VIII—Montana, Wyoming, North Dakota, South Dakota, Utah, and Colorado.

Region IX—California, Nevada, Arizona, Hawaii, Guam, American Samoa, Commonwealth of the Northern Mariana Islands.

Region X—Washington, Oregon, Idaho, and Alaska.

Equivalent method means any testing or analytical method approved by the Administrator under §§ 260.20 and 260.21.

Existing hazardous waste management (HWM) facility or *existing facility* means a facility which was in operation or for which construction commenced on or before November 19, 1980. A facility has commenced construction if:

(1) The owner or operator has obtained the Federal, State and local approvals or permits necessary to begin physical construction; and either

(2)(i) A continuous on-site, physical construction program has begun; or

(ii) The owner or operator has entered into contractual obligations—which cannot be cancelled or modified without substantial loss—for physical construction of the facility to be completed within a reasonable time.

Existing portion means that land surface area of an existing waste management unit, included in the original Part A permit application, on which wastes have been placed prior to the issuance of a permit.

Existing tank system or *existing component* means a tank system or component that is used for the storage or treatment of hazardous waste and that is in operation, or for which installation has commenced on or prior to July 14, 1986. Installation will be considered to have commenced if the owner or operator has obtained all Federal, State, and local approvals or permits necessary to begin physical construction of the site or installation of the tank system and if either (1) a continuous on-site physical construction or installation program has begun, or (2) the owner or operator has entered into contractual obligations—which cannot be canceled or modified without substantial loss—for physical construction of the site or in-

stallation of the tank system to be completed within a reasonable time.

Facility means all contiguous land, and structures, other appurtenances, and improvements on the land, used for treating, storing, or disposing of hazardous waste. A facility may consist of several treatment, storage, or disposal operational units (e.g., one or more landfills, surface impoundments, or combinations of them).

Federal agency means any department, agency, or other instrumentality of the Federal Government, any independent agency or establishment of the Federal Government including any Government corporation, and the Government Printing Office.

Federal, State and local approvals or permits necessary to begin physical construction means permits and approvals required under Federal, State or local hazardous waste control statutes, regulations or ordinances.

Final closure means the closure of all hazardous waste management units at the facility in accordance with all applicable closure requirements so that hazardous waste management activities under Parts 264 and 265 of this chapter are no longer conducted at the facility unless subject to the provisions in § 262.34.

Food-chain crops means tobacco, crops grown for human consumption, and crops grown for feed for animals whose products are consumed by humans.

Free liquids means liquids which readily separate from the solid portion of a waste under ambient temperature and pressure.

Freeboard means the vertical distance between the top of a tank or surface impoundment dike, and the surface of the waste contained therein.

Generator means any person, by site, whose act or process produces hazardous waste identified or listed in Part 261 of this chapter or whose act first causes a hazardous waste to become subject to regulation.

Ground water means water below the land surface in a zone of saturation.

Hazardous waste means a hazardous waste as defined in § 261.3 of this chapter.

Hazardous waste constituent means a constituent that caused the Administrator to list the hazardous waste in Part 261, Subpart D, of this chapter, or a constituent listed in Table 1 of § 261.24 of this chapter.

Hazardous waste management unit is a contiguous area of land on or in which hazardous waste is placed, or the largest area in which there is significant likelihood of mixing hazardous waste constituents in the same area. Examples of hazardous waste management units include a surface impoundment, a waste pile, a land treatment area, a landfill cell, an incinerator, a tank and its associated piping and underlying containment system and a container storage area. A container alone does not constitute a unit; the unit includes containers and the land or pad upon which they are placed.

In operation refers to a facility which is treating, storing, or disposing of hazardous waste.

Inactive portion means that portion of a facility which is not operated after the effective date of Part 261 of this chapter. (See also "active portion" and "closed portion".)

Incinerator means any enclosed device using controlled flame combustion that neither meets the criteria for classification as a boiler nor is listed as an industrial furnace.

Incompatible waste means a hazardous waste which is unsuitable for:

(1) Placement in a particular device or facility because it may cause corrosion or decay of containment materials (e.g., container inner liners or tank walls); or

(2) Commingling with another waste or material under uncontrolled conditions because the commingling might produce heat or pressure, fire or explosion, violent reaction, toxic dusts, mists, fumes, or gases, or flammable fumes or gases.

(See Part 265, Appendix V, of this chapter for examples.)

Individual generation site means the contiguous site at or on which one or more hazardous wastes are generated. An individual generation site, such as a large manufacturing plant, may have one or more sources of hazardous

waste but is considered a single or individual generation site if the site or property is contiguous.

Industrial furnace means any of the following enclosed devices that are integral components of manufacturing processes and that use controlled flame devices to accomplish recovery of materials or energy:

(1) Cement kilns

(2) Lime kilns

(3) Aggregate kilns

(4) Phosphate kilns

(5) Coke ovens

(6) Blast furnaces

(7) Smelting, melting and refining furnaces (including pyrometallurgical devices such as cupolas, reverberator furnaces, sintering machine, roasters, and foundry furnaces)

(8) Titanium dioxide chloride process oxidation reactors

(9) Methane reforming furnaces

(10) Pulping liquor recovery furnaces

(11) Combustion devices used in the recovery of sulfur values from spent sulfuric acid

(12) Such other devices as the Administrator may, after notice and comment, add to this list on the basis of one or more of the following factors:

(i) The design and use of the device primarily to accomplish recovery of material products;

(ii) The use of the device to burn or reduce raw materials to make a material product;

(iii) The use of the device to burn or reduce secondary materials as effective substitutes for raw materials, in processes using raw materials as principal feedstocks;

(iv) The use of the device to burn or reduce secondary materials as ingredients in an industrial process to make a material product;

(v) The use of the device in common industrial practice to produce a material product; and

(vi) Other factors, as appropriate.

Inground tank means a device meeting the definition of "tank" in § 260.10 whereby a portion of the tank wall is situated to any degree within the ground, thereby preventing visual inspection of that external surface area of the tank that is in the ground.

Injection well means a well into which fluids are injected. (See also "underground injection".)

Inner liner means a continuous layer of material placed inside a tank or container which protects the construction materials of the tank or container from the contained waste or reagents used to treat the waste.

Installation inspector means a person who, by reason of his knowledge of the physical sciences and the principles of engineering, acquired by a professional education and related practical experience, is qualified to supervise the installation of tank systems.

International shipment means the transportation of hazardous waste into or out of the jurisdiction of the United States.

Landfill means a disposal facility or part of a facility where hazardous waste is placed in or on land and which is not a pile, a land treatment facility, a surface impoundment, an underground injection well, a salt dome formation, a salt bed formation, an underground mine, or a cave.

Landfill cell means a discrete volume of a hazardous waste landfill which uses a liner to provide isolation of wastes from adjacent cells or wastes. Examples of landfill cells are trenches and pits.

Land treatment facility means a facility or part of a facility at which hazardous waste is applied onto or incorporated into the soil surface; such facilities are disposal facilities if the waste will remain after closure.

Leachate means any liquid, including any suspended components in the liquid, that has percolated through or drained from hazardous waste.

Leak-detection system means a system capable of detecting the failure of either the primary or secondary containment structure or the presence of a release of hazardous waste or accumulated liquid in the secondary containment structure. Such a system must employ operational controls (e.g., daily visual inspections for releases into the secondary containment system of aboveground tanks) or consist of an interstitial monitoring device designed to detect continuously and automatically the failure of the pri-

mary or secondary containment structure or the presence of a release of hazardous waste into the secondary containment structure.

Liner means a continuous layer of natural or man-made materials, beneath or on the sides of a surface impoundment, landfill, or landfill cell, which restricts the downward or lateral escape of hazardous waste, hazardous waste constituents, or leachate.

Management or *hazardous waste management* means the systematic control of the collection, source separation, storage, transportation, processing, treatment, recovery, and disposal of hazardous waste.

Manifest means the shipping document EPA form 8700-22 and, if necessary, EPA form 8700-22A, originated and signed by the generator in accordance with the instructions included in the Appendix to Part 262.

Manifest document number means the U.S. EPA twelve digit identification number assigned to the generator plus a unique five digit document number assigned to the Manifest by the generator for recording and reporting purposes.

Mining overburden returned to the mine site means any material overlying an economic mineral deposit which is removed to gain access to that deposit and is then used for reclamation of a surface mine.

Miscellaneous unit means a hazardous waste management unit where hazardous waste is treated, stored, or disposed of and that is not a container, tank, surface impoundment, pile, land treatment unit, landfill, incinerator, boiler, industrial furnace, underground injection well with appropriate technical standards under 40 CFR Part 146, or unit eligible for a research, development, and demonstration permit under § 270.65.

Movement means that hazardous waste transported to a facility in an individual vehicle.

New hazardous waste management facility or *new facility* means a facility which began operation, or for which construction commenced after October 21, 1976. (See also "Existing hazardous waste management facility".)

New tank system or *new tank component* means a tank system or component that will be used for the storage or treatment of hazardous waste and for which installation has commenced after July 14, 1986; except, however, for purposes of § 264.193(g)(2) and § 265.193(g)(2), a new tank system is one for which construction commences after July 14, 1986. (See also "existing tank system.")

On ground tank means a device meeting the definition of "tank" in § 260.10 and that is situated in such a way that the bottom of the tank is on the same level as the adjacent surrounding surface so that the external tank bottom cannot be visually inspected.

On-site means the same or geographically contiguous property which may be divided by public or private right-of-way, provided the entrance and exit between the properties is at a cross-roads intersection, and access is by crossing as opposed to going along, the right-of-way. Non-contiguous properties owned by the same person but connected by a right-of-way which he controls and to which the public does not have access, is also considered on-site property.

Open burning means the combustion of any material without the following characteristics:

(1) Control of combustion air to maintain adequate temperature for efficient combustion,

(2) Containment of the combustion-reaction in an enclosed device to provide sufficient residence time and mixing for complete combustion, and

(3) Control of emission of the gaseous combustion products.

(See also "incineration" and "thermal treatment".)

Operator means the person responsible for the overall operation of a facility.

Owner means the person who owns a facility or part of a facility.

Partial closure means the closure of a hazardous waste management unit in accordance with the applicable closure requirements of Parts 264 and 265 of this chapter at a facility that contains other active hazardous waste management units. For example, partial closure may include the closure of a tank (including its associated piping and underlying containment systems),

landfill cell, surface impoundment, waste pile, or other hazardous waste management unit, while other units of the same facility continue to operate.

Person means an individual, trust, firm, joint stock company, Federal Agency, corporation (including a government corporation), partnership, association, State, municipality, commission, political subdivision of a State, or any interstate body.

Personnel or *facility personnel* means all persons who work, at, or oversee the operations of, a hazardous waste facility, and whose actions or failure to act may result in noncompliance with the requirements of Part 264 or 265 of this chapter.

Pile means any non-containerized accumulation of solid, nonflowing hazardous waste that is used for treatment or storage.

Point source means any discernible, confined, and discrete conveyance, including, but not limited to any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, or vessel or other floating craft, from which pollutants are or may be discharged. This term does not include return flows from irrigated agriculture.

Publicly owned treatment works or *POTW* means any device or system used in the treatment (including recycling and reclamation) of municipal sewage or industrial wastes of a liquid nature which is owned by a "State" or "municipality" (as defined by section 502(4) of the CWA). This definition includes sewers, pipes, or other conveyances only if they convey wastewater to a POTW providing treatment.

Regional Administrator means the Regional Administrator for the EPA Region in which the facility is located, or his designee.

Representative sample means a sample of a universe or whole (e.g., waste pile, lagoon, ground water) which can be expected to exhibit the average properties of the universe or whole.

Run-off means any rainwater, leachate, or other liquid that drains over land from any part of a facility.

Run-on means any rainwater, leachate, or other liquid that drains over land onto any part of a facility.

Saturated zone or *zone of saturation* means that part of the earth's crust in which all voids are filled with water.

Sludge means any solid, semi-solid, or liquid waste generated from a municipal, commercial, or industrial wastewater treatment plant, water supply treatment plant, or air pollution control facility exclusive of the treated effluent from a wastewater treatment plant.

Small Quantity Generator means a generator who generates less than 1000 kg of hazardous waste in a calendar month.

Solid waste means a solid waste as defined in § 261.2 of this chapter.

State means any of the several States, the District of Columbia, the Commonwealth of Puerto Rico, the Virgin Islands, Guam, American Samoa, and the Commonwealth of the Northern Mariana Islands.

Storage means the holding of hazardous waste for a temporary period, at the end of which the hazardous waste is treated, disposed of, or stored elsewhere.

Sump means any pit or reservoir that meets the definition of tank and those troughs/trenches connected to it that serves to collect hazardous waste for transport to hazardous waste storage, treatment, or disposal facilities.

Surface impoundment or *impoundment* means a facility or part of a facility which is a natural topographic depression, man-made excavation, or diked area formed primarily of earthen materials (although it may be lined with man-made materials), which is designed to hold an accumulation of liquid wastes or wastes containing free liquids, and which is not an injection well. Examples of surface impoundments are holding, storage, settling, and aeration pits, ponds, and lagoons.

Tank means a stationary device, designed to contain an accumulation of hazardous waste which is constructed primarily of non-earthen materials (e.g., wood, concrete, steel, plastic) which provide structural support.

Tank system means a hazardous waste storage or treatment tank and

its associated ancillary equipment and containment system.

Thermal treatment means the treatment of hazardous waste in a device which uses elevated temperatures as the primary means to change the chemical, physical, or biological character or composition of the hazardous waste. Examples of thermal treatment processes are incineration, molten salt, pyrolysis, calcination, wet air oxidation, and microwave discharge. (See also "incinerator" and "open burning".)

Totally enclosed treatment facility means a facility for the treatment of hazardous waste which is directly connected to an industrial production process and which is constructed and operated in a manner which prevents the release of any hazardous waste or any constituent thereof into the environment during treatment. An example is a pipe in which waste acid is neutralized.

Transfer facility means any transportation related facility including loading docks, parking areas, storage areas and other similar areas where shipments of hazardous waste are held during the normal course of transportation.

Transport vehicle means a motor vehicle or rail car used for the transportation of cargo by any mode. Each cargo-carrying body (trailer, railroad freight car, etc.) is a separate transport vehicle.

Transportation means the movement of hazardous waste by air, rail, highway, or water.

Transporter means a person engaged in the offsite transportation of hazardous waste by air, rail, highway, or water.

Treatability Study means a study in which a hazardous waste is subjected to a treatment process to determine: (1) Whether the waste is amenable to the treatment process, (2) what pretreatment (if any) is required, (3) the optimal process conditions needed to achieve the desired treatment, (4) the efficiency of a treatment process for a specific waste or wastes, or (5) the characteristics and volumes of residuals from a particular treatment process. Also included in this definition for the purpose of the § 261.4 (e) and (f) exemptions are liner compatibility, corrosion, and other material compatibility studies and toxicological and health effects studies. A "treatability study" is not a means to commercially treat or dispose of hazardous waste.

Treatment means any method, technique, or process, including neutralization, designed to change the physical, chemical, or biological character or composition of any hazardous waste so as to neutralize such waste, or so as to recover energy or material resources from the waste, or so as to render such waste non-hazardous, or less hazardous; safer to transport, store, or dispose of; or amenable for recovery, amenable for storage, or reduced in volume.

Treatment zone means a soil area of the unsaturated zone of a land treatment unit within which hazardous constituents are degraded, transformed, or immobilized.

Underground injection means the subsurface emplacement of fluids through a bored, drilled or driven well; or through a dug well, where the depth of the dug well is greater than the largest surface dimension. (See also "injection well".)

Underground tank means a device meeting the definition of "tank" in § 260.10 whose entire surface area is totally below the surface of and covered by the ground.

Unfit-for use tank system means a tank system that has been determined through an integrity assessment or other inspection to be no longer capable of storing or treating hazardous waste without posing a threat of release of hazardous waste to the environment.

Unsaturated zone or *zone of aeration* means the zone between the land surface and the water table.

United States means the 50 States, the District of Columbia, the Commonwealth of Puerto Rico, the U.S. Virgin Islands, Guam, American Samoa, and the Commonwealth of the Northern Mariana Islands.

Uppermost aquifer means the geologic formation nearest the natural ground surface that is an aquifer, as well as lower aquifers that are hydraulically interconnected with this aqui-

fer within the facility's property boundary.

Vessel includes every description of watercraft, used or capable of being used as a means of transportation on the water.

Wastewater treatment unit means a device which:

(1) Is part of a wastewater treatment facility that is subject to regulation under either section 402 or 307(b) of the Clean Water Act; and

(2) Receives and treats or stores an influent wastewater that is a hazardous waste as defined in § 261.3 of this chapter, or that generates and accumulates a wastewater treatment sludge that is a hazardous waste as defined in § 261.3 of this chapter, or treats or stores a wastewater treatment sludge which is a hazardous waste as defined in § 261.3 of this Chapter; and

(3) Meets the definition of tank or tank system in § 260.10 of this chapter.

Water (bulk shipment) means the bulk transportation of hazardous waste which is loaded or carried on board a vessel without containers or labels.

Well means any shaft or pit dug or bored into the earth, generally of a cylindrical form, and often walled with bricks or tubing to prevent the earth from caving in.

Well injection: (See "underground injection".)

Zone of engineering control means an area under the control of the owner/operator that, upon detection of a hazardous waste release, can be readily cleaned up prior to the release of hazardous waste or hazardous constituents to ground water or surface water.

[45 FR 33073, May 19, 1980]

EDITORIAL NOTE: For FEDERAL REGISTER citations affecting § 260.10, see the List of CFR Sections Affected in the Finding Aids section of this volume.

EFFECTIVE DATE NOTE: At 55 FR 2353, Jan. 23, 1990, § 260.10 was amended by revising the definition of "designated facility," effective July 23, 1990. For the convenience of the reader, the superseded text is set forth as follows:

§ 260.10 Definitions.

* * * * *

Designated facility means a hazardous waste treatment, storage, or disposal facility which has received an EPA permit (or a facility with interim status) in accordance with the requirements of Parts 270 and 124 of this chapter, a permit from a State authorized in accordance with Part 271 of this chapter, or that is regulated under § 261.6(c)(2) or Subpart F of Part 266 of this chapter, and that has been designated on the manifest by the generator pursuant to § 262.20.

* * * * *

§ 260.11 References.

(a) When used in Parts 260 through 270 of this chapter, the following publications are incorporated by reference:

"ASTM Standard Test Methods for Flash Point of Liquids by Setaflash Closed Tester," ASTM Standard D-3278-78, available from American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

"ASTM Standard Test Methods for Flash Point by Pensky-Martens Closed Tester," ASTM Standard D-93-79 or D-93-80. D-93-80 is available from American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

"ASTM Standard Method for Analysis of Reformed Gas by Gas Chromatography," ASTM Standard D 1946-82, available from American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

"ASTM Standard Test Method for Heat of Combustion of Hydrocarbon Fuels by Bomb Calorimeter (High-Precision Method)," ASTM Standard D 2382-83, available from American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

"ASTM Standard Practices for General Techniques of Ultraviolet-Visible Quantitative Analysis," ASTM Standard E 169-87, available from American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

"ASTM Standard Practices for General Techniques of Infrared Quantitative Analysis," ASTM Standard E 168-88, available from American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

"ASTM Standard Practice for Packed Column Gas Chromatography," ASTM Standard E 260-85, available from American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

"ASTM Standard Test Method for Aromatics in Light Naphthas and Aviation Gaso-

lines by Gas Chromatography," ASTM Standard D 2267-88, available from American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

"ASTM Standard Test Method for Vapor Pressure-Temperature Relationship and Initial Decomposition Temperature of Liquids by Isoteriscope," ASTM Standard D 2879-86, available from American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

"APTI Course 415: Control of Gaseous Emissions," EPA Publication EPA-450/2-81-005, December 1981, available from National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.

"Flammable and Combustible Liquids Code" (1977 or 1981), available from the National Fire Protection Association, 470 Atlantic Avenue, Boston, MA 02210.

"Test Methods for Evaluating Solid Waste, Physical/Chemical Methods", EPA Publication SW-846 [Second Edition, 1982 as amended by Update I (April 1984), and Update II (April 1985). The Second Edition of SW-846 and Updates I and II are available from the National Technical Information Service (NTIS), 5285 Port Royal Road, Springfield, VA 22161, (703) 487-4600. The document number is PB87-120-291 and the cost is $48.95 for paper copies and $13.50 for microfiche.

The following 47 analytical testing methods are contained in the Third Edition of "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods" EPA Publication SW-846 (November 1986) and its Revision I (December 1987), which are available for the cost of $110.00 from the Government Printing Office, Superintendent of Documents, Washington, DC 20402, (202) 783-3238 (document number 955-001-00000-1): [1]

0010 Modified Method 5 Sampling Train
0020 Source Assessment Sampling System (SASS)
0030 Volatile Organic Sampling Train
1320 Multiple Extraction Procedure
1330 Extraction Procedure for Oily Wastes
3611 Alumina Column Cleanup and Separation of Petroleum Wastes
5040 Protocol for Analysis of Sorbent Cartridges from Volatile Organic Sampling Train
6010 Inductively Coupled Plasma Atomic Emission Spectroscopy
7090 Beryllium (AA, Direct Aspiration)
7091 Beryllium (AA, Furnace Technique)
7198 Chromium, Hexavalent (Differential Pulse Polarography)
7210 Copper (AA, Direct Aspiration)
7211 Copper (AA, Furnace Technique)
7380 Iron (AA, Direct Aspiration)
7381 Iron (AA, Furnace Technique)
7460 Manganese (AA, Direct Aspiration)
7461 Manganese (AA, Furnace Technique)
7550 Osmium (AA, Direct Aspiration)
7770 Sodium (AA, Direct Aspiration)
7840 Thallium (AA, Direct Aspiration)
7841 Thallium (AA, Furnace Technique)
7910 Vanadium (AA, Direct Aspiration)
7911 Vanadium (AA, Furnace Technique)
7950 Zinc (AA, Direct Aspiration)
7951 Zinc (AA, Furnace Technique)
9022 Total Organic Halides (TOX) by Neutron Activation Analysis
9035 Sulfate (Colorimetric, Automated, Chloranilate)
9036 Sulfate (Colorimetric, Automated, Methylthymol Blue, AA II)
9038 Sulfate (Turbidimetric)
9060 Total Organic Carbon
9065 Phenolics (Spectrophotometric, Manual 4-AAP with Distillation)
9066* Phenolics (Colorimetric, Automated 4-AAP with Distillation)
9067 Phenolics (Spectrophotometric, MBTH with Distillation)
9070 Total Recoverable Oil and Grease (Gravimetric, Separatory Funnel Extraction)
9071 Oil and Grease Extraction Method for Sludge Samples
9080 Cation-Exchange Capacity of Soils (Ammonium Acetate)
9081 Cation-Exchange Capacity of Soils (Sodium Acetate)
9100 Saturated Hydraulic Conductivity, Saturated Leachate Conductivity, and Intrinsic Permeability
9131 Total Coliform: Multiple Tube Fermentation Technique
9132 Total Coliform: Membrane Filter Technique
9200 Nitrate
9250 Chloride (Colorimetric, Automated Ferricyanide AAI)
9251 Chloride (Colorimetric, Automated Ferricyanide AAII)
9252 Chloride (Titrimetric, Mercuric Nitrate)
9310 Gross Alpha and Gross Beta
9315 Alpha-Emitting Radium Isotopes
9320 Radium-228

*When Method 9066 is used it must be preceded by the manual distillation specified in procedure 7.1 of Method 9065. Just

[1] The Agency notes that, for guidance purposes, the Third Edition and its Revision I supersede the Second Edition and its Updates I and II. However, for regulatory purposes, the Second Edition and Updates I and II remain in effect together with the 47 methods of the Third Edition and its Revision I cited above. See 54 *FR* 40260-40269, September 29, 1989.

prior to distillation in Method 9065, adjust the sulfuric acid-preserved sample to pH 4 with 1 + 9 NaOH. After the manual distillation is completed, the autoanalyzer manifold is simplified by connecting the resample line directly to the sampler.

(b) The references listed in paragraph (a) of this section are also available for inspection at the Office of the Federal Register, 1100 L Street, NW, Washington, DC 20408. These incorporations by reference were approved by the Director of the Federal Register. These materials are incorporated as they exist on the date of approval and a notice of any change in these materials will be published in the FEDERAL REGISTER.

[46 FR 35247, July 7, 1981, as amended at 50 FR 18374, Apr. 30, 1985; 52 FR 8073, Mar. 16, 1987; 52 FR 41295 Oct. 27, 1987; 55 FR 40266, Sept. 29, 1989; 55 FR 8949, Mar. 9, 1990; 55 FR 25493, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25493, June 21, 1990, in § 260.11, paragraph (a) was amended by adding the third, fourth, fifth, sixth, seventh, eighth, ninth and tenth references, effective December 21, 1990.

Subpart C—Rulemaking Petitions

§ 260.20 General.

(a) Any person may petition the Administrator to modify or revoke any provision in Parts 260 through 265 and 268 of this chapter. This section sets forth general requirements which apply to all such petitions. Section 260.21 sets forth additional requirements for petitions to add a testing or analytical method to Part 261, 264 or 265. Section 260.22 sets forth additional requirements for petitions to exclude a waste at a particular facility from § 261.3 of this chapter or the lists of hazardous wastes in Subpart D of Part 261.

(b) Each petition must be submitted to the Administrator by certified mail and must include:

(1) The petitioner's name and address;

(2) A statement of the petitioner's interest in the proposed action;

(3) A description of the proposed action, including (where appropriate) suggested regulatory language; and

(4) A statement of the need and justification for the proposed action, including any supporting tests, studies, or other information.

(c) The Administrator will make a tentative decision to grant or deny a petition and will publish notice of such tentative decision, either in the form of an advanced notice of proposed rulemaking, a proposed rule, or a tentative determination to deny the petition, in the FEDERAL REGISTER for written public comment.

(d) Upon the written request of any interested person, the Administrator may, at his discretion, hold an informal public hearing to consider oral comments on the tentative decision. A person requesting a hearing must state the issues to be raised and explain why written comments would not suffice to communicate the person's views. The Administrator may in any case decide on his own motion to hold an informal public hearing.

(e) After evaluating all public comments the Administrator will make a final decision by publishing in the FEDERAL REGISTER a regulatory amendment or a denial of the petition.

[45 FR 33073, May 19, 1980, as amended at 51 FR 40636, Nov. 7, 1986]

§ 260.21 Petitions for equivalent testing or analytical methods.

(a) Any person seeking to add a testing or analytical method to Part 261, 264, or 265 of this chapter may petition for a regulatory amendment under this section and § 260.20. To be successful, the person must demonstrate to the satisfaction of the Administrator that the proposed method is equal to or superior to the corresponding method prescribed in Part 261, 264, or 265 of this chapter, in terms of its sensitivity, accuracy, and precision (i.e., reproducibility).

(b) Each petition must include, in addition to the information required by § 260.20(b):

(1) A full description of the proposed method, including all procedural steps and equipment used in the method;

(2) A description of the types of wastes or waste matrices for which the proposed method may be used;

(3) Comparative results obtained from using the proposed method with those obtained from using the rele-

vant or corresponding methods prescribed in Part 261, 264, or 265 of this chapter;

(4) An assessment of any factors which may interfere with, or limit the use of, the proposed method; and

(5) A description of the quality control procedures necessary to ensure the sensitivity, accuracy and precision of the proposed method.

(c) After receiving a petition for an equivalent method, the Administrator may request any additional information on the proposed method which he may reasonably require to evaluate the method.

(d) If the Administrator amends the regulations to permit use of a new testing method, the method will be incorporated in "Test Methods for the Evaluation of Solid Waste: Physical/Chemical Methods," SW-846, U.S. Environmental Protection Agency, Office of Solid Waste, Washington, DC 20460.

[45 FR 33073, May 19, 1980, as amended at 49 FR 47391, Dec. 4, 1984]

§ 260.22 Petitions to amend Part 261 to exclude a waste produced at a particular facility.

(a) Any person seeking to exclude a waste at a particular generating facility from the lists in Subpart D of Part 261 may petition for a regulatory amendment under this section and § 260.20. To be successful:

(1) The petitioner must demonstrate to the satisfaction of the Administrator that the waste produced by a particular generating facility does not meet any of the criteria under which the waste was listed as a hazardous or an actutely hazardous waste; and

(2) Based on a complete application, the Administrator must determine, where he has a reasonable basis to believe that factors (including additional constituents) other than those for which the waste was listed could cause the waste to be a hazardous waste, that such factors do not warrant retaining the waste as a hazardous waste. A waste which is so excluded, however, still may be a hazardous waste by operation of Subpart C of Part 261.

(b) The procedures in this Section and § 260.20 may also be used to petition the Administrator for a regulatory amendment to exclude from § 261.3(a)(2)(ii) or (c), a waste which is described in these Sections and is either a waste listed in Subpart D, or is derived from a waste listed in Subpart D. This exclusion may only be issued for a particular generating, storage, treatment, or disposal facility. The petitioner must make the same demonstration as required by paragraph (a) of this section. Where the waste is a mixture of solid waste and one or more listed hazardous wastes or is derived from one or more hazardous wastes, his demonstration must be made with respect to the waste mixture as a whole; analyses must be conducted for not only those constituents for which the listed waste contained in the mixture was listed as hazardous, but also for factors (including additional constituents) that could cause the waste mixture to be a hazardous waste. A waste which is so excluded may still be a hazardous waste by operation of Subpart C of Part 261.

(c) If the waste is listed with codes "I", "C", "R", or "E", in Subpart D,

(1) The petitioner must show that the waste does not exhibit the relevant characteristic for which the waste was listed as defined in § 261.21, § 261.22, § 261.23, or § 261.24 using any applicable methods prescribed therein. The petitioner also must show that the waste does not exhibit any of the other characteristics defined in § 261.21, § 261.22, § 261.23, or § 261.24 using any applicable methods prescribed therein;

(2) Based on a complete application, the Administrator must determine, where he has a reasonable basis to believe that factors (including additional constituents) other than those for which the waste was listed could cause the waste to be hazardous waste, that such factors do not warrant retaining the waste as a hazardous waste. A waste which is so excluded, however, still may be a hazardous waste by operation of Subpart C of Part 261.

(d) If the waste is listed with code "T" in Subpart D,

(1) The petitioner must demonstrate that the waste:

(i) Does not contain the constituent or constituents (as defined in Appen-

dix VII of Part 261) that caused the Administrator to list the waste, using the appropriate test methods prescribed in Appendix III; or

(ii) Although containing one or more of the hazrdous constituents (as defined in Appendix VII of Part 261) that caused the Administrator to list the waste, does not meet the criterion of § 261.11(a)(3) when considering the factors used by the Administrator in § 261.11(a)(3) (i) through (xi) under which the waste was listed as hazardous; and

(2) Based on a complete application, the Administrator must determine, where he has a reasonable basis to believe that factors (including additional constituents) other than those for which the waste was listed could cause the waste to be a hazardous waste, that such factors do not warrant retaining the waste as a hazardous waste; and

(3) The petitioner must demonstrate that the waste does not exhibit any of the characteristics defined in § 261.21, § 261.22, § 261.23, and § 261.24 using any applicable methods prescribed therein;

(4) A waste which is so excluded, however, still may be a hazardous waste by operation of Subpart C of Part 261.

(e) If the waste is listed with the code "H" in Subpart D,

(1) The petitioner must demonstrate that the waste does not meet the criterion of § 261.11(a)(2); and

(2) Based on a complete application, the Administrator must determine, where he has a reasonable basis to believe that additional factors (including additional constituents) other than those for which the waste was listed could cause the waste to be a hazardous waste, that such factors do not warrant retaining the waste as a hazardous waste; and

(3) The petitioner must demonstrate that the waste does not exhibit any of the characteristics defined in § 261.21, § 261.22, § 261.23, and § 261.24 using any applicable methods prescribed therein;

(4) A waste which is so excluded, however, still may be a hazardous waste by operation of Subpart C of Part 261.

(f) [Reserved for listing radioactive wastes.]

(g) [Reserved for listed infectious wastes.]

(h) Demonstration samples must consist of enough representative samples, but in no case less than four samples, taken over a period of time sufficient to represent the variability or the uniformity of the waste.

(i) Each petition must include, in addition to the information required by § 260.20(b):

(1) The name and address of the laboratory facility performing the sampling or tests of the waste;

(2) The names and qualifications of the persons sampling and testing the waste;

(3) The dates of sampling and testing;

(4) The location of the generating facility;

(5) A description of the manufacturing processes or other operations and feed materials producing the waste and an assessment of whether such processes, operations, or feed materials can or might produce a waste that is not covered by the demonstration;

(6) A description of the waste and an estimate of the average and maximum monthly and annual quantities of waste covered by the demonstration;

(7) Pertinent data on and discussion of the factors delineated in the respective criterion for listing a hazardous waste, where the demonstration is based on the factors in § 261.11(a)(3);

(8) A description of the methodologies and equipment used to obtain the representative samples;

(9) A description of the sample handling and preparation techniques, including techniques used for extraction, containerization and preservation of the samples;

(10) A description of the tests performed (including results);

(11) The names and model numbers of the instruments used in performing the tests; and

(12) The following statement signed by the generator of the waste or his authorized representative:

I certify under penalty of law that I have personally examined and am familiar with the information submitted in this demon-

stration and all attached documents, and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

(j) After receiving a petition for an exclusion, the Administrator may request any additional information which he may reasonably require to evaluate the petition.

(k) An exclusion will only apply to the waste generated at the individual facility covered by the demonstration and will not apply to waste from any other facility.

(l) The Administrator may exclude only part of the waste for which the demonstration is submitted where he has reason to believe that variability of the waste justifies a partial exclusion.

[45 FR 33073, May 19, 1980, as amended at 50 FR 28742, July 15, 1985; 54 FR 27116, June 27, 1989]

EDITORIAL NOTE: For information on the availability of a guidance manual for petitions to delist hazardous wastes, see 50 FR 21607, May 28, 1985.

§ 260.30 Variances from classification as a solid waste.

In accordance with the standards and criteria in § 260.31 and the procedures in § 260.33, the Regional Administrator may determine on a case-by-case basis that the following recycled materials are not solid wastes:

(a) Materials that are accumulated speculatively without sufficient amounts being recycled (as defined in § 261.1(c)(8) of this chapter);

(b) Materials that are reclaimed and then reused within the original primary production process in which they were generated;

(c) Materials that have been reclaimed but must be reclaimed further before the materials are completely recovered.

[50 FR 661, Jan. 4, 1985; 50 FR 14219, Apr. 11, 1985]

§ 260.31 Standards and criteria for variances from classification as a solid waste.

(a) The Regional Administrator may grant requests for a variance from classifying as a solid waste those materials that are accumulated speculatively without sufficient amounts being recycled if the applicant demonstrates that sufficient amounts of the material will be recycled or transferred for recycling in the following year. If a variance is granted, it is valid only for the following year, but can be renewed, on an annual basis, by filing a new application. The Regional Administrator's decision will be based on the following standards and criteria:

(1) The manner in which the material is expected to be recycled, when the material is expected to be recycled, and whether this expected disposition is likely to occur (for example, because of past practice, market factors, the nature of the material, or contractual arrangements for recycling);

(2) The reason that the applicant has accumulated the material for one or more years without recycling 75 percent of the volume accumulated at the beginning of the year;

(3) The quantity of material already accumulated and the quantity expected to be generated and accumulated before the material is recycled;

(4) The extent to which the material is handled to minimize loss;

(5) Other relevant factors.

(b) The Regional Administrator may grant requests for a variance from classifying as a solid waste those materials that are reclaimed and then reused as feedstock within the original primary production process in which the materials were generated if the reclamation operation is an essential part of the production process. This determination will be based on the following criteria:

(1) How economically viable the production process would be if it were to use virgin materials, rather than reclaimed materials;

(2) The prevalence of the practice on an industry-wide basis;

(3) The extent to which the material is handled before reclamation to minimize loss;

(4) The time periods between generating the material and its reclamation, and between reclamation and return to the original primary production process;

(5) The location of the reclamation operation in relation to the production process;

(6) Whether the reclaimed material is used for the purpose for which it was originally produced when it is returned to the original process, and whether it is returned to the process in substantially its original form;

(7) Whether the person who generates the material also reclaims it;

(8) Other relevant factors.

(c) The Regional Administrator may grant requests for a variance from classifying as a solid waste those materials that have been reclaimed but must be reclaimed further before recovery is completed if, after initial reclamation, the resulting material is commodity-like (even though it is not yet a commercial product, and has to be reclaimed further). This determination will be based on the following factors:

(1) The degree of processing the material has undergone and the degree of further processing that is required;

(2) The value of the material after it has been reclaimed;

(3) The degree to which the reclaimed material is like an analogous raw material;

(4) The extent to which an end market for the reclaimed material is guaranteed;

(5) The extent to which the reclaimed material is handled to minimize loss;

(6) Other relevant factors.

[50 FR 662, Jan. 4, 1985]

§ 260.32 Variance to be classified as a boiler.

In accordance with the standards and criteria in § 260.10 (definition of "boiler"), and the procedures in § 260.33, the Regional Administrator may determine on a case-by-case basis that certain enclosed devices using controlled flame combustion are boilers, even though they do not otherwise meet the definition of boiler contained in § 260.10, after considering the following criteria:

(a) The extent to which the unit has provisions for recovering and exporting thermal energy in the form of steam, heated fluids, or heated gases; and

(b) The extent to which the combustion chamber and energy recovery equipment are of integral design; and

(c) The efficiency of energy recovery, calculated in terms of the recovered energy compared with the thermal value of the fuel; and

(d) The extent to which exported energy is utilized; and

(e) The extent to which the device is in common and customary use as a "boiler" functioning primarily to produce steam, heated fluids, or heated gases; and

(f) Other factors, as appropriate.

[50 FR 662, Jan. 4, 1985]

§ 260.33 Procedures for variances from classification as a solid waste or to be classified as a boiler.

The Regional Administrator will use the following procedures in evaluating applications for variances from classification as a solid waste or applications to classify particular enclosed flame combustion devices as boilers:

(a) The applicant must apply to the Regional Administrator in the region where the recycler is located. The application must address the relevant criteria contained in § 260.31 or § 260.32 of this part.

(b) The Regional Administrator will evaluate the application and issue a draft notice tentatively granting or denying the application. Notification of this tentative decision will be provided by newspaper advertisement and radio broadcast in the locality where the recycler is located. The Regional Administrator will accept comment on the tentative decision for 30 days, and may also hold a public hearing upon request or at his discretion. The Regional Administrator will issue a final decision after receipt of comments and after the hearing (if any), and this decision may not be appealed to the Administrator.

[50 FR 662, Jan. 4, 1985]

§ 260.40 Additional regulation of certain hazardous waste recycling activities on a case-by-case basis.

(a) The Regional Administrator may decide on a case-by-case basis that persons accumulating or storing the recyclable materials described in § 261.6(a)(2)(iv) of this chapter should be regulated under § 261.6 (b) and (c) of this chapter. The basis for this decision is that the materials are being accumulated or stored in a manner that does not protect human health and the environment because the materials or their toxic constituents have not been adequately contained, or because the materials being accumulated or stored together are incompatible. In making this decision, the Regional Administrator will consider the following factors:

(1) The types of materials accumulated or stored and the amounts accumulated or stored;

(2) The method of accumulation or storage;

(3) The length of time the materials have been accumulated or stored before being reclaimed;

(4) Whether any contaminants are being released into the environment, or are likely to be so released; and

(5) Other relevant factors.

The procedures for this decision are set forth in § 260.41 of this chapter.

[50 FR 662, Jan. 4, 1985]

§ 260.41 Procedures for case-by-case regulation of hazardous waste recycling activities.

The Regional Administrator will use the following procedures when determining whether to regulate hazardous waste recycling activities described in § 261.6(a)(2)(iv) under the provisions of § 261.6 (b) and (c), rather than under the provisions of Subpart F of Part 266 of this chapter.

(a) If a generator is accumulating the waste, the Regional Administrator will issue a notice setting forth the factual basis for the decision and stating that the person must comply with the applicable requirements of Subparts A, C, D, and E of Part 262 of this chapter. The notice will become final within 30 days, unless the person served requests a public hearing to challenge the decision. Upon receiving such a request, the Regional Administrator will hold a public hearing. The Regional Administrator will provide notice of the hearing to the public and allow public participation at the hearing. The Regional Administrator will issue a final order after the hearing stating whether or not compliance with Part 262 is required. The order becomes effective 30 days after service of the decision unless the Regional Administrator specifies a later date or unless review by the Administrator is requested. The order may be appealed to the Administrator by any person who participated in the public hearing. The Administrator may choose to grant or to deny the appeal. Final Agency action occurs when a final order is issued and Agency review procedures are exhausted.

(b) If the person is accumulating the recyclable material as a storage facility, the notice will state that the person must obtain a permit in accordance with all applicable provisions of Parts 270 and 124 of this chapter. The owner or operator of the facility must apply for a permit within no less than 60 days and no more than six months of notice, as specified in the notice. If the owner or operator of the facility wishes to challenge the Regional Administrator's decision, he may do so in his permit application, in a public hearing held on the draft permit, or in comments filed on the draft permit or on the notice of intent to deny the permit. The fact sheet accompanying the permit will specify the reasons for the Agency's determination. The question of whether the Regional Administrator's decision was proper will remain open for consideration during the public comment period discussed under § 124.11 of this chapter and in any subsequent hearing.

[50 FR 663, Jan. 4, 1985]

APPENDIX I—OVERVIEW OF SUBTITLE C REGULATIONS

The Agency believes that there are many people who suspect, but are not sure, that their activities are subject to control under the RCRA Subtitle C rules. This appendix is written for these people. It is designed to

help those who are unfamiliar with the hazardous waste control program to determine with which, if any, of the regulations they should comply.

Definition of Solid Waste

The first question which such a person should ask himself is: "Is the material I handle a solid waste?" If the answer to this question is "No", then the material is not subject to control under RCRA and, therefore, the person need not worry about whether he should comply with the Subtitle C rules.

Section 261.2 of this chapter provides a definition of "solid waste" which expands the statutory definition of that term given in section 1004(27) of RCRA. This definition is diagrammed in Figure 1 below.

Figure 1 explains that all materials are either: (1) Garbage refuse, or sludge; (2) solid, liquid, semi-solid or contained gaseous material; or (3) something else. No materials in the third category are solid waste. All materials in the first category are solid waste. Materials in the second category are solid waste unless they are one of the five exclusions specified in § 261.4(a).

Definition of Hazardous Waste

If a person has determined that his material is a "solid waste", the next question he should ask is: "Is the solid waste I handle a hazardous waste?"

Hazardous waste is defined in § 261.3 of this chapter. Section 261.3 provides that, in general, a solid waste is a hazardous waste if: (1) It is, or contains, a hazardous waste listed in Subpart D of Part 261 of this chapter, or (2) the waste exhibits any of the characteristics defined in Subpart C of Part 261. However, Parts 260 and 261 also contain provisions which exclude (§§ 261.4(b), 260.20, and 260.22) certain solid wastes from the definition of "hazardous waste", even though they are listed in Subpart D or exhibit one or more of the characteristics defined in Subpart C. Figure 2 depicts the interplay of these special provisions with the definition of "hazardous waste". It presents a series of questions which a person should ask himself concerning his waste. After doing so, the person should be able to determine if the solid waste he handles is a hazardous waste.

Hazardous Waste Regulations

If this is the case, the person should look at Figure 3. Figure 3 depicts the special provisions specified in the final Part 261 rules for hazardous waste which:

1. Is generated by a small quantity generator
2. Is or is intended to be legitimately and beneficially used, re-used, recycled, or reclaimed
3. Is a sludge; is listed in Part 261, Subpart D; or is a mixture containing a waste listed in Part 261, Subpart D.

For each of these Groups, Figure 3 indicates with which Subtitle C regulations (if any) the person handling these wastes must comply. Figure 3 also explains that, if a person handles hazardous waste which is not included in any one of the above three categories, his waste is subject to the Subtitle C regulations diagrammed in Figure 4.

Figure 4 is a flowchart which identifies the three categories of activities regulated under the Subtitle C rules, and the corresponding set of rules with which people in each of these categories must comply. It points out that all people who handle hazardous waste are either: (1) Generators of hazardous waste, (2) transporters of hazardous waste, (3) owners or operators of hazardous waste treatment, storage, or disposal facilities, or (4) a combination of the above. Figure 4 indicates that all of these people must notify EPA of their hazardous waste activities in accordance with the Section 3010 Notification Procedures (see 45 FR 12746 *et seq.*), and obtain an EPA identification number.

It should be noted that people handling wastes listed in Subpart D of Part 261 who have filed, or who intend to file an application to exempt their waste from regulation under the Subtitle C rules, must also comply with the notification requirements of section 3010.

If a person generates hazardous waste, Figure 4 indicates that he must comply with the Part 262 rules. If he transports it, he must comply with the Part 263 rules. The standards in both these Parts are designed to ensure, among other things, proper recordkeeping and reporting, the use of a manifest system to track shipments of hazardous waste, the use of proper labels and containers, and the delivery of the waste to a permitted treatment, storage, or disposal facility.

If a person owns or operates a facility which treats, stores, or disposes of hazardous waste, the standards with which he must comply depend on a number of factors. First of all, if the owner or operator of a *storage* facility is also the person who generates the waste, and the waste is stored at the facility for less than 90 days for subsequent shipment off-site, then the person must comply with § 262.34 of the Part 262 rules.

All other owners or operators of treatment, storage, or disposal facilities must comply with either the Part 264 or the Part 265 rules. To determine with which of these sets of rules an owner or operator must comply, he must find out whether his facility qualifies for interim status. To qualify, the owner or operator must: (1) Have been

treating, storing, or disposing of the hazardous waste, or commenced facility construction on or before October 21, 1976, (2) comply with the section 3010 notification requirements, and (3) apply for a permit under Part 270 of this chapter.

If the owner or operator has done all of the above, he qualifies for interim status, and he must comply with the Part 265 rules. These rules contain administrative requirements, monitoring and closure standards, and an abbreviated set of technical and closure and post-closure cost estimate requirements. The owner or operator must comply with these standards until final administrative disposition of his permit application is made. If a permit is issued to the owner or operator, he must then comply with the permit which will be based on the Part 264 rules.

If the owner or operator has not carried out the above three requirements, he does not qualify for interim status. Until he is issued a permit for his facility, the owner or operator must stop waste management operations (if any) at the facility, and send his hazardous waste (if any) to a facility whose owner or operator has interim status or to a storage facility following the Part 262 rules.

In order to apply for a permit, the owner or operator must comply with the procedures specified in Part 270 of this chapter.

It should be noted that the Agency will be periodically revising the rules depicted in Figures 3 and 4. All persons are encouraged to write to EPA to verify that the regulations which they are reading are up-to-date. To obtain this verification, contact: Solid Waste Information, U.S. Environmental Protection Agency, 26 West St. Clair Street, Cincinnati, Ohio 45268 (513) 684-5362.

FIGURE 1

DEFINITION OF A SOLID WASTE

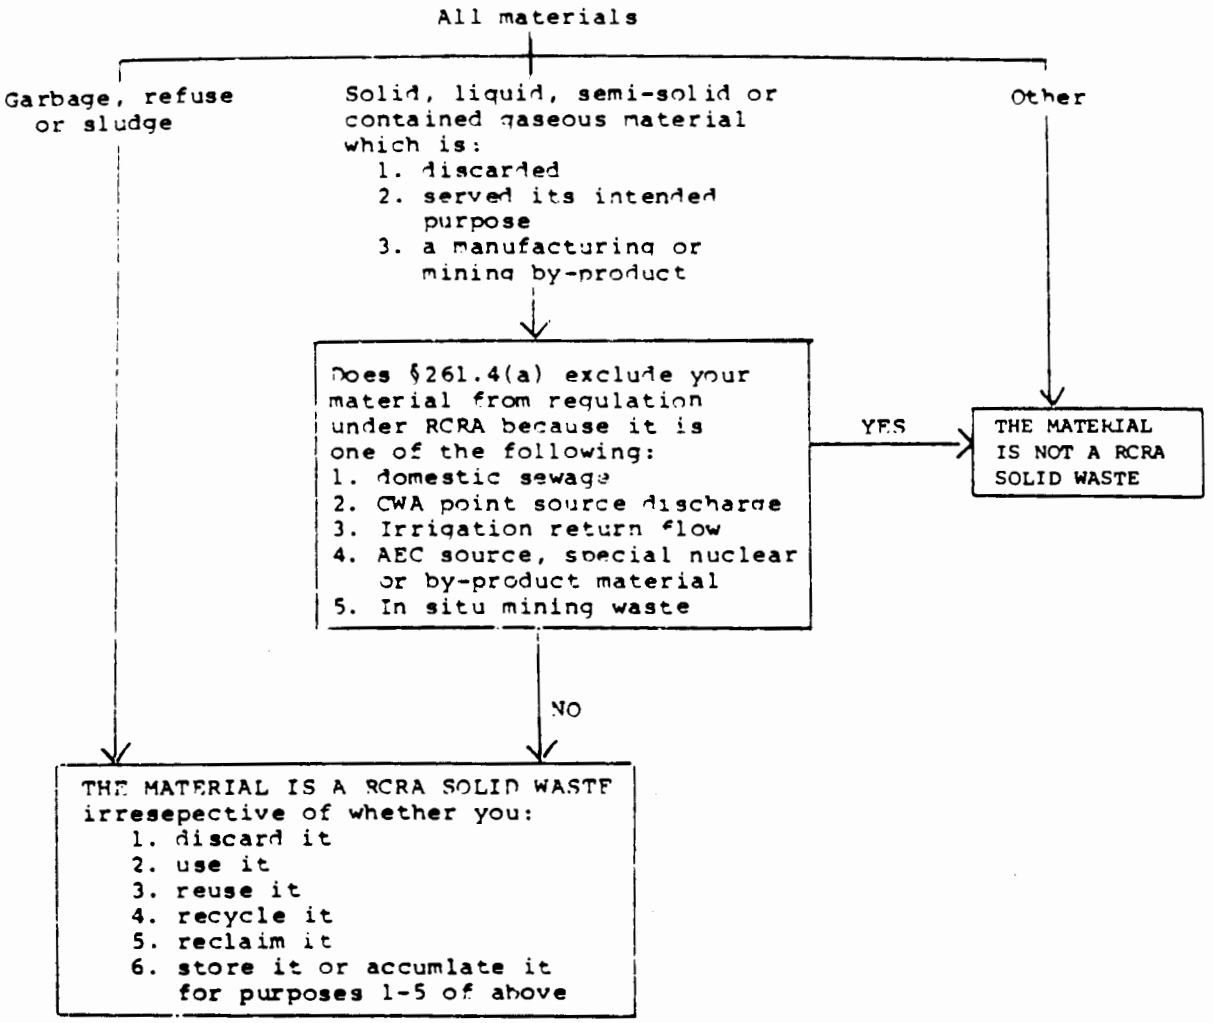

FIGURE 2

DEFINITION OF A HAZARDOUS WASTE

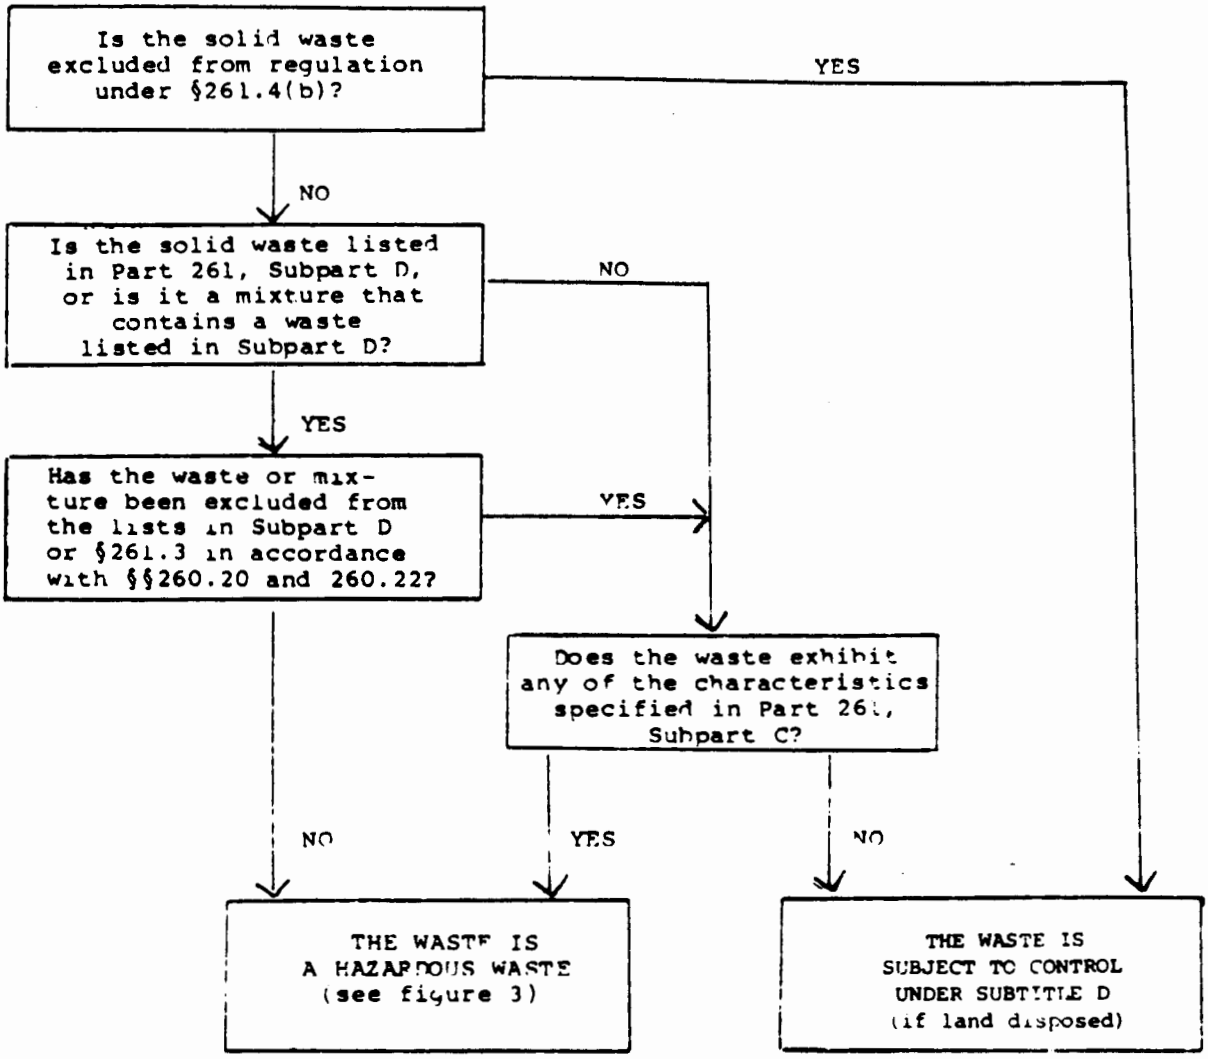

FIGURE 3

SPECIAL PROVISIONS FOR CERTAIN HAZARDOUS WASTE

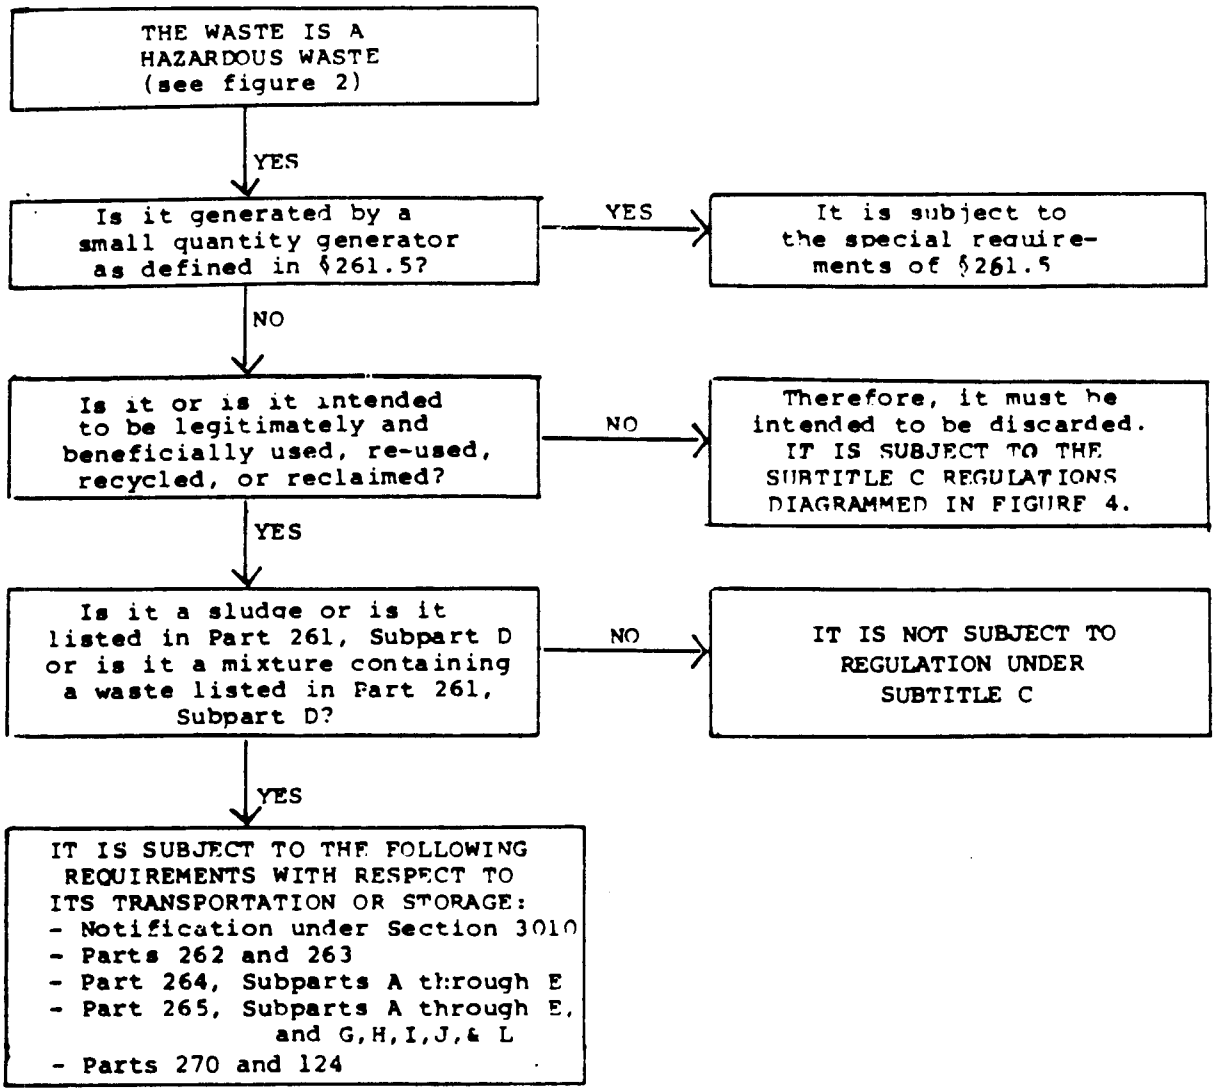

FIGURE 4

REGULATIONS FOR HAZARDOUS WASTE
NOT COVERED IN DIAGRAM 3

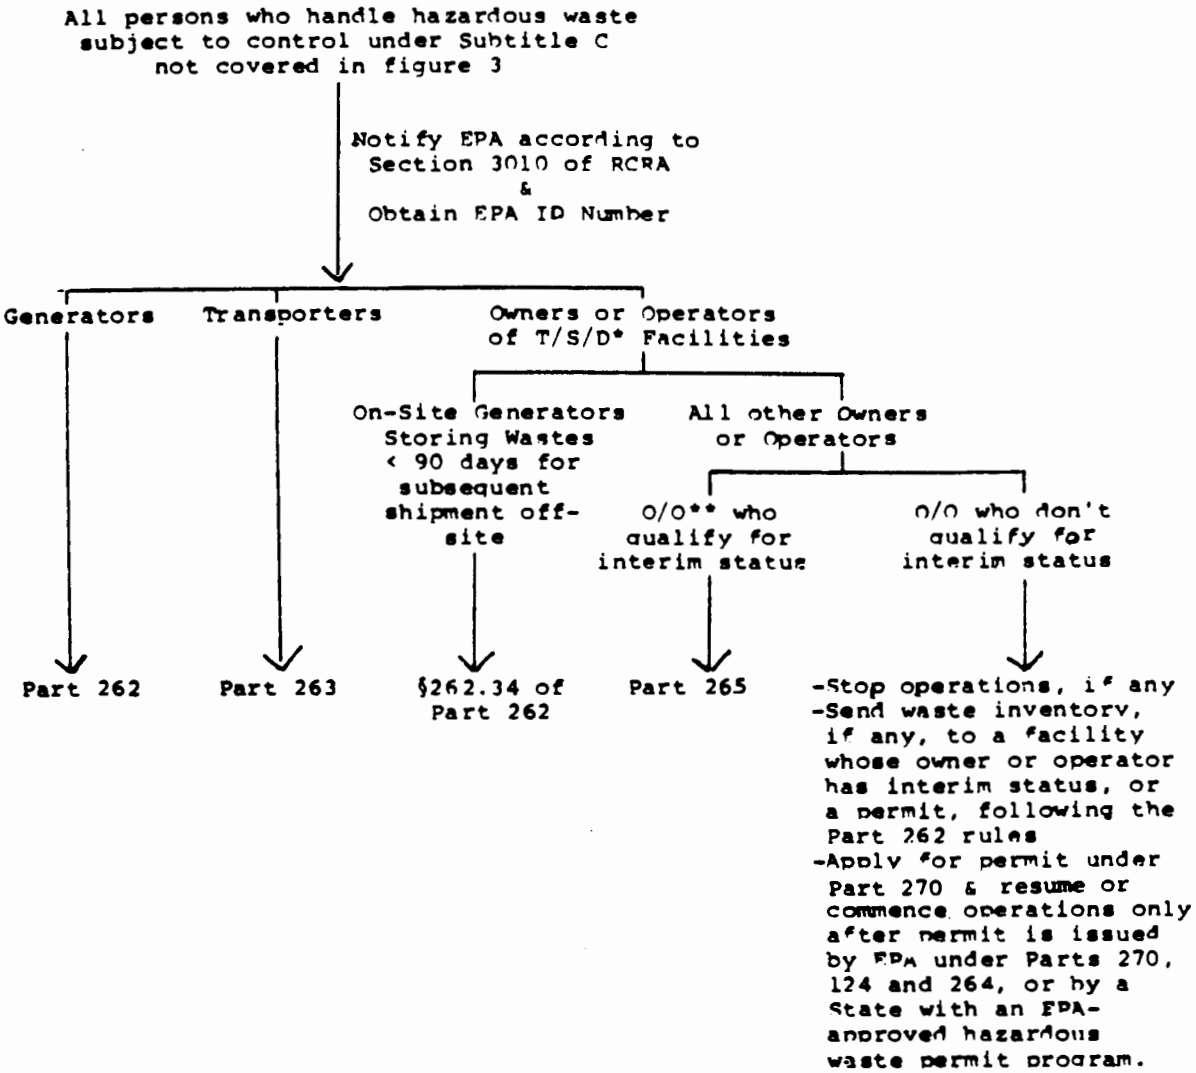

* T/S/D stands for Treatment, Storage, or Disposal
** O/O stands for Owners or Operators

[45 FR 33073, May 19, 1980, as amended at 48 FR 14293, Apr. 1, 1983]

PART 261—IDENTIFICATION AND LISTING OF HAZARDOUS WASTE

Subpart A—General

Sec.
261.1 Purpose and scope.
261.2 Definition of solid waste.
261.3 Definition of hazardous waste.
261.4 Exclusions.
261.5 Special requirements for hazardous waste generated by conditionally exempt small quantity generators.
261.6 Requirements for recyclable materials.
261.7 Residues of hazardous waste in empty containers.
261.8 PCB wastes regulated under Toxic Substance Control Act.

Subpart B—Criteria for Identifying the Characteristics of Hazardous Waste and for Listing Hazardous Wastes

261.10 Criteria for identifying the characteristics of hazardous waste.
261.11 Criteria for listing hazardous waste.

Subpart C—Characteristics of Hazardous Waste

261.20 General.
261.21 Characteristic of ignitability.
261.22 Characteristic of corrosivity.
261.23 Characteristic of reactivity.
261.24 Toxicity characteristic.

Subpart D—Lists of Hazardous Wastes

261.30 General.
261.31 Hazardous wastes from non-specific sources.
261.32 Hazardous wastes from specific sources.
261.33 Discarded commercial chemical products, off-specification species, container residues, and spill residues thereof.

APPENDICES

APPENDIX I—REPRESENTATIVE SAMPLING METHODS
APPENDIX II—METHOD 1311 TOXICITY CHARACTERISTIC LEACHING PROCEDURE (TCLP)
APPENDIX III—CHEMICAL ANALYSIS TEST METHODS
APPENDIX IV—[RESERVED FOR RADIOACTIVE WASTE TEST METHODS]
APPENDIX V—[RESERVED FOR INFECTIOUS WASTE TREATMENT SPECIFICATIONS]
APPENDIX VI—[RESERVED FOR ETIOLOGIC AGENTS]
APPENDIX VII—BASIS FOR LISTING HAZARDOUS WASTE
APPENDIX VIII—HAZARDOUS CONSTITUENTS
APPENDIX IX—WASTES EXCLUDED UNDER §§ 260.20 AND 260.22
APPENDIX X—METHOD OF ANALYSIS FOR CHORINATED DIBENZO-P-DIOXINS AND -DIBENZOFURANS

AUTHORITY: 42 U.S.C. 6905, 6912(a), 6921, 6922, and 6938.

SOURCE: 45 FR 33119, May 19, 1980, unless otherwise noted.

Subpart A—General

§ 261.1 Purpose and scope.

(a) This part identifies those solid wastes which are subject to regulation as hazardous wastes under Parts 262 through 265, 268, and Parts 270, 271, and 124 of this chapter and which are subject to the notification requirements of section 3010 of RCRA. In this part:

(1) Subpart A defines the terms "solid waste" and "hazardous waste", identifies those wastes which are excluded from regulation under Parts 262 through 266, 268 and 270 and establishes special management requirements for hazardous waste produced by conditionally exempt small quantity generators and hazardous waste which is recycled.

(2) Subpart B sets forth the criteria used by EPA to identify characteristics of hazardous waste and to list particular hazardous wastes.

(3) Subpart C identifies characteristics of hazardous waste.

(4) Subpart D lists particular hazardous wastes.

(b)(1) The definition of solid waste contained in this part applies only to wastes that also are hazardous for purposes of the regulations implementing Subtitle C of RCRA. For example, it does not apply to materials (such as non-hazardous scrap, paper, textiles, or rubber) that are not otherwise hazardous wastes and that are recycled.

(2) This part identifies only some of the materials which are solid wastes and hazardous wastes under sections 3007, 3013, and 7003 of RCRA. A material which is not defined as a solid waste in this part, or is not a hazardous waste identified or listed in this part, is still a solid waste and a hazardous waste for purposes of these sections if:

(i) In the case of sections 3007 and 3013, EPA has reason to believe that the material may be a solid waste within the meaning of section 1004(27) of RCRA and a hazardous waste within the meaning of section 1004(5) of RCRA; or

(ii) In the case of section 7003, the statutory elements are established.

(c) For the purposes of §§ 261.2 and 261.6:

(1) A "spent material" is any material that has been used and as a result of contamination can no longer serve the purpose for which it was produced without processing;

(2) "Sludge" has the same meaning used in § 260.10 of this chapter;

(3) A "by-product" is a material that is not one of the primary products of a production process and is not solely or separately produced by the production process. Examples are process residues such as slags or distillation column bottoms. The term does not include a co-product that is produced for the general public's use and is ordinarily used in the form it is produced by the process.

(4) A material is "reclaimed" if it is processed to recover a usable product, or if it is regenerated. Examples are recovery of lead values from spent batteries and regeneration of spent solvents.

(5) A material is "used or reused" if it is either:

(i) Employed as an ingredient (including use as an intermediate) in an industrial process to make a product (for example, distillation bottoms from one process used as feedstock in another process). However, a material will not satisfy this condition if distinct components of the material are recovered as separate end products (as when metals are recovered from metal-containing secondary materials); or

(ii) Employed in a particular function or application as an effective substitute for a commercial product (for example, spent pickle liquor used as phosphorous precipitant and sludge conditioner in wastewater treatment).

(6) "Scrap metal" is bits and pieces of metal parts (*e.g.*,) bars, turnings, rods, sheets, wire) or metal pieces that may be combined together with bolts or soldering (*e.g.*, radiators, scrap automobiles, railroad box cars), which when worn or superfluous can be recycled.

(7) A material is "recycled" if it is used, reused, or reclaimed.

(8) A material is "accumulated speculatively" if it is accumulated before being recycled. A material is not accumulated speculatively, however, if the person accumulating it can show that the material is potentially recyclable and has a feasible means of being recycled; and that—during the calendar year (commencing on January 1)—the amount of material that is recycled, or transferred to a different site for recycling, equals at least 75 percent by weight or volume of the amount of that material accumulated at the beginning of the period. In calculating the percentage of turnover, the 75 percent requirement is to be applied to each material of the same type (*e.g.*, slags from a single smelting process) that is recycled in the same way (*i.e.*, from which the same material is recovered or that is used in the same way). Materials accumulating in units that would be exempt from regulation under § 261.4(c) are not be included in making the calculation. (Materials that are already defined as solid wastes also are not to be included in making the calculation.) Materials are no longer in this category once they are removed from accumulation for recycling, however.

[45 FR 33119, May 19, 1980, as amended at 48 FR 14293, Apr. 1, 1983; 50 FR 663, Jan. 4, 1985; 51 FR 10174, Mar. 24, 1986; 51 FR 40636, Nov. 7, 1986]

§ 261.2 Definition of solid waste.

(a)(1) A *solid waste* is any discarded material that is not excluded by § 261.4(a) or that is not excluded by variance granted under §§ 260.30 and 260.31.

(2) A *discarded material* is any material which is:

(i) *Abandoned*, as explained in paragraph (b) of this section; or

(ii) *Recycled*, as explained in paragraph (c) of this section; or

(iii) Considered *inherently waste-like*, as explained in paragraph (d) of this section.

(b) Materials are solid waste if they are *abandoned* by being:

(1) Disposed of; or

(2) Burned or incinerated; or

(3) Accumulated, stored, or treated (but not recycled) before or in lieu of being abandoned by being disposed of, burned, or incinerated.

(c) Materials are solid wastes if they are *recycled*—or accumulated, stored, or treated before recycling—as specified in paragraphs (c)(1) through (4) of this section.

(1) *Used in a manner constituting disposal.* (i) Materials noted with a "*" in Column 1 of Table I are solid wastes when they are:

(A) Applied to or placed on the land in a manner that constitutes disposal; or

(B) Used to produce products that are applied to or placed on the land or are otherwise contained in products that are applied to or placed on the land (in which cases the product itself remains a solid waste).

(ii) However, commercial chemical products listed in § 261.33 are not solid wastes if they are applied to the land and that is their ordinary manner of use.

(2) *Burning for energy recovery.* (i) Materials noted with a "*" in column 2 of Table 1 are solid wastes when they are:

(A) Burned to recover energy;

(B) Used to produce a fuel or are otherwise contained in fuels (in which cases the fuel itself remains a solid waste).

(ii) However, commercial chemical products listed in § 261.33 are not solid wastes if they are themselves fuels.

(3) *Reclaimed.* Materials noted with a "*" in column 3 of Table 1 are solid wastes when reclaimed.

(4) *Accumulated speculatively.* Materials noted with a "*" in column 4 of Table 1 are solid wastes when accumulated speculatively.

TABLE 1

	Use constituting disposal (§ 261.2(c)(1))	Energy recovery/fuel (§ 261.2(c)(2))	Reclamation (§ 261.2(c)(3))	Speculative accumulation (§ 261.2(c)(4))
	(1)	(2)	(3)	(4)
Spent Materials	(*)	(*)	(*)	(*)
Sludges (listed in 40 CFR Part 261.31 or 261.32)	(*)	(*)	(*)	(*)
Sludges exhibiting a characteristic of hazardous waste	(*)	(*)		(*)
By-products (listed in 40 CFR Part 261.31 or 261.32)	(*)	(*)	(*)	(*)
By-products exhibiting a characteristic of hazardous waste	(*)	(*)		(*)
Commercial chemical products listed in 40 CFR 261.33	(*)	(*)		
Scrap metal	(*)	(*)	(*)	(*)

Note: The terms "spent materials", "sludges", "by-products," and "scrap metal" are defined in § 261.1.

(d) *Inherently waste-like materials.* The following materials are solid wastes when they are recycled in any manner:

(1) Hazardous Waste Nos. F020, F021 (unless used as an ingredient to make a product at the site of generation), F022, F023, F026, and F028.

(2) The Administrator will use the following criteria to add wastes to that list:

(i)(A) The materials are ordinarily disposed of, burned, or incinerated; or

(B) The materials contain toxic constituents listed in Appendix VIII of Part 261 and these constituents are not ordinarily found in raw materials or products for which the materials substitute (or are found in raw materials or products in smaller concentrations) and are not used or reused during the recycling process; and

(ii) The material may pose a substantial hazard to human health and the environment when recycled.

(e) *Materials that are not solid waste when recycled.* (1) Materials are not solid wastes when they can be shown to be recycled by being:

(i) Used or reused as ingredients in an industrial process to make a product, provided the materials are not being reclaimed; or

(ii) Used or reused as effective substitutes for commercial products; or

(iii) Returned to the original process from which they are generated, without first being reclaimed. The material must be returned as a substitute for raw material feedstock, and the process must use raw materials as principal feedstocks.

(2) The following materials are solid wastes, even if the recycling involves use, reuse, or return to the original process (described in paragraphs (e)(1)(i) through (iii) of this section):

(i) Materials used in a manner constituting disposal, or used to produce products that are applied to the land; or

(ii) Materials burned for energy recovery, used to produce a fuel, or contained in fuels; or

(iii) Materials accumulated speculatively; or

(iv) Materials listed in paragraph (d)(1) of this section.

(f) *Documentation of claims that materials are not solid wastes or are conditionally exempt from regulation.* Respondents in actions to enforce regulations implementing Subtitle C of RCRA who raise a claim that a certain material is not a solid waste, or is conditionally exempt from regulation, must demonstrate that there is a known market or disposition for the material, and that they meet the terms of the exclusion or exemption. In doing so, they must provide appropriate documentation (such as contracts showing that a second person uses the material as an ingredient in a production process) to demonstrate that the material is not a waste, or is exempt from regulation. In addition, owners or operators of facilities claiming that they actually are recycling materials must show that they have the necessary equipment to do so.

[50 FR 664, Jan. 4, 1985, as amended at 50 FR 33542, Aug. 20, 1985]

§ 261.3 Definition of hazardous waste.

(a) A solid waste, as defined in § 261.2, is a hazardous waste if:

(1) It is not excluded from regulation as a hazardous waste under § 261.4(b); and

(2) It meets any of the following criteria:

(i) It exhibits any of the characteristics of hazardous waste identified in subpart C except that any mixture of a waste from the extraction, beneficiation, and processing of ores and minerals excluded under § 261.4(b)(7) and any other solid waste exhibiting a characteristic of hazardous waste under subpart C of this part only if it exhibits a characteristic that would not have been exhibited by the excluded waste alone if such mixture had not occurred or if it continues to exhibit any of the characteristics exhibited by the non-excluded wastes prior to mixture. Further, for the purposes of applying the Extraction Procedure Toxicity characteristic to such mixtures, the mixture is also a hazardous waste if it exceeds the maximum concentration for any contaminant listed in table I to § 261.24 that would not have been exceeded by the excluded waste alone if the mixture had not occurred or if it continues to exceed the maximum concentration for any contaminant exceeded by the nonexempt waste prior to mixture.

(ii) It is listed in Subpart D and has not been excluded from the lists in Subpart D under §§ 260.20 and 260.22 of this chapter.

(iii) It is a mixture of a solid waste and a hazardous waste that is listed in subpart D of this part solely because it exhibits one or more of the characteristics of hazardous waste identified in subpart C, unless the resultant mixture no longer exhibits any characteristic of hazardous waste identified in subpart C of this part or unless the solid waste is excluded from regulation under § 261.4(b)(7) and the resultant mixture no longer exhibits any characteristic of hazardous waste identified in subpart C of this part for which the hazardous waste listed in subpart D of this part was listed.

(iv) It is a mixture of solid waste and one or more hazardous wastes listed in Subpart D and has not been excluded from this paragraph under §§ 260.20 and 260.22 of this chapter; however, the following mixtures of solid wastes and hazardous wastes listed in Subpart D are not hazardous wastes (except by application of paragraph (a)(2)(i) or (ii) of this section) if the generator can demonstrate that the

mixture consists of wastewater the discharge of which is subject to regulation under either section 402 or section 307(b) of the Clean Water Act (including wastewater at facilities which have eliminated the discharge of wastewater) and:

(A) One or more of the following spent solvents listed in § 261.31—carbon tetrachloride, tetrachloroethylene, trichoroethylene—*Provided*, That the maximum total weekly usage of these solvents (other than the amounts that can be demonstrated not to be discharged to wastewater) divided by the average weekly flow of wastewater into the headworks of the facility's wastewater treatment or pretreatment system does not exceed 1 part per million; or

(B) One or more of the following spent solvents listed in § 261.31—methylene chloride, 1,1,1-trichloroethane, chlorobenzene, o-dichlorobenzene, cresols, cresylic acid, nitrobenzene, toluene, methyl ethyl ketone, carbon disulfide, isobutanol, pyridine, spent chloroflucrocarbon solvents—provided that the maximum total weekly usage of these solvents (other than the amounts that can be demonstrated not to be discharged to wastewater) divided by the average weekly flow of wastewater into the headworks of the facility's wastewater treatment or pretreatment system does not exceed 25 parts per million; or

(C) One of the following wastes listed in § 261.32—heat exchanger bundle cleaning sludge from the petroleum refining industry (EPA Hazardous Waste No. K050); or

(D) A discarded commercial chemical product, or chemical intermediate listed in § 261.33, arising from *de minimis* losses of these materials from manufacturing operations in which these materials are used as raw materials or are produced in the manufacturing process. For purposes of this subparagraph, *"de minimis"* losses include those from normal material handling operations (e.g. spills from the unloading or transfer of materials from bins or other containers, leaks from pipes, valves or other devices used to transfer materials); minor leaks of process equipment, storage tanks or containers; leaks from well-maintained pump packings and seals; sample purgings; relief device discharges; discharges from safety showers and rinsing and cleaning of personal safety equipment; and rinsate from empty containers or from containers that are rendered empty by that rinsing; or

(E) Wastewater resulting from laboratory operations containing toxic (T) wastes listed in Subpart D, *Provided, That* the annualized average flow of laboratory wastewater does not exceed one percent of total wastewater flow into the headworks of the facility's wastewater treatment or pre-treatment system, or provided the wastes, combined annualized average concentration does not exceed one part per million in the headworks of the facility's wastewater treatment or pre-treatment facility. Toxic (T) wastes used in laboratories that are demonstrated not to be discharged to wastewater are not to be included in this calculation.

(b) A solid waste which is not excluded from regulation under paragraph (a)(1) of this section becomes a hazardous waste when any of the following events occur:

(1) In the case of a waste listed in Subpart D, when the waste first meets the listing description set forth in Subpart D.

(2) In the case of a mixture of solid waste and one or more listed hazardous wastes, when a hazardous waste listed in Subpart D is first added to the solid waste.

(3) In the case of any other waste (including a waste mixture), when the waste exhibits any of the characteristics identified in Subpart C.

(c) Unless and until it meets the criteria of paragraph (d):

(1) A hazardous waste will remain a hazardous waste.

(2)(i) Except as otherwise provided in paragraph (c)(2)(ii) of this section, any solid waste generated from the treatment, storage, or disposal of a hazardous waste, including any sludge, spill residue, ash, emission control dust, or leachate (but not including precipitation run-off) is a hazardous waste. (However, materials that are reclaimed from solid wastes and that are used beneficially are not solid wastes and hence are not hazardous wastes

under this provision unless the reclaimed material is burned for energy recovery or used in a manner constituting disposal.)

(ii) The following solid wastes are not hazardous even though they are generated from the treatment, storage, or disposal of a hazardous waste, unless they exhibit one or more of the characteristics of hazardous waste: (A) Waste pickle liquor sludge generated by lime stabilization of spent pickle liquor from the iron and steel industry (SIC Codes 331 and 332).

(B) Waste from burning any of the materials exempted from regulation by § 261.6(a)(3) (v) through (ix).

(d) Any solid waste described in paragraph (c) of this section is not a hazardous waste if it meets the following criteria:

(1) In the case of any solid waste, it does not exhibit any of the characteristics of hazardous waste identified in Subpart C.

(2) In the case of a waste which is a listed waste under Subpart D, contains a waste listed under Subpart D or is derived from a waste listed in Subpart D, it also has been excluded from paragraph (c) under §§ 260.20 and 260.22 of this chapter.

[45 FR 33119, May 19, 1980, as amended at 46 FR 56588, Nov. 17, 1981; 50 FR 14219, Apr. 11, 1985; 50 FR 49202, Nov. 29, 1985; 52 FR 11821, Apr. 13, 1987; 54 FR 36641, Sept. 1, 1989]

§ 261.4 Exclusions.

(a) *Materials which are not solid wastes.* The following materials are not solid wastes for the purpose of this part:

(1)(i) Domestic sewage; and

(ii) Any mixture of domestic sewage and other wastes that passes through a sewer system to a publicly-owned treatment works for treatment. "Domestic sewage" means untreated sanitary wastes that pass through a sewer system.

(2) Industrial wastewater discharges that are point source discharges subject to regulation under section 402 of the Clean Water Act, as amended.

[*Comment:* This exclusion applies only to the actual point source discharge. It does not exclude industrial wastewaters while they are being collected, stored or treated before discharge, nor does it exclude sludges that are generated by industrial wastewater treatment.]

(3) Irrigation return flows.

(4) Source, special nuclear or byproduct material as defined by the Atomic Energy Act of 1954, as amended, 42 U.S.C. 2011 *et seq.*

(5) Materials subjected to in-situ mining techniques which are not removed from the ground as part of the extraction process.

(6) Pulping liquors (*i.e.*, black liquor) that are reclaimed in a pulping liquor recovery furnace and then reused in the pulping process, unless it is accumulated speculatively as defined in § 261.1(c) of this chapter.

(7) Spent sulfuric acid used to produce virgin sulfuric acid, unless it is accumulated speculatively as defined in § 261.1(c) of this chapter.

(8) Secondary materials that are reclaimed and returned to the original process or processes in which they were generated where they are reused in the production process provided:

(i) Only tank storage is involved, and the entire process through completion of reclamation is closed by being entirely connected with pipes or other comparable enclosed means of conveyance;

(ii) Reclamation does not involve controlled flame combustion (such as occurs in boilers, industrial furnaces, or incinerators);

(iii) The secondary materials are never accumulated in such tanks for over twelve months without being reclaimed; and

(iv) The reclaimed material is not used to produce a fuel, or used to produce products that are used in a manner constituting disposal.

(b) *Solid wastes which are not hazardous wastes.* The following solid wastes are not hazardous wastes:

(1) Household waste, including household waste that has been collected, transported, stored, treated, disposed, recovered (e.g., refuse-derived fuel) or reused. "Household waste" means any material (including garbage, trash and sanitary wastes in septic tanks) derived from households (including single and multiple residences, hotels and motels, bunk-

houses, ranger stations, crew quarters, campgrounds, picnic grounds and day-use recreation areas). A resource recovery facility managing municipal solid waste shall not be deemed to be treating, storing, disposing of, or otherwise managing hazardous wastes for the purposes of regulation under this subtitle, if such facility:

(i) Receives and burns only

(A) Household waste (from single and multiple dwellings, hotels, motels, and other residential sources) and

(B) Solid waste from commercial or industrial sources that does not contain hazardous waste; and

(ii) Such facility does not accept hazardous wastes and the owner or operator of such facility has established contractual requirements or other appropriate notification or inspection procedures to assure that hazardous wastes are not received at or burned in such facility.

(2) Solid wastes generated by any of the following and which are returned to the soils as fertilizers:

(i) The growing and harvesting of agricultural crops.

(ii) The raising of animals, including animal manures.

(3) Mining overburden returned to the mine site.

(4) Fly ash waste, bottom ash waste, slag waste, and flue gas emission control waste generated primarily from the combustion of coal or other fossil fuels.

(5) Drilling fluids, produced waters, and other wastes associated with the exploration, development, or production of crude oil, natural gas or geothermal energy.

(6)(i) Wastes which fail the test for the Toxicity Characteristic because chromium is present or are listed in subpart D due to the presence of chromium, which do not fail the test for the Toxicity Characteristic for any other constituent or are not listed due to the presence of any other constituent, and which do not fail the test for any other characteristic, if it is shown by a waste generator or by waste generators that:

(A) The chromium in the waste is exclusively (or nearly exclusively) trivalent chromium; and

(B) The waste is generated from an industrial process which uses trivalent chromium exlcusively (or nearly exclusively) and the process does not generate hexavalent chromium; and

(C) The waste is typically and frequently managed in non-oxidizing environments.

(ii) Specific wastes which meet the standard in paragraphs (b)(6)(i)(A), (B) and (C) (so long as they do not fail the test for the charactristic of EP toxicity, and do not fail the test for any other characteristic) are:

(A) Chrome (blue) trimmings generated by the following subcategories of the leather tanning and finishing industry; hair pulp/chrome tan/retan/wet finish; hair save/chrome tan/retan/wet finish; retan/wet finish; no beamhouse; through-the-blue; and shearling.

(B) Chrome (blue) shavings generated by the following subcategories of the leather tanning and finishing industry: Hair pulp/chrome tan/retan/wet finish; hair save/chrome tan/retan/wet finish; retan/wet finish; no beamhouse; through-the-blue; and shearling.

(C) Buffing dust generated by the following subcategories of the leather tanning and finishing industry; hair pulp/chrome tan/retan/wet finish; hair save/chrome tan/retan/wet finish; retan/wet finish; no beamhouse; through-the-blue.

(D) Sewer screenings generated by the following subcategories of the leather tanning and finishing industry: Hair pulp/crome tan/retan/wet finish; hair save/chrome tan/retan/wet finish; retan/wet finish; no beamhouse; through-the-blue; and shearling.

(E) Wastewater treatment sludges generated by the following subcategories of the leather tanning and finishing industry: Hair pulp/chrome tan/retan/wet finish; hair save/chrome tan/retan/wet finish; retan/wet finish; no beamhouse; through-the-blue; and shearling.

(F) Wastewater treatment sludes generated by the following subcategories of the leather tanning and finishing industry: Hair pulp/chrome tan/retan/wet finish; hair save/chrome-

tan/retan/wet finish; and through-the-blue.

(G) Waste scrap leather from the leather tanning industry, the shoe manufacturing industry, and other leather product manufacturing industries.

(H) Wastewater treatment sludges from the production of TiO_2 pigment using chromium-bearing ores by the chloride process.

(7) Solid waste from the extraction, beneficiation, and processing of ores and minerals (including coal), including phosphate rock and overburden from the mining of uranium ore. For purposes of § 261.4(b)(7), beneficiation of ores and minerals is restricted to the following activities: Crushing; grinding; washing; dissolution; crystallization; filtration; sorting; sizing; drying; sintering; pelletizing; briquetting; calcining to remove water and/or carbon dioxide; roasting, autoclaving, and/or chlorination in preparation for leaching (except where the roasting (and/or autoclaving and/or chlorination)/leaching sequence produces a final or intermediate product that does not undergo further beneficiation or processing); gravity concentration; magnetic separation; electrostatic separation; flotation; ion exchange; solvent extraction; electrowinning; precipitation; amalgamation; and heap, dump, vat, tank, and *in situ* leaching. For the purposes of § 261.4(b)(7), solid waste from the processing of ores and minerals will include only the following wastes, until EPA completes a report to Congress and a regulatory determination on their ultimate regulatory status:

(i) Slag from primary copper processing;

(ii) Slag from primary lead processing;

(iii) Red and brown muds from bauxite refining;

(iv) Phosphogypsum from phosphoric acid production;

(v) Slag from elemental phosphorus production;

(vi) Gasifier ash from coal gasification;

(vii) Process wastewater from coal gasification;

(viii) Calcium sulfate wastewater treatment plant sludge from primary copper processing;

(ix) Slag tailings from primary copper processing;

(x) Fluorogypsum from hydrofluoric acid production;

(xi) Process wastewater from hydrofluoric acid production;

(xii) Air pollution control dust/sludge from iron blast furnaces;

(xiii) Iron blast furnace slag;

(xiv) Treated residue from roasting/leaching of chrome ore;

(xv) Process wastewater from primary magnesium processing by the anhydrous process;

(xvi) Process wastewater from phosphoric acid production;

(xvii) Basic oxygen furnace and open hearth furnace air pollution control dust/sludge from carbon steel production;

(xviii) Basic oxygen furnace and open hearth furnace slag from carbon steel production;

(xix) Chloride process waste solids from titanium tetrachloride production;

(xx) Slag from primary zinc processing.

(8) Cement kiln dust waste.

(9) Solid waste which consists of discarded wood or wood products which fails the test for the Toxicity Characteristic solely for arsenic and which is not a hazardous waste for any other reason or reasons, if the waste is generated by persons who utilize the arsenical-treated wood and wood products for these materials' intended end use.

(10) Petroleum-contaminated media and debris that fail the test for the Toxicity Characteristic of § 261.24 (Hazardous Waste Codes D018 through D043 only) and are subject to the corrective action regulations under part 280 of this chapter.

(c) Hazardous wastes which are exempted from certain regulations. A hazardous waste which is generated in a product or raw material storage tank, a product or raw material transport vehicle or vessel, a product or raw material pipeline, or in a manufacturing process unit or an associated non-waste-treatment-manufacturing unit, is not subject to regulation under

Parts 262 through 265, 268, 270, 271 and 124 of this chapter or to the notification requirements of section 3010 of RCRA until it exits the unit in which it was generated, unless the unit is a surface impoundment, or unless the hazardous waste remains in the unit more than 90 days after the unit ceases to be operated for manufacturing, or for storage or transportation of product or raw materials.

(d) *Samples.* (1) Except as provided in paragraph (d)(2) of this section, a sample of solid waste or a sample of water, soil, or air, which is collected for the sole purpose of testing to determine its characteristics or composition, is not subject to any requirements of this part or Parts 262 through 268 or Part 270 or Part 124 of this chapter or to the notification requirements of section 3010 of RCRA, when:

(i) The sample is being transported to a laboratory for the purpose of testing; or

(ii) The sample is being transported back to the sample collector after testing; or

(iii) The sample is being stored by the sample collector before transport to a laboratory for testing; or

(iv) The sample is being stored in a laboratory before testing; or

(v) The sample is being stored in a laboratory after testing but before it is returned to the sample collector; or

(vi) The sample is being stored temporarily in the laboratory after testing for a specific purpose (for example, until conclusion of a court case or enforcement action where further testing of the sample may be necessary).

(2) In order to qualify for the exemption in paragraphs (d)(1) (i) and (ii) of this section, a sample collector shipping samples to a laboratory and a laboratory returning samples to a sample collector must:

(i) Comply with U.S. Department of Transportation (DOT), U.S. Postal Service (USPS), or any other applicable shipping requirements; or

(ii) Comply with the following requirements if the sample collector determines that DOT, USPS, or other shipping requirements do not apply to the shipment of the sample:

(A) Assure that the following information accompanies the sample:

(*1*) The sample collector's name, mailing address, and telephone number;

(*2*) The laboratory's name, mailing address, and telephone number;

(*3*) The quantity of the sample;

(*4*) The date of shipment; and

(*5*) A description of the sample.

(B) Package the sample so that it does not leak, spill, or vaporize from its packaging.

(3) This exemption does not apply if the laboratory determines that the waste is hazardous but the laboratory is no longer meeting any of the conditions stated in paragraph (d)(1) of this section.

(e) *Treatability Study Samples.* (1) Except as provided in paragraph (e)(2) of this section, persons who generate or collect samples for the purpose of conducting treatability studies as defined in section 260.10, are not subject to any requirement of Parts 261 through 263 of this chapter or to the notification requirements of Section 3010 of RCRA, nor are such samples included in the quantity determinations of § 261.5 and § 262.34(d) when:

(i) The sample is being collected and prepared for transportation by the generator or sample collector; or

(ii) The sample is being accumulated or stored by the generator or sample collector prior to transportation to a laboratory or testing facility; or

(iii) The sample is being transported to the laboratory or testing facility for the purpose of conducting a treatability study.

(2) The exemption in paragraph (e)(1) of this section is applicable to samples of hazardous waste being collected and shipped for the purpose of conducting treatability studies provided that:

(i) The generator or sample collector uses (in "treatability studies") no more than 1000 kg of any non-acute hazardous waste, 1 kg of acute hazardous waste, or 250 kg of soils, water, or debris contaminated with acute hazardous waste for each process being evaluated for each generated waste stream; and

(ii) The mass of each sample shipment does not exceed 1000 kg of non-

acute hazardous waste, 1 kg of acute hazardous waste, or 250 kg of soils, water, or debris contaminated with acute hazardous waste; and

(iii) The sample must be packaged so that it will not leak, spill, or vaporize from its packaging during shipment and the requirements of paragraph A or B of this subparagraph are met.

(A) The transportation of each sample shipment complies with U.S. Department of Transportation (DOT), U.S. Postal Service (USPS), or any other applicable shipping requirements; or

(B) If the DOT, USPS, or other shipping requirements do not apply to the shipment of the sample, the following information must accompany the sample:

(*1*) The name, mailing address, and telephone number of the originator of the sample;

(*2*) The name, address, and telephone number of the facility that will perform the treatability study;

(*3*) The quantity of the sample;

(*4*) The date of shipment; and

(*5*) A description of the sample, including its EPA Hazardous Waste Number.

(iv) The sample is shipped to a laboratory or testing facility which is exempt under § 261.4(f) or has an appropriate RCRA permit or interim status.

(v) The generator or sample collector maintains the following records for a period ending 3 years after completion of the treatability study:

(A) Copies of the shipping documents;

(B) A copy of the contract with the facility conducting the treatability study;

(C) Documentation showing:

(*1*) The amount of waste shipped under this exemption;

(*2*) The name, address, and EPA identification number of the laboratory or testing facility that received the waste;

(*3*) The date the shipment was made; and

(*4*) Whether or not unused samples and residues were returned to the generator.

(vi) The generator reports the information required under paragraph (e)(v)(C) of this section in its biennial report.

(3) The Regional Administrator, or State Director (if located in an authorized State), may grant requests, on a case-by-case basis, for quantity limits in excess of those specified in paragraph (e)(2)(i) of this section, for up to an additional 500 kg of non-acute hazardous waste, 1 kg of acute hazardous waste, and 250 kg of soils, water, or debris contaminated with acute hazardous waste, to conduct further treatability study evaluation when: There has been an equipment or mechanical failure during the conduct of a treatability study; there is a need to verify the results of a previously conducted treatability study; there is a need to study and analyze alternative techniques within a previously evaluated treatment process; or there is a need to do further evaluation of an ongoing treatability study to determine final specifications for treatment. The additional quantities allowed are subject to all the provisions in paragraphs (e)(1) and (e)(2)(ii)(vi) of this section. The generator or sample collector must apply to the Regional Administrator in the Region where the sample is collected and provide in writing the following information:

(i) The reason why the generator or sample collector requires additional quantity of sample for the treatability study evaluation and the additional quantity needed;

(ii) Documentation accounting for all samples of hazardous waste from the waste stream which have been sent for or undergone treatability studies including the data each previous sample from the waste stream was shipped, the quantity of each previous shipment, the laboratory or testing facility to which it was shipped, what treatability study processes were conducted on each sample shipped, and the available results of each treatability study;

(iii) A description of the technical modifications or change in specifications which will be evaluated and the expected results;

(iv) If such further study is being required due to equipment or mechanical failure, the applicant must include information regarding the reason for

the failure or breakdown and also include what procedures or equipment improvements have been made to protect against further breakdowns; and

(v) Such other information that the Regional Administrator considers necessary.

(f) *Samples Undergoing Treatability Studies at Laboratories and Testing Facilities.* Samples undergoing treatability studies and the laboratory or testing facility conducting such treatability studies (to the extent such facilities are not otherwise subject to RCRA requirements) are not subject to any requirement of this Part, Part 124, Parts 262-266, 268, and 270, or to the notification requirements of Section 3010 of RCRA provided that the conditions of paragraphs (f) (1) through (11) of this section are met. A mobile treatment unit (MTU) may qualify as a testing facility subject to paragraphs (f) (1) through (11) of this section. Where a group of MTUs are located at the same site, the limitations specified in (f) (1) through (11) of this section apply to the entire group of MTUs collectively as if the group were one MTU.

(1) No less than 45 days before conducting treatability studies, the facility notifies the Regional Administrator, or State Director (if located in an authorized State), in writing that it intends to conduct treatability studies under this paragraph.

(2) The laboratory or testing facility conducting the treatability study has an EPA identification number.

(3) No more than a total of 250 kg of "as received" hazardous waste is subjected to initiation of treatment in all treatability studies in any single day. "As received" waste refers to the waste as received in the shipment from the generator or sample collector.

(4) The quantity of "as received" hazardous waste stored at the facility for the purpose of evaluation in treatability studies does not exceed 1000 kg, the total of which can include 500 kg of soils, water, or debris contaminated with acute hazardous waste or 1 kg of acute hazardous waste. This quantity limitation does not include:

(i) Treatability study residues; and

(ii) Treatment materials (including nonhazardous solid waste) added to "as received" hazardous waste.

(5) No more than 90 days have elapsed since the treatability study for the sample was completed, or no more than one year has elapsed since the generator or sample collector shipped the sample to the laboratory or testing facility, whichever date first occurs.

(6) The treatability study does not involve the placement of hazardous waste on the land or open burning of hazardous waste.

(7) The facility maintains records for 3 years following completion of each study that show compliance with the treatment rate limits and the storage time and quantity limits. The following specific information must be included for each treatability study conducted:

(i) The name, address, and EPA identification number of the generator or sample collector of each waste sample;

(ii) The date the shipment was received;

(iii) The quantity of waste accepted;

(iv) The quantity of "as received" waste in storage each day;

(v) The date the treatment study was initiated and the amount of "as received" waste introduced to treatment each day;

(vi) The date the treatability study was concluded;

(vii) The date any unused sample or residues generated from the treatability study were returned to the generator or sample collector or, if sent to a designated facility, the name of the facility and the EPA identification number.

(8) The facility keeps, on-site, a copy of the treatability study contract and all shipping papers associated with the transport of treatability study samples to and from the facility for a period ending 3 years from the completion date of each treatability study.

(9) The facility prepares and submits a report to the Regional Administrator, or State Director (if located in an authorized State), by March 15 of each year that estimates the number of studies and the amount of waste expected to be used in treatability studies during the current year, and in-

cludes the following information for the previous calendar year:

(i) The name, address, and EPA identification number of the facility conducting the treatability studies;

(ii) The types (by process) of treatability studies conducted;

(iii) The names and addresses of persons for whom studies have been conducted (including their EPA identification numbers);

(iv) The total quantity of waste in storage each day;

(v) The quantity and types of waste subjected to treatability studies;

(vi) When each treatability study was conducted;

(vii) The final disposition of residues and unused sample from each treatability study.

(10) The facility determines whether any unused sample or residues generated by the treatability study are hazardous waste under § 261.3 and, if so, are subject to Parts 261 through 268, and Part 270 of this Chapter, unless the residues and unused samples are returned to the sample originator under the § 261.4(e) exemption.

(11) The facility notifies the Regional Administrator, or State Director (if located in an authorized State), by letter when the facility is no longer planning to conduct any treatability studies at the site.

(Approved by the Office of Management and Budget under control number 2050-0088)

[45 FR 33119, May 19, 1980]

EDITORIAL NOTE: For FEDERAL REGISTER citations affecting § 261.4, see the List of CFR Sections Affected in the Finding Aids section of this volume.

EFFECTIVE DATE NOTE: At 55 FR 2353, Jan. 23, 1990, § 261.4 paragraph (b)(7) was revised, effective July 23, 1990. At 55 FR 11862, Mar. 29, 1990, § 261.4 was amended by revising paragraphs (b)(6)(i) introductory text and (b)(9), and by adding paragraph (b)(10), effective September 25, 1990. At 55 FR 26987, June 29, 1990, paragraph (b)(10) was corrected, effective September 25, 1990. For the convenience of the user, the superseded text is set forth below:

§ 261.4 Exclusions.

(b)* * *

(6)(i) Wastes which fail the test for the characteristic of EP toxicity because chromium is present or are listed in Subpart D due to the presence of chromium, which do not fail the test for the characteristic of EP toxicity for any other constituent or are not listed due to the presence of any other constituent, and which do not fail the text for any other characteristic, if it is shown by a waste generator or by waste generators that:

* * * * *

(7) Solid waste from the extraction, beneficiation, and processing of ores and minerals (including coal), including phosphate rock and overburden from the mining of uranium ore. For purposes of this paragraph, beneficiation of ores and minerals is restricted to the following activities: crushing, grinding, washing, dissolution, crystallization, filtration, sorting, sizing, drying, sintering, pelletizing, briquetting, calcining to remove water and/or carbon dioxide, roasting in preparation for leaching (except where the roasting/leaching sequence produces a final or intermediate product that does not undergo further beneficiation or processing), gravity concentration, magnetic separation, electrostatic separation, floatation, ion exchange, solvent extraction, electrowinning, precipitation, amalgamation, and heap, dump, vat, tank, and *in situ* leaching. For the purposes of this paragraph, solid waste from the processing of ores and minerals includes only:

(i) The following solid wastes from the processing of ores and minerals that are retained within this exclusion:

(A) Slag from primary copper smelting;

(B) Slag from primary lead smelting;

(C) Red and brown muds from bauxite refining;

(D) Phosphogypsum from phosphoric acid production;

(E) Slag from elemental phosphorus production; and

(ii) The following solid wastes from the processing of ores and minerals that are conditionally retained within this exclusion, pending collection and evaluation of additional data:

(A) Roast/leach ore residue from primary chromite production;

(B) Gasifier ash from coal gasification;

(C) Process wastewater from coal gasification;

(D) Slag tailings from primary copper smelting;

(E) Calcium sulfate wastewater treatment plant sludge from primary copper smelting/refining;

(F) Furnace off-gas solids from elemental phosphorus production;

(G)Fluorogypsum from hydrofluoric acid production;

(H) Process wastewater from hydrofluoric acid production;

(I) Air pollution control dust/sludge from iron blast furnaces;

(J) Iron blast furnace slag;

(K) Process wastewater from primary lead production;

(L) Air pollution control dust/sludge from lightweight aggregate production;

(M) Process wastewater from primary magnesium processing by the anhydrous process;

(N) Process wastewater from phosphoric acid production;

(O) Basic oxygen furnace and open hearth furnace slag from carbon steel production;

(P) Basic oxygen furnace and open hearth furnace air pollution control dust/sludge from carbon steel production;

(Q) Sulfate processing waste acids from titanium dioxide production;

(R) Sulfate processing waste solids from titanium dioxide production;

(S) Chloride processing waste solids from titanium tetrachloride production; and

(T) Slag from primary zinc smelting.

* * * * *

(9) Solid waste which consists of discarded wood or wood products which fails the test for the characteristic of EP toxicity and which is not a hazardous waste for any other reason if the waste is generated by persons who utilize the arsenical-treated wood and wood products for these materials' intended end use.

* * * * *

§ 261.5 Special requirements for hazardous waste generated by conditionally exempt small quantity generators.

(a) A generator is a conditionally exempt small quantity generator in a calendar month if he generates no more than 100 kilograms of hazardous waste in that month.

(b) Except for those wastes identified in paragraphs (e), (f), (g), and (j) of this section, a conditionally exempt small quantity generator's hazardous wastes are not subject to regulation under Parts 262 through 266, 268, and Parts 270 and 124 of this chapter, and the notification requirements of section 3010 of RCRA, provided the generator complies with the requirements of paragraphs (f), (g), and (j) of this section.

(c) Hazardous waste that is not subject to regulation or that is subject only to § 262.11, § 262.12, § 262.40(c), and § 262.41 is not included in the quantity determinations of this part and Parts 262 through 266, 268, and 270 and is not subject to any of the requirements of those parts. Hazardous waste that is subject to the requirements of § 261.6 (b) and (c) and Subparts C, D, and F of Part 266 is included in the quantity determination of this part and is subject to the requirements of Parts 262 through 266 and 270.

(d) In determining the quantity of hazardous waste generated, a generator need not include:

(1) Hazardous waste when it is removed from on-site storage; or

(2) Hazardous waste produced by on-site treatment (including reclamation) of his hazardous waste, so long as the hazardous waste that is treated was counted once; or

(3) Spent materials that are generated, reclaimed, and subsequently reused on-site, so long as such spent materials have been counted once.

(e) If a generator generates acute hazardous waste in a calendar month in quantities greater than set forth below, all quantities of that acute hazardous waste are subject to full regulation under Parts 262 through 266, 268, and Parts 270 and 124 of this chapter, and the notification requirements of section 3010 of RCRA:

(1) A total of one kilogram of acute hazardous wastes listed in §§ 261.31, 261.32, or 261.33(e).

(2) A total of 100 kilograms of any residue or contaminated soil, waste, or other debris resulting from the clean-up of a spill, into or on any land or water, of any acute hazardous wastes listed in §§ 261.31, 261.32, or 261.33(e).

[Comment: "Full regulation" means those regulations applicable to generators of greater than 1,000 kg of non-acutely hazardous waste in a calendar month.]

(f) In order for acute hazardous wastes generated by a generator of acute hazardous wastes in quantities equal to or less than those set forth in paragraph (e)(1) or (2) of this section to be excluded from full regulation under this section, the generator must comply with the following requirements:

(1) Section 262.11 of this chapter;

(2) The generator may accumulate acute hazardous waste on-site. If he accumulates at any time acute hazard-

ous wastes in quantities greater than those set forth in paragraph (e)(1) or (e)(2) of this section, all of those accumulated wastes are subject to regulation under Parts 262 through 266, 268, and Parts 270 and 124 of this chapter, and the applicable notification requirements of section 3010 of RCRA. The time period of § 262.34(a) of this chapter, for accumulation of wastes on-site, begins when the accumulated wastes exceed the applicable exclusion limit;

(3) A conditionally exempt small quantity generator may either treat or dispose of his acute hazardous waste in an on-site facility or ensure delivery to an off-site treatment, storage or disposal facility, either of which, if located in the U.S., is:

(i) Permitted under Part 270 of this chapter;

(ii) In interim status under Parts 270 and 265 of this chapter;

(iii) Authorized to manage hazardous waste by a State with a hazardous waste management program approved under Part 271 of this chapter;

(iv) Permitted, licensed, or registered by a State to manage municipal or industrial solid waste; or

(v) A facility which:

(A) Beneficially uses or reuses, or legitimately recycles or reclaims its waste; or

(B) Treats its waste prior to beneficial use or reuse, or legitimate recycling or reclamation.

(g) In order for hazardous waste generated by a conditionally exempt small quantity generator in quantities of less than 100 kilograms of hazardous waste during a calendar month to be excluded from full regulation under this section, the generator must comply with the following requirements:

(1) Section 262.11 of this chapter;

(2) The conditionally exempt small quantity generator may accumulate hazardous waste on-site. If he accumulates at any time more than a total of 1000 kilograms of his hazardous wastes, all of those accumulated wastes are subject to regulation under the special provisions of Part 262 applicable to generators of between 100 kg and 1000 kg of hazardous waste in a calendar month as well as the requirements of Parts 263 through 266, 268, and Parts 270 and 124 of this chapter, and the applicable notification requirements of section 3010 of RCRA. The time period of § 262.34(d) for accumulation of wastes on-site begins for a conditionally exempt small quantity generator when the accumulated wastes exceed 1000 kilograms;

(3) A conditionally exempt small quantity generator may either treat or dispose of his hazardous waste in an on-site facility or ensure delivery to an off-site treatment, storage or disposal facility, either of which, if located in the U.S., is:

(i) Permitted under Part 270 of this chapter;

(ii) In interim status under Parts 270 and 265 of this chapter;

(iii) Authorized to manage hazardous waste by a State with a hazardous waste management program approved under Part 271 of this chapter;

(iv) Permitted, licensed, or registered by a State to manage municipal or industrial solid waste; or

(v) A facility which:

(A) Beneficially uses or reuses, or legitimately recycles or reclaims its waste; or

(B) Treats its waste prior to beneficial use or reuse, or legitimate recycling or reclamation.

(h) Hazardous waste subject to the reduced requirements of this section may be mixed with non-hazardous waste and remain subject to these reduced requirements even though the resultant mixture exceeds the quantity limitations identified in this section, unless the mixture meets any of the characteristics of hazardous waste identified in Subpart C.

(i) If any person mixes a solid waste with a hazardous waste that exceeds a quantity exclusion level of this section, the mixture is subject to full regulation.

(j) If a conditionally exempt small quantity generator's wastes are mixed with used oil, the mixture is subject to Subpart E of Part 266 of this chapter if it is destined to be burned for energy recovery. Any material produced from such a mixture by processing, blending, or other treatment is also so regulated if it is destined to be burned for energy recovery.

[51 FR 10174, Mar. 24, 1986, as amended at 51 FR 28682, Aug. 8, 1986; 51 FR 40637, Nov. 7, 1986; 53 FR 27163, July 19, 1988]

§ 261.6 Requirements for recyclable materials.

(a)(1) Hazardous wastes that are recycled are subject to the requirements for generators, transporters, and storage facilities of paragraphs (b) and (c) of this section, except for the materials listed in paragraphs (a)(2) and (a)(3) of this section. Hazardous wastes that are recycled will be known as "recyclable materials."

(2) The following recyclable materials are not subject to the requirements of this section but are regulated under Subparts C through G of Part 266 of this chapter and all applicable provisions in Parts 270 and 124 of this chapter:

(i) Recyclable materials used in a manner constituting disposal (Subpart C);

(ii) Hazardous wastes burned for energy recovery in boilers and industrial furnaces that are not regulated under Subpart O of Part 264 or 265 of this chapter (Subpart D);

(iii) Used oil that exhibits one or more of the characteristics of hazardous waste and is burned for energy recovery in boilers and industrial furnaces that are not regulated under Subpart O of Part 264 or 265 of this chapter (Subpart E);

(iv) Recyclable materials from which precious metals are reclaimed (Subpart F);

(v) Spent lead-acid batteries that are being reclaimed (Subpart G).

(3) The following recyclable materials are not subject to regulation under Parts 262 through Parts 266 or Parts 268, 270 or 124 of this chapter, and are not subject to the notification requirements of section 3010 of RCRA:

(i) Industrial ethyl alcohol that is reclaimed except that, unless provided otherwise in an international agreement as specified in § 262.58:

(A) A person initiating a shipment for reclamation in a foreign country, and any intermediary arranging for the shipment, must comply with the requirements applicable to a primary exporter in §§ 262.53, 262.56 (a)(1)-(4), (6), and (b), and 262.57, export such materials only upon consent of the receiving country and in conformance with the EPA Acknowledgment of Consent as defined in Subpart E of Part 262, and provide a copy of the EPA Acknowledgment of Consent to the shipment to the transporter transporting the shipment for export;

(B) Transporters transporting a shipment for export may not accept a shipment if he knows the shipment does not conform to the EPA Acknowledgment of Consent, must ensure that a copy of the EPA Acknowledgment of Consent accompanies the shipment and must ensure that it is delivered to the facility designated by the person initiating the shipment.

(ii) Used batteries (or used battery cells) returned to a battery manufacturer for regeneration;

(iii) Used oil that exhibits one or more of the characteristics of hazardous waste but is recycled in some other manner than being burned for energy recovery;

(iv) Scrap metal;

(v) Fuels produced from the refining of oil-bearing hazardous wastes along with normal process streams at a petroleum refining facility if such wastes result from normal petroleum refining, production, and transportation practices;

(vi) Oil reclaimed from hazardous waste resulting from normal petroleum refining, production, and transportation practices, which oil is to be refined along with normal process streams at a petroleum refining facility;

(vii) Coke and coal tar from the iron and steel industry that contains EPA Hazardous Waste No. K087 (Decanter tank tar sludge from coking operations) from the iron and steel production process;

(viii)(A) Hazardous waste fuel produced from oil-bearing hazardous wastes from petroleum refining, production, or transportation practices, or produced from oil reclaimed from such hazardous wastes, where such hazardous wastes are reintroduced into a process that does not use distillation or does not produce products from crude oil so long as the resulting fuel meets the used oil specification under § 266.40(e) of this chapter and so long

as no other hazardous wastes are used to produce the hazardous waste fuel;

(B) Hazardous waste fuel produced from oil-bearing hazardous waste from petroleum refining production, and transportation practices, where such hazardous wastes are reintroduced into a refining process after a point at which contaminants are removed, so long as the fuel meets the used oil fuel specification under § 266.40(e) of this chapter; and

(C) Oil reclaimed from oil-bearing hazardous wastes from petroleum refining, production, and transportation practices, which reclaimed oil is burned as a fuel without reintroduction to a refining process, so long as the reclaimed oil meets the used oil fuel specification under § 266.40(e) of this chapter; and

(ix) Petroleum coke produced from petroleum refinery hazardous wastes containing oil at the same facility at which such wastes were generated, unless the resulting coke product exceeds one or more of the characteristics of hazardous waste in Part 261, Subpart C.

(b) Generators and transporters of recyclable materials are subject to the applicable requirements of Parts 262 and 263 of this chapter and the notification requirements under section 3010 of RCRA, except as provided in paragraph (a) of this section.

(c)(1) Owners or operators of facilities that store recyclable materials before they are recycled are regulated under all applicable provisions of subparts A through L, AA, and BB of parts 264 and 265, and under parts 124, 266, 268, and 270 of this chapter and the notification requirements under section 3010 of RCRA, except as provided in paragraph (a) of this section. (The recycling process itself is exempt from regulation except as provided in § 261.6(d).)

(2) Owners or operators of facilities that recycle recyclable materials without storing them before they are recycled are subject to the following requirements, except as provided in paragraph (a) of this section:

(i) Notification requirements under section 3010 of RCRA;

(ii) Sections 265.71 and 265.72 (dealing with the use of the manifest and manifest discrepancies) of this chapter.

(iii) Section 261.6(d) of this chapter.

(d) Owners or operators of facilities subject to RCRA permitting requirements with hazardous waste management units that recycle hazardous wastes are subject to the requirements of subparts AA and BB of part 264 or 265 of this chapter.

[50 FR 49203, Nov. 29, 1985, as amended at 51 FR 28682, Aug. 8, 1986; 51 FR 40637, Nov. 7, 1986; 52 FR 11821, Apr. 13, 1987; 55 FR 25493, June 21, 1990]

EFFECTIVE DATE NOTE: At 55 FR 25493, June 21, 1990, in § 261.6, paragraph (c)(1) was revised and paragraphs (c)(2)(iii) and (d) were added, effective December 21, 1990. For the convenience of the user the superseded text appears as follows:

§ 261.6 Requirements for recyclable materials.

* * * * *

(c)(1) Owners or operators of facilities that store recyclable materials before they are recycled are regulated under all applicable provisions of Subparts A through L of Parts 264 and 265, and under Parts 124, 266, 268, and 270 of this Chapter and the notification requirements under section 3010 of RCRA, except as provided in paragraph (a) of this section. (The recycling process itself is exempt from regulation.)

* * * * *

§ 261.7 Residues of hazardous waste in empty containers.

(a)(1) Any hazardous waste remaining in either (i) an empty container or (ii) an inner liner removed from an empty container, as defined in paragraph (b) of this section, is not subject to regulation under Parts 261 through 265, or Part 268, 270 or 124 of this chapter or to the notification requirements of section 3010 of RCRA.

(2) Any hazardous waste in either (i) a container that is not empty or (ii) an inner liner removed from a container that is not empty, as defined in paragraph (b) of this section, is subject to regulation under Parts 261 through 265, and Parts 268, 270 and 124 of this chapter and to the notification requirements of section 3010 of RCRA.

(b)(1) A container or an inner liner removed from a container that has

held any hazardous waste, except a waste that is a compressed gas or that is identified as an acute hazardous waste listed in §§ 261.31, 261.32, or 261.33(e) of this chapter is empty if:

(i) All wastes have been removed that can be removed using the practices commonly employed to remove materials from that type of container, *e.g.*, pouring, pumping, and aspirating, *and*

(ii) No more than 2.5 centimeters (one inch) of residue remain on the bottom of the container or inner liner, *or*

(iii)(A) No more than 3 percent by weight of the total capacity of the container remains in the container or inner liner if the container is less than or equal to 110 gallons in size, or

(B) No more than 0.3 percent by weight of the total capacity of the container remains in the container or inner liner if the container is greater than 110 gallons in size.

(2) A container that has held a hazardous waste that is a compressed gas is empty when the pressure in the container approaches atmospheric.

(3) A container or an inner liner removed from a container that has held an acute hazardous waste listed in §§ 261.31, 261.32, or 261.33(e) is empty if:

(i) The container or inner liner has been triple rinsed using a solvent capable of removing the commercial chemical product or manufacturing chemical intermediate;

(ii) The container or inner liner has been cleaned by another method that has been shown in the scientific literature, or by tests conducted by the generator, to achieve equivalent removal; or

(iii) In the case of a container, the inner liner that prevented contact of the commercial chemical product or manufacturing chemical intermediate with the container, has been removed.

[45 FR 78529, Nov. 25, 1980, as amended at 47 FR 36097, Aug. 18, 1982; 48 FR 14294, Apr. 1, 1983; 50 FR 1999, Jan. 14, 1985; 51 FR 40637, Nov. 7, 1986]

§ 261.8 PCB wastes regulated under Toxic Substance Control Act.

The disposal of PCB-containing dielectric fluid and electric equipment containing such fluid authorized for use and regulated under part 761 of this chapter and that are hazardous only because they fail the test for the Toxicity Characteristic (Hazardous Waste Codes D018 through D043 only) are exempt from regulation under parts 261 through 265, and parts 268, 270, and 124 of this chapter, and the notification requirements of section 3010 of RCRA.

[55 FR 11862, Mar. 29, 1990]

EFFECTIVE DATE NOTE: At 55 FR 11862, Mar. 29, 1990, § 261.8 was added, effective September 25, 1990.

Subpart B—Criteria for Identifying the Characteristics of Hazardous Waste and for Listing Hazardous Waste

§ 261.10 Criteria for identifying the characteristics of hazardous waste.

(a) The Administrator shall identify and define a characteristic of hazardous waste in Subpart C only upon determining that:

(1) A solid waste that exhibits the characteristic may:

(i) Cause, or significantly contribute to, an increase in mortality or an increase in serious irreversible, or incapacitating reversible, illness; or

(ii) Pose a substantial present or potential hazard to human health or the environment when it is improperly treated, stored, transported, disposed of or otherwise managed; and

(2) The characteristic can be:

(i) Measured by an available standardized test method which is reasonably within the capability of generators of solid waste or private sector laboratories that are available to serve generators of solid waste; or

(ii) Reasonably detected by generators of solid waste through their knowledge of their waste.

§ 261.11 Criteria for listing hazardous waste.

(a) The Administrator shall list a solid waste as a hazardous waste only upon determining that the solid waste meets one of the following criteria:

(1) It exhibits any of the characteristics of hazardous waste identified in Subpart C.

(2) It has been found to be fatal to humans in low doses or, in the absence of data on human toxicity, it has been shown in studies to have an oral LD 50 toxicity (rat) of less than 50 milligrams per kilogram, an inhalation LC 50 toxicity (rat) of less than 2 milligrams per liter, or a dermal LD 50 toxicity (rabbit) of less than 200 milligrams per kilogram or is otherwise capable of causing or significantly contributing to an increase in serious irreversible, or incapacitating reversible, illness. (Waste listed in accordance with these criteria will be designated Acute Hazardous Waste.)

(3) It contains any of the toxic constituents listed in Appendix VIII and, after considering the following factors, the Administrator concludes that the waste is capable of posing a substantial present or potential hazard to human health or the environment when improperly treated, stored, transported or disposed of, or otherwise managed:

(i) The nature of the toxicity presented by the constituent.

(ii) The concentration of the constituent in the waste.

(iii) The potential of the constituent or any toxic degradation product of the constituent to migrate from the waste into the environment under the types of improper management considered in paragraph (a)(3)(vii) of this section.

(iv) The persistence of the constituent or any toxic degradation product of the constituent.

(v) The potential for the constituent or any toxic degradation product of the constituent to degrade into nonharmful constituents and the rate of degradation.

(vi) The degree to which the constituent or any degradation product of the constituent bioaccumulates in ecosystems.

(vii) The plausible types of improper management to which the waste could be subjected.

(viii) The quantities of the waste generated at individual generation sites or on a regional or national basis.

(ix) The nature and severity of the human health and environmental damage that has occurred as a result of the improper management of wastes containing the constituent.

(x) Action taken by other governmental agencies or regulatory programs based on the health or environmental hazard posed by the waste or waste constituent.

(xi) Such other factors as may be appropriate.

Substances will be listed on Appendix VIII only if they have been shown in scientific studies to have toxic, carcinogenic, mutagenic or teratogenic effects on humans or other life forms.

(Wastes listed in accordance with these criteria will be designated Toxic wastes.)

(b) The Administrator may list classes or types of solid waste as hazardous waste if he has reason to believe that individual wastes, within the class or type of waste, typically or frequently are hazardous under the definition of hazardous waste found in section 1004(5) of the Act.

(c) The Administrator will use the criteria for listing specified in this section to establish the exclusion limits referred to in § 261.5(c).

[45 FR 33119, May 19, 1980, as amended at 55 FR 18726, May 4, 1990]

Subpart C—Characteristics of Hazardous Waste

§ 261.20 General.

(a) A solid waste, as defined in § 261.2, which is not excluded from regulation as a hazardous waste under § 261.4(b), is a hazardous waste if it exhibits any of the characteristics identified in this subpart.

[*Comment*: § 262.11 of this chapter sets forth the generator's responsibility to determine whether his waste exhibits one or more of the characteristics identified in this subpart]

(b) A hazardous waste which is identified by a characteristic in this subpart is assigned every EPA Hazardous Waste Number that is applicable as set forth in this subpart. This number must be in complying with the notification requirements of section 3010 of

the Act and all applicable recordkeeping and reporting requirements under parts 262 through 265, 268, and 270 of this chapter.

(c) For purposes of this subpart, the Administrator will consider a sample obtained using any of the applicable sampling methods specified in Appendix I to be a representative sample within the meaning of Part 260 of this chapter.

[*Comment*: Since the Appendix I sampling methods are not being formally adopted by the Administrator, a person who desires to employ an alternative sampling method is not required to demonstrate the equivalency of his method under the procedures set forth in §§ 260.20 and 260.21.]

[45 FR 33119, May 1980, as amended at 51 FR 40336, Nov. 7, 1986; 55 FR 22684, June 1, 1990]

§ 261.21 Characteristic of ignitability.

(a) A solid waste exhibits the characteristic of ignitability if a representative sample of the waste has any of the following properties:

(1) It is a liquid, other than an aqueous solution containing less than 24 percent alcohol by volume and has flash point less than 60°C (140°F), as determined by a Pensky-Martens Closed Cup Tester, using the test method specified in ASTM Standard D-93-79 or D-93-80 (incorporated by reference, see § 260.11), or a Setaflash Closed Cup Tester, using the test method specified in ASTM Standard D-3278-78 (incorporated by reference, see § 260.11), or as determined by an equivalent test method approved by the Administrator under procedures set forth in §§ 260.20 and 260.21.

(2) It is not a liquid and is capable, under standard temperature and pressure, of causing fire through friction, absorption of moisture or spontaneous chemical changes and, when ignited, burns so vigorously and persistently that it creates a hazard.

(3) It is an ignitable compressed gas as defined in 49 CFR 173.300 and as determined by the test methods described in that regulation or equivalent test methods approved by the Administrator under §§ 260.20 and 260.21.

(4) It is an oxidizer as defined in 49 CFR 173.151.

(b) A solid waste that exhibits the characteristic of ignitability has the EPA Hazardous Waste Number of D001.

[45 FR 33119, May 19, 1980, as amended at 46 FR 35247, July 7, 1981; 55 FR 22684, June 1, 1990]

§ 261.22 Characteristic of corrosivity.

(a) A solid waste exhibits the characteristic of corrosivity if a representative sample of the waste has either of the following properties:

(1) It is aqueous and has a pH less than or equal to 2 or greater than or equal to 12.5, as determined by a pH meter using either an EPA test method or an equivalent test method approved by the Administrator under the procedures set forth in §§ 260.20 and 260.21. The EPA test method for pH is specified as Method 5.2 in "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods" (incorporated by reference, see § 260.11).

(2) It is a liquid and corrodes steel (SAE 1020) at a rate greater than 6.35 mm (0.250 inch) per year at a test temperature of 55°C (130°F) as determined by the test method specified in NACE (National Association of Corrosion Engineers) Standard TM-01-69 as standardized in "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods" (incorporated by reference, see § 260.11) or an equivalent test method approved by the Administrator under the procedures set forth in §§ 260.20 and 260.21.

(b) A solid waste that exhibits the characteristic of corrosivity has the EPA Hazardous Waste Number of D002.

[45 FR 33119, May 19, 1980, as amended at 46 FR 35247, July 7, 1981; 55 FR 22684, June 1, 1990]

§ 261.23 Characteristic of reactivity.

(a) A solid waste exhibits the characteristic of reactivity if a representative sample of the waste has *any* of the following properties:

(1) It is normally unstable and readily undergoes violent change without detonating.

(2) It reacts violently with water.

(3) It forms potentially explosive mixtures with water.

(4) When mixed with water, it generates toxic gases, vapors or fumes in a quantity sufficient to present a danger to human health or the environment.

(5) It is a cyanide or sulfide bearing waste which, when exposed to pH conditions between 2 and 12.5, can generate toxic gases, vapors or fumes in a quantity sufficient to present a danger to human health or the environment.

(6) It is capable of detonation or explosive reaction if it is subjected to a strong initiating source or if heated under confinement.

(7) It is readily capable of detonation or explosive decomposition or reaction at standard temperature and pressure.

(8) It is a forbidden explosive as defined in 49 CFR 173.51, or a Class A explosive as defined in 49 CFR 173.53 or a Class B explosive as defined in 49 CFR 173.88.

(b) A solid waste that exhibits the characteristic of reactivity has the EPA Hazardous Waste Number of D003.

[45 FR 33119, May 19, 1980, as amended at 55 FR 22684, June 1, 1990]

§ 261.24 Toxicity characteristic.

(a) A solid waste exhibits the characteristic of toxicity if, using the test methods described in Appendix II or equivalent methods approved by the Administrator under the procedures set forth in §§ 260.20 and 260.21, the extract from a representative sample of the waste contains any of the contaminants listed in Table 1 at the concentration equal to or greater than the respective value given in that Table. Where the waste contains less than 0.5 percent filterable solids, the waste itself, after filtering using the methodology outlined in Appendix II, is considered to be the extract for the purpose of this section.

(b) A solid waste that exhibits the characteristic of toxicity has the EPA Hazardous Waste Number specified in Table I which corresponds to the toxic contaminant causing it to be hazardous.

TABLE 1.—MAXIMUM CONCENTRATION OF CONTAMINANTS FOR THE TOXICITY CHARACTERISTIC

EPA HW No.[1]	Contaminant	CAS No.[2]	Regulatory Level (mg/L)
D004	Arsenic	7440-38-2	5.0
D005	Barium	7440-39-3	100.0
D018	Benzene	71-43-2	0.5
D006	Cadmium	7440-43-9	1.0
D019	Carbon tetrachloride	56-23-5	0.5
D020	Chlordane	57-74-9	0.03
D021	Chlorobenzene	108-90-7	100.0
D022	Chloroform	67-66-3	6.0
D007	Chromium	7440-47-3	5.0
D023	o-Cresol	95-48-7	[4] 200.0
D024	m-Cresol	108-39-4	[4] 200.0
D025	p-Cresol	106-44-5	[4] 200.0
D026	Cresol		[4] 200.0
D016	2,4-D	94-75-7	10.0
D027	1,4-Dichlorobenzene	106-46-7	7.5
D028	1,2-Dichloroethane	107-06-2	0.5
D029	1,1-Dichloroethylene	75-35-4	0.7
D030	2,4-Dinitrotoluene	121-14-2	[3] 0.13
D012	Endrin	72-20-8	0.02
D031	Heptachlor (and its epoxide).	76-44-8	0.008
D032	Hexachlorobenzene	118-74-1	[3] 0.13
D033	Hexachlorobutadiene	87-68-3	0.5
D034	Hexachloroethane	67-72-1	3.0
D008	Lead	7439-92-1	5.0
D013	Lindane	58-89-9	0.4
D009	Mercury	7439-97-6	0.2
D014	Methoxychlor	72-43-5	10.0
D035	Methyl ethyl ketone	78-93-3	200.0
D036	Nitrobenzene	98-95-3	2.0
D037	Pentrachlorophenol	87-86-5	100.0
D038	Pyridine	110-86-1	[3] 5.0
D010	Selenium	7782-49-2	1.0
D011	Silver	7440-22-4	5.0
D039	Tetrachloroethylene	127-18-4	0.7
D015	Toxaphene	8001-35-2	0.5
D040	Trichloroethylene	79-01-6	0.5
D041	2,4,5-Trichlorophenol	95-95-4	400.0
D042	2,4,6-Trichlorophenol	88-06-2	2.0
D017	2,4,5-TP (Silvex)	93-72-1	1.0
D043	Vinyl chloride	75-01-4	0.2

[1] Hazardous waste number.
[2] Chemical abstracts service number.
[3] Quantitation limit is greater than the calculated regulatory level. The quantitation limit therefore becomes the regulatory level.
[4] If o-, m-, and p-Cresol concentrations cannot be differentiated, the total cresol (D026) concentration is used. The regulatory level of total cresol is 200 mg/l.

[55 FR 11862, Mar. 29, 1990, as amended at 55 FR 22684, June 1, 1990; 55 FR 26987, June 29, 1990]

EFFECTIVE DATE NOTE: At 55 FR 11862, Mar. 29, 1990, § 261.24 was revised, effective September 25, 1990. At 55 FR 26987, June 29, 1990, the entry for "Heptachlor" in Table 1 was corrected, effective September 25, 1990. For the convenience of the user, the superseded text is set forth below:

§ 261.24 Characteristic of EP toxicity.

(a) A solid waste exhibits the characteristic of EP toxicity if, using the test methods described in Appendix II or equivalent methods approved by the Administrator under the procedures set forth in §§ 260.20 and 260.21, the extract from a representative sample of the waste contains any of the contaminants listed in Table I at a concentration equal to or greater than the respective value given in that Table. Where the waste contains less than 0.5 percent filterable solids, the waste itself, after filtering, is considered to be the extract for the purposes of this section.

(b) A solid waste that exhibits the characteristic of EP toxicity, but is not listed as a hazardous waste in Subpart D, has the EPA Hazardous Waste Number specified in Table I which corresponds to the toxic contaminant causing it to be hazardous.

TABLE I—MAXIMUM CONCENTRATION OF CONTAMINANTS FOR CHARACTERISTIC OF EP TOXICITY

EPA hazardous waste number	Contaminant	Maximum concentration (milligrams per liter)
D004	Arsenic	5.0
D005	Barium	100.0
D006	Cadmium	1.0
D007	Chromium	5.0
D008	Lead	5.0
D009	Mercury	0.2
D010	Selenium	1.0
D011	Silver	5.0
D012	Endrin (1,2,3,4,10,10-hexachloro-1,7-epoxy-1,4,4a,5,6,7,8,8a-octahydro-1,4-endo, endo-5,8-dimethano-naphthalene.	0.02
D013	Lindane (1,2,3,4,5,6-hexa- chlorocyclohexane, gamma isomer	0.4
D014	Methoxychlor (1,1,1-Trichloro-2,2-bis [p-methoxyphenyl]ethane).	10.0
D015	Toxaphene ($C_{10}H_{10}Cl_8$, Technical chlorinated camphene, 67-69 percent chlorine).	0.5
D016	2,4-D, (2,4-Dichlorophenoxyacetic acid).	10.0
D017	2,4,5-TP Silvex (2,4,5-Trichlorophenoxypropionic acid).	1.0

Subpart D—Lists of Hazardous Wastes

§ 261.30 General.

(a) A solid waste is a hazardous waste if it is listed in this subpart, unless it has been excluded from this list under §§ 260.20 and 260.22.

(b) The Administrator will indicate his basis for listing the classes or types of wastes listed in this subpart by employing one or more of the following Hazard Codes:

Ignitable Waste ..... (I)
Corrosive Waste ..... (C)
Reactive Waste ..... (R)
Toxicity Characteristic Waste ..... (E)
Acute Hazardous Waste ..... (H)
Toxic Waste ..... (T)

Appendix VII identifies the constituent which caused the Administrator to list the waste as a Toxicity Characteristic Waste (E) or Toxic Waste (T) in §§ 261.31 and 261.32.

(c) Each hazardous waste listed in this subpart is assigned an EPA Hazardous Waste Number which precedes the name of the waste. This number must be used in complying with the notification requirements of Section 3010 of the Act and certain recordkeeping and reporting requirements under Parts 262 through 265, 268, and Part 270 of this chapter.

(d) The following hazardous wastes listed in § 261.31 or § 261.32 are subject to the exclusion limits for acutely hazardous wastes established in § 261.5: EPA Hazardous Wastes Nos. FO20, FO21, FO22, FO23, FO26, and FO27.

[45 FR 33119, May 19, 1980, as amended at 48 FR 14294, Apr. 1, 1983; 50 FR 2000, Jan. 14, 1985; 51 FR 40636, Nov. 7, 1986; 55 FR 11863, Mar. 29, 1990]

EFFECTIVE DATE NOTE: At 55 FR 11863, Mar. 29, 1990, § 261.30 paragraph (b) was revised, effective September 25, 1990. For the convenience of the user, the superseded text is set forth below:

§ 261.30 General.

* * * * *

(b) The Administrator will indicate his basis for listing the classes or types of wastes listed in this Subpart by employing one or more of the following Hazard Codes:

Ignitable Waste ..... (I)
Corrosive Waste ..... (C)
Reactive Waste ..... (R)
EP Toxic Waste ..... (E)

Acute Hazardous Waste	(H)
Toxic Waste	(T)

Appendix VII identifies the constituent which caused the Administrator to list the waste as an EP Toxic Waste (E) or Toxic Waste (T) in §§ 261.31 and 261.32.

* * * * *

§ 261.31 Hazardous wastes from non-specific sources.

The following solid wastes are listed hazardous wastes from non-specific sources unless they are excluded under §§ 260.20 and 260.22 and listed in Appendix IX.

Industry and EPA hazardous waste No.	Hazardous waste	Hazard code
Generic:		
F001	The following spent halogenated solvents used in degreasing: Tetrachloroethylene, trichloroethylene, methylene chloride, 1,1,1-trichloroethane, carbon tetrachloride, and chlorinated fluorocarbons; all spent solvent mixtures/blends used in degreasing containing, before use, a total of ten percent or more (by volume) of one or more of the above halogenated solvents or those solvents listed in F002, F004, and F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.	(T)
F002	The following spent halogenated solvents: Tetrachloroethylene, methylene chloride trichloroethylene, 1,1,1-trichloroethane, chlorobenzene, 1,1,2-trichloro-1,2,2-trifluoroethane, ortho-dichlorobenzene, trichlorofluoromethane, and 1,1,2-trichloroethane, all spent solvent mixtures/blends containing, before use, a total of ten percent or more (by volume) of one or more of the above halogenated solvents or those listed in F001, F004, or F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.	(T)
F003	The following spent non-halogenated solvents: Xylene, acetone, ethyl acetate, ethyl benzene, ethyl ether, methyl isobutyl ketone, n-butyl alcohol, cyclohexanone, and methanol; all spent solvent mixtures/blends containing, before use, only the above spent non-halogenated solvents, and all spent solvent mixtures/blends containing, before use, one or more of the above non-halogenated solvents, and, a total of ten percent or more (by volume) of one or more of those solvents listed in F001, F002, F004, and F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.	(I)*
F004	The following spent non-halogenated solvents: Cresols and cresylic acid, and nitrobenzene; all spent solvent mixtures/blends containing, before use, a total of ten percent or more (by volume) of one or more of the above non-halogenated solvents or those solvents listed in F001, F002, and F005; and still bottoms from the recovery of these spent solvents and spent solvent mixtures.	(T)
F005	The following spent non-halogenated solvents: Toluene, methyl ethyl ketone, carbon disulfide, isobutanol, pyridine, benzene, 2-ethoxyethanol, and 2-nitropropane; all spent solvent mixtures/blends containing, before use, a total of ten percent or more (by volume) of one or more of the above non-halogenated solvents or those solvents listed in F001, F002, or F004, and still bottoms from the recovery of these spent solvents and spent solvent mixtures.	(I,T)
F006	Wastewater treatment sludges from electroplating operations except from the following processes: (1) Sulfuric acid anodizing of aluminum; (2) tin plating on carbon steel; (3) zinc plating (segregated basis) on carbon steel; (4) aluminum or zinc-aluminum plating on carbon steel, (5) cleaning/stripping associated with tin, zinc and aluminum plating on carbon steel, and (6) chemical etching and milling of aluminum.	(T)
F007	Spent cyanide plating bath solutions from electroplating operations	(R, T)
F008	Plating bath residues from the bottom of plating baths from electroplating operations where cyanides are used in the process	(R, T)
F009	Spent stripping and cleaning bath solutions from electroplating operations where cyanides are used in the process	(R, T)
F010	Quenching bath residues from oil baths from metal heat treating operations where cyanides are used in the process	(R, T)
F011	Spent cyanide solutions from salt bath pot cleaning from metal heat treating operations.	(R, T)
F012	Quenching waste water treatment sludges from metal heat treating operations where cyanides are used in the process	(T)
F019	Wastewater treatment sludges from the chemical conversion coating of aluminum except from zirconium phosphating in aluminum can washing when such phosphating is an exclusive conversion coating process.	(T)

Industry and EPA hazardous waste No.	Hazardous waste	Hazard code
F020	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production or manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tri- or tetrachlorophenol, or of intermediates used to produce their pesticide derivatives. (This listing does not include wastes from the production of Hexachlorophene from highly purified 2,4,5-trichlorophenol.).	(H)
F021	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production or manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of pentachlorophenol, or of intermediates used to produce its derivatives.	(H)
F022	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tetra-, penta-, or hexachlorobenzenes under alkaline conditions.	(H)
F023	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production of materials on equipment previously used for the production or manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tri- and tetrachlorophenols. (This listing does not include wastes from equipment used only for the production or use of Hexachlorophene from highly purified 2,4,5-trichlorophenol.).	(H)
F024	Process wastes, including but not limited to, distillation residues, heavy ends, tars, and reactor clean-out wastes, from the production of certain chlorinated aliphatic hydrocarbons by free radical catalyzed processes. These chlorinated aliphatic hydrocarbons are those having carbon chain lengths ranging from one to and including five, with varying amounts and positions of chlorine substitution. (This listing does not include wastewaters, wastewater treatment sludges, spent catalysts, and wastes listed in § 261.31 or § 261.32.).	(T)
F025	Condensed light ends, spent filters and filter aids, and spent desiccant wastes from the production of certain chlorinated aliphatic hydrocarbons, by free radical catalyzed processes. These chlorinated aliphatic hydrocarbons are those having carbon chain lengths ranging from one to and including five, with varying amounts and positions of chlorine substitution.	(T)
F026	Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production of materials on equipment previously used for the manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tetra-, penta-, or hexachlorobenzene under alkaline conditions.	(H)
F027	Discarded unused formulations containing tri-, tetra-, or pentachlorophenol or discarded unused formulations containing compounds derived from these chlorophenols. (This listing does not include formulations containing Hexachlorophene sythesized from prepurified 2,4,5-trichlorophenol as the sole component.).	(H)
F028	Residues resulting from the incineration or thermal treatment of soil contaminated with EPA Hazardous Waste Nos. F020, F021, F022, F023, F026, and F027.	(T)
F039	Leachate resulting from the treatment, storage, or disposal of wastes classified by more than one waste code under Subpart D, or from a mixture of wastes classified under Subparts C and D of this part. (Leachate resulting from the management of one or more of the following EPA Hazardous Wastes and no other hazardous wastes retains its hazardous waste code(s): F020, F021, F022, F023, F026, F027, and/or F028.).	(T).

*(I,T) should be used to specify mixtures containing ignitable and toxic constituents.

[46 FR 4617, Jan. 16, 1981]

EDITORIAL NOTE: For FEDERAL REGISTER citations affecting § 261.31, see the List of CFR Sections Affected in the Finding Aids section of this volume.

§ 261.32 Hazardous wastes from specific sources.

The following solid wastes are listed hazardous wastes from specific sources unless they are excluded under §§ 260.20 and 260.22 and listed in Appendix IX.

Industry and EPA hazardous waste No.	Hazardous waste	Hazard code
Wood preservation: K001	Bottom sediment sludge from the treatment of wastewaters from wood preserving processes that use creosote and/or pentachlorophenol.	(T)
Inorganic pigments:		
K002	Wastewater treatment sludge from the production of chrome yellow and orange pigments.	(T)
K003	Wastewater treatment sludge from the production of molybdate orange pigments	(T)

Industry and EPA hazardous waste No.	Hazardous waste	Hazard code
K004	Wastewater treatment sludge from the production of zinc yellow pigments	(T)
K005	Wastewater treatment sludge from the production of chrome green pigments	(T)
K006	Wastewater treatment sludge from the production of chrome oxide green pigments (anhydrous and hydrated).	(T)
K007	Wastewater treatment sludge from the production of iron blue pigments	(T)
K008	Oven residue from the production of chrome oxide green pigments	(T)
Organic chemicals:		
K009	Distillation bottoms from the production of acetaldehyde from ethylene	(T)
K010	Distillation side cuts from the production of acetaldehyde from ethylene	(T)
K011	Bottom stream from the wastewater stripper in the production of acrylonitrile	(R, T)
K013	Bottom stream from the acetonitrile column in the production of acrylonitrile	(R, T)
K014	Bottoms from the acetonitrile purification column in the production of acrylonitrile	(T)
K015	Still bottoms from the distillation of benzyl chloride	(T)
K016	Heavy ends or distillation residues from the production of carbon tetrachloride	(T)
K017	Heavy ends (still bottoms) from the purification column in the production of epichlorohydrin.	(T)
K018	Heavy ends from the fractionation column in ethyl chloride production	(T)
K019	Heavy ends from the distillation of ethylene dichloride in ethylene dichloride production.	(T)
K020	Heavy ends from the distillation of vinyl chloride in vinyl chloride monomer production.	(T)
K021	Aqueous spent antimony catalyst waste from fluoromethanes production	(T)
K022	Distillation bottom tars from the production of phenol/acetone from cumene	(T)
K023	Distillation light ends from the production of phthalic anhydride from naphthalene	(T)
K024	Distillation bottoms from the production of phthalic anhydride from naphthalene	(T)
K025	Distillation bottoms from the production of nitrobenzene by the nitration of benzene	(T)
K026	Stripping still tails from the production of methy ethyl pyridines	(T)
K027	Centrifuge and distillation residues from toluene diisocyanate production	(R, T)
K028	Spent catalyst from the hydrochlorinator reactor in the production of 1,1,1-trichloroethane.	(T)
K029	Waste from the product steam stripper in the production of 1,1,1-trichloroethane	(T)
K030	Column bottoms or heavy ends from the combined production of trichloroethylene and perchloroethylene.	(T)
K083	Distillation bottoms from aniline production	(T)
K085	Distillation or fractionation column bottoms from the production of chlorobenzenes	(T)
K093	Distillation light ends from the production of phthalic anhydride from ortho-xylene	(T)
K094	Distillation bottoms from the production of phthalic anhydride from ortho-xylene	(T)
K095	Distillation bottoms from the production of 1,1,1-trichloroethane	(T)
K096	Heavy ends from the heavy ends column from the production of 1,1,1-trichloroethane.	(T)
K103	Process residues from aniline extraction from the production of aniline	(T)
K104	Combined wastewater streams generated from nitrobenzene/aniline production	(T)
K105	Separated aqueous stream from the reactor product washing step in the production of chlorobenzenes.	(T)
K107	Column bottoms from product separation from the production of 1,1-dimethylhydrazine (UDMH) from carboxylic acid hydrazines.	(C,T)
K108	Condensed column overheads from product separation and condensed reactor vent gases from the production of 1,1-dimethylhydrazine (UDMH) from carboxylic acid hydrazides.	(I,T)
K109	Spent filter cartridges from product purification from the production of 1,1-dimethylhydrazine (UDMH) from carboxylic acid hydrazides.	(T)
K110	Condensed column overheads from intermediate separation from the production of 1,1-dimethylhydrazine (UDMH) from carboxylic acid hydrazides.	(T)
K111	Product washwaters from the production of dinitrotoluene via nitration of toluene	(C,T)
K112	Reaction by-product water from the drying column in the production of toluenediamine via hydrogenation of dinitrotoluene.	(T)
K113	Condensed liquid light ends from the purification of toluenediamine in the production of toluenediamine via hydrogenation of dinitrotoluene.	(T)
K114	Vicinals from the purification of toluenediamine in the production of toluenediamine via hydrogenation of dinitrotoluene.	(T)
K115	Heavy ends from the purification of toluenediamine in the production of toluenediamine via hydrogenation of dinitrotoluene.	(T)
K116	Organic condensate from the solvent recovery column in the production of toluene diisocyanate via phosgenation of toluenediamine.	(T)
K117	Wastewater from the reactor vent gas scrubber in the production of ethylene dibromide via bromination of ethene.	(T)
K118	Spent adsorbent solids from purification of ethylene dibromide in the production of ethylene dibromide via bromination of ethene.	(T)
K136	Still bottoms from the purification of ethylene dibromide in the production of ethylene dibromide via bromination of ethene.	(T)

Industry and EPA hazardous waste No.	Hazardous waste	Hazard code
Inorganic chemicals:		
K071	Brine purification muds from the mercury cell process in chlorine production, where separately prepurified brine is not used.	(T)
K073	Chlorinated hydrocarbon waste from the purification step of the diaphragm cell process using graphite anodes in chlorine production.	(T)
K106	Wastewater treatment sludge from the mercury cell process in chlorine production	(T)
Pesticides:		
K031	By-product salts generated in the production of MSMA and cacodylic acid	(T)
K032	Wastewater treatment sludge from the production of chlordane	(T)
K033	Wastewater and scrub water from the chlorination of cyclopentadiene in the production of chlordane.	(T)
K034	Filter solids from the filtration of hexachlorocyclopentadiene in the production of chlordane.	(T)
K035	Wastewater treatment sludges generated in the production of creosote	(T)
K036	Still bottoms from toluene reclamation distillation in the production of disulfoton	(T)
K037	Wastewater treatment sludges from the production of disulfoton	(T)
K038	Wastewater from the washing and stripping of phorate production	(T)
K039	Filter cake from the filtration of diethylphosphorodithioic acid in the production of phorate.	(T)
K040	Wastewater treatment sludge from the production of phorate	(T)
K041	Wastewater treatment sludge from the production of toxaphene	(T)
K042	Heavy ends or distillation residues from the distillation of tetrachlorobenzene in the production of 2,4,5-T.	(T)
K043	2,6-Dichlorophenol waste from the production of 2,4-D	(T)
K097	Vacuum stripper discharge from the chlordane chlorinator in the production of chlordane.	(T)
K098	Untreated process wastewater from the production of toxaphene	(T)
K099	Untreated wastewater from the production of 2,4-D	(T)
K123	Process wastewater (including supernates, filtrates, and washwaters) from the production of ethylenebisdithiocarbamic acid and its salt.	(T)
K124	Reactor vent scrubber water from the production of ethylenebisdithiocarbamic acid and its salts.	(C, T)
K125	Filtration, evaporation, and centrifugation solids from the production of ethylenebis-dithiocarbamic acid and its salts.	(T)
K126	Baghouse dust and floor sweepings in milling and packaging operations from the production or formulation of ethylenebisdithiocarbamic acid and its salts.	(T)
K131	Wastewater from the reactor and spent sulfuric acid from the acid dryer from the production of methyl bromide.	(C, T)
K132	Spent absorbent and wastewater separator solids from the production of methyl bromide.	(T)
Explosives:		
K044	Wastewater treatment sludges from the manufacturing and processing of explosives	(R)
K045	Spent carbon from the treatment of wastewater containing explosives	(R)
K046	Wastewater treatment sludges from the manufacturing, formulation and loading of lead-based initiating compounds.	(T)
K047	Pink/red water from TNT operations	(R)
Petroleum refining:		
K048	Dissolved air flotation (DAF) float from the petroleum refining industry	(T)
K049	Slop oil emulsion solids from the petroleum refining industry	(T)
K050	Heat exchanger bundle cleaning sludge from the petroleum refining industry	(T)
K051	API separator sludge from the petroleum refining industry	(T)
K052	Tank bottoms (leaded) from the petroleum refining industry	(T)
Iron and steel:		
K061	Emission control dust/sludge from the primary production of steel in electric furnaces.	(T)
K062	Spent pickle liquor generated by steel finishing operations of facilities within the iron and steel industry (SIC Codes 331 and 332).	(C,T)
Primary copper:		
K064	Acid plant blowdown slurry/sludge resulting from the thickening of blowdown slurry from primary copper production	(T)
Primary lead:		
K065	Surface impoundment solids contained in and dredged from surface impoundments at primary lead smelting facilities.	(T)
Primary zinc:		
K066	Sludge from treatment of process wastewater and/or acid plant blowdown from primary zinc production.	(T)
Primary aluminum:		
K088	Spent potliners from primary aluminum reduction	(T)
Ferroalloys:		
K090	Emission control dust or sludge from ferrochromiumsilicon production	(T)
K091	Emission control dust or sludge from ferrochromium production	(T)

Industry and EPA hazardous waste No.	Hazardous waste	Hazard code
Secondary lead:		
K069	Emission control dust/sludge from secondary lead smelting	(T)
K100	Waste leaching solution from acid leaching of emission control dust/sludge from secondary lead smelting.	(T)
Veterinary pharmaceuticals:		
K084	Wastewater treatment sludges generated during the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.	(T)
K101	Distillation tar residues from the distillation of aniline-based compounds in the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.	(T)
K102	Residue from the use of activated carbon for decolorization in the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.	(T)
Ink formulation:		
K086	Solvent washes and sludges, caustic washes and sludges, or water washes and sludges from cleaning tubs and equipment used in the formulation of ink from pigments, driers, soaps, and stabilizers containing chromium and lead.	(T)
Coking:		
K060	Ammonia still lime sludge from coking operations	(T)
K087	Decanter tank tar sludge from coking operations	(T)

[46 FR 4618, Jan. 16, 1981]

EDITORIAL NOTE: For FEDERAL REGISTER citations affecting § 261.32, see the List of CFR Sections Affected in the Finding Aids section of this volume.

EFFECTIVE DATE NOTE: At 55 FR 18505, May 2, 1990, the table in § 261.32 was amended by adding to the subgroup "Organic chemicals" the entries for EPA hazardous waste numbers K107, K108, K109 and K110, effective November 2, 1990.

§ 261.33 Discarded commercial chemical products, off-specification species, container residues, and spill residues thereof.

The following materials or items are hazardous wastes if and when they are discarded or intended to be discarded as described in § 261.2(a)(2)(i), when they are mixed with waste oil or used oil or other material and applied to the land for dust suppression or road treatment, when they are otherwise applied to the land in lieu of their original intended use or when they are contained in products that are applied to the land in lieu of their original intended use, or when, in lieu of their original intended use, they are produced for use as (or as a component of) a fuel, distributed for use as a fuel, or burned as a fuel.

(a) Any commercial chemical product, or manufacturing chemical intermediate having the generic name listed in paragraph (e) or (f) of this section.

(b) Any off-specification commercial chemical product or manufacturing chemical intermediate which, if it met specifications, would have the generic name listed in paragraph (e) or (f) of this section.

(c) Any residue remaining in a container or in an inner liner removed from a container that has held any commercial chemical product or manufacturing chemical intermediate having the generic name listed in paragraphs (e) or (f) of this section, unless the container is empty as defined in § 261.7(b) of this chapter.

[*Comment:* Unless the residue is being beneficially used or reused, or legitimately recycled or reclaimed; or being accumulated, stored, transported or treated prior to such use, re-use, recycling or reclamation, EPA considers the residue to be intended for discard, and thus, a hazardous waste. An example of a legitimate re-use of the residue would be where the residue remains in the container and the container is used to hold the same commercial chemical product or manufacturing chemical intermediate it previously held. An example of the discard of the residue would be where the drum is sent to a drum reconditioner who reconditions the drum but discards the residue.]

(d) Any residue or contaminated soil, water or other debris resulting from the cleanup of a spill into or on any land or water of any commercial chemical product or manufacturing chemical intermediate having the generic name listed in paragraph (e) or (f) of this section, or any residue or contaminated soil, water or other debris resulting from the cleanup of a spill, into or on any land or water, of

any off-specification chemical product and manufacturing chemical intermediate which, if it met specifications, would have the generic name listed in paragraph (e) or (f) of this section.

[*Comment:* The phrase "commercial chemical product or manufacturing chemical intermediate having the generic name listed in . . ." refers to a chemical substance which is manufactured or formulated for commercial or manufacturing use which consists of the commercially pure grade of the chemical, any technical grades of the chemical that are produced or marketed, and all formulations in which the chemical is the sole active ingredient. It does not refer to a material, such as a manufacturing process waste, that contains any of the substances listed in paragraph (e) or (f). Where a manufacturing process waste is deemed to be a hazardous waste because it contains a substance listed in paragraph (e) or (f), such waste will be listed in either § 261.31 or § 261.32 or will be identified as a hazardous waste by the characteristics set forth in Subpart C of this part.]

(e) The commercial chemical products, manufacturing chemical intermediates or off-specification commercial chemical products or manufacturing chemical intermediates referred to in paragraphs (a) through (d) of this section, are identified as acute hazardous wastes (H) and are subject to be the small quantity exclusion defined in § 261.5(e).

[*Comment:* For the convenience of the regulated community the primary hazardous properties of these materials have been indicated by the letters T (Toxicity), and R (Reactivity). Absence of a letter indicates that the compound only is listed for acute toxicity.]

These wastes and their corresponding EPA Hazardous Waste Numbers are:

Hazardous waste No.	Chemical abstracts No.	Substance
P023	107-20-0	Acetaldehyde, chloro-
P002	591-08-2	Acetamide, N-(aminothioxomethyl)-
P057	640-19-7	Acetamide, 2-fluoro-
P058	62-74-8	Acetic acid, fluoro-, sodium salt
P002	591-08-2	1-Acetyl-2-thiourea
P003	107-02-8	Acrolein
P070	116-06-3	Aldicarb
P004	309-00-2	Aldrin
P005	107-18-6	Allyl alcohol
P006	20859-73-8	Aluminum phosphide (R,T)
P007	2763-96-4	5-(Aminomethyl)-3-isoxazolol
P008	504-24-5	4-Aminopyridine
P009	131-74-8	Ammonium picrate (R)
P119	7803-55-6	Ammonium vanadate
P099	506-61-6	Argentate(1-), bis(cyano-C)-, potassium
P010	7778-39-4	Arsenic acid H_3AsO_4
P012	1327-53-3	Arsenic oxide As_2O_3
P011	1303-28-2	Arsenic oxide As_2O_5
P011	1303-28-2	Arsenic pentoxide
P012	1327-53-3	Arsenic trioxide
P038	692-42-2	Arsine, diethyl-
P036	696-28-6	Arsonous dichloride, phenyl-
P054	151-56-4	Aziridine
P067	75-55-8	Aziridine, 2-methyl-
P013	542-62-1	Barium cyanide
P024	106-47-8	Benzenamine, 4-chloro-
P077	100-01-6	Benzenamine, 4-nitro-
P028	100-44-7	Benzene, (chloromethyl)-
P042	51-43-4	1,2-Benzenediol, 4-[1-hydroxy-2-(methylamino)ethyl]-, (R)-
P046	122-09-8	Benzeneethanamine, alpha,alpha-dimethyl-
P014	108-98-5	Benzenethiol
P001	[1] 81-81-2	2H-1-Benzopyran-2-one, 4-hydroxy-3-(3-oxo-1-phenylbutyl)-, & salts, when present at concentrations greater than 0.3%
P028	100-44-7	Benzyl chloride
P015	7440-41-7	Beryllium
P017	598-31-2	Bromoacetone
P018	357-57-3	Brucine
P045	39196-18-4	2-Butanone, 3,3-dimethyl-1-(methylthio)-, O-[methylamino)carbonyl] oxime

Hazardous waste No.	Chemical abstracts No.	Substance
P021	592-01-8	Calcium cyanide
P021	592-01-8	Calcium cyanide $Ca(CN)_2$
P022	75-15-0	Carbon disulfide
P095	75-44-5	Carbonic dichloride
P023	107-20-0	Chloroacetaldehyde
P024	106-47-8	p-Chloroaniline
P026	5344-82-1	1-(o-Chlorophenyl)thiourea
P027	542-76-7	3-Chloropropionitrile
P029	544-92-3	Copper cyanide
P029	544-92-3	Copper cyanide Cu(CN)
P030	.....	Cyanides (soluble cyanide salts), not otherwise specified
P031	460-19-5	Cyanogen
P033	506-77-4	Cyanogen chloride
P033	506-77-4	Cyanogen chloride (CN)Cl
P034	131-89-5	2-Cyclohexyl-4,6-dinitrophenol
P016	542-88-1	Dichloromethyl ether
P036	696-28-6	Dichlorophenylarsine
P037	60-57-1	Dieldrin
P038	692-42-2	Diethylarsine
P041	311-45-5	Diethyl-p-nitrophenyl phosphate
P040	297-97-2	O,O-Diethyl O-pyrazinyl phosphorothioate
P043	55-91-4	Diisopropylfluorophosphate (DFP)
P004	309-00-2	1,4,5,8-Dimethanonaphthalene, 1,2,3,4,10,10-hexa- chloro-1,4,4a,5,8,8a,-hexahydro-, (1alpha,4alpha,4abeta,5alpha,8alpha,8abeta)-
P060	465-73-6	1,4,5,8-Dimethanonaphthalene, 1,2,3,4,10,10-hexa- chloro-1,4,4a,5,8,8a-hexahydro-, (1alpha,4alpha,4abeta,5beta,8beta,8abeta)-
P037	60-57-1	2,7:3,6-Dimethanonaphth[2,3-b]oxirene, 3,4,5,6,9,9-hexachloro-1a,2,2a,3,6,6a,7,7a-octahydro-, (1aalpha,2beta,2aalpha,3beta,6beta,6aalpha,7beta, 7aalpha)-
P051	[1] 72-20-8	2,7:3,6-Dimethanonaphth [2,3-b]oxirene, 3,4,5,6,9,9-hexachloro-1a,2,2a,3,6,6a,7,7a-octahydro-, (1aalpha,2beta,2abeta,3alpha,6alpha,6abeta,7beta, 7aalpha)-, & metabolites
P044	60-51-5	Dimethoate
P046	122-09-8	alpha,alpha-Dimethylphenethylamine
P047	[1] 534-52-1	4,6-Dinitro-o-cresol, & salts
P048	51-28-5	2,4-Dinitrophenol
P020	88-85-7	Dinoseb
P085	152-16-9	Diphosphoramide, octamethyl-
P111	107-49-3	Diphosphoric acid, tetraethyl ester
P039	298-04-4	Disulfoton
P049	541-53-7	Dithiobiuret
P050	115-29-7	Endosulfan
P088	145-73-3	Endothall
P051	72-20-8	Endrin
P051	72-20-8	Endrin, & metabolites
P042	51-43-4	Epinephrine
P031	460-19-5	Ethanedinitrile
P066	16752-77-5	Ethanimidothioic acid, N-[[(methylamino)carbonyl]oxy]-, methyl ester
P101	107-12-0	Ethyl cyanide
P054	151-56-4	Ethyleneimine
P097	52-85-7	Famphur
P056	7782-41-4	Fluorine
P057	640-19-7	Fluoroacetamide
P058	62-74-8	Fluoroacetic acid, sodium salt
P065	628-86-4	Fulminic acid, mercury(2 +) salt (R,T)
P059	76-44-8	Heptachlor
P062	757-58-4	Hexaethyl tetraphosphate
P116	79-19-6	Hydrazinecarbothioamide
P068	60-34-4	Hydrazine, methyl-
P063	74-90-8	Hydrocyanic acid
P063	74-90-8	Hydrogen cyanide
P096	7803-51-2	Hydrogen phosphide
P060	465-73-6	Isodrin
P007	2763-96-4	3(2H)-Isoxazolone, 5-(aminomethyl)-
P092	62-38-4	Mercury, (acetato-O)phenyl-
P065	628-86-4	Mercury fulminate (R,T)
P082	62-75-9	Methanamine, N-methyl-N-nitroso-
P064	624-83-9	Methane, isocyanato-
P016	542-88-1	Methane, oxybis[chloro-
P112	509-14-8	Methane, tetranitro- (R)

Hazardous waste No.	Chemical abstracts No.	Substance
P118	75-70-7	Methanethiol, trichloro-
P050	115-29-7	6,9-Methano-2,4,3-benzodioxathiepin, 6,7,8,9,10,10-hexachloro-1,5,5a,6,9,9a-hexahydro-, 3-oxide
P059	76-44-8	4,7-Methano-1H-indene, 1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro-
P066	16752-77-5	Methomyl
P068	60-34-4	Methyl hydrazine
P064	624-83-9	Methyl isocyanate
P069	75-86-5	2-Methyllactonitrile
P071	298-00-0	Methyl parathion
P072	86-88-4	alpha-Naphthylthiourea
P073	13463-39-3	Nickel carbonyl
P073	13463-39-3	Nickel carbonyl $Ni(CO)_4$, (T-4)-
P074	557-19-7	Nickel cyanide
P074	557-19-7	Nickel cynaide $Ni(CN)_2$
P075	[1] 54-11-5	Nicotine, & salts
P076	10102-43-9	Nitric oxide
P077	100-01-6	p-Nitroaniline
P078	10102-44-0	Nitrogen dioxide
P076	10102-43-9	Nitrogen oxide NO
P078	10102-44-0	Nitrogen oxide NO_2
P081	55-63-0	Nitroglycerine (R)
P082	62-75-9	N-Nitrosodimethylamine
P084	4549-40-0	N-Nitrosomethylvinylamine
P085	152-16-9	Octamethylpyrophosphoramide
P087	20816-12-0	Osmium oxide OsO_4, (T-4)-
P087	20816-12-0	Osmium tetroxide
P088	145-73-3	7-Oxabicyclo[2.2.1]heptane-2,3-dicarboxylic acid
P089	56-38-2	Parathion
P034	131-89-5	Phenol, 2-cyclohexyl-4,6-dinitro-
P048	51-28-5	Phenol, 2,4-dinitro-
P047	[1] 534-52-1	Phenol, 2-methyl-4,6-dinitro-, & salts
P020	88-85-7	Phenol, 2-(1-methylpropyl)-4,6-dinitro-
P009	131-74-8	Phenol, 2,4,6-trinitro-, ammonium salt (R)
P092	62-38-4	Phenylmercury acetate
P093	103-85-5	Phenylthiourea
P094	298-02-2	Phorate
P095	75-44-5	Phosgene
P096	7803-51-2	Phosphine
P041	311-45-5	Phosphoric acid, diethyl 4-nitrophenyl ester
P039	298-04-4	Phosphorodithioic acid, O,O-diethyl S-[2-(ethylthio)ethyl] ester
P094	298-02-2	Phosphorodithioic acid, O,O-diethyl S-[(ethylthio)methyl] ester
P044	60-51-5	Phosphorodithioic acid, O,O-dimethyl S-[2-(methylamino)-2-oxoethyl] ester
P043	55-91-4	Phosphorofluoridic acid, bis(1-methylethyl) ester
P089	56-38-2	Phosphorothioic acid, O,O-diethyl O-(4-nitrophenyl) ester
P040	297-97-2	Phosphorothioic acid, O,O-diethyl O-pyrazinyl ester
P097	52-85-7	Phosphorothioic acid, O-[4-[(dimethylamino)sulfonyl]phenyl] O,O-dimethyl ester
P071	298-00-0	Phosphorothioic acid, O,O,-dimethyl O-(4-nitrophenyl) ester
P110	78-00-2	Plumbane, tetraethyl-
P098	151-50-8	Potassium cyanide
P098	151-50-8	Potassium cyanide K(CN)
P099	506-61-6	Potassium silver cyanide
P070	116-06-3	Propanal, 2-methyl-2-(methylthio)-, O-[(methylamino)carbonyl]oxime
P101	107-12-0	Propanenitrile
P027	542-76-7	Propanenitrile, 3-chloro-
P069	75-86-5	Propanenitrile, 2-hydroxy-2-methyl-
P081	55-63-0	1,2,3-Propanetriol, trinitrate (R)
P017	598-31-2	2-Propanone, 1-bromo-
P102	107-19-7	Propargyl alcohol
P003	107-02-8	2-Propenal
P005	107-18-6	2-Propen-1-ol
P067	75-55-8	1,2-Propylenimine
P102	107-19-7	2-Propyn-1-ol
P008	504-24-5	4-Pyridinamine
P075	[1] 54-11-5	Pyridine, 3-(1-methyl-2-pyrrolidinyl)-, (S)-, & salts
P114	12039-52-0	Selenious acid, dithallium(1 +) salt

Hazardous waste No.	Chemical abstracts No.	Substance
P103	630-10-4	Selenourea
P104	506-64-9	Silver cyanide
P104	506-64-9	Silver cyanide Ag(CN)
P105	26628-22-8	Sodium azide
P106	143-33-9	Sodium cyanide
P106	143-33-9	Sodium cyanide Na(CN)
P107	1314-96-1	Strontium sulfide SrS
P108	[1] 57-24-9	Strychnidin-10-one, & salts
P018	357-57-3	Strychnidin-10-one, 2,3-dimethoxy-
P108	[1] 57-24-9	Strychnine, & salts
P115	7446-18-6	Sulfuric acid, dithallium(1+) salt
P109	3689-24-5	Tetraethyldithiopyrophosphate
P110	78-00-2	Tetraethyl lead
P111	107-49-3	Tetraethyl pyrophosphate
P112	509-14-8	Tetranitromethane (R)
P062	757-58-4	Tetraphosphoric acid, hexaethyl ester
P113	1314-32-5	Thallic oxide
P113	1314-32-5	Thallium oxide Tl_2O_3
P114	12039-52-0	Thallium(I) selenite
P115	7446-18-6	Thallium(I) sulfate
P109	3689-24-5	Thiodiphosphonic acid, tetraethyl ester
P045	39196-18-4	Thiofanox
P049	541-53-7	Thioimidodicarbonic diamide $[(H_2N)C(S)]_2NH$
P014	108-98-5	Thiophenol
P116	79-19-6	Thiosemicarbazide
P026	5344-82-1	Thiourea, (2-chlorophenyl)-
P072	86-88-4	Thiourea, 1-naphthalenyl-
P093	103-85-5	Thiourea, phenyl-
P123	8001-35-2	Toxaphene
P118	75-70-7	Trichloromethanethiol
P119	7803-55-6	Vanadic acid, ammonium salt
P120	1314-62-1	Vanadium oxide V_2O_5
P120	1314-62-1	Vanadium pentoxide
P084	4549-40-0	Vinylamine, N-methyl-N-nitroso-
P001	[1] 81-81-2	Warfarin, & salts, when present at concentrations greater than 0.3%
P121	557-21-1	Zinc cyanide
P121	557-21-1	Zinc cyanide $Zn(CN)_2$
P122	1314-84-7	Zinc phosphide Zn_3P_2, when present at concentrations greater than 10% (R,T)

[1] CAS Number given for parent compound only.

(f) The commercial chemical products, manfacturing chemical intermediates, or off-specification commercial chemical products referred to in paragraphs (a) through (d) of this section, are identified as toxic wastes (T), unless otherwise designated and are subject to the small quantity generator exclusion defined in § 261.5 (a) and (g).

[*Comment:* For the convenience of the regulated community, the primary hazardous properties of these materials have been indicated by the letters T (Toxicity), R (Reactivity), I (Ignitability) and C (Corrosivity). Absence of a letter indicates that the compound is only listed for toxicity.]

These wastes and their corresponding EPA Hazardous Waste Numbers are:

Hazardous waste No.	Chemical abstracts No.	Substance
U001	75-07-0	Acetaldehyde (I)
U034	75-87-6	Acetaldehyde, trichloro-
U187	62-44-2	Acetamide, N-(4-ethoxyphenyl)-
U005	53-96-3	Acetamide, N-9H-fluoren-2-yl-
U240	[1] 94-75-7	Acetic acid, (2,4-dichlorophenoxy)-, salts & esters
U112	141-78-6	Acetic acid ethyl ester (I)
U144	301-04-2	Acetic acid, lead(2+) salt
U214	563-68-8	Acetic acid, thallium(1+) salt

Hazardous waste No.	Chemical abstracts No.	Substance
see F027	93-76-5	Acetic acid, (2,4,5-trichlorophenoxy)-
U002	67-64-1	Acetone (I)
U003	75-05-8	Acetonitrile (I,T)
U004	98-86-2	Acetophenone
U005	53-96-3	2-Acetylaminofluorene
U006	75-36-5	Acetyl chloride (C,R,T)
U007	79-06-1	Acrylamide
U008	79-10-7	Acrylic acid (I)
U009	107-13-1	Acrylonitrile
U011	61-82-5	Amitrole
U012	62-53-3	Aniline (I,T)
U136	75-60-5	Arsinic acid, dimethyl-
U014	492-80-8	Auramine
U015	115-02-6	Azaserine
U010	50-07-7	Azirino[2',3':3,4]pyrrolo[1,2-a]indole-4,7-dione, 6-amino-8-[[(aminocarbonyl)oxy]methyl]-1,1a,2,8,8a,8b-hexahydro-8a-methoxy-5-methyl-, [1aS-(1aalpha, 8beta,8aalpha,8balpha)]-
U157	56-49-5	Benz[j]aceanthrylene, 1,2-dihydro-3-methyl-
U016	225-51-4	Benz[c]acridine
U017	98-87-3	Benzal chloride
U192	23950-58-5	Benzamide, 3,5-dichloro-N-(1,1-dimethyl-2-propynyl)-
U018	56-55-3	Benz[a]anthracene
U094	57-97-6	Benz[a]anthracene, 7,12-dimethyl-
U012	62-53-3	Benzenamine (I,T)
U014	492-80-8	Benzenamine, 4,4'-carbonimidoylbis[N,N-dimethyl-
U049	3165-93-3	Benzenamine, 4-chloro-2-methyl-, hydrochloride
U093	60-11-7	Benzenamine, N,N-dimethyl-4-(phenylazo)-
U328	95-53-4	Benzenamine, 2-methyl-
U353	106-49-0	Benzenamine, 4-methyl-
U158	101-14-4	Benzenamine, 4,4'-methylenebis[2-chloro-
U222	636-21-5	Benzenamine, 2-methyl-, hydrochloride
U181	99-55-8	Benzenamine, 2-methyl-5-nitro-
U019	71-43-2	Benzene (I,T)
U038	510-15-6	Benzeneacetic acid, 4-chloro-alpha-(4-chlorophenyl)-alpha-hydroxy-, ethyl ester
U030	101-55-3	Benzene, 1-bromo-4-phenoxy-
U035	305-03-3	Benzenebutanoic acid, 4-[bis(2-chloroethyl)amino]-
U037	108-90-7	Benzene, chloro-
U221	25376-45-8	Benzenediamine, ar-methyl-
U028	117-81-7	1,2-Benzenedicarboxylic acid, bis(2-ethylhexyl) ester
U069	84-74-2	1,2-Benzenedicarboxylic acid, dibutyl ester
U088	84-66-2	1,2-Benzenedicarboxylic acid, diethyl ester
U102	131-11-3	1,2-Benzenedicarboxylic acid, dimethyl ester
U107	117-84-0	1,2-Benzenedicarboxylic acid, dioctyl ester
U070	95-50-1	Benzene, 1,2-dichloro-
U071	541-73-1	Benzene, 1,3-dichloro-
U072	106-46-7	Benzene, 1,4-dichloro-
U060	72-54-8	Benzene, 1,1'-(2,2-dichloroethylidene)bis[4-chloro-
U017	98-87-3	Benzene, (dichloromethyl)-
U223	26471-62-5	Benzene, 1,3-diisocyanatomethyl- (R,T)
U239	1330-20-7	Benzene, dimethyl- (I,T)
U201	108-46-3	1,3-Benzenediol
U127	118-74-1	Benzene, hexachloro-
U056	110-82-7	Benzene, hexahydro- (I)
U220	108-88-3	Benzene, methyl-
U105	121-14-2	Benzene, 1-methyl-2,4-dinitro-
U106	606-20-2	Benzene, 2-methyl-1,3-dinitro-
U055	98-82-8	Benzene, (1-methylethyl)- (I)
U169	98-95-3	Benzene, nitro-
U183	608-93-5	Benzene, pentachloro-
U185	82-68-8	Benzene, pentachloronitro-
U020	98-09-9	Benzenesulfonic acid chloride (C,R)
U020	98-09-9	Benzenesulfonyl chloride (C,R)
U207	95-94-3	Benzene, 1,2,4,5-tetrachloro-
U061	50-29-3	Benzene, 1,1'-(2,2,2-trichloroethylidene)bis[4-chloro-
U247	72-43-5	Benzene, 1,1'-(2,2,2-trichloroethylidene)bis[4- methoxy-
U023	98-07-7	Benzene, (trichloromethyl)-
U234	99-35-4	Benzene, 1,3,5-trinitro-
U021	92-87-5	Benzidine
U202	[1] 81-07-2	1,2-Benzisothiazol-3(2H)-one, 1,1-dioxide, & salts
U203	94-59-7	1,3-Benzodioxole, 5-(2-propenyl)-

Hazardous waste No.	Chemical abstracts No.	Substance
U141	120-58-1	1,3-Benzodioxole, 5-(1-propenyl)-
U090	94-58-6	1,3-Benzodioxole, 5-propyl-
U064	189-55-9	Benzo[rst]pentaphene
U248	[1]81-81-2	2H-1-Benzopyran-2-one, 4-hydroxy-3-(3-oxo-1-phenyl-butyl)-, & salts, when present at concentrations of 0.3% or less
U022	50-32-8	Benzo[a]pyrene
U197	106-51-4	p-Benzoquinone
U023	98-07-7	Benzotrichloride (C,R,T)
U085	1464-53-5	2,2'-Bioxirane
U021	92-87-5	[1,1'-Biphenyl]-4,4'-diamine
U073	91-94-1	[1,1'-Biphenyl]-4,4'-diamine, 3,3'-dichloro-
U091	119-90-4	[1,1'-Biphenyl]-4,4'-diamine, 3,3'-dimethoxy-
U095	119-93-7	[1,1'-Biphenyl]-4,4'-diamine, 3,3'-dimethyl-
U225	75-25-2	Bromoform
U030	101-55-3	4-Bromophenyl phenyl ether
U128	87-68-3	1,3-Butadiene, 1,1,2,3,4,4-hexachloro-
U172	924-16-3	1-Butanamine, N-butyl-N-nitroso-
U031	71-36-3	1-Butanol (I)
U159	78-93-3	2-Butanone (I,T)
U160	1338-23-4	2-Butanone, peroxide (R,T)
U053	4170-30-3	2-Butenal
U074	764-41-0	2-Butene, 1,4-dichloro- (I,T)
U143	303-34-4	2-Butenoic acid, 2-methyl-, 7-[[2,3-dihydroxy-2-(1-methoxyethyl)-3-methyl-1-oxobutoxy]methyl]-2,3,5,7a-tetrahydro-1H-pyrrolizin-1-yl ester, [1S-[1alpha(Z),7(2S*,3R*),7aalpha]]-
U031	71-36-3	n-Butyl alcohol (I)
U136	75-60-5	Cacodylic acid
U032	13765-19-0	Calcium chromate
U238	51-79-6	Carbamic acid, ethyl ester
U178	615-53-2	Carbamic acid, methylnitroso-, ethyl ester
U097	79-44-7	Carbamic chloride, dimethyl-
U114	[1] 111-54-6	Carbamodithioic acid, 1,2-ethanediylbis-, salts & esters
U062	2303-16-4	Carbamothioic acid, bis(1-methylethyl)-, S-(2,3-dichloro-2-propenyl) ester
U215	6533-73-9	Carbonic acid, dithallium(1+) salt
U033	353-50-4	Carbonic difluoride
U156	79-22-1	Carbonochloridic acid, methyl ester (I,T)
U033	353-50-4	Carbon oxyfluoride (R,T)
U211	56-23-5	Carbon tetrachloride
U034	75-87-6	Chloral
U035	305-03-3	Chlorambucil
U036	57-74-9	Chlordane, alpha & gamma isomers
U026	494-03-1	Chlornaphazin
U037	108-90-7	Chlorobenzene
U038	510-15-6	Chlorobenzilate
U039	59-50-7	p-Chloro-m-cresol
U042	110-75-8	2-Chloroethyl vinyl ether
U044	67-66-3	Chloroform
U046	107-30-2	Chloromethyl methyl ether
U047	91-58-7	beta-Chloronaphthalene
U048	95-57-8	o-Chlorophenol
U049	3165-93-3	4-Chloro-o-toluidine, hydrochloride
U032	13765-19-0	Chromic acid H_2CrO_4, calcium salt
U050	218-01-9	Chrysene
U051	.....	Creosote
U052	1319-77-3	Cresol (Cresylic acid)
U053	4170-30-3	Crotonaldehyde
U055	98-82-8	Cumene (I)
U246	506-68-3	Cyanogen bromide (CN)Br
U197	106-51-4	2,5-Cyclohexadiene-1,4-dione
U056	110-82-7	Cyclohexane (I)
U129	58-89-9	Cyclohexane, 1,2,3,4,5,6-hexachloro-, (1alpha,2alpha,3beta,4alpha,5alpha,6beta)-
U057	108-94-1	Cyclohexanone (I)
U130	77-47-4	1,3-Cyclopentadiene, 1,2,3,4,5,5-hexachloro-
U058	50-18-0	Cyclophosphamide
U240	[1] 94-75-7	2,4-D, salts & esters
U059	20830-81-3	Daunomycin
U060	72-54-8	DDD

Hazardous waste No.	Chemical abstracts No.	Substance
U061	50-29-3	DDT
U062	2303-16-4	Diallate
U063	53-70-3	Dibenz[a,h]anthracene
U064	189-55-9	Dibenzo[a,i]pyrene
U066	96-12-8	1,2-Dibromo-3-chloropropane
U069	84-74-2	Dibutyl phthalate
U070	95-50-1	o-Dichlorobenzene
U071	541-73-1	m-Dichlorobenzene
U072	106-46-7	p-Dichlorobenzene
U073	91-94-1	3,3'-Dichlorobenzidine
U074	764-41-0	1,4-Dichloro-2-butene (I,T)
U075	75-71-8	Dichlorodifluoromethane
U078	75-35-4	1,1-Dichloroethylene
U079	156-60-5	1,2-Dichloroethylene
U025	111-44-4	Dichloroethyl ether
U027	108-60-1	Dichloroisopropyl ether
U024	111-91-1	Dichloromethoxy ethane
U081	120-83-2	2,4-Dichlorophenol
U082	87-65-0	2,6-Dichlorophenol
U084	542-75-6	1,3-Dichloropropene
U085	1464-53-5	1,2:3,4-Diepoxybutane (I,T)
U108	123-91-1	1,4-Diethyleneoxide
U028	117-81-7	Diethylhexyl phthalate
U086	1615-80-1	N,N'-Diethylhydrazine
U087	3288-58-2	O,O-Diethyl S-methyl dithiophosphate
U088	84-66-2	Diethyl phthalate
U089	56-53-1	Diethylstilbesterol
U090	94-58-6	Dihydrosafrole
U091	119-90-4	3,3'-Dimethoxybenzidine
U092	124-40-3	Dimethylamine (I)
U093	60-11-7	p-Dimethylaminoazobenzene
U094	57-97-6	7,12-Dimethylbenz[a]anthracene
U095	119-93-7	3,3'-Dimethylbenzidine
U096	80-15-9	alpha,alpha-Dimethylbenzylhydroperoxide (R)
U097	79-44-7	Dimethylcarbamoyl chloride
U098	57-14-7	1,1-Dimethylhydrazine
U099	540-73-8	1,2-Dimethylhydrazine
U101	105-67-9	2,4-Dimethylphenol
U102	131-11-3	Dimethyl phthalate
U103	77-78-1	Dimethyl sulfate
U105	121-14-2	2,4-Dinitrotoluene
U106	606-20-2	2,6-Dinitrotoluene
U107	117-84-0	Di-n-octyl phthalate
U108	123-91-1	1,4-Dioxane
U109	122-66-7	1,2-Diphenylhydrazine
U110	142-84-7	Dipropylamine (I)
U111	621-64-7	Di-n-propylnitrosamine
U041	106-89-8	Epichlorohydrin
U001	75-07-0	Ethanal (I)
U174	55-18-5	Ethanamine, N-ethyl-N-nitroso-
U155	91-80-5	1,2-Ethanediamine, N,N-dimethyl-N'-2-pyridinyl-N'-(2-thienylmethyl)-
U067	106-93-4	Ethane, 1,2-dibromo-
U076	75-34-3	Ethane, 1,1-dichloro-
U077	107-06-2	Ethane, 1,2-dichloro-
U131	67-72-1	Ethane, hexachloro-
U024	111-91-1	Ethane, 1,1'-[methylenebis(oxy)]bis[2-chloro-
U117	60-29-7	Ethane, 1,1'-oxybis-(I)
U025	111-44-4	Ethane, 1,1'-oxybis[2-chloro-
U184	76-01-7	Ethane, pentachloro-
U208	630-20-6	Ethane, 1,1,1,2-tetrachloro-
U209	79-34-5	Ethane, 1,1,2,2-tetrachloro-
U218	62-55-5	Ethanethioamide
U226	71-55-6	Ethane, 1,1,1-trichloro-
U227	79-00-5	Ethane, 1,1,2-trichloro-
U359	110-80-5	Ethanol, 2-ethoxy-
U173	1116-54-7	Ethanol, 2,2'-(nitrosoimino)bis-
U004	98-86-2	Ethanone, 1-phenyl-
U043	75-01-4	Ethene, chloro-
U042	110-75-8	Ethene, (2-chloroethoxy)-
U078	75-35-4	Ethene, 1,1-dichloro-

Hazardous waste No.	Chemical abstracts No.	Substance
U079	156-60-5	Ethene, 1,2-dichloro-, (E)-
U210	127-18-4	Ethene, tetrachloro-
U228	79-01-6	Ethene, trichloro-
U112	141-78-6	Ethyl acetate (I)
U113	140-88-5	Ethyl acrylate (I)
U238	51-79-6	Ethyl carbamate (urethane)
U117	60-29-7	Ethyl ether (I)
U114	[1] 111-54-6	Ethylenebisdithiocarbamic acid, salts & esters
U067	106-93-4	Ethylene dibromide
U077	107-06-2	Ethylene dichloride
U359	110-80-5	Ethylene glycol monoethyl ether
U115	75-21-8	Ethylene oxide (I,T)
U116	96-45-7	Ethylenethiourea
U076	75-34-3	Ethylidene dichloride
U118	97-63-2	Ethyl methacrylate
U119	62-50-0	Ethyl methanesulfonate
U120	206-44-0	Fluoranthene
U122	50-00-0	Formaldehyde
U123	64-18-6	Formic acid (C,T)
U124	110-00-9	Furan (I)
U125	98-01-1	2-Furancarboxaldehyde (I)
U147	108-31-6	2,5-Furandione
U213	109-99-9	Furan, tetrahydro-(I)
U125	98-01-1	Furfural (I)
U124	110-00-9	Furfuran (I)
U206	18883-66-4	Glucopyranose, 2-deoxy-2-(3-methyl-3-nitrosoureido)-, D-
U206	18883-66-4	D-Glucose, 2-deoxy-2-[[(methylnitrosoamino)-carbonyl]amino]-
U126	765-34-4	Glycidylaldehyde
U163	70-25-7	Guanidine, N-methyl-N'-nitro-N-nitroso-
U127	118-74-1	Hexachlorobenzene
U128	87-68-3	Hexachlorobutadiene
U130	77-47-4	Hexachlorocyclopentadiene
U131	67-72-1	Hexachloroethane
U132	70-30-4	Hexachlorophene
U243	1888-71-7	Hexachloropropene
U133	302-01-2	Hydrazine (R,T)
U086	1615-80-1	Hydrazine, 1,2-diethyl-
U098	57-14-7	Hydrazine, 1,1-dimethyl-
U099	540-73-8	Hydrazine, 1,2-dimethyl-
U109	122-66-7	Hydrazine, 1,2-diphenyl-
U134	7664-39-3	Hydrofluoric acid (C,T)
U134	7664-39-3	Hydrogen fluoride (C,T)
U135	7783-06-4	Hydrogen sulfide
U135	7783-06-4	Hydrogen sulfide H_2S
U096	80-15-9	Hydroperoxide, 1-methyl-1-phenylethyl- (R)
U116	96-45-7	2-Imidazolidinethione
U137	193-39-5	Indeno[1,2,3-cd]pyrene
U190	85-44-9	1,3-Isobenzofurandione
U140	78-83-1	Isobutyl alcohol (I,T)
U141	120-58-1	Isosafrole
U142	143-50-0	Kepone
U143	303-34-4	Lasiocarpine
U144	301-04-2	Lead acetate
U146	1335-32-6	Lead, bis(acetato-O)tetrahydroxytri-
U145	7446-27-7	Lead phosphate
U146	1335-32-6	Lead subacetate
U129	58-89-9	Lindane
U163	70-25-7	MNNG
U147	108-31-6	Maleic anhydride
U148	123-33-1	Maleic hydrazide
U149	109-77-3	Malononitrile
U150	148-82-3	Melphalan
U151	7439-97-6	Mercury
U152	126-98-7	Methacrylonitrile (I, T)
U092	124-40-3	Methanamine, N-methyl- (I)
U029	74-83-9	Methane, bromo-
U045	74-87-3	Methane, chloro- (I, T)
U046	107-30-2	Methane, chloromethoxy-
U068	74-95-3	Methane, dibromo-

Hazardous waste No.	Chemical abstracts No.	Substance
U080	75-09-2	Methane, dichloro-
U075	75-71-8	Methane, dichlorodifluoro-
U138	74-88-4	Methane, iodo-
U119	62-50-0	Methanesulfonic acid, ethyl ester
U211	56-23-5	Methane, tetrachloro-
U153	74-93-1	Methanethiol (I, T)
U225	75-25-2	Methane, tribromo-
U044	67-66-3	Methane, trichloro-
U121	75-69-4	Methane, trichlorofluoro-
U036	57-74-9	4,7-Methano-1H-indene, 1,2,4,5,6,7,8,8-octachloro-2,3,3a,4,7,7a-hexahydro-
U154	67-56-1	Methanol (I)
U155	91-80-5	Methapyrilene
U142	143-50-0	1,3,4-Metheno-2H-cyclobuta[cd]pentalen-2-one, 1,1a,3,3a,4,5,5,5a,5b,6-decachlorooctahydro-
U247	72-43-5	Methoxychlor
U154	67-56-1	Methyl alcohol (I)
U029	74-83-9	Methyl bromide
U186	504-60-9	1-Methylbutadiene (I)
U045	74-87-3	Methyl chloride (I,T)
U156	79-22-1	Methyl chlorocarbonate (I,T)
U226	71-55-6	Methyl chloroform
U157	56-49-5	3-Methylcholanthrene
U158	101-14-4	4,4'-Methylenebis(2-chloroaniline)
U068	74-95-3	Methylene bromide
U080	75-09-2	Methylene chloride
U159	78-93-3	Methyl ethyl ketone (MEK) (I,T)
U160	1338-23-4	Methyl ethyl ketone peroxide (R,T)
U138	74-88-4	Methyl iodide
U161	108-10-1	Methyl isobutyl ketone (I)
U162	80-62-6	Methyl methacrylate (I,T)
U161	108-10-1	4-Methyl-2-pentanone (I)
U164	56-04-2	Methylthiouracil
U010	50-07-7	Mitomycin C
U059	20830-81-3	5,12-Naphthacenedione, 8-acetyl-10-[(3-amino-2,3,6-trideoxy)-alpha-L-lyxo-hexopyranosyl)oxy]-7,8,9,10-tetrahydro-6,8,11-trihydroxy-1-methoxy-, (8S-cis)-
U167	134-32-7	1-Naphthalenamine
U168	91-59-8	2-Naphthalenamine
U026	494-03-1	Naphthalenamine, N,N'-bis(2-chloroethyl)-
U165	91-20-3	Naphthalene
U047	91-58-7	Naphthalene, 2-chloro-
U166	130-15-4	1,4-Naphthalenedione
U236	72-57-1	2,7-Naphthalenedisulfonic acid, 3,3'-[(3,3'-dimethyl[1,1'-biphenyl]-4,4'-diyl)bis(azo)bis[5-amino-4-hydroxy]-, tetrasodium salt
U166	130-15-4	1,4-Naphthoquinone
U167	134-32-7	alpha-Naphthylamine
U168	91-59-8	beta-Naphthylamine
U217	10102-45-1	Nitric acid, thallium(1 +) salt
U169	98-95-3	Nitrobenzene (I,T)
U170	100-02-7	p-Nitrophenol
U171	79-46-9	2-Nitropropane (I,T)
U172	924-16-3	N-Nitrosodi-n-butylamine
U173	1116-54-7	N-Nitrosodiethanolamine
U174	55-18-5	N-Nitrosodiethylamine
U176	759-73-9	N-Nitroso-N-ethylurea
U177	684-93-5	N-Nitroso-N-methylurea
U178	615-53-2	N-Nitroso-N-methylurethane
U179	100-75-4	N-Nitrosopiperidine
U180	930-55-2	N-Nitrosopyrrolidine
U181	99-55-8	5-Nitro-o-toluidine
U193	1120-71-4	1,2-Oxathiolane, 2,2-dioxide
U058	50-18-0	2H-1,3,2-Oxazaphosphorin-2-amine, N,N-bis(2-chloroethyl)tetrahydro-, 2-oxide
U115	75-21-8	Oxirane (I,T)
U126	765-34-4	Oxiranecarboxyaldehyde
U041	106-89-8	Oxirane, (chloromethyl)-
U182	123-63-7	Paraldehyde
U183	608-93-5	Pentachlorobenzene
U184	76-01-7	Pentachloroethane
U185	82-68-8	Pentachloronitrobenzene (PCNB)
See F027	87-86-5	Pentachlorophenol

Hazardous waste No.	Chemical abstracts No.	Substance
U161	108-10-1	Pentanol, 4-methyl-
U186	504-60-9	1,3-Pentadiene (I)
U187	62-44-2	Phenacetin
U188	108-95-2	Phenol
U048	95-57-8	Phenol, 2-chloro-
U039	59-50-7	Phenol, 4-chloro-3-methyl-
U081	120-83-2	Phenol, 2,4-dichloro-
U082	87-65-0	Phenol, 2,6-dichloro-
U089	56-53-1	Phenol, 4,4'-(1,2-diethyl-1,2-ethenediyl)bis-, (E)-
U101	105-67-9	Phenol, 2,4-dimethyl-
U052	1319-77-3	Phenol, methyl-
U132	70-30-4	Phenol, 2,2'-methylenebis[3,4,6-trichloro-
U170	100-02-7	Phenol, 4-nitro-
See F027	87-86-5	Phenol, pentachloro-
See F027	58-90-2	Phenol, 2,3,4,6-tetrachloro-
See F027	95-95-4	Phenol, 2,4,5-trichloro-
See F027	88-06-2	Phenol, 2,4,6-trichloro-
U150	148-82-3	L-Phenylalanine, 4-[bis(2-chloroethyl)amino]-
U145	7446-27-7	Phosphoric acid, lead(2+) salt (2:3)
U087	3288-58-2	Phosphorodithioic acid, O,O-diethyl S-methyl ester
U189	1314-80-3	Phosphorus sulfide (R)
U190	85-44-9	Phthalic anhydride
U191	109-06-8	2-Picoline
U179	100-75-4	Piperidine, 1-nitroso-
U192	23950-58-5	Pronamide
U194	107-10-8	1-Propanamine (I,T)
U111	621-64-7	1-Propanamine, N-nitroso-N-propyl-
U110	142-84-7	1-Propanamine, N-propyl- (I)
U066	96-12-8	Propane, 1,2-dibromo-3-chloro-
U083	78-87-5	Propane, 1,2-dichloro-
U149	109-77-3	Propanedinitrile
U171	79-46-9	Propane, 2-nitro- (I,T)
U027	108-60-1	Propane, 2,2'-oxybis[2-chloro-
U193	1120-71-4	1,3-Propane sultone
See F027	93-72-1	Propanoic acid, 2-(2,4,5-trichlorophenoxy)-
U235	126-72-7	1-Propanol, 2,3-dibromo-, phosphate (3:1)
U140	78-83-1	1-Propanol, 2-methyl- (I,T)
U002	67-64-1	2-Propanone (I)
U007	79-06-1	2-Propenamide
U084	542-75-6	1-Propene, 1,3-dichloro-
U243	1888-71-7	1-Propene, 1,1,2,3,3,3-hexachloro-
U009	107-13-1	2-Propenenitrile
U152	126-98-7	2-Propenenitrile, 2-methyl- (I,T)
U008	79-10-7	2-Propenoic acid (I)
U113	140-88-5	2-Propenoic acid, ethyl ester (I)
U118	97-63-2	2-Propenoic acid, 2-methyl-, ethyl ester
U162	80-62-6	2-Propenoic acid, 2-methyl-, methyl ester (I,T)
U194	107-10-8	n-Propylamine (I,T)
U083	78-87-5	Propylene dichloride
U148	123-33-1	3,6-Pyridazinedione, 1,2-dihydro-
U196	110-86-1	Pyridine
U191	109-06-8	Pyridine, 2-methyl-
U237	66-75-1	2,4-(1H,3H)-Pyrimidinedione, 5-[bis(2-chloroethyl)amino]-
U164	56-04-2	4(1H)-Pyrimidinone, 2,3-dihydro-6-methyl-2-thioxo-
U180	930-55-2	Pyrrolidine, 1-nitroso-
U200	50-55-5	Reserpine
U201	108-46-3	Resorcinol
U202	[1] 81-07-2	Saccharin, & salts
U203	94-59-7	Safrole
U204	7783-00-8	Selenious acid
U204	7783-00-8	Selenium dioxide
U205	7488-56-4	Selenium sulfide
U205	7488-56-4	Selenium sulfide SeS_2 (R,T)
U015	115-02-6	L-Serine, diazoacetate (ester)

Hazardous waste No.	Chemical abstracts No.	Substance
See F027	93-72-1	Silvex (2,4,5-TP)
U206	18883-66-4	Streptozotocin
U103	77-78-1	Sulfuric acid, dimethyl ester
U189	1314-80-3	Sulfur phosphide (R)
See F027	93-76-5	2,4,5-T
U207	95-94-3	1,2,4,5-Tetrachlorobenzene
U208	630-20-6	1,1,1,2-Tetrachloroethane
U209	79-34-5	1,1,2,2-Tetrachloroethane
U210	127-18-4	Tetrachloroethylene
See F027	58-90-2	2,3,4,6-Tetrachlorophenol
U213	109-99-9	Tetrahydrofuran (I)
U214	563-68-8	Thallium(I) acetate
U215	6533-73-9	Thallium(I) carbonate
U216	7791-12-0	Thallium(I) chloride
U216	7791-12-0	Thallium chloride TlCl
U217	10102-45-1	Thallium(I) nitrate
U218	62-55-5	Thioacetamide
U153	74-93-1	Thiomethanol (I,T)
U244	137-26-8	Thioperoxydicarbonic diamide $[(H_2N)C(S)]_2S_2$, tetramethyl-
U219	62-56-6	Thiourea
U244	137-26-8	Thiram
U220	108-88-3	Toluene
U221	25376-45-8	Toluenediamine
U223	26471-62-5	Toluene diisocyanate (R,T)
U328	95-53-4	o-Toluidine
U353	106-49-0	p-Toluidine
U222	636-21-5	o-Toluidine hydrochloride
U011	61-82-5	1H-1,2,4-Triazol-3-amine
U227	79-00-5	1,1,2-Trichloroethane
U228	79-01-6	Trichloroethylene
U121	75-69-4	Trichloromonofluoromethane
See F027	95-95-4	2,4,5-Trichlorophenol
See F027	88-06-2	2,4,6-Trichlorophenol
U234	99-35-4	1,3,5-Trinitrobenzene (R,T)
U182	123-63-7	1,3,5-Trioxane, 2,4,6-trimethyl-
U235	126-72-7	Tris(2,3-dibromopropyl) phosphate
U236	72-57-1	Trypan blue
U237	66-75-1	Uracil mustard
U176	759-73-9	Urea, N-ethyl-N-nitroso-
U177	684-93-5	Urea, N-methyl-N-nitroso-
U043	75-01-4	Vinyl chloride
U248	[1] 81-81-2	Warfarin, & salts, when present at concentrations of 0.3% or less
U239	1330-20-7	Xylene (I)
U200	50-55-5	Yohimban-16-carboxylic acid, 11,17-dimethoxy-18-[(3,4,5-trimethoxybenzoyl)oxy]-, methyl ester, (3beta,16beta,17alpha,18beta,20alpha)-
U249	1314-84-7	Zinc phosphide Zn_3P_2, when present at concentrations of 10% or less

[1] CAS Number given for parent compound only.

(Approved by the Office of Management and Budget under control number 2050-0047)

[45 FR 78529, 78541, Nov. 25, 1980]

EDITORIAL NOTE: For FEDERAL REGISTER citations affecting § 261.33, see the List of CFR Sections Affected in the Finding Aids section of this volume.

APPENDIX I—REPRESENTATIVE SAMPLING METHODS

The methods and equipment used for sampling waste materials will vary with the form and consistency of the waste materials to be sampled. Samples collected using the sampling protocols listed below, for sampling waste with properties similar to the indicated materials, will be considered by the Agency to be representative of the waste.

Extremely viscous liquid—ASTM Standard D140-70 Crushed or powdered material—ASTM Standard D346-75 Soil or rock-like

material—ASTM Standard D420-69 Soil-like material—ASTM Standard D1452-65

Fly Ash-like material—ASTM Standard D2234-76 [ASTM Standards are available from ASTM, 1916 Race St., Philadelphia, PA 19103]

Containerized liquid wastes—"COLIWASA" described in "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods," * U.S. Environmental Protection Agency, Office of Solid Waste, Washington, D.C. 20460. [Copies may be obtained from Solid Waste Information, U.S. Environmental Protection Agency, 26 W. St. Clair St., Cincinnati, Ohio 45268]

Liquid waste in pits, ponds, lagoons, and similar reservoirs.—"Pond Sampler" described in "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods." *

This manual also contains additional information on application of these protocols.

APPENDIX II—METHOD 1311 TOXICITY CHARACTERISTIC LEACHING PROCEDURE (TCLP)

1.0 Scope and Application

1.1 The TCLP is designed to determine the mobility of both organic and inorganic analytes present in liquid, solid, and multiphasic wastes.

1.2 If a total analysis of the waste demonstrates that individual analytes are not present in the waste, or that they are present but at such low concentrations that the appropriate regulatory levels could not possibly be exceeded, the TCLP need not be run.

1.3 If an analysis of any one of the liquid fractions of the TCLP extract indicates that a regulated compound is present at such high concentrations that, even after accounting for dilution from the other fractions of the extract, the concentration would be equal to or above the regulatory level for that compound, then the waste is hazardous and it is not necessary to analyze the remaining fractions of the extract.

1.4 If an analysis of extract obtained using a bottle extractor shows that the concentration of any regulated volatile analyte equals or exceeds the regulatory level for that compound, then the waste is hazardous and extraction using the ZHE is not necessary. However, extract from a bottle extractor cannot be used to demonstrate that the concentration of volatile compounds is below the regulatory level.

2.0 Summary of Method

2.1 For liquid wastes (i.e., those containing less than 0.5% dry solid material), the waste, after filtration through a 0.6 to 0.8 μm glass fiber filter, is defined as the TCLP extract.

2.2 For wastes containing greater than or equal to 0.5% solids, the liquid, if any, is separated from the solid phase and stored for later analysis; the particle size of the solid phase is reduced, if necessary. The solid phase is extracted with an amount of extraction fluid equal to 20 times the weight of the solid phase. The extraction fluid employed is a function of the alkalinity of the solid phase of the waste. A special extractor vessel is used when testing for volatile analytes (see Table 1 for a list of volatile compounds). Following extraction, the liquid extract is separated from the solid phase by filtration through a 0.6 to 0.8 μm glass fiber filter.

2.3 If compatible (i.e., multiple phases will not form on combination), the initial liquid phase of the waste is added to the liquid extract, and these are analyzed together. If incompatible, the liquids are analyzed separately and the results are mathematically combined to yield a volume-weighted average concentration.

3.0 Interferences

3.1 Potential interferences that may be encountered during analysis are discussed in the individual analytical methods.

4.0 Apparatus and Materials

4.1 Agitation apparatus: The agitation apparatus must be capable of rotating the extraction vessel in an end-over-end fashion (see Figure 1) at 30 ±2 rpm. Suitable devices known to EPA are identified in Table 2.

4.2 Extraction Vessels.

4.2.1 Zero-Headspace Extraction Vessel (ZHE). This device is for use only when the waste is being tested for the mobility of volatile analytes (i.e., those listed in Table 1). The ZHE (depicted in Figure 2) allows for liquid/solid separation within the device, and effectively precludes headspace. This type of vessel allows for initial liquid/solid separation, extraction, and final extract filtration without opening the vessel (see section 4.3.1). The vessels shall have an internal volume of 500-600 mL, and be equipped to accommodate a 90-110 mm filter. The devices contain VITON* O-rings

* These methods are also described in "Samplers and Sampling Procedures for Hazardous Waste Streams," EPA 600/2-80-018, January 1980.

* VITON* is a registered trademark of DuPont.

which should be replaced frequently. Suitable ZHE devices known to EPA are identified in Table 3.

For the ZHE to be acceptable for use, the piston within the ZHE should be able to be moved with approximately 15 pounds per square inch (psi) or less. If it takes more pressure to move the piston, the O-rings in the device should be replaced. If this does not solve the problem, the ZHE is unacceptable for TCLP analyses and the manufacturer should be contacted.

The ZHE should be checked for leaks after every extraction. If the device contains a built-in pressure gauge, pressurize the device to 50 psi, allow it to stand unattended for 1 hour, and recheck the pressure. If the device does not have a built-in pressure gauge, pressurize the device to 50 psi, submerge it in water, and check for the presence of air bubbles escaping from any of the fittings. If pressure is lost, check all fittings and inspect and replace O-rings, if necessary. Retest the device. If leakage problems cannot be solved, the manufacturer should be contacted.

Some ZHEs use gas pressure to actuate the ZHE piston, while others use mechanical pressure (see Table 3). Whereas the volatiles procedures (see section 7.3) refers to pounds per square inch (psi), for the mechanically actuated piston, the pressure applied is measured in torque-inch-pounds. Refer to the manufacturer's instructions as to the proper conversion.

4.2.2 Bottle Extraction Vessel. When the waste is being evaluated using the nonvolatile extraction, a jar with sufficient capacity to hold the sample and the extraction fluid is needed. Headspace is allowed in this vessel.

The extraction bottles may be constructed from various materials, depending on the analytes to be analyzed and the nature of the waste (see section 4.3.3). It is recommended that borosilicate glass bottles be used instead of other types of glass, especially when inorganics are of concern. Plastic bottles, other than polytetrafluoroethylene, shall not be used if organics are to be investigated. Bottles are available from a number of laboratory suppliers. When this type of extraction vessel is used, the filtration device discussed in section 4.3.2 is used for initial liquid/solid separation and final extract filtration.

4.3 Filtration Devices: It is recommended that all filtrations be performed in a hood.

4.3.1 Zero-Headspace Extractor Vessel (ZHE): When the waste is evaluated for volatiles, the zero-headspace extraction vessel described in section 4.2.1 is used for filtration. The device shall be capable of supporting and keeping in place the glass fiber filter and be able to withstand the pressure needed to accomplish separation (50 psi).

NOTE: When it is suspected that the glass fiber filter has been ruptured, an in-line glass fiber filter may be used to filter the material within the ZHE.

4.3.2 Filter Holder: When the waste is evaluated for other than volatile analytes, any filter holder capable of supporting a glass fiber filter and able to withstand the pressure needed to accomplish separation may be used. Suitable filter holders range from simple vacuum units to relatively complex systems capable of exerting pressures of up to 50 psi or more. The type of filter holder used depends on the properties of the material to be filtered (see section 4.3.3). These devices shall have a minimum internal volume of 300 mL and be equipped to accommodate a minimum filter size of 47 mm (filter holders having an internal capacity of 1.5 L or greater, and equipped to accommodate a 142 mm diameter filter, are recommended). Vacuum filtration can only be used for wastes with low solids content ($<10\%$) and for highly granular, liquid-containing wastes. All other types of wastes should be filtered using positive pressure filtration. Suitable filter holders known to EPA are shown in Table 4.

4.3.3 Materials of Construction: Extraction vessels and filtration devices shall be made of inert materials which will not leach or absorb waste components. Glass, polytetrafluoroethylene (PTFE), or type 316 stainless steel equipment may be used when evaluating the mobility of both organic and inorganic components. Devices made of high density polyethylene (HDPE), polypropylene (PP), or polyvinyl chloride (PVC) may be used only when evaluating the mobility of metals. Borosilicate glass bottles are recommended for use over other types of glass bottles, especially when inorganics are analytes of concern.

4.4 Filters: Filters shall be made of borosilicate glass fiber, shall contain no binder materials, and shall have an effective pore size of 0.6 to 0.8 μm, or equivalent. Filters known to EPA which meet these specifications are identified in Table 5. Pre-filters must not be used. When evaluating the mobility of metals, filters shall be acid-washed prior to use by rinsing with 1N nitric acid followed by three consecutive rinses with deionized distilled water (a minimum of 1 L per rinse is recommended). Glass fiber filter are fragile and should be handled with care.

4.5 pH Meters: The meter should be accurate to $\pm$ 0.05 units at 25°C.

4.6 ZHE Extract Collection Devices: TEDLAR® [2] bags or glass, stainless steel or

[2] TEDLAR® is a registered trademark of Dupont.

PTFE gag-tight syringes are used to collect the initial liquid phase and the final extract of the waste when using the ZHE device. The devices listed are recommended for use under the following conditions:

4.6.1 If a waste contains an aqueous liquid phase or if a waste does not contain a significant amount of nonaqueous liquid (i.e., <1% of total waste), the TEDLAR® bag or a 600 mL syringe should be used to collect and combine the initial liquid and solid extract.

4.6.2 If a waste contains a significant amount of nonaqueous liquid in the initial liquid phase (i.e., >1% of total waste), the syringe or the TEDLAR® bag may be used for both the intitial solid/liquid separation and the final extract filtration. However, analysts should use one or the other, not both.

4.6.3 If the waste contains no initial liquid phase (is 100% solid) or has no significant solid phase (is 100% liquid), either the TEDLAR® bag or the syringe may be used. If the syringe is used, discard the first 5 mL of liquid expressed from the device. The remaining aliquots are used for analysis.

4.7 ZHE Extraction Fluid Transfer Devices: Any device capable of transferring the extraction fluid into the ZHE without changing the nature of the extraction fluid is acceptable (e.g, a positive displacement or peristaltic pump, a gas tight syringe, pressure filtration unit (see section 4.3.2), or other ZHE device).

4.8 Laboratory Balance: Any laboratory balance accurate to within ± 0.01 grams may be used (all weight measurements are to be within ± 0.1 grams).

4.9 Beaker or Erlenmeyer flask, glass, 500 mL.

4.10 Watchglass, appropriate diameter to cover beaker or erlenmeyer flask.

4.11 Magnetic stirrer.

5.0 Reagents

5.1 Reagent grade chemicals shall be used in all tests. Unless otherwise indicated, it is intended that all reagents shall conform to the specifications of the Committee on Analytical Reagents of the American Chemical Society, where such specifications are available. Other grades may be used, provided it is first ascertained that the reagent is of sufficiently high purity to permit its use without lessening the accuracy of the determination.

5.2 Reagent water. Reagent water is defined as water in which an interferant is not observed at or above the methods detection limit of the analyte(s) of interest. For nonvolatile extractions, ASTM Type II water or equivalent meets the definition of reagent water. For volatile extractions, it is recommended that reagent water be generated by any of the following methods. Reagent water should be monitored periodically for impurities.

5.2.1 Reagent water for volatile extractions may be generated by passing tap water through a carbon filter bed containing about 500 grams of activated carbon (Calgon Corp., Filtrasorb-300 or equivalent).

5.2.2 A water purification system (Millipore Super-Q or equivalent) may also be used to generate reagent water for volatile extractions.

5.2.3 Reagent water for volatile extractions may also be prepared by boiling water for 15 minutes. Subsequently, while maintaining the water temperature at 90 + 5 degrees C, bubble a contaminant-free inert gas (e.g., nitrogen) through the water for 1 hour. While still hot, transfer the water to a narrow mouth screw-cap bottle under zero-headspace and seal with a Teflon-lined septum and cap.

5.3 Hydrochloric acid (1N), HCl, made from ACS reagent grade.

5.4 Nitric acid (1N), HNO_3, made from ACS reagent grade.

5.5 Sodium hydroxide (1N), NaOH, made from ACS reagent grade.

5.6 Clacial acetic acid, CH_3CH_2OOH, ACS reagent grade.

5.7 Extraction fluid.

5.7.1 Extraction fluid #1: Add 5.7 mL glacial CH_3CH_2OOH to 500 mL of reagent water (See section 5.2), add 64.3 mL of 1N NaOH, and dilute to a volume of 1 liter. When correctly prepared, the pH of this fluid will be 4.93±0.05.

5.7.2 Extraction fluid #2: Dilute 5.7 mL glacial CH_3CH_2OOH with reagent water (See section 5.2) to a volume of 1 liter. When correctly prepared, the pH of this fluid will be 2.88±0.05.

NOTE: These extraction fluids should be monitored frequently for impurities. The pH should be checked prior to use to ensure that these fluids are made up accurately. If impurities are found or the pH is not within the above specifications, the fluid shall be discarded and fresh extraction fluid prepared.

5.8 Analytical standards shall be prepared according to the appropriate analytical method.

6.0 Sample Collection, Preservation, and Handling

6.1 All samples shall be collected using an appropriate sampling plan.

6.2 The TCLP may place requirements on the minimal size of the field sample, depending upon the physical state or states of the waste and the analytes of concern. An aliquot is needed for preliminary evaluation of which extraction fluid is to be used for the nonvolatile analyte extraction procedure. Another aliquot may be needed to ac-

tually conduct the nonvolatile extraction (see section 1.4 concerning the use of this extract for volatile organics). If volatile organics are of concern, another aliquot may be needed. Quality control measures may require additional aliquots. Further, it is always wise to collect more samples just in case something goes wrong with the initial attempt to conduct the test.

6.3 Preservatives shall not be added to samples before extraction.

6.4 Samples may be refrigerated unless refrigeration results in irreversible physical change to the waste. If precipitation occurs, the entire sample (including precipitate) should be extracted.

6.5 When the waste is to be evaluated for volatile analytes, care shall be taken to minimize the loss of volatiles. Samples shall be collected and stored in a manner intended to prevent the loss of volatile analytes (e.g., samples should be collected in Teflon-lined septum capped vials and stored at 4 °C. Samples should be opened only immediately prior to extraction).

6.6 TCLP extracts should be prepared for analysis and analyzed as soon as possible following extraction. Extracts or portions of extracts for metallic analyte determinations must be acidified with nitric acid to a pH <2, unless precipitation occurs (see section 7.2.14 if precipitation occurs). Extracts should be preserved for other analytes according to the guidance given in the individual analysis methods. Extracts or portions of extracts for organic analyte determinations shall not be allowed to come into contact with the atmosphere (i.e., no headspace) to prevent losses. See section 8.0 (QA requirements) for acceptable sample and extract holding times.

7.0 Procedure

7.1 Preliminary Evaluations. Perform preliminary TCLP evaluations on a minimum 100 gram aliquot of waste. This aliquot may not actually undergo TCLP extraction. These preliminary evaluations include: (1) Determination of the percent solids (section 7.1.1); (2) determination of whether the waste contains insignificant solids and is, therefore, its own extract after filtration (section 7.1.2); (3) determination of whether the solid portion of the waste requires particle size reduction (section 7.1.3); and (4) determination of which of the two extraction fluids are to be used for the nonvolatile TCLP extraction of the waste (section 7.1.4.).

7.1.1 Preliminary determination of percent solids: Percent solids is defined as that fraction of a waste sample (as a percentage of the total sample) from which no liquid may be forced out by an applied pressure, as described below.

7.1.1.1 If the waste will obviously yield no liquid when subjected to pressure filtration (i.e., is 100% solids) proceed to section 7.1.3.

7.1.1.2 If the sample is liquid or multiphasic, liquid/solid separation to make a preliminary determination of percent solids is required. This involves the filtration device described in section 4.3.2 and is outlined in sections 7.1.1.3 through 7.1.1.9.

7.1.1.3 Pre-weigh the filter and the container that will receive the filtrate.

7.1.1.4 Assemble the filter holder and filter following the manufacturer's instructions. Place the filter on the support screen and secure.

7.1.1.5 Weigh out a subsample of the waste (100 gram minimum) and record the weight.

7.1.1.6 Allow slurries to stand to permit the solid phase to settle. Wastes that settle slowly may be centrifuged prior to filtration. Centrifugation is to be used only as an aid to filtration. If used, the liquid should be decanted and filtered followed by filtration of the solid portion of the waste through the same filtration system.

7.1.1.7 Quantitatively transfer the waste sample to the filter holder (liquid and solid phases). Spread the waste sample evenly over the surface of the filter. If filtration of the waste at 4 °C reduces the amount of expressed liquid over what would be expressed at room temperature then allow the sample to warm up to room temperature in the device before filtering.

NOTE: If waste material (>1% of original sample weight) has obviously adhered to the container used to transfer the sample to the filtration apparatus, determine the weight of this residue and subtract it from the sample weight determined in section 7.1.1.5 to determine he weight of the waste sample that will be filtered.

Gradually apply vacuum or gentle pressure of 1-10 psi, until air or pressurizing gas moves through the filter. If this point is not reached under 10 psi, and if no additional liquid has passed through the filter in any 2 minute interval, slowly increase the pressure in 10 psi increments to a maximum of 50 psi. After each incremental increase of 10 psi, if the pressurizing gas has not moved through the filter, and if no additional liquid has passed through the filter in any 2 minute interval, proceed to the next 10 psi increment. When the pressurizing gas begins to move through the filter, or when liquid flow has ceased at 50 psi (i.e., filtration does not result in any additional filtrate within any 2 minute period), stop the filtration.

NOTE: Instantaneous application of high pressure can degrade the glass fiber filter and may cause premature plugging.

7.1.1.8 The material in the filter holder is defined as the solid phase of the waste, and the filtrate is defined as the liquid phase.

NOTE: Some wastes, such as oily wastes and some paint wastes, will obviously contain some material that appears to be a liquid. Even after applying vacuum or pressure filtration, as outlined in section 7.1.1.7, this material may not filter. If this is the case, the material within the filtration device is defined as a solid. Do not replace the original filter with a fresh filter under any circumstances. Use only one filter.

7.1.1.9 Determine the weight of the liquid phase by subtracting the weight of the filtrate container (see section 7.1.1.3) from the total weight of the filtrate-filled container. Determine the weight of the solid phase of the waste sample by subtracting the weight of the liquid phase from the weight of the total waste sample, as determined in section 7.1.1.5 or 7.1.1.7.

Record the weight of the liquid and solid phases. Calculate the percent solids as follows:

$$\text{Percent solids} = \frac{\text{Weight of solid (section 7.1.1.9)}}{\text{Total weight of waste (section 7.1.1.5 or 7.1.1.7)}} \times 100$$

7.1.2 If the percent solids determined in section 7.1.1.9 is equal to or greater than 0.5%, then proceed either to section 7.1.3 to determine whether the solid material requires particle size reduction or to section 7.1.2.1 if it is noticed that a small amount of the filtrate is entrained in wetting of the filter. If the percent solids determined in section 7.1.1.9 is less than 0.5%, then proceed to section 7.2.9 if the nonvolatile TCLP is to be performed and to section 7.3 with a fresh portion of the waste if the volatile TCLP is to be performed.

7.1.2.1 Remove the solid phase and filter from the filtration apparatus.

7.1.2.2 Dry the filter and solid phase at 100± 20°C until two successive weighings yield the same value within ± 1%. Record the final weight.

NOTE: Caution should be taken to ensure that the subject solid will not flash upon heating. It is recommended that the drying oven be vented to a hood or other appropriate device.

7.1.2.3 Calculate the percent dry solids as follows:

$$\text{\% dry solids} = \frac{\text{(Weight of dry waste + filter)} - \text{tared weight of filter}}{\text{Initial weight of waste (section 7.1.1.5 or 7.1.1.7)}} \times 100$$

7.1.2.4 If the percent dry solids is less than 0.5%, then proceed to section 7.2.9 if the nonvolatile TCLP is to be performed, and to section 7.3 if the volatile TCLP is to be performed. If the percent dry solids is greater than or equal to 0.5%, and if the nonvolatile TCLP is to be performed, return to the beginning of this section (7.1) and, with a fresh portion of waste, determine whether particle size reduction is necessary (section 7.1.3) and determine the appropriate extraction fluid (section 7.1.4). If only the volatile TCLP is to be performed, see the note in section 7.1.4.

7.1.3 Determination of whether the waste requires particle size reduction (particle size is reduced during this step): Using the solid portion of the waste, evaluate the solid for particle size. Particle size reduction is required, unless the solid has a surface area per gram of material equal to or greater than 3.1 cm^2, or is smaller than 1 cm in its narrowest dimension (i.e., is capable of passing through a 9.5 mm (0.375 inch) standard sieve). If the surface area is smaller or the particle size larger than described above, prepare the solid portion of the waste for extraction by crushing, cutting, or grinding the waste to a surface area or particle size as described above. If the solids are prepared for organic volatiles extraction, special precautions must be taken (see section 7.3.6).

NOTE: Surface area criteria are meant for filamentous (e.g., paper, cloth, and similar) waste materials. Actual measurement of surface area is not required, nor is it recommended. For materials that do not obviously meet the criteria, sample-specific methods would need to be developed and employed to measure the surface area. Such methodology is currently not available.

7.1.4 Determination of appropriate extraction fluid: If the solid content of the waste is greater than or equal to 0.5% and if the sample will be extracted for nonvolatile

constituents (section 7.2), determine the appropriate fluid (section 5.7) for the nonvolatiles extraction as follows:

NOTE: TCLP extraction for volatile constituents uses only extraction fluid #1 (section 5.7.1). Therefore, if TCLP extraction for nonvolatiles is not required, proceed to section 7.3.

7.1.4.1 Weigh out a small subsample of the solid phase of the waste, reduce the solid (if necessary) to a particle size of approximately 1 mm in diameter or less, and transfer 5.0 grams of the solid phase of the waste to a 500 mL beaker or Erlenmeyer flask.

7.1.4.2 Add 96.5 mL of reagent water to the beaker, cover with a watchglass, and stir vigorously for 5 minutes using a magnetic stirrer. Measure and record the pH. If the pH is <5.0, use extraction fluid #1. Proceed to section 7.2.

7.1.4.3 If the pH from section 7.1.4.2 is >5.0, add 3.5 mL 1N NCl, slurry briefly, cover with a watchglass, heat to 50°C, and hold at 50°C for 10 minutes.

7.1.4.4 Let the solution cool to room temperature and record the pH. If the pH is <5.0, use extraction fluid #1. If the pH is >5.0, use extraction fluid #2. Proceed to section 7.2.

7.1.5 If the aliquot of the waste used for the preliminary evaluation (sections 7.1.1–7.1.4) was determined to be 100% solid at section 7.1.1.1, then it can be used for the section 7.2 extraction (assuming at least 100 grams remain), and the section 7.3 extraction (assuming at least 25 grams remain). If the aliquot was subjected to the procedure in section 7.1.1.7, then another aliquot shall be used for the volatile extraction procedure in section 7.3. The aliquot of the waste subjected to the procedure in section 7.1.1.7 might be appropriate for use for the section 7.2 extraction if an adequate amount of solid (as determined by section 7.1.1.9) was obtained. The amount of solid necessary is dependent upon whether a sufficient amount of extract will be produced to support the analyses. If an adequate amount of solid remains, proceed to section 7.2.10 of the nonvolatile TCLP extraction.

7.2 Procedure When Volatiles are not Involved. A minimum sample size of 100 grams (solid and liquid phases) is recommended. In some cases, a larger sample size may be appropriate, depending on the solids content of the waste sample (percent solids, See section 7.1.1), whether the initial liquid phase of the waste will be miscible with the aqueous extract of the solid, and whether inorganics, semivolatile organics, pesticides, and herbicides are all analytes of concern. Enough solids should be generated for extraction such that the volume of TCLP extract will be sufficient to support all of the analyses required. If the amount of extract generated by a single TCLP extraction will not be sufficient to perform all of the analyses, more than one extraction may be performed and the extracts from each combined and aliquoted for analysis.

7.2.1 If the waste will obviously yield no liquid when subjected to pressure filtration (i.e., is 100% solid, see section 7.1.1), weigh out a subsample of the waste (100 gram minimum) and proceed to section 7.2.9.

7.2.2 If the sample is liquid or multiphasic, liquid/solid separation is required. This involves the filtration device described in section 4.3.2 and is outlined in sections 7.2.3 to 7.2.8.

7.2.3 Pre-weigh the container that will receive the filtrate.

7.2.4 Assemble the filter holder and filter following the manufacturer's instructions. Place the filter on the support screen and secure. Acid-wash the filter if evaluating the mobility of metals (see section 4.4).

NOTE: Acid-washed filters may be used for all nonvolatile extractions even when metals are not of concern.

7.2.5 Weigh out a subsample of the waste (100 gram minimum) and record the weight. If the waste contains <0.5% dry solids (section 7.1.2), the liquid portion of the waste, after filtration, is defined as the TCLP extract. Therefore, enough of the sample should be filtered so that the amount of filtered liquid will support all of the analyses required of the TCLP extract. For wastes containing >0.5% dry solids (sections 7.1.1 or 7.1.2), use the percent solids information obtained in section 7.1.1 to determine the optimum sample size (100 gram minimum) for filtration. Enough solids should be generated by filtration to support the analyses to be performed on the TCLP extract.

7.2.6 Allow slurries to stand to permit the solid phase to settle. Wastes that settle slowly may be centrifuged prior to filtration. Use centrifugation only as an aid to filtration. If the waste is centrifuged, the liquid should be decanted and filtered followed by filtration of the solid portion of the waste through the same filtration system.

7.2.7 Quantitatively transfer the waste sample (liquid and solid phases) to the filter holder (see section 4.3.2). Spread the waste sample evenly over the surface of the filter. If filtration of the waste at 4 °C reduces the amount of expressed liquid over what would be expressed at room temperature, then allow the sample to warm up to room temperature in the device before filtering.

NOTE: If waste material (>1% of the original sample weight) has obviously adhered to the container used to transfer the sample to the filtration apparatus, determine the weight of this residue and subtract it from the sample weight determined in section

7.2.5, to determine the weight of the waste sample that will be filtered.

Gradually apply vacuum or gentle pressure of 1-10 psi, until air or pressurizing gas moves through the filter. If this point is reached under 10 psi, and if no additional liquid has passed through the filter in any 2 minute interval, slowly increase the pressure in 10 psi increments to a maximum of 50 psi. After each incremental increase of 10 psi, if the pressurizing gas has not moved through the filter, and if no additional liquid has passed through the filter in any 2 minute interval, proceed to the next 10 psi increment. When the pressurizing gas begins to move through the filter, or when the liquid flow has ceased at 50 psi (i.e., filtration does not result in any additional filtrate within a 2 minute period), stop the filtration.

NOTE: Instantaneous application of high pressure can degrade the glass fiber filter and may cause premature plugging.

7.2.8 The material in the filter holder is defined as the solid phase of the waste, and the filtrate is defined as the liquid phase. Weigh the filtrate. The liquid phase may now be either analyzed (See section 7.2.12) or stored at 4°C until time of analysis.

NOTE: Some wastes, such as oily wastes and some paint wastes, will obviously contain some material that appears to be a liquid. Even after applying vacuum or pressure filtration, as outlined in section 7.2.7, this material may not filter. If this is the case, the material within the filtration device is defined as a solid and is carried through the extraction as a solid. Do not replace the original filter with a fresh filter under any circumstances. Use only one filter.

7.2.9 If the waste contains <0.5% dry solids (see section 7.1.2), proceed to section 7.2.13. If the waste contains >0.5% dry solids (see section 7.1.1 or 7.1.2), and if particle size reduction of the solid was needed in section 7.1.3, proceed to section 7.2.10. If the waste as received passes a 9.5 mm sieve, quantitatively transfer the solid material into the extractor bottle along with the filter used to separate the initial liquid from the solid phase, and proceed to section 7.2.11.

7.2.10 Prepare the solid portion of the waste for extraction by crushing, cutting, or grinding the waste to a surface area or particle size as described in section 7.1.3. When the surface area or particle size has been appropriately altered, quantitatively transfer the solid material into an extractor bottle. Include the filter used to separate the initial liquid from the solid phase.

NOTE: Sieving of the waste is not normally required. Surface area requirements are meant for filamentous (e.g., paper, cloth) and similar waste materials. Actual measurement of surface area is not recommended. If sieving is necessary, a Teflon-coated sieve should be used to avoid contamination of the sample.

7.2.11 Determine the amount of extraction fluid to add to the extractor vessel as follows:

$$\text{Weight of extraction fluid} = \frac{20 \times \text{percent solids (section 7.1.1)} \times \text{weight of waste filtered (section 7.2.5 or 7.2.7)}}{100}$$

Slowly add this amount of appropriate extraction fluid (see section 7.1.4) to the extractor vessel. Close the extractor bottle tightly (it is recommended that Teflon tape be used to ensure a tight seal), secure in rotary agitation device, and rotate at 30 ± 2 rpm for 18 ± 2 hours. Ambient temperature (i.e., temperature of room in which extraction takes place) shall be maintained at 23 ± 2°C during the extraction period.

NOTE: As agitation continues, pressure may build within the extractor bottle for some types of wastes (e.g., limed or calcium carbonate containing waste may evolve gases such as carbon dioxide). To relieve excess pressure, the extractor bottle may be periodically opened (e.g., after 15 minutes, 30 minutes, and 1 hour) and vented into a hood.

7.2.12 Following the 18 ± 2 hour extraction, separate the material in the extractor vessel into its component liquid and solid phases by filtering through a new glass fiber filter, as outlined in section 7.2.7. For final filtration of the TCLP extract, the glass fiber filter may be changed, if necessary, to facilitate filtration. Filter(s) shall be acid-washed (see section 4.4) if evaluating the mobility of metals.

7.2.13 Prepare the TCLP extract as follows:

7.2.13.1 If the waste contained no initial liquid phase, the filtered liquid material obtained from section 7.2.12 is defined as the TCLP extract. Proceed to section 7.2.14.

7.2.13.2 If compatible (e.g., multiple phases will not result on combination), combine the filtered liquid resulting from section 7.2.12 with the initial liquid phase of the waste obtained in section 7.2.7. This combined liquid is defined as the TCLP extract. Proceed to section 7.2.14.

7.2.13.3 If the initial liquid phase of the waste, as obtained from section 7.2.7, is not or may not be compatible with the filtered liquid resulting from section 7.2.12, do not combine these liquids. Analyze these liquids, collectively defined as the TCLP extract,

and combine the results mathematically, as described in section 7.2.14.

7.2.14 Following collection of the TCLP extract, the pH of the extract should be recorded. Immediately aliquot and preserve the extract for analysis. Metals aliquots must be acidified with nitric acid to pH <2. If precipitation is observed upon addition of nitric acid to a small aliquot of the extract, then the remaining portion of the extract for metals analyses shall not be acidified and the extract shall be analyzed as soon as possible. All other aliquots must be stored under refrigeration (4 °C) until analyzed. The TCLP extract shall be prepared and analyzed according to appropriate analytical methods. TCLP extracts to be analyzed for metals shall be acid digested except in those instances where digestion causes loss of metallic analytes. If an analysis of the undigested extract shows that the concentration of any regulated metallic analyte exceeds the regulatory level, then the waste is hazardous and digestion of the extract is not necessary. However, data on undigested extracts alone cannot be used to demonstrate that the waste is not hazardous. If the individual phases are to be analyzed separately, determine the volume of the individual phases (to ± 0.5%), conduct the appropriate analyses, and combine the results mathematically by using a simple volume-weighted average:

$$\text{Final Analyte Concentration} = \frac{(V_1)(C_1)+(V_2)(C_2)}{V_1+V_2}$$

where:

V_1 = The volume of the first phase (L).
C_1 = The concentration of the analyte of concern in the first phase (mg/L).
V_2 = The volume of the second phase (L).
C_2 = The concentration of the analyte of concern in the second phase (mg/L).

7.2.15 Compare the analyte concentrations in the TCLP extract with the levels identified in the appropriate regulations. Refer to section 8.0 for quality assurance requirements.

7.3 Procedure When Volatiles are Involved. Use the ZHE device to obtain TCLP extract for analysis of volatile compounds only. Extract resulting from the use of the ZHE shall not be used to evaluate the mobility of nonvolatile analytes (e.g., metals, pesticides, etc.).

The ZHE device has approximately a 500 mL internal capacity. The ZHE can thus accommodate a maximum of 25 grams of solid (defined as that fraction of a sample from which no additional liquid may be forced out by an applied pressure of 50 psi), due to the need to add an amount of extraction fluid equal to 20 times the weight of the solid phase.

Charge the ZHE with sample only once and do not open the device until the final extract (of the solid) has been collected. Repeated filling of the ZHE to obtain 25 grams of solid is not permitted.

Do not allow the waste, the initial liquid phase, or the extract to be exposed to the atmosphere for any more time than is absolutely necessary. Any manipulation of these materials should be done when cold (4°C) to minimize loss of volatiles.

7.3.1 Pre-weigh the (evacuated) filtrate collection container (See section 4.6) and set aside. If using a TEDLAR® bag, express all liquid from the ZHE device into the bag, whether for the initial or final liquid/solid separation, and take an aliquot from the liquid in the bag for analysis. The containers listed in section 4.6 are recommended for use under the conditions stated in sections 4.6.1–4.6.3.

7.3.2 Place the ZHE piston within the body of the ZHE (it may be helpful first to moisten the piston O-rings slightly with extraction fluid). Adjust the piston within the ZHE body to a height that will minimize the distance the piston will have to move once the ZHE is charged with sample (based upon sample size requirements determined from section 7.3, section 7.1.1 and/or 7.1.2). Secure the gas inlet/outlet flange (bottom flange) onto the ZHE body in accordance with the manufacturer's instructions. Secure the glass fiber filter between the support screens and set aside. Set liquid inlet/outlet flange (top flange) aside.

7.3.3 If the waste is 100% solid (see section 7.1.1), weigh out a subsample (25 gram maximum) of the waste, record weight, and proceed to section 7.3.5.

7.3.4 If the waste contains <5% dry solids (section 7.1.2), the liquid portion of waste, after filtration, is defined as the TCLP extract. Filter enough of the sample so that the amount of filtered liquid will support all of the volatile analyses required. For wastes containing >5% dry solids (sections 7.1.1 and/or 7.1.2), use the percent solids information obtained in section 7.1.1 to determine the optimum sample size to charge into the ZHE. The recommended sample size is as follows:

7.3.4.1 For waste containing <5% solids (see Section 7.1.1), weigh out a 500 gram subsample of waste and record the weight.

7.3.4.2 For wastes containing >5% solids (see Section 7.1.1), determine the amount of waste to charge into the ZHE as follows:

$$\text{Weight of waste to charge ZHE} = \frac{25}{\text{percent solids (section 7.1.1)}} \times 100$$

Weigh out a subsample of the waste of the appropriate size and record the weight.

7.3.5 If particle size reduction of the solid portion of the waste was required in section 7.1.3, proceed to section 7.3.6. If particle size reduction was not required in section 7.1.3, proceed to section 7.3.7.

7.3.6 Prepare the waste for extraction by crushing, cutting, or grinding the solid portion of the waste to a surface area or particle size as described in section 7.1.3.1. Wastes and appropriate reduction equipment should be refrigerated, if possible, to 4°C prior to particle size reduction. The means used to effect particle size reduction must not generate heat in and of itself. If reduction of the solid phase of the waste is necessary, exposure of the waste to the atmosphere should be avoided to the extent possible.

NOTE: Sieving of the waste is not recommended due to the possibility that volatiles may be lost. The use of an appropriately graduated ruler is recommended as an acceptable alternative. Surface area requirements are meant for filamentous (e.g., paper, cloth) and similar waste materials. Actual measurement of surface area is not recommended.

When the surface area or particle size has been appropriately altered, proceed to section 7.3.7.

7.3.7 Waste slurries need not be allowed to stand to permit the solid phase to settle. Do not centrifuge wastes prior to filtration.

7.3.8 Quantitatively transfer the entire sample (liquid and solid phases) quickly to the ZHE. Secure the filter and support screens onto the top flange of the device and secure the top flange to the ZHE body in accordance with the manufacturer's instructions. Tighten all ZHE fittings and place the device in the vertical position (gas inlet/outlet flange on the bottom). Do not attach the extract collection device to the top plate.

NOTE: If waste material (>1% of original sample weight) has obviously adhered to the container used to transfer the sample to the ZHE, determine the weight of this residue and subtract it from the sample weight determined in section 7.3.4 to determine the weight of the waste sample that will be filtered.

Attach a gas line to the gas inlet/outlet valve (bottom flange) and, with the liquid inlet/outlet valve (top flange) open, begin applying gentle pressure of 1-10 psi (or more if necessary) to force all headspace slowly out of the ZHE device into a hood. At the first appearance of liquid from the liquid inlet/outlet valve, quickly close the valve and discontinue pressure. If filtration of the waste at 4 °C reduces the amount of expressed liquid over what would be expressed at room temperature, then allow the sample to warm up to room temperature in the device before filtering. If the waste is 100% solid (see section 7.1.1), slowly increase the pressure to a maximum of 50 psi to force most of the headspace out of the device and proceed to section 7.3.12.

7.3.9 Attach the evacuated pre-weighed filtrate collection container to the liquid inlet/outlet valve and open the valve. Begin applying gentle pressure of 1-10 psi to force the liquid phase of the sample into the filtrate collection container. If no additional liquid has passed through the filter in any 2 minute interval, slowly increase the pressure in 10 psi increments to a maximum of 50 psi. After each incremental increase of 10 psi, if no additional liquid has passed through the filter in any 2 minute interval, proceed to the next 10 psi increment. When liquid flow has ceased such that continued pressure filtration at 50 psi does not result in any additional filtrate within a 2 minute period, stop the filtration. Close the liquid inlet/outlet valve, discontinue pressure to the piston, and disconnect and weigh the filtrate collection container.

NOTE: Instantaneous application of high pressure can degrade the glass fiber filter and may cause premature plugging.

7.3.10 The material in the ZHE is defined as the solid phase of the waste and the filtrate is defined as the liquid phase.

NOTE: Some wastes, such as oily wastes and some paint wastes, will obviously contain some material that appears to be a liquid. Even after applying pressure filtration, this material will not filter. If this is the case, the material within the filtration device is defined as a solid and is carried through the TCLP extraction as a solid.

If the original waste contained <0.5% dry solids (see section 7.1.2), this filtrate is defined as the TCLP extract and is analyzed directly. Proceed to section 7.3.15.

7.3.11 The liquid phase may now be either analyzed immediately (See sections 7.3.13 through 7.3.15) or stored at 4°C under minimal headspace conditions until time of analysis.

Determine the weight of extraction fluid #1 to add to the ZHE as follows:

$$\text{Weight of extraction fluid} = \frac{20 \times \text{percent solids (section 7.1.1)} \times \text{weight of waste filtered (section 7.3.4 or 7.3.8)}}{100}$$

7.3.12 The following sections detail how to add the appropriate amount of extraction fluid to the solid material within the ZHE and agitation of the ZHE vessel. Extraction fluid #1 is used in all cases (See section 5.7).

7.3.12.1 With the ZHE in the vertical position, attach a line from the extraction fluid reservoir to the liquid inlet/outlet valve. The line used shall contain fresh extraction fluid and should be preflushed with fluid to eliminate any air pockets in the line. Release gas pressure on the ZHE piston (from the gas inlet/outlet valve), open the liquid inlet/outlet valve, and begin transferring extraction fluid (by pumping or similar means) into the ZHE. Continue pumping extraction fluid into the ZHE until the appropriate amount of fluid has been introduced into the device.

7.3.12.2 After the extraction fluid has been added, immediately close the liquid inlet/outlet valve and disconnect the extraction fluid line. Check the ZHE to ensure that all valves are in their closed positions. Manually rotate the device in an end-over-end fashion 2 or 3 times. Reposition the ZHE in the vertical position with the liquid inlet/outlet valve on top. Pressurize the ZHE to 5-10 psi (if necessary) and slowly open the liquid inlet/outlet valve to bleed out any headspace (into a hood) that may have been introduced due to the addition of extraction fluid. This bleeding shall be done quickly and shall be stopped at the first appearance of liquid from the valve. Re-pressurize the ZHE with 5-10 psi and check all ZHE fittings to ensure that they are closed.

7.3.12.3 Place the ZHE in the rotary agitation apparatus (if it is not already there) and rotate at 30 ± 2 rpm for 18 ± 2 hours. Ambient temperature (i.e., temperature of room in which extraction occurs) shall be maintained at 22 ± 3°C during agitation.

7.3.13 Following the 18 ± 2 hour agitation period, check the pressure behind the ZHE piston by quickly opening and closing the gas inlet/outlet valve and noting the escape of gas. If the pressure has not been maintained (i.e., no gas release observed), the device is leaking. Check the ZHE for leaking as specified in section 4.2.1, and perform the extraction again with a new sample of waste. If the pressure within the device has been maintained, the material in the extractor vessel is once again separated into its component liquid and solid phases. If the waste contained an initial liquid phase, the liquid may be filtered directly into the same filtrate collection container (i.e., TEDLAR® bag) holding the initial liquid phase of the waste. A separate filtrate collection container must be used if combining would create multiple phases, or there is not enough volume left within the filtrate collection container. Filter through the glass fiber filter, using the ZHE device as discussed in section 7.3.9. All extract shall be filtered and collected if the TEDLAR® bag is used, if the extract is multiphasic, or if the waste contained an initial liquid phase (see sections 4.6 and 7.3.1).

NOTE: An in-line glass fiber filter may be used to filter the material within the ZHE if it is suspected that the glass fiber filter has been ruptured.

7.3.14 If the original waste contained no initial liquid phase, the filtered liquid material obtained from section 7.3.13 is defined as the TCLP extract. If the waste contained an initial liquid phase, the filtered liquid material obtained from section 7.3.13 and the initial liquid phase (section 7.3.9) are collectively defined as the TCLP extract.

7.3.15 Following collection of the TCLP extract, immediately prepare the extract for analysis and store with minimal headspace at 4°C until analyzed. Analyze the TCLP extract according to the appropriate analytical methods. If the individual phases are to be analyzed separately (i.e., are not miscible), determine the volume of the individual phases (to 0.5%), conduct the appropriate analyses, and combine the results mathematically by using a simple volume-weighted average:

$$\text{Final Analtye Concentration} = \frac{(V_1)(C_1)+(V_2)(C_2)}{V_1+V_2}$$

where:

V_1 = The volume of the first phases (L).

C_1 = The concentration of the analyte of concern in the first phase (mg/L).
V_2 = The volume of the second phase (L).
C_2 = The concentration of the analyte of concern in the second phase (mg/L).

7.3.16 Compare the analyte concentrations in the TCLP extract with the levels identified in the appropriate regulations. Refer to section 8.0 for quality assurance requirements.

8.0 Quality Assurance

8.1 A minimum of one blank (using the same extraction fluid as used for the samples) must be analyzed for every 20 extractions that have been conducted in an extraction vessel.

8.2 A matrix spike shall be performed for each waste type (e.g., wastewater treatment sludge, contaminated soil, etc.) unless the result exceeds the regulatory level and the data is being used solely to demonstrate that the waste property exceeds the regulatory level. A minimum of one matrix spike must be analyzed for each analytical batch. The bias determined from the matrix spike determination shall be used to correct the measured values. (See sections 8.2.4 and 8.2.5.) As a minimum, follow the matrix spike addition guidance provided in each analytical method.

8.2.1 Matrix spikes are to be added after filtration of the TCLP extract and before preservation. Matrix spikes should not be added prior to TCLP extraction of the sample.

8.2.2 In most cases, matrix spikes should be added at a concentration equivalent to the corresponding regulatory level. If the analyte concentration is less than one half the regulatory level, the spike concentration may be as low as one half of the analyte concentration, but may not be not less than five times the method detection limit. In order to avoid differences in matrix effects, the matrix spikes must be added to the same nominal volume of TCLP extract as that which was analyzed for the unspiked sample.

8.2.3 The purpose of the matrix spike is to monitor the performance of the analytical methods used, and to determine whether matrix interferences exist. Use of other internal calibration methods, modification of the analytical methods, or use of alternate analytical methods may be needed to accurately measure the analyte concentration of the TCLP extract when the recovery of the matrix spike is below the expected analytical method performance.

8.2.4 Matrix spike recoveries are calculated by the following formula:

$$\%R\ (\%\ \text{Recovery}) = 100\ (X_s - X_u)/K$$

where:

X_s = measured value for the spiked sample,
X_u = measured value for the unspiked sample, and
K = known value of the spike in the sample.

8.2.5 Measured values are corrected for analytical bias using the following formula:

$$X_c = 100\ (X_u/\%R)$$

where:

X_c = corrected value, and
X_u = measured value of the unspiked sample.

8.3 All quality control measures described in the appropriate analytical methods shall be followed.

8.4 Samples must undergo TCLP extraction within the following time periods:

SAMPLE MAXIMUM HOLDING TIMES (DAYS)

	From: Field collection to: TCLP extraction	From: TCLP extraction to: Preparative extraction	From: preparative extraction to: determinative analysis	Total elapsed time
Volatiles	14	NA	14	28
Semivolatiles	14	7	40	61
Mercury	28	NA	28	56
Metals, except mercury	180	NA	180	360

NA = Not applicable.

If sample holding times are exceeded, the values obtained will be considered minimal concentrations. Exceeding the holding time is not acceptable in establishing that a waste does not exceed the regulatory level. Exceeding the holding time will not invalidate characterization if the waste exceeds the regulatory level.

TABLE 1.—VOLATILE ANALYTES [1,2]

Compound	CAS No.
Acetone	67-64-1
Benzene	71-43-2
n-Butyl alcohol	71-36-3
Carbon disulfide	75-15-0
Carbon tetrachloride	56-23-5
Chlorobenzene	108-90-7
Chloroform	67-66-3
1,2-Dichloroethane	107-06-2
1,1-Dichloroethylene	75-35-4
Ethyl acetate	141-78-6
Ethyl benzene	100-41-4
Ethyl ether	60-29-7
Isobutanol	78-83-1
Methanol	67-56-1
Methylene chloride	75-09-2
Methyl ethyl ketone	78-93-3
Methyl isobutyl ketone	108-10-1
Tetrachloroethylene	127-18-4
Toluene	108-88-3

TABLE 1.—VOLATILE ANALYTES [1,2]—Continued

Compound	CAS No.
1,1,1,-Trichloroethane	71-55-6
Trichloroethylene	79-01-6
Trichlorofluoromethane	75-69-4
1,1,2-Trichloro-1,2,2-trifluoroethane	76-13-1
Vinyl chloride	75-01-4
Xylene	1330-20-7

[1] When testing for any or all of these analytes, the zero-headspace extractor vessel shall be used instead of the bottle extractor.

[2] Benzene, carbon tetrachloride, chlorobenzene, chloroform, 1,2-dichlorethane, 1,1-dichloroethylene, methyl ethyl ketone, tetrachloroethylene, trichloroethylene, and vinyl chloride are toxicity characteristic constituents.

TABLE 2.—SUITABLE ROTARY AGITATION APPARATUS [1]

Company	Location	Model No.
Analytical Testing and Consulting Services, Inc.	Warrington, PA, (215) 343-4490.	4-vessel (DC20S), 8-vessel (DC20), 12-vessel (DC20B).
Associated Design and Manufacturing Company.	Alexandria VA, (703) 549-5999.	2-vessel (3740-2), 4-vessel (3740-4), 6-vessel (3740-6), 8-vessel (3740-8), 12-vessel (3740-12), 24-vessel (3740-24).
Environmental Machine and Design, Inc.	Lynchburg, VA, (804) 845-6424.	8-vessel (08-00-00) 4-vessel (04-00-00).
IRA Machine Shop and Laboratory.	Santurce, PR, (809) 752-4004.	8-vessel (011001).
Lars Lande Manufacturing.	Whitmore Lake, MI, (313) 449-4116.	10-vessel (01VRE), 5-vessel (5VRE).
Millipore Corp.	Bedford, MA, (800) 225-3384.	4-ZHE or 4 1-liter, bottle extractor, (YT30ORAHW).

[1] Any device that rotates the extraction vessel in an end-over-end fashion at 30 ± 2 rpm is acceptable.

TABLE 3.—SUITABLE ZERO-HEADSPACE EXTRACTOR VESSELS [1]

Company	Location	Model No.
Analytical Testing & Consulting Services, Inc..	Warrington, PA, (215) 343-4490.	C102, Mechanical Pressure Device.
Associated Design and Manufacturing Company.	Alexandria VA, (703) 549-5999.	3745-ZHE, Gas Pressure Device.

TABLE 3.—SUITABLE ZERO-HEADSPACE EXTRACTOR VESSELS [1]—Continued

Company	Location	Model No.
Lars Lande Manufacturing [2].	Whitmore Lake, MI, (313) 449-4116.	ZHE-11, Gas Pressure Device.
Millipore Corporation.	Bedford, MA, (800) 225-3384.	YT30090HW, Gas Pressure Device.
Environmental Machine and Design, Inc..	Lynchburg, VA, (804) 845-6424.	VOLA-TOX1, Gas Pressure Device.

[1] Any device that meets the specifications listed in section 4.2.1. of the method is acceptable.

[2] This device uses a 110 mm filter.

TABLE 4.—SUITABLE FILTER HOLDERS [1]

Company	Location	Model/catalogue No.	Size
Nucleopore Corporation.	Pleasanton, CA, (800) 882-7711.	425910 410400	142mm, 47 mm.
Micro Filtration Systems.	Dublin, CA, (800) 334-7132, (415) 828-6010.	302400 311400	142 mm, 47 mm.
Millipore Corporation.	Bedford, MA, (800) 225-3384.	YT30142HW XX1004700	142 mm, 47 mm.

[1] Any device capable of separating the liquid from the solid phase of the waste is suitable, providing that it is chemically compatible with the waste and the constituents to be analyzed. Plastic devices (not listed above) may be used when only inorganic analytes are of concern. The 142 mm size filter holder is recommended.

TABLE 5.—SUITABLE FILTER MEDIA [1]

Company	Location	Model	Pore Size (μm)
Millipore Corporation.	Bedford, MA, (800) 225-3384.	AP40	0.7
Nucleopore Corporation.	Pleasanton, CA, (415) 463-2530.	211625	0.7
Whatman Laboratory Products, Inc..	Clifton, NJ, (201) 773-5800.	GFF	0.7
Micro Filtration Systems.	Dublin, CA, (800) 334-7132, (415) 828-6010.	GF75	0.7

[1] Any filter that meets the specifications in section 4.4 of the Method is suitable.

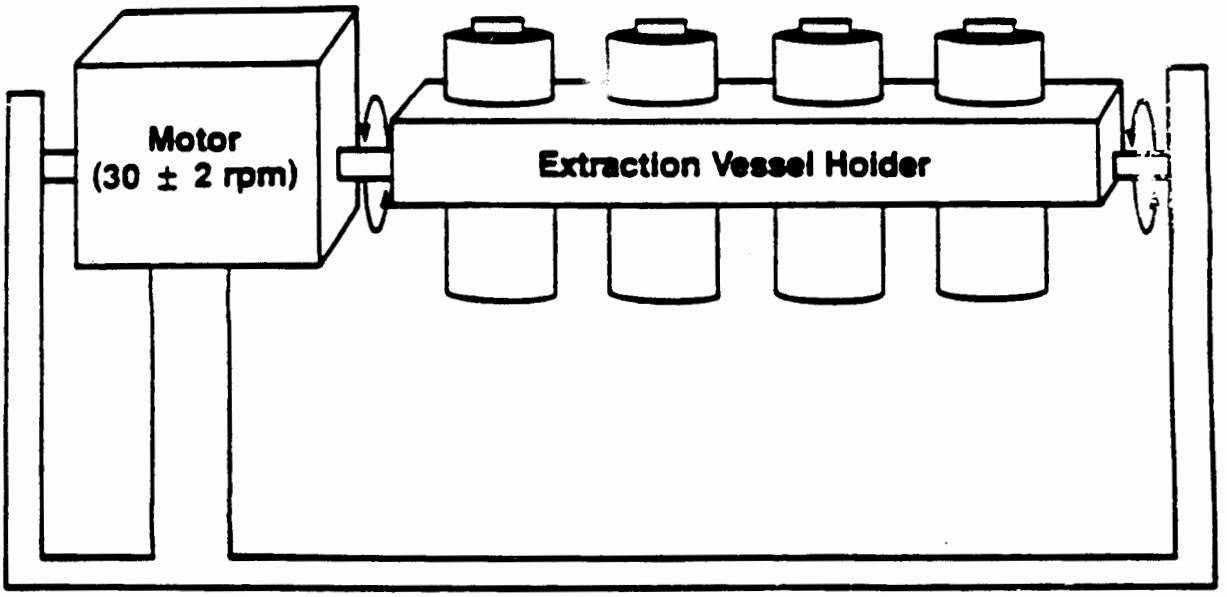

Figure 1. Rotary Agitation Apparatus

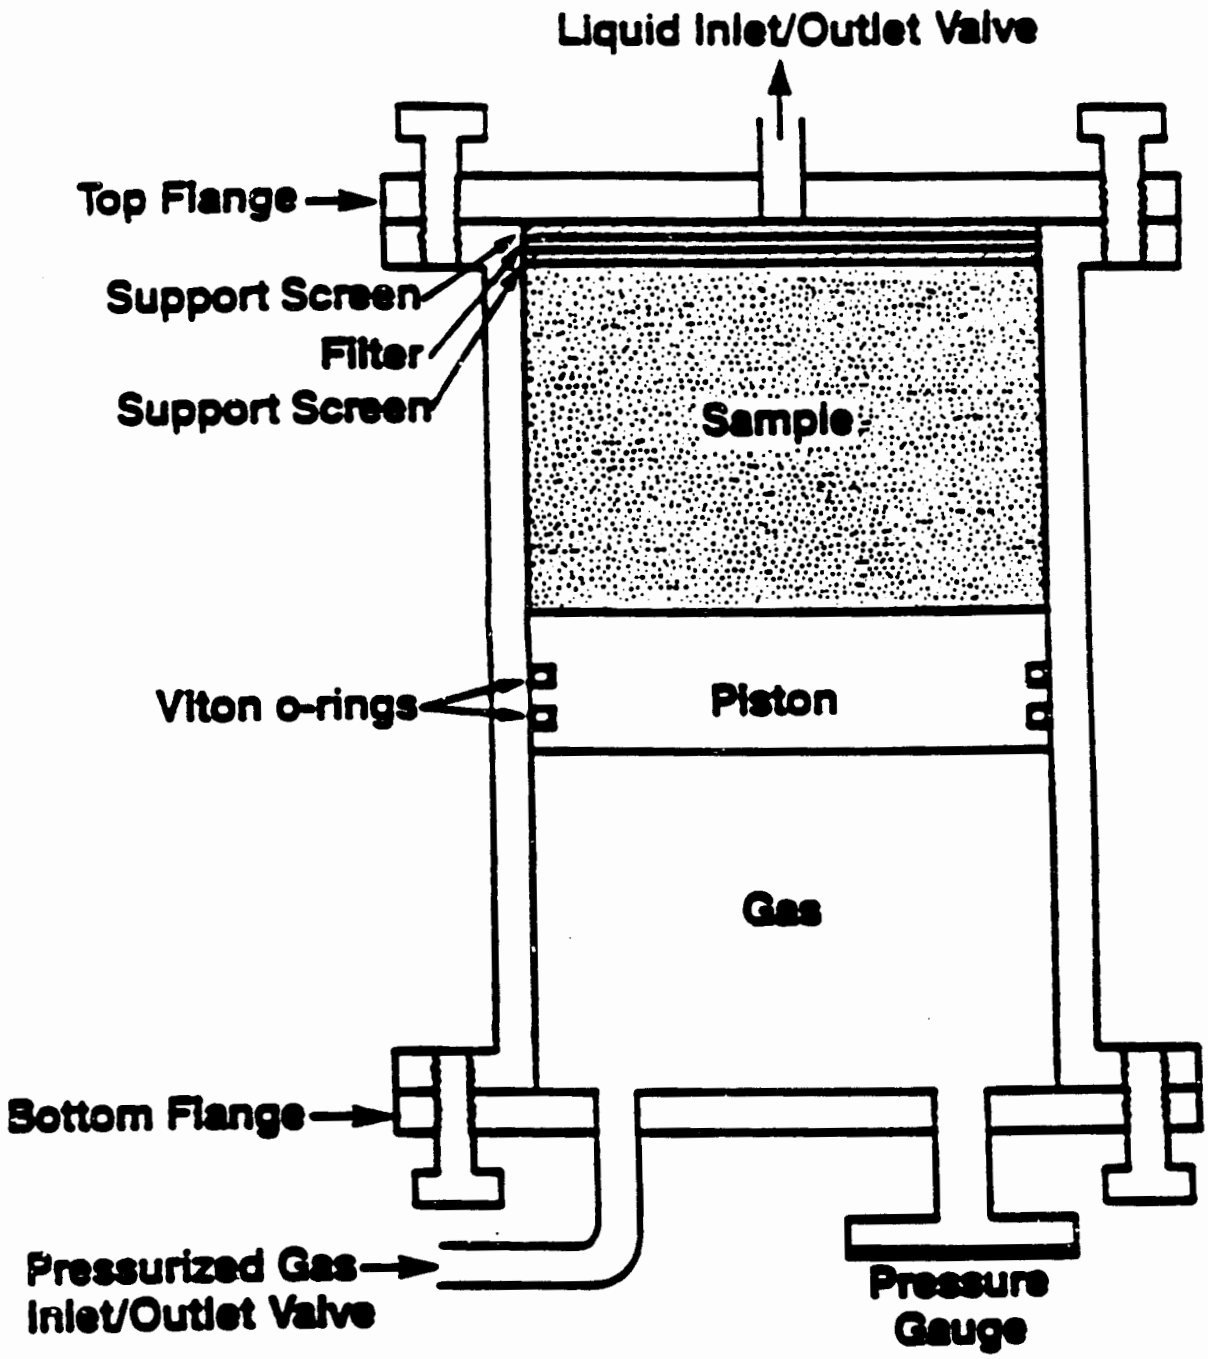

Figure 2. Zero-Headspace Extractor (ZHE)

METHOD 1311

TOXICITY CHARACTERISTIC LEACHATE PROCEDURE

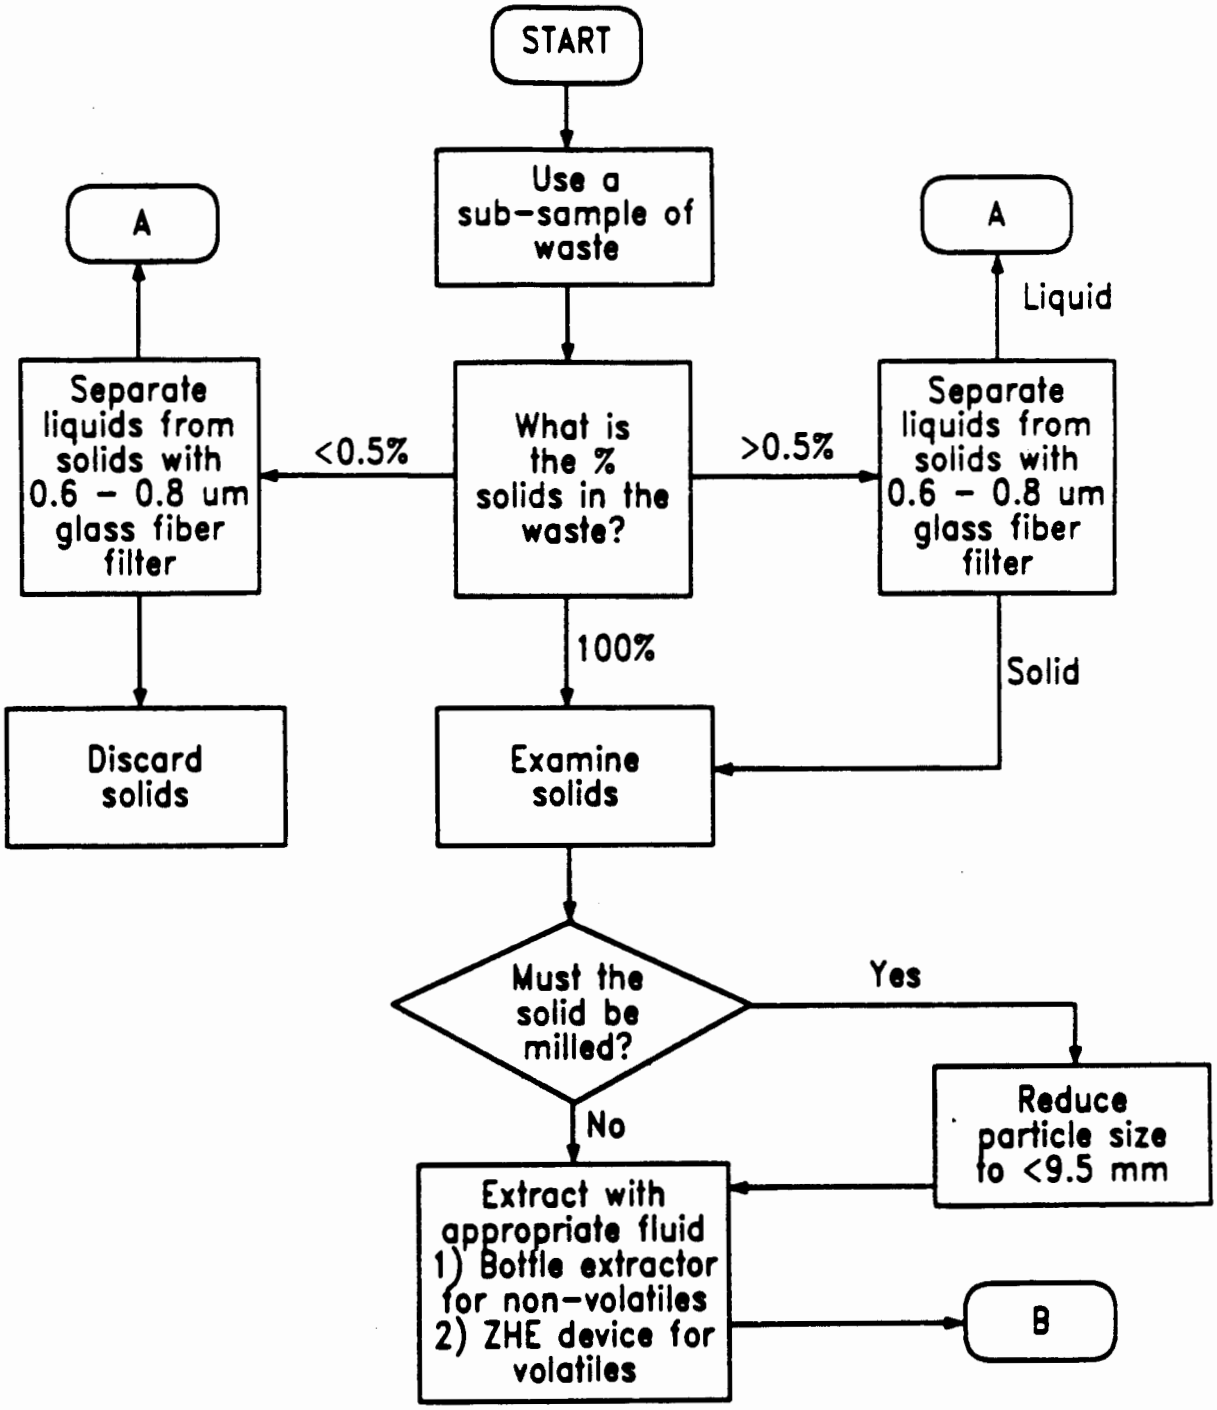

METHOD 1311 (CONTINUED)

TOXICITY CHARACTERISTIC LEACHATE PROCEDURE

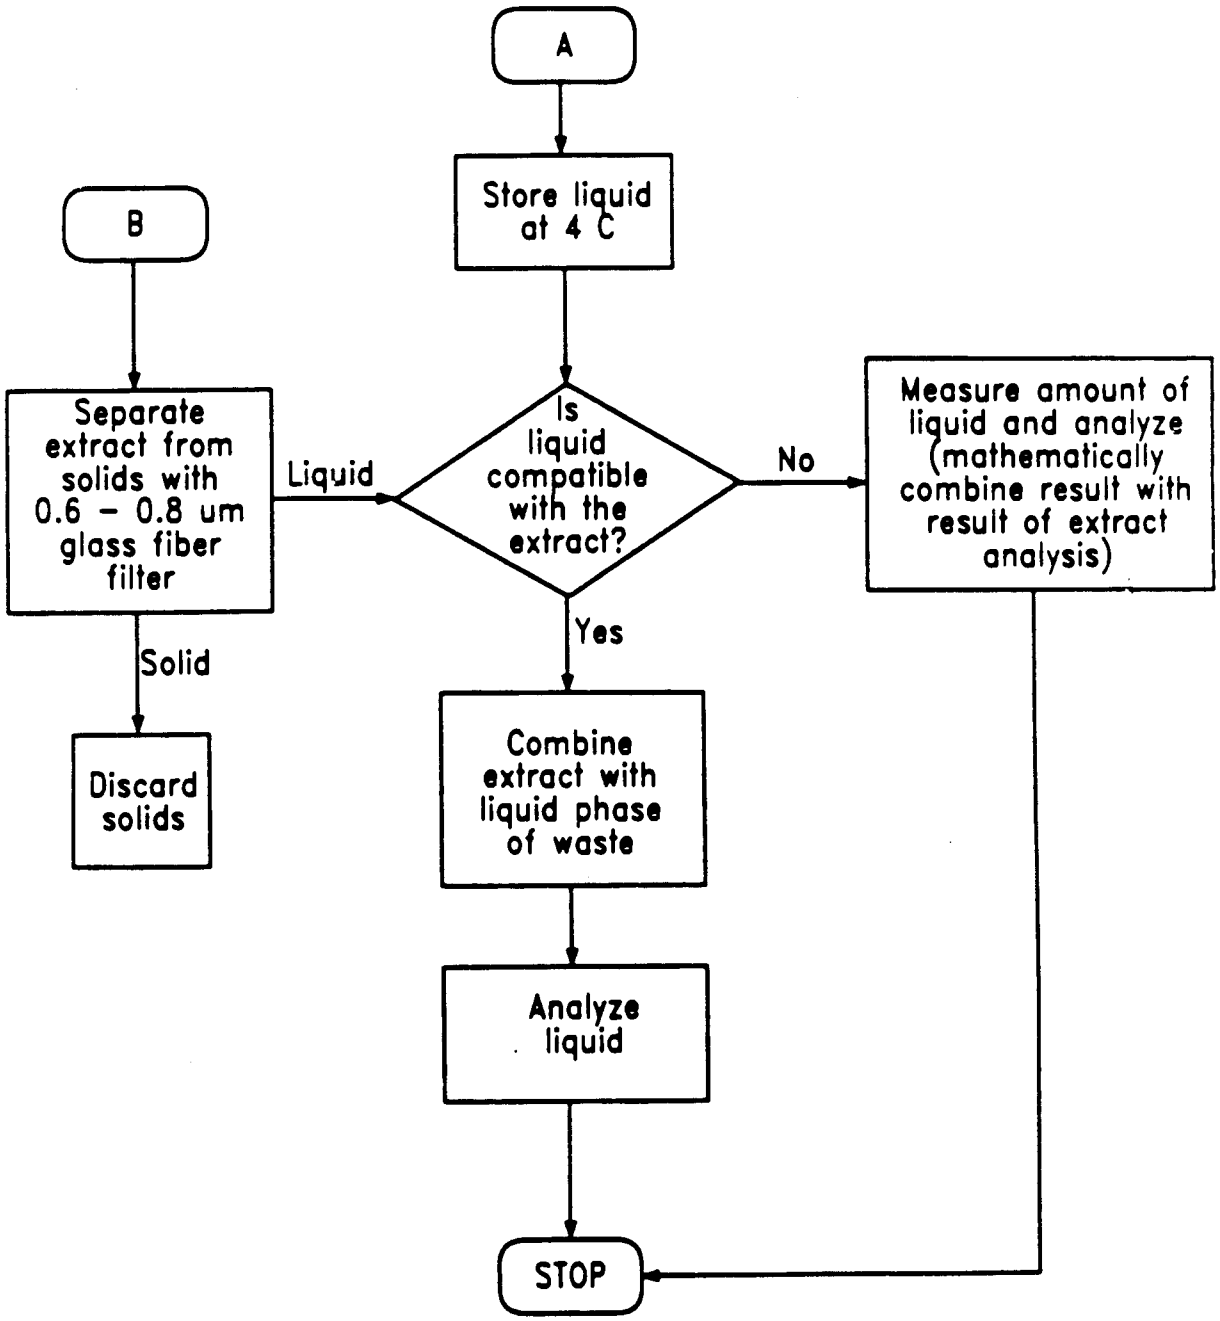

[55 FR 26987, June 29, 1990]

EFFECTIVE DATE NOTE: At 55 FR 11863, Mar. 29, 1990, Appendix II of Part 261 was revised, effective September 25 1990. At 55 FR 26987, June 29, 1990, Appendix II of Part 261 was correctly revised, effective September 25, 1990. For the convenience of the user, the superseded text is set forth below:

APPENDIX II—EP TOXICITY TEST PROCEDURES

A. Extraction Procedure (EP)

1. A representative sample of the waste to be tested (minimum size 100 grams) shall be obtained using the methods specified in Appendix I or any other method capable of yielding a representative sample within the meaning of Part 260. [For detailed guidance on conducting the various aspects of the EP see "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods" (incorporated by reference, see § 260.11).]

2. The sample shall be separated into its component liquid and solid phases using the method described in "Separation Procedure" below. If the solid residue [b] obtained using this method totals less than 0.5% of the original weight of the waste, the residue can be discarded and the operator shall treat the liquid phase as the extract and proceed immediately to Step 8.

3. The solid material obtained from the Separation Procedure shall be evaluated for its particle size. If the solid material has a surface area per gram of material equal to, or greater than, 3.1 cm^2 or passes through a 9.5 mm (0.375 inch) standard sieve, the operator shall proceed to Step 4. If the surface area is smaller or the particle size larger than specified above, the solid material shall be prepared for extraction by crushing, cutting or grinding the material so that it passes through a 9.5 mm (0.375 inch) sieve or, if the material is in a single piece, by subjecting the material to the "Structural Integrity Procedure" described below.

4. The solid material obtained in Step 3 shall be weighed and placed in an extractor with 16 times its weight of deionized water. Do not allow the material to dry prior to weighing. For purposes of this test, an acceptable extractor is one which will impart sufficient agitation to the mixture to not only prevent stratification of the sample and extraction fluid but also insure that all sample surfaces are continuously brought into contact with well mixed extraction fluid.

5. After the solid material and deionized water are placed in the extractor, the operator shall begin agitation and measure the pH of the solution in the extractor. If the pH is greater than 5.0, the pH of the solution shall be decreased to 5.0 ± 0.2 by adding 0.5 N acetic acid. If the pH is equal to or less than 5.0, no acetic acid should be added. The pH of the solution shall be monitored, as described below, during the course of the extraction and if the pH rises above 5.2, 0.5N acetic acid shall be added to bring the pH down to 5.0 ± 0.2. However, in no event shall the aggregrate amount of acid added to the solution exceed 4 ml of acid per gram of solid. The mixture shall be agitated for 24 hours and maintained at 20°-40°C (68°-104°F) during this time. It is recommended that the operator monitor and adjust the pH during the course of the extraction with a device such as the Type 45-A pH Controller manufactured by Chemtrix, Inc., Hillsboro, Oregon 97123 or its equivalent, in conjunction with a metering pump and reservoir of 0.5N acetic acid. If such a system is not available, the following manual procedure shall be employed:

(a) A pH meter shall be calibrated in accordance with the manufacturer's specifications.

(b) The pH of the solution shall be checked and, if necessary, 0.5N acetic acid shall be manually added to the extractor until the pH reaches 5.0 ± 0.2. The pH of the solution shall be adjusted at 15, 30 and 60 minute intervals, moving to the next longer interval if the pH does not have to be adjusted more than 0.5N pH units.

(c) The adjustment procedure shall be continued for at least 6 hours.

(d) If at the end of the 24-hour extraction period, the pH of the solution is not below 5.2 and the maximum amount of acid (4 ml per gram of solids) has not been added, the pH shall be adjusted to 5.0 ± 0.2 and the extraction continued for an additional four hours, during which the pH shall be adjusted at one hour intervals.

6. At the end of the 24 hour extraction period, deionized water shall be added to the extractor in an amount determined by the following equation:

$V = (20)(W) - 16(W) - A$

V = ml deionized water to be added

W = weight in grams of solid charged to extractor

A = ml of 0.5N acetic acid added during extraction

[b] The percent solids is determined by drying the filter pad at 80°C until it reaches constant weight and then calculating the percent solids using the following equation:

Percent solids =

$$\frac{(\text{weight of pad} + \text{solid}) - (\text{tare weight of pad})}{\text{initial weight of sample}} \times 100$$

7. The material in the extractor shall be separated into its component liquid and solid phases as described under "Separation Procedure."

8. The liquids resulting from Steps 2 and 7 shall be combined. This combined liquid (or the waste itself if it has less than ½ percent solids, as noted in Step 2) is the extract and shall be analyzed for the presence of any of the contaminants specified in Table I of § 261.24 using the Analytical Procedures designated below.

Separation Procedure

Equipment: A filter holder, designed for filtration media having a nominal pore size of 0.45 micrometers and capable of applying a 5.3 kg/cm^2 (75 psi) hydrostatic pressure to the solution being filtered, shall be used. For mixtures containing nonabsorptive solids, where separation can be effected without imposing a 5.3 kg/cm^2 pressure differential, vacuum filters employing a 0.45 micrometers filter media can be used. (For further guidance on filtration equipment or procedures see "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods" incorporated by reference, see § 260.11). Procedure:[2]

(i) Following manufacturer's directions, the filter unit shall be assembled with a filter bed consisting of a 0.45 micrometer filter membrane. For difficult or slow to filter mixtures a prefilter bed consisting of the following prefilters in increasing pore size (0.65 micrometer membrane, fine glass fiber prefilter, and coarse glass fiber prefilter) can be used.

(ii) The waste shall be poured into the filtration unit.

(iii) The reservoir shall be slowly pressurized until liquid begins to flow from the filtrate outlet at which point the pressure in the filter shall be immediately lowered to 10-15 psig. Filtration shall be continued until liquid flow ceases.

(iv) The pressure shall be increased stepwise in 10 psi increments to 75 psig and filtration continued until flow ceases or the pressurizing gas begins to exit from the filtrate outlet.

(v) The filter unit shall be depressurized, the solid material removed and weighed and then transferred to the extraction apparatus, or, in the case of final filtration prior to analysis, discarded. Do not allow the material retained on the filter pad to dry prior to weighing.

(vi) The liquid phase shall be stored at 4°C for subsequent use in Step 8.

B. Structural Integrity Procedure

Equipment: A Structural Integrity Tester having a 3.18 cm (1.25 in.) diameter hammer weighing 0.33 kg (0.73 lbs.) and having a free fall of 15.24 cm (6 in.) shall be used. This device is available from Associated Design and Manufacturing Company, Alexandria, VA 22314, as Part No. 125, or it may be fabricated to meet the specifications shown in Figure 1.

---

[2]This procedure is intended to result in separation of the "free" liquid portion of the waste from any solid matter having a particle size >0.45 μm. If the sample will not filter, various other separation techniques can be used to aid in the filtration. As described above, pressure filtration is employed to speed up the filtration process. This does not alter the nature of the separation. If liquid does not separate during filtration, the waste can be centrifuged. If separation occurs during centrifugation, the liquid portion (centrifugate) is filtered through the 0.45 μm filter prior to becoming mixed with the liquid portion of the waste obtained from the initial filtration. Any material that will not pass through the filter after centrifugation is considered a solid and is extracted.

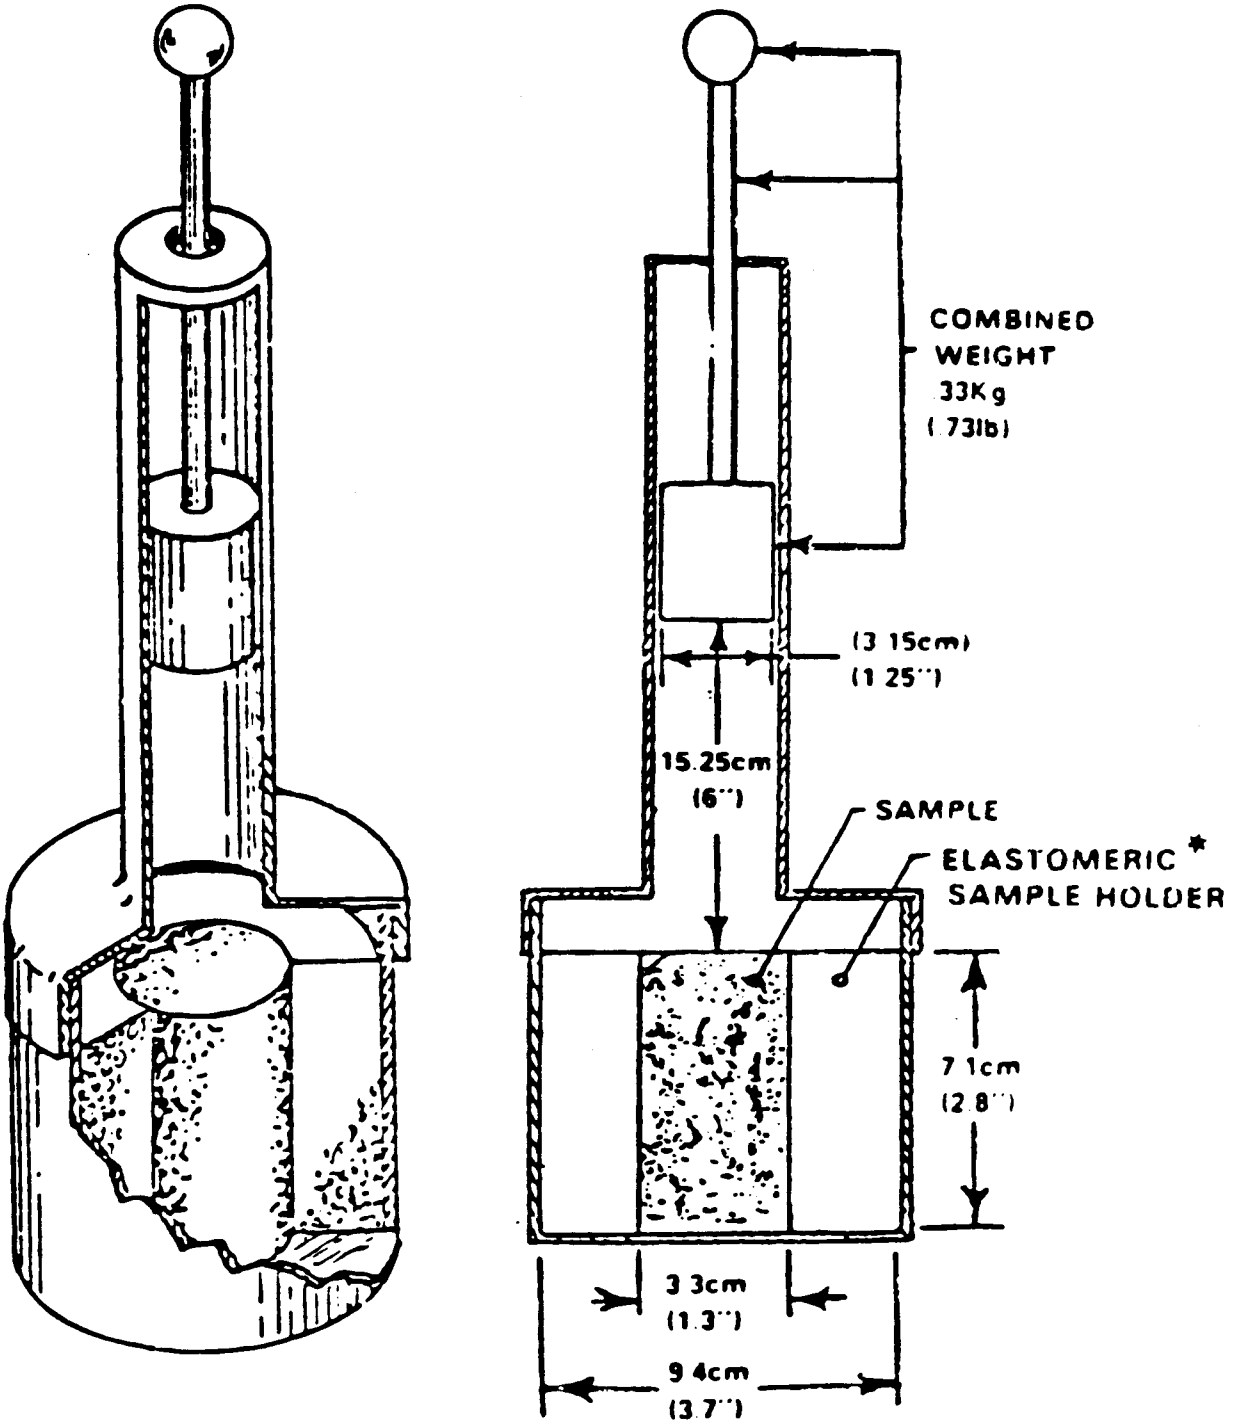

*ELASTOMERIC SAMPLE HOLDER FABRICATED OF MATERIAL FIRM ENOUGH TO SUPPORT THE SAMPLE

Figure 1

COMPACTION TESTER

Procedure

1. The sample holder shall be filled with the material to be tested. If the sample of waste is a large monolithic block, a portion shall be cut from the block having the dimensions of a 3.3 cm (1.3 in.) diameter x 7.1 cm (2.8 in.) cylinder. For a fixated waste, samples may be cast in the form of a 3.3 cm (1.3 in.) diameter x 7.1 cm (2.8 in.) cylinder for purposes of conducting this test. In such cases, the waste may be allowed to cure for 30 days prior to further testing.

2. The sample holder shall be placed into the Structural Integrity Tester, then the hammer shall be raised to its maximum height and dropped. This shall be repeated fifteen times.

3. The material shall be removed from the sample holder, weighed, and transferred to the extraction apparatus for extraction.

Analytical Procedures for Analyzing Extract Contaminants

The test methods for analyzing the extract are as follows:

1. For arsenic, barium, cadmium, chromium, lead, mercury, selenium, silver, endrin, lindane, methoxychlor, toxaphene, 2,4-D[2,4-dichlorophenoxyacetic acid] or 2,4,5-TP [2,4,5-trichlorophenoxypropionic acid]: "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods" (incorporated by reference, see § 260.11).

2. [Reserved]

For all analyses, the methods of standard addition shall be used for quantification of species concentration.

[45 FR 33119, May 19, 1980, as amended at 46 FR 35247, July 7, 1981]

APPENDIX III—CHEMICAL ANALYSIS TEST METHODS

Tables 1, 2, and 3 specify the appropriate analytical procedures, described in "Test Methods for Evaluating Solid Waste, Physical/Chemical Methods," (incorporated by reference, see § 260.11) which shall be used to determine whether a sample contains a given Appendix VII or VIII toxic constituent.

Table 1 identifies each Appendix VII or VIII organic constituent along with the approved measurement method. Table 2 identifies the corresponding methods for inorganic species. Table 3 summarizes the contents of SW-846 and supplies specific section and method numbers for sampling and analysis methods.

Prior to final sampling and analysis method selection the analyst should consult the specific section or method described in SW-846 for additional guidance on which of the approved methods should be employed for a specific sample analysis situation.

TABLE 1—ANALYSIS METHODS FOR ORGANIC CHEMICALS CONTAINED IN SW-846

Compound	Method Numbers
Acetonitrile	8030, 8240
Acrolein	8030, 8240
Acrylamide	8015, 8240
Acrylonitrile	8030, 8240
2-Amino-l-methylbenzene (*o*-Toluidine)	8250
4-Amino-l-methylbenzene (*p*-Toluidine)	8250
Aniline	8250
Benzene	8020, 8024
Benz(a)anthracene	8100, 8250, 8310
Benzo(a)pyrene	8100, 8250, 8310
Benzotrichloride	8120, 8250
Benzyl chloride	8120, 8250
Benzo(b)fluoanthene	8100, 8250, 8310
Bis(2-chloroethoxymethane)	8010, 8240
Bis(2-chloroethyl)ether	8010, 8240
Bis(2-chloroisopropyl)ether	8010, 8240
Carbon disulfide	8015, 8240
Carbon tetrachloride	8010, 8240
Chlordane	8080, 8250
Chlorinated biphenyls	8080, 8250
Chlorinated dibenzo-*p*-dioxins	8280
Chlorinated dibenzofurans	8280
Chloroacetaldehyde	8010, 8240
Chlorobenzene	8020, 8240
Chloroform	8010, 8240
Chloromethane	8010, 8240
2-Chlorophenol	8040, 8250
Chrysene	8100, 8250, 8310
Creosote [1]	8100, 8250
Cresol(s)	8040, 8250
Cresylic Acid(s)	8040, 8250
Dichlorobenzene(s)	8010, 8120, 8250
Dichloroethane(s)	8010, 8240
Dichloromethane	8010, 8240
Dichlorophenoxyacetic acid	8150, 8250
Dichloropropanol	8120, 8250
Dimethyl sulfate	8250, 8270
1,1-Dimethylhydrazine (UDMH)	8250
2,4-Dimethylphenol	8040, 8250
Dinitrobenzene	8090, 8250
4,6-Dinitro-o-cresol	8040, 8250
2,4-Dinitrotoluene	8090, 8250
2,6-Dinitrotoluene	8060, 8250
Endrin	8080, 8250
2-Ethoxyethanol	8030, 8240
Ethyl ether	8015, 8240
Ethylene dibromide	8010, 8240
Ethylene thiourea	8250, 8330
Formaldehyde	8015, 8240
Formic acid	8250
Heptachlor	8080, 8250
Hexachlorobenzene	8120, 8250
Hexachlorobutadiene	8120, 8250
Hexachloroethane	8010, 8240
Hexachlorocyclopentadiene	8120, 8250
Lindane	8080, 8250
Maleic anhydride	8250
Methanol	8010, 8240
Methomyl	8250
Methyl bromide	8010, 8240, 8260
Methyl ethyl ketone	8015, 8240
Methyl isobutyl ketone	8015, 8240

TABLE 1—ANALYSIS METHODS FOR ORGANIC CHEMICALS CONTAINED IN SW-846—Continued

Compound	Method Numbers
Napthalene	8100, 8250
Napthoquinone	8090, 8250
Nitrobenzene	8090, 8250
4-Nitrophenol	8040, 8240
2-Nitropropane	8030, 8240
Paraldehyde (trimer of acetaldehyde)	8015, 8240
Pentachlorophenol	8040, 8250
Phenol	8040, 8250
Phorate	8140
Phosphorodithioic acid esters	8140
Phthalic anhydride	8090, 8250
2-Picoline	8090, 8250
Pyridine	8090, 8250
Tetrachlorobenzene(s)	8120, 8250
Tetrachloroethane(s)	8010, 8240
Tetrachloroethene	8010, 8240
Tetrachlorophenol	8040, 8250
Toluene	8020, 8024
Toluene diisocyanate(s)	8250
Toluenediamine	8250
2,4-Toluenediamine	8250
2,6-Toluenediamine	8250
3,4-Toluenediamine	8250
Toxaphene	8080, 8250
Trichloroethane	8010, 8240
Trichloroethene(s)	8010, 8240
Trichlorofluoromethane	8010, 8240
Trichlorophenol(s)	8040, 8250
2,4,5-Trichlorophenoxy propionic acid	8150, 8250
Trichloropropane	8010, 8240
Vinyl chloride	8010, 8240
Vinylidene chloride	8010, 8240
Xylene	8020, 8240

[1] Analyne for phenanthrene and carbazole; if these are present in a ratio between 1.4:1 and 5:1 creosote should be considered present.

TABLE 2—ANALYSIS METHODS FOR INORGANIC CHEMICALS AND MISCELLANEOUS GROUPS OF ANALYTES CONTAINED IN SW-846[a]

Compound	Third Edition Method(s)	Second Edition Method(s)
Aluminum	6010	
Antimony	6010	7040, 7041
Arsenic	6010	7060,7061
Barium	6010	7080, 7081
Beryllium	6010, 7090, 7091	
Boron	6010	

TABLE 2—ANALYSIS METHODS FOR INORGANIC CHEMICALS AND MISCELLANEOUS GROUPS OF ANALYTES CONTAINED IN SW-846[a]—Continued

Compound	Third Edition Method(s)	Second Edition Method(s)
Cadmium	6010	7130, 7131
Calcium	6010	
Chromium	6010	7190, 7191
Chromium, Hexavalent	7198	7195, 7196, 7197
Cobalt	6010	
Copper	6010, 7210, 7211	
Iron	6010, 7380, 7381	
Lead	6010	7420, 7421
Magnesium	6010	
Manganese	6010, 7460, 7461	
Mercury		7470, 7471
Molybdenum	6010	
Nickel	6010	7520, 7521
Osmium	7550	
Potassium	6010	
Selenium	6010	7740, 7741
Silicon	6010	
Silver	6010	7760, 7761
Sodium	6010, 7770	
Thallium	6010, 7840, 7841	
Vanadium	6010, 7910, 7911	
Zinc	6010, 7950, 7951	
Cyanides		9010
Total Organic Halides	9022	9020
Sulfides		9030
Sulfates	9035, 9036, 9038	
Total Organic Carbon	9060	
Phenolics	9065, 9066[c], 9067	
Oil and Grease	9070, 9071	
Total Coliform	9131, 9132	
Nitrate	9200	
Chlorides	9250, 9251, 9252	
Gross Alpha and Gross Beta	9310	
Alpha-Emitting Radium Isotopes	9315	
Radium-228	9320	

[a] The Third Edition of SW-846 and its Revision I are available from the Government Printing Office, Superintendent of Documents, Washington, DC 20402, (202) 783-3238, document number 955-001-00000-1.

[c] When Method 9066 is used it must be preceded by the manual distillation specified in procedure 7.1 of Method 9065. Just prior to distillation in Method 9065, adjust the sulfuric acid-preserved sample to pH 4 with 1+9 NaOH. After the manual distillation is completed, the autoanalyzer manifold is simplified by connecting the re-sample line directly to the sampler.

TABLE 3—SAMPLING AND ANALYSIS METHODS CONTAINED IN SW-846[a]

Title	Third Edition		Second Edition	
	Section No.	Method No.	Section No.	Method No.
Quality Control	1.0		10.0	
Introduction	1.1		10.1	
Quality Control	1.2			

TABLE 3—SAMPLING AND ANALYSIS METHODS CONTAINED IN SW-846 [a]—Continued

Title	Third Edition		Second Edition	
	Section No.	Method No.	Section No.	Method No.
Method Detection Limit	1.3			
Data Reporting	1.4			
Quality Control Documentation	1.5			
References	1.6			
Choosing the Correct Procedure	2.0			
Purpose	2.1			
Required Information	2.2			
Implementing the Guidance	2.3			
Characteristics	2.4			
Ground Water	2.5			
References	2.6			
Metallic Analytes	3.0			
Sampling Considerations	3.1			
Sample Preparation Methods	3.2			
Acid Digestion of Waters for Total Recoverable or Dissolved Metals for Analysis by Flame AAS or ICP	3.2	3005		
Acid Digestion of Aqueous Samples and Extracts for Total Metals for Analysis by Flame AAS or ICP	3.2	3010	4.1	3010
Acid Digestion of Aqueous Samples and Extracts for Total Metals for Analysis by Furnace AAS	3.2	3020	4.1	3020
Dissolution Procedure for Oils, Greases, or Waxes	3.2	3040	4.1	3040
Acid Digestion of Sediments, Sludges and Soils	3.2	3050	4.1	3050
Methods for the Determination of Metals	3.3			
Inductively Coupled Plasma Atomic Emissions Spectroscopy	3.3	*6010		
Atomic Absorption Methods	3.3	7000		
Aluminum, Flame AAS	3.3	7020		
Antimony, Flame AAS	3.3	7040	7.0	7040
Antimony, Furnace AAS	3.3	7041	7.0	7041
Arsenic, Furnace AAS	3.3	7060	7.0	7060
Arsenic, Gaseous Hydride AAS	3.3	7061	7.0	7061
Barium, Flame AAS	3.3	7080	7.0	7080
Barium, Furnace AAS	3.3	7081	7.0	7081
Beryllium, Flame AAS	3.3	*7090		
Beryllium, Furnace AAS	3.3	*7091		
Cadmium, Flame AAS	3.3	7130	7.0	7130
Cadmium, Furnace AAS	3.3	7131	7.0	7131
Calcium, Flame AAS	3.3	7140		
Chromium, Flame AAS	3.3	7190	7.0	7190
Chromium, Furnace AAS	3.3	7191	7.0	7191
Chromium, Hexavalent, Coprecipitation	3.3	7195	7.0	7195
Chromium, Hexavalent, Colorimetric	3.3	7196	7.0	7196
Chromium, Hexavalent, Chelation/Extraction	3.3	7197	7.0	7197
Chromium, Hexavalent, Differential Pulse Polarography	3.3	*7198		
Cobalt, Flame AAS	3.3	7200		
Cobalt, Furnace AAS	3.3	7201		
Copper, Flame AAS	3.3	*7210		
Copper, Furnace AAS	3.3	*7211		
Iron, Flame AAS	3.3	*7380		
Iron, Furnace AAS	3.3	*7381		
Lead, Flame AAS	3.3	7420	7.0	7420
Lead, Furnace AAS	3.3	7421	5.0	7421
Magnesium, Flame AAS	3.3	7450		
Manganese, Flame AAS	3.3	*7460		
Manganese, Furnace AAS	3.3	*7461		
Mercury in Liquid Waste, Manual Cold Vapor Technique	3.3	7470	7.0	7470
Mercury in Solid or Semisolid Waste, Manual Cold Vapor Technique	3.3	7471	7.0	7471
Molybdenum, Flame AAS	3.3	7480		
Molybdenum, Furnace AAS	3.3	7481		
Nickel, Flame AAS	3.3	7520	7.0	7520
Osmium, Flame AAS	3.3	*7550		
Potassium, Flame AAS	3.3	7610		
Selenium, Furnace AAS	3.3	7740	7.0	7740
Selenium, Gaseous Hydride AAS	3.3	7741	7.0	7741
Silver, Flame AAS	3.3	7760	7.0	7760
Silver, Furnace AAS	3.3	7761	7.0	7761
Sodium, Flame AAS	3.3	*7770		

TABLE 3— SAMPLING AND ANALYSIS METHODS CONTAINED IN SW-846 [a]—Continued

Title	Third Edition		Second Edition	
	Section No.	Method No.	Section No.	Method No.
Thallium, Flame AAS	3.3	*7840		
Thallium, Furnace AAS	3.3	*7841		
Tin, Flame AAS	3.3	7870		
Vanadium, Flame AAS	3.3	*7910		
Vanadium, Furnace AAS	3.3	*7911		
Zinc, Flame AAS	3.3	*7950		
Zinc, Furnace AAS	3.3	*7951		
Organic Analytes	4.0		8.0	
Sampling Considerations	4.1			
Sample Preparation Methods	4.2			
Extractions and Preparations	4.2.1			
Organic Extraction and Sample Preparation	4.2.1	3500		
Separatory Funnel Liquid-Liquid Extraction	4.2.1	3510	4.2	3510
Continuous Liquid-Liquid Extraction	4.2.1	3520	4.2	3520
Soxhlet Extraction	4.2.1	3540	4.2	3540
Ultrasonic Extraction	4.2.1	3550	4.2	3550
Waste Dilution	4.2.1	3580		
Purge-and-Trap	4.2.1	5030	5.0	5030
Protocol for Analysis of Sorbent Cartridges from VOST	4.2.1	*5040		
Cleanup	4.2.2			
Cleanup	4.2.2	3600		
Alumina Column Cleanup	4.2.2	3610		
Alumina Column Cleanup and Separation of Petroleum Wastes	4.2.2	*3611		
Florisil Column Cleanup	4.2.2	3620		
Silica Gel Cleanup	4.2.2	3630		
Gel-Permeation Cleanup	4.2.2	3640		
Acid-Base Partition Cleanup	4.2.2	3650	4.2	3530
Sulfur Cleanup	4.2.2	3660		
Determination of Organic Analytes	4.3			
Gas Chromatographic Methods	4.3.1		8.1	
Gas Chromatography	4.3.1	8000		
Halogenated Volatile Organics	4.3.1	8010	8.1	8010
EDB and DBCP	4.3.1	8011		
Nonhalogenated Volatile Organics	4.3.1	8015	8.1	8015
Aromatic Volatile Organics	4.3.1	8020	8.1	8020
Volatile Organic Compounds in Water by Purge-and-Trap Capillary Column GC with PID and Electrolytic Conductivity Detector in Series	4.3.1	8021		
Acrolein, Acrylonitrile, Acetonitrile	4.3.1	8030	8.1	8030
Phenols	4.3.1	8040	8.1	8040
Phthalate Esters	4.3.1	8060	8.1	8060
Nitrosamines	4.3.1	8070		
Organochlorine Pesticides and PCBs as Aroclors	4.3.1	8080	8.1	8080
Nitroaromatics and Cyclic Ketones	4.3.1	8090	8.1	8090
Polynuclear Aromatic Hydrocarbons	4.3.1	8100	8.1	8100
Haloethers	4.3.1	8110		
Chlorinated Hydrocarbons	4.3.1	8120	8.1	8120
Organophosphorus Pesticides	4.3.1	8140	8.1	8140
Organophosphorus Pesticides: Capillary Column	4.3.1	8141		
Chlorinated Herbicides	4.3.1	8150	8.1	8150
Gas Chromatographic/Mass Spectroscopic Methods	4.3.2		8.2	
GC/MS Volatiles	4.3.2	8240	8.2	8240
GC/MS Semivolatiles, Packed Column	4.3.2	8250	8.2	8250
GC/MS for Volatiles Capillary Column	4.3.2	8260		
GC/MS Semivolatiles, Capillary Column	4.3.2	8270	8.2	8270
Analysis of Chlorinated Dioxins and Dibenzofurans	4.3.2	8280		
High Performance Liquid Chromatographic Methods (HPLC)	4.3.3		8.3	
Polynuclear Aromatic Hydrocarbons	4.3.3	8310	8.3	8310
Miscellaneous Screening Methods	4.4			
Headspace	4.4	3810	5.0	5020
Hexadecane Extraction and Screening of Purgeable Organics	4.4	3820		
Miscellaneous Test Methods	5.0		9.0	

TABLE 3—SAMPLING AND ANALYSIS METHODS CONTAINED IN SW-846 [a]—Continued

Title	Third Edition		Second Edition	
	Section No.	Method No.	Section No.	Method No.
Total and Amenable Cyanide (Colorimetric, Manual)	5.0	9010	9.0	9010
Total and Amenable Cyanide (Colorimetric, Automated)	5.0	9012		
Total Organic Halides (TOX)	5.0	9020	9.0	9020
Purgeable Organic Halides (POX)	5.0	9021		
Total Organic Halides (TOX) by Neutron Activation Analysis	5.0	*9022		
Acid-Soluble and Acid-Insoluble Sulfides	5.0	9030	9.0	9030
Extractable Sulfides	5.0	9031		
Sulfate, (Colorimetric, Automated, Chloranilate)	5.0	*9035		
Sulfate, (Colorimetric, Automated, Methylthymol Blue, AA II)	5.0	*9036		
Sulfate, (Turbidimetric)	5.0	*9038		
Total Organic Carbon	5.0	*9060		
Phenolics, (Spectrophotometric, Manual 4-AAP)	5.0	*9065		
Phenolics, (Colorimetric, Automated 4-AAP)	5.0	*9066		
Phenolics, (Spectrophotometric, MBTH)	5.0	*9067		
Total Recoverable Oil and Grease (Gravimetric, Separatory Funnel Extraction)	5.0	*9070		
Oil and Grease Extraction Method for Sludge Samples	5.0	*9071		
Total Coliform: Multiple Tube Fermentation	5.0	*9131		
Total Coliform: Membrane Filter	5.0	*9132		
Nitrate	5.0	*9200		
Chloride (Colorimetric, Automated Ferricyanide AAI)	5.0	*9250		
Chloride (Colorimetric, Automated Ferricyanide AAII)	5.0	*9251		
Chloride (Titrimetric, Mercuric Nitrate)	5.0	*9252		
Properties	6.0			
Multiple Extraction Procedure	6.0	*1320		
Extraction Procedure for Oily Wastes	6.0	*1330		
pH Electrometric Measurement	6.0	9040	9.0	9040
pH Paper Method	6.0	9041		
Soil pH	6.0	9045		
Specific Conductance	6.0	9050		
Cation-Exchange Capacity of Soils (Ammonium Acetate)	6.0	*9080		
Cation-Exchange Capacity of Soils (Sodium Acetate)	6.0	*9081		
Compatibility Test for Wastes and Membrane Liners	6.0	9090		
Paint Filter Liquids Test	6.0	9095	9.0	9095
Saturated Hydraulic Conductivity, Saturated Leachate Conductivity, and Intrinsic Permeability	6.0	*9100		
Gross Alpha and Gross Beta	6.0	*9310		
Alpha-Emitting Radium Isotopes	6.0	*9315		
Radium-228	6.0	*9320		
Introduction and Regulatory Definitions	7.0		2.0	
Ignitability	7.1		2.1.1	
Corrosivity	7.2		2.1.2	
Reactivity	7.3		2.1.3	
Test Method to Determine Hydrogen Cyanide Released from Wastes	7.3			
Test Method to Determine Hydrogen Sulfide Released from Wastes	7.3			
Extraction Procedure Toxicity	7.4		2.1.4	
Methods for Determining Characteristics	8.0		2.0	
Ignitability	8.1		2.1.1	
Pensky-Martens Closed-Cup Method	8.1	1010	2.1.1	1010
Setaflash Closed-Cup Method	8.1	1020	2.1.1	1020
Corrosivity	8.2		2.1.2	
Corrosivity Toward Steel	8.2	1110	2.1.2	1110
Reactivity	8.3		2.1.3	
Toxicity	8.4		2.1.4	
Extraction Procedure (EP) Toxicity Test Method and Structural Integrity Test	8.4	1310	2.1.4	1310
Sampling Plan	9.0		1.0	
Design and Development	9.1		1.0, 1.1	
Implementation	9.2		1.2, 1.3, 1.4	
Sampling Methods	10.0			
Modified Method 5 Sampling Train, Appendix A and B	10.0	*0010		
Source Assessment Sampling System (SASS)	10.0	*0020		
Volatile Organic Sampling Train	10.0	*0030		
Ground Water Monitoring	11.0			
Background and Objectives	11.1			
Relationship to the Regulations and to Other Documents	11.2			

TABLE 3—SAMPLING AND ANALYSIS METHODS CONTAINED IN SW-846 [a]—Continued

Title	Third Edition		Second Edition	
	Section No.	Method No.	Section No.	Method No.
Revisions and Additions	11.3			
Acceptable Designs and Practices	11.4			
Unacceptable Designs and Practices	11.5			
Land Treatment Monitoring	12.0			
Background	12.1			
Treatment Zone	12.2			
Regulatory Definition	12.3			
Monitoring and Sampling Strategy	12.4			
Analysis	12.5			
References and Bibliography	12.6			
Incineration	13.0			
Introduction	13.1			
Regulatory Definition	13.2			
Waste Characterization Strategy	13.3			
Stack-Gas Effluent Characterization Strategy	13.4			
Additional Effluent Characterization Strategy	13.5			
Selection of Specific Sampling and Analysis Methods	13.6			
References	13.7			

The Third Edition of SW-846 and its Revision are available from the Government Printing Office, Superintendent of Documents, Washington, DC 20402, (202) 738-3238, document number 955-001-00000-1.

[a] This method may be used in conjunction with or in addition to the methods found in the Second Edition of SW-846 as amended by Updates I and II.

When Method 9066 is used it must be preceded by the manual distillation specified in procedure 7.1 of Method 9065. Just prior to distillation in Method 9065, adjust the sulfuric acid-preserved sample to pH 4 with 1+9 NaOH. After the manual distillation is completed, the autoanalyzer manifold is simplified by connecting the re-sample line directly to the sampler.

[48 FR 15257, Apr. 8, 1983, as amended at 50 FR 2000, Jan. 14, 1985; 50 FR 42942, Oct. 23, 1985; 51 FR 5330, Feb. 13, 1986; 51 FR 6541, Feb. 25, 1986; 51 FR 37729, Oct. 24, 1986; 54 FR 41407, Oct. 6, 1989; 54 FR 40267, Sept. 29, 1989; 55 FR 8950, Mar. 9, 1990; 55 FR 18505, May 2, 1990]

EFFECTIVE DATE NOTE: At 55 FR 18505, May 2, 1990, Table 1 of Appendix III of Part 261 was amended by adding the entry for "1,1-Dimethylhydrazine (UMDH)" effective November 2, 1990.

APPENDIX IV—[RESERVED FOR RADIOACTIVE WASTE TEST METHODS]

APPENDIX V—[RESERVED FOR INFECTIOUS WASTE TREATMENT SPECIFICATIONS]

APPENDIX VI—[RESERVED FOR ETIOLOGIC AGENTS]

APPENDIX VII—BASIS FOR LISTING HAZARDOUS WASTE

EPA hazardous waste No.	Hazardous constituents for which listed
F001	Tetrachloroethylene, methylene chloride trichloroethylene, 1,1,1-trichloroethane, carbon tetrachloride, chlorinated fluorocarbons.
F002	Tetrachloroethylene, methylene chloride, trichloroethylene, 1,1,1-trichloroethane, 1,1,2-trichloroethane, chlorobenzene, 1,1,2-trichloro-1,2,2-trichfluoroethane, ortho-dichlorobenzene, trichlorofluoromethane.
F003	N.A.
F004	Cresols and cresylic acid, nitrobenzene.
F005	Toluene, methyl ethyl ketone, carbon disulfide, isobutanol, pyridine, 2-ethoxyethanol, benzene, 2-nitropropane.
F006	Cadmium, hexavalent chromium, nickel, cyanide (complexed).
F007	Cyanide (salts).
F008	Cyanide (salts).
F009	Cyanide (salts).
F010	Cyanide (salts).
F011	Cyanide (salts).
F012	Cyanide (complexed).
F019	Hexavalent chromium, cyanide (complexed).
F020	Tetra- and pentachlorodibenzo-*p*-dioxins; tetra and pentachlorodi-benzofurans; tri- and tetrachlorophenols and their chlorophenoxy derivative acids, esters, ethers, amine and other salts.

EPA hazardous waste No.	Hazardous constituents for which listed
F021	Penta- and hexachlorodibenzo-*p*-dioxins; penta- and hexachlorodibenzofurans; pentachlorophenol and its derivatives.
F022	Tetra-, penta-, and hexachlorodibenzo-*p*-dioxins; tetra-, penta-, and hexachlorodibenzofurans.
F023	Tetra-, and pentachlorodibenzo-*p*-dioxins; tetra- and pentachlorodibenzofurans; tri- and tetrachlorophenols and their chlorophenoxy derivative acids, esters, ethers, amine and other salts.
F024	Chloromethane, dichloromethane, trichloromethane, carbon tetrachloride, chloroethylene, 1,1-dichloroethane, 1,2-dichloroethane, trans-1-2-dichloroethylene, 1,1-dichloroethylene, 1,1,1-trichloroethane, 1,1,2-trichloroethane, trichloroethylene, 1,1,1,2-tetra-chloroethane, 1,1,2,2-tetrachloroethane, tetrachloroethylene, pentachloroethane, hexachloroethane, allyl chloride (3-chloropropene), dichloropropane, dichloropropene, 2-chloro-1,3-butadiene, hexachloro-1,3-butadiene, hexachlorocyclopentadiene, hexachlorocyclohexane, benzene, chlorbenzene, dichlorobenzenes, 1,2,4-trichlorobenzene, tetrachlorobenzene, pentachlorobenzene, hexachlorobenzene, toluene, naphthalene.
F025	Chloromethane; Dichloromethane; Trichloromethane; Carbon tetrachloride; Chloroethylene; 1,1-Dichloroethane; 1,2-Dichloroethane; trans-1,2-Dichloroethylene; 1,1-Dichloroethylene; 1,1,1-Trichloroethane; 1,1,2-Trichloroethane; Trichloroethylene; 1,1,1,2-Tetrachloroethane; 1,1,2,2-Tetrachloroethane; Tetrachloroethylene; Pentachloroethane; Hexachloroethane; Allyl chloride (3-Chloropropene); Dichloropropane; Dichloropropene; 2-Chloro-1,3-butadiene; Hexachloro-1,3-butadiene; Hexachlorocyclopentadiene; Benzene; Chlorobenzene; Dichlorobenzene; 1,2,4-Trichlorobenzene; Tetrachlorobenzene; Pentachlorobenzene; Hexachlorobenzene; Toluene; Naphthalene.
F026	Tetra-, penta-, and hexachlorodibenzo-*p*-dioxins; tetra-, penta-, and hexachlorodibenzofurans.
F027	Tetra-, penta-, and hexachlorodibenzo-*p*-dioxins; tetra-, penta-, and hexachlorodibenzofurans; tri-, tetra-, and pentachlorophenols and their chlorophenoxy derivative acids, esters, ethers, amine and other salts.
F028	Tetra-, penta-, and hexachlorodibenzo-*p*-dioxins; tetra-, penta-, and hexachlorodibenzofurans; tri-, tetra-, and pentachlorophenols and their chlorophenoxy derivative acids, esters, ethers, amine and other salts.
F039	All constituents for which treatment standards are specified for multi-source leachate (wastewaters and nonwastewaters) under 40 CFR 268.43(a), Table CCW.
K001	Pentachlorophenol, phenol, 2-chlorophenol, p-chloro-m-cresol, 2,4-dimethylphenyl, 2,4-dinitrophenol, trichlorophenols, tetrachlorophenols, 2,4-dinitrophenol, cresosote, chrysene, naphthalene, fluoranthene, benzo(b)fluoranthene, benzo(a)pyrene, indeno(1,2,3-cd)pyrene, benz(a)anthracene, dibenz(a)anthracene, acenaphthalene.
K002	Hexavalent chromium, lead
K003	Hexavalent chromium, lead.
K004	Hexavalent chromium.
K005	Hexavalent chromium, lead.
K006	Hexavalent chromium.
K007	Cyanide (complexed), hexavalent chromium.
K008	Hexavalent chromium.
K009	Chloroform, formaldehyde, methylene chloride, methyl chloride, paraldehyde, formic acid.
K010	Chloroform, formaldehyde, methylene chloride, methyl chloride, paraldehyde, formic acid, chloroacetaldehyde.
K011	Acrylonitrile, acetonitrile, hydrocyanic acid.
K013	Hydrocyanic acid, acrylonitrile, acetonitrile.
K014	Acetonitrile, acrylamide.
K015	Benzyl chloride, chlorobenzene, toluene, benzotrichloride.
K016	Hexachlorobenzene, hexachlorobutadiene, carbon tetrachloride, hexachloroethane, perchloroethylene.
K017	Epichlorohydrin, chloroethers [bis(chloromethyl) ether and bis (2-chloroethyl) ethers], trichloropropane, dichloropropanols.
K018	1,2-dichloroethane, trichloroethylene, hexachlorobutadiene, hexachlorobenzene.
K019	Ethylene dichloride, 1,1,1-trichloroethane, 1,1,2-trichloroethane, tetrachloroethanes (1,1,2,2-tetrachloroethane and 1,1,1,2-tetrachloroethane), trichloroethylene, tetrachloroethylene, carbon tetrachloride, chloroform, vinyl chloride, vinylidene chloride.
K020	Ethylene dichloride, 1,1,1-trichloroethane, 1,1,2-trichloroethane, tetrachloroethanes (1,1,2,2-tetrachloroethane and 1,1,1,2-tetrachloroethane), trichloroethylene, tetrachloroethylene, carbon tetrachloride, chloroform, vinyl chloride, vinylidene chloride.
K021	Antimony, carbon tetrachloride, chloroform.
K022	Phenol, tars (polycyclic aromatic hydrocarbons).
K023	Phthalic anhydride, maleic anhydride.
K024	Phthalic anhydride, 1,4-naphthoquinone.
K025	Meta-dinitrobenzene, 2,4-dinitrotoluene.
K026	Paraldehyde, pyridines, 2-picoline.
K027	Toluene diisocyanate, toluene-2, 4-diamine.
K028	1,1,1-trichloroethane, vinyl chloride.
K029	1,2-dichloroethane, 1,1,1-trichloroethane, vinyl chloride, vinylidene chloride, chloroform.
K030	Hexachlorobenzene, hexachlorobutadiene, hexachloroethane, 1,1,1,2-tetrachloroethane, 1,1,2,2-tetrachloroethane, ethylene dichloride.
K031	Arsenic.
K032	Hexachlorocyclopentadiene.
K033	Hexachlorocyclopentadiene.
K034	Hexachlorocyclopentadiene.
K035	Creosote, chrysene, naphthalene, fluoranthene benzo(b) fluoranthene, benzo(a)pyrene, indeno(1,2,3-cd) pyrene, benzo(a)anthracene, dibenzo(a)anthracene, acenaphthalene.
K036	Toluene, phosphorodithioic and phosphorothioic acid esters.
K037	Toluene, phosphorodithioic and phosphorothioic acid esters.
K038	Phorate, formaldehyde, phosphorodithioic and phosphorothioic acid esters.
K039	Phosphorodithioic and phosphorothioic acid esters.
K040	Phorate, formaldehyde, phosphorodithioic and phosphorothioic acid esters.
K041	Toxaphene.
K042	Hexachlorobenzene, ortho-dichlorobenzene.
K043	2,4-dichlorophenol, 2,6-dichlorophenol, 2,4,6-trichlorophenol.
K044	N.A.
K045	N.A.
K046	Lead.

EPA hazardous waste No.	Hazardous constituents for which listed
K047	N.A.
K048	Hexavalent chromium, lead.
K049	Hexavalent chromium, lead.
K050	Hexavalent chromium.
K051	Hexavalent chromium, lead.
K052	Lead.
K060	Cyanide, napthalene, phenolic compounds, arsenic.
K061	Hexavalent chromium, lead, cadmium.
K062	Hexavalent chromium, lead.
K064	Lead, cadmium.
K065	Do.
K066	Do.
K069	Hexavalent chromium, lead, cadmium.
K071	Mercury.
K073	Chloroform, carbon tetrachloride, hexacholroethane, trichloroethane, tetrachloroethylene, dichloroethylene, 1,1,2,2-tetrachloroethane.
K083	Aniline, diphenylamine, nitrobenzene, phenylenediamine.
K084	Arsenic.
K085	Benzene, dichlorobenzenes, trichlorobenzenes, tetrachlorobenzenes, pentachlorobenzene, hexachlorobenzene, benzyl chloride.
K086	Lead, hexavalent chromium.
K087	Phenol, naphthalene.
K088	Cyanide (complexes).
K090	Chromium.
K091	Do.
K093	Phthalic anhydnde, maleic anhydride.
K094	Phthalic anhydnde.
K095	1,1,2-trichloroethane, 1,1,1,2-tetrachloroethane, 1,1,2,2-tetrachloroethane.
K096	1,2-dichloroethane, 1,1,1-trichloroethane, 1,1,2-trichloroethane.
K097	Chlordane, heptachlor.
K098	Toxaphene.
K099	2,4-dichlorophenol, 2,4,6-trichlorophenol.
K100	Hexavalent chromium, lead, cadmium.
K101	Arsenic.
K102	Arsenic.
K103	Aniline, nitrobenzene, phenylenediamine.
K104	Aniline, benzene, diphenylamine, nitrobenzene, phenylenediamine.
K105	Benzene, monochlorobenzene, dichlorobenzenes, 2,4,6-trichlorophenol.
K106	Mercury.
K107	1,1-Dimethylhydrazine (UDMH).
K108	1,1-Dimethylhydrazine (UDMH).
K109	1,1-Dimethylhydrazine (UDMH).
K110	1,1-Dimethylhydrazine (UDMH).
K111	2,4-Dinitrotoluene.
K112	2,4-Toluenediamine, *o*-toluidine, *p*-toluidine, aniline.
K113	2,4-Toluenediamine, *o*-toluidine, *p*-toluidine, aniline.
K114	2,4-Toluenediamine, *o*-toluidine, *p*-toluidine.
K115	2,4-Toluenediamine.
K116	Carbon tetrachloride, tetrachloroethylene, chloroform, phosgene.
K117	Ethylene dibromide.
K118	Ethylene dibromide.
K123	Ethylene thiourea.
K124	Ethylene thiourea.
K125	Ethylene thiourea.
K126	Ethylene thiourea.
K131	Dimethyl sulfate, Methyl bromide.
K132	Methyl bromide.
K136	Ethylene dibromide.

N.A.—Waste is hazardous because it fails the test for the characteristic of ignitability, corrosivity, or reactivity.

[46 FR 4619, Jan. 16, 1981, as amended at 46 FR 27477, May 20, 1981; 49 FR 5312, Feb. 10, 1984; 50 FR 2000, Jan. 14, 1985; 50 FR 42942, Oct. 23, 1985; 51 FR 5330, Feb. 13, 1986; 51 FR 6541, Feb. 25, 1986; 51 FR 37729, Oct. 24, 1986; 54 FR 35421, Sept. 13, 1989; 54 FR 41407, Oct. 6, 1989; 54 FR 50978, Dec. 11, 1989; 55 FR 18505, May 2, 1990; 55 FR 22684, June 1, 1990]

EFFECTIVE DATE NOTE: At 55 FR 18505, May 2, 1990, Appendix VII to Part 261 was amended by adding the entries for EPA hazardous waste numbers K107, K108, K109 and K110, effective November 2, 1990.

APPENDIX VIII—HAZARDOUS CONSTITUENTS

Common name	Chemical abstracts name	Chemical abstracts No.	Hazardous waste No.
Acetonitrile	Same	75-05-8	U003
Acetophenone	Ethanone, 1-phenyl-	98-86-2	U004
2-Acetylaminefluarone	Acetamide, N-9H-fluoren-2-yl-	53-96-3	U005
Acetyl chloride	Same	75-36-5	U006
1-Acetyl-2-thiourea	Acetamide, N-(aminothioxomethyl)-	591-08-2	P002
Acrolein	2-Propenal	107-02-8	P003
Acrylamide	2-Propenamide	79-06-1	U007
Acrylonitrile	2-Propenenitrile	107-13-1	U009
Aflatoxins	Same	1402-68-2	
Aldicarb	Propanal, 2-methyl-2-(methylthio)-, O-[(methylamino)carbonyl]oxime.	116-06-3	P070

Common name	Chemical abstracts name	Chemical abstracts No.	Hazardous waste No.
Aldrin	1,4,5,8-Dimethanonaphthalene, 1,2,3,4,10,10-10-hexachloro-1,4,4a,5,8,8a-hexahydro-, (1alpha,4alpha,4abeta,5alpha,8alpha, 8abeta)-.	309-00-2	P004
Allyl alcohol	2-Propen-1-ol	107-18-6	P005
Allyl chloride	1-Propane, 3-chloro	107-18-6	
Aluminum phosphide	Same	20859-73-8	P006
4-Aminobiphenyl	[1,1'-Biphenyl]-4-amine	92-67-1	
5-(Aminomethyl)-3-isoxazolol	3(2H)-Isoxazolone, 5-(aminomethyl)-	2763-96-4	P007
4-Aminopyridine	4-Pyridinamine	504-24-5	P008
Amitrole	1H-1,2,4-Triazol-3-amine	61-82-5	U011
Ammonium vanadate	Vanadic acid, ammonium salt	7803-55-6	P119
Aniline	Benzenamine	62-53-3	U012
Antimony	Same	7440-36-0	
Antimony compounds, N.O.S.[1]			
Aramite	Sulfurous acid, 2-chloroethyl 2-[4-(1,1-dimethylethyl)phenoxy]-1-methylethyl ester.	140-57-8	
Arsenic	Same	7440-38-2	
Arsenic compounds, N.O.S.[1]			
Arsenic acid	Arsenic acid H_3AsO_4	7778-39-4	P010
Arsenic pentoxide	Arsenic oxide As_2O_5	1303-28-2	P011
Arsenic trioxide	Arsenic oxide As_2O_3	1327-53-3	P012
Auramine	Benzenamine, 4,4'-carbonimidoylbis[N,N-dimethyl.	492-80-8	U014
Azaserine	L-Serine, diazoacetate (ester)	115-02-6	U015
Barium	Same	7440-39-3	
Barium compounds, N.O.S.[1]			
Barium cyanide	Same	542-62-1	P013
Benz[c]acridine	Same	225-51-4	U016
Benz[a]anthracene	Same	56-55-3	U018
Benzal chloride	Benzene, (dichloromethyl)-	98-87-3	U017
Benzene	Same	71-43-2	U019
Benzenearsonic acid	Arsonic acid, phenyl-	98-05-5	
Benzidine	[1,1'-Biphenyl]-4,4'-diamine	92-87-5	U021
Benzo[b]fluoranthene	Benz[e]acephenanthrylene	205-99-2	
Benzo[j]fluoranthene	Same	205-82-3	
Benzo[a]pyrene	Same	50-32-8	U022
p-Benzoquinone	2,5-Cyclohexadiene-1,4-dione	106-51-4	U197
Benzotrichloride	Benzene, (trichloromethyl)-	98-07-7	U023
Benzyl chloride	Benzene, (chloromethyl)-	100-44-7	P028
Beryllium	Same	7440-41-7	P015
Beryllium compounds, N.O.S.[1]			
Bromoacetone	2-Propanone, 1-bromo-	598-31-2	P017
Bromoform	Methane, tribromo-	75-25-2	U225
4-Bromophenyl phenyl ether	Benzene, 1-bromo-4-phenoxy-	101-55-3	U030
Brucine	Strychnidin-10-one, 2,3-dimethoxy-	357-57-3	P018
Butyl benzyl phthalate	1,2-Benzenedicarboxylic acid, butyl phenylmethyl ester.	85-68-7	
Cacodylic acid	Arsinic acid, dimethyl-	75-60-5	U136
Cadmium	Same	7440-43-9	
Cadmium compounds, N.O.S.[1]			
Calcium chromate	Chromic acid H_2CrO_4, calcium salt	13765-19-0	U032
Calcium cyanide	Calcium cyanide $Ca(CN)_2$	592-01-8	P021
Carbon disulfide	Same	75-15-0	P022
Carbon oxyfluoride	Carbonic difluoride	353-50-4	U033
Carbon tetrachloride	Methane, tetrachloro-	56-23-5	U211
Chloral	Acetaldehyde, trichloro-	75-87-6	U034
Chlorambucil	Benzenebutanoic acid, 4-[bis(2-chloroethyl)amino]-.	305-03-3	U035
Chlordane	4,7-Methano-1H-indene, 1,2,4,5,6,7,8,8-octachloro-2,3,3a,4,7,7a-hexahydro-.	57-74-9	U036
Chlordane (alpha and gamma isomers)			U036
Chlorinated benzenes, N.O.S.[1]			
Chlorinated ethane, N.O.S.[1]			
Chlorinated fluorocarbons, N.O.S.[1]			
Chlorinated naphthalene, N.O.S.[1]			
Chlorinated phenol, N.O.S.[1]			
Chlornaphazin	Naphthalenamine, N,N'-bis(2-chloroethyl)-	494-03-1	U026
Chloroacetaldehyde	Acetaldehyde, chloro-	107-20-0	P023
Chloroalkyl ethers, N.O.S.[1]			

Common name	Chemical abstracts name	Chemical abstracts No.	Hazardous waste No.
p-Chloroaniline	Benzenamine, 4-chloro-	106-47-8	P024
Chlorobenzene	Benzene, chloro-	108-90-7	U037
Chlorobenzilate	Benzeneacetic acid, 4-chloro-alpha-(4-chlorophenyl)-alpha-hydroxy-, ethyl ester.	510-15-6	U038
p-Chloro-m-cresol	Phenol, 4-chloro-3-methyl-	59-50-7	U039
2-Chloroethyl vinyl ether	Ethene, (2-chloroethoxy)-	110-75-8	U042
Chloroform	Methane, trichloro-	67-66-3	U044
Chloromethyl methyl ether	Methane, chloromethoxy-	107-30-2	U046
beta-Chloronaphthalene	Naphthalene, 2-chloro-	91-58-7	U047
o-Chlorophenol	Phenol, 2-chloro-	95-57-8	U048
1-(o-Chlorophenyl)thiourea	Thiourea, (2-chlorophenyl)-	5344-82-1	P026
Chloroprene	1,3-Butadiene, 2-chloro-	126-99-8	
3-Chloropropionitrile	Propanenitrile, 3-chloro-	542-76-7	P027
Chromium	Same	7440-47-3	
Chromium compounds, N.O.S.[1]			
Chrysene	Same	218-01-9	U050
Citrus red No. 2	2-Naphthalenol, 1-[(2,5-dimethoxyphenyl)azo]-.	6358-53-8	
Coal tar creosote	Same	8007-45-2	
Copper cyanide	Copper cyanide CuCN	544-92-3	P029
Creosote	Same		U051
Cresol (Cresylic acid)	Phenol, methyl-	1319-77-3	U052
Crotonaldehyde	2-Butenal	4170-30-3	U053
Cyanides (soluble salts and complexes) N.O.S.[1].			P030
Cyanogen	Ethanedinitrile	460-19-5	P031
Cyanogen bromide	Cyanogen bromide (CN)Br	506-68-3	U246
Cyanogen chloride	Cyanogen chloride (CN)Cl	506-77-4	P033
Cycasin	beta-D-Glucopyranoside, (methyl-ONN-azoxy)methyl.	14901-08-7	
2-Cyclohexyl-4,6-dinitrophenol	Phenol, 2-cyclohexyl-4,6-dinitro-	131-89-5	P034
Cyclophosphamide	2H-1,3,2-Oxazaphosphorin-2-amine, N,N-bis(2-chloroethyl)tetrahydro-, 2-oxide.	50-18-0	U058
2,4-D	Acetic acid, (2,4-dichlorophenoxy)-	94-75-7	U240
2,4-D, salts, esters			U240
Daunomycin	5,12-Naphthacenedione, 8-acetyl-10-[(3-amino-2,3,6-trideoxy-alpha-L-lyxo-hexopyranosyl)oxy]-7,8,9,10-tetrahydro-6,8,11-trihydroxy-1-methoxy-, (8S-cis)-.	20830-81-3	U059
DDD	Benzene, 1,1'-(2,2-dichloroethylidene)bis[4-chloro-.	72-54-8	U060
DDE	Benzene, 1,1'-(dichloroethenylidene)bis[4-chloro-.	72-55-9	
DDT	Benzene, 1,1'-(2,2,2-trichloroethylidene)bis[4-chloro-.	50-29-3	U061
Diallate	Carbamothioic acid, bis(1-methylethyl)-, S-(2,3-dichloro-2-propenyl) ester.	2303-16-4	U062
Dibenz[a,h]acridine	Same	226-36-8	
Dibenz[a,j]acridine	Same	224-42-0	
Dibenz[a,h]anthracene	Same	53-70-3	U063
7H-Dibenzo[c,g]carbazole	Same	194-59-2	
Dibenzo[a,e]pyrene	Naphtho[1,2,3,4-def]chrysene	192-65-4	
Dibenzo[a,h]pyrene	Dibenzo[b,def]chrysene	189-64-0	
Dibenzo[a,i]pyrene	Benzo[rst]pentaphene	189-55-9	U064
1,2-Dibromo-3-chloropropane	Propane, 1,2-dibromo-3-chloro-	96-12-8	U066
Dibutyl phthalate	1,2-Benzenedicarboxylic acid, dibutyl ester	84-74-2	U069
o-Dichlorobenzene	Benzene, 1,2-dichloro-	95-50-1	U070
m-Dichlorobenzene	Benzene, 1,3-dichloro-	541-73-1	U071
p-Dichlorobenzene	Benzene, 1,4-dichloro-	106-46-7	U072
Dichlorobenzene, N.O.S.[1]	Benzene, dichloro-	25321-22-6	
3,3'-Dichlorobenzidine	[1,1'-Biphenyl]-4,4'-diamine, 3,3'-dichloro-	91-94-1	U073
1,4-Dichloro-2-butene	2-Butene, 1,4-dichloro-	764-41-0	U074
Dichlorodifluoromethane	Methane, dichlorodifluoro-	75-71-8	U075
Dichloroethylene, N.O.S.[1]	Dichloroethylene	25323-30-2	
1,1-Dichloroethylene	Ethene, 1,1-dichloro-	75-35-4	U078
1,2-Dichloroethylene	Ethene, 1,2-dichlrol-, (E)-	156-60-5	U079
Dichloroethyl ether	Ethane, 1,1'oxybis[2-chloro-	111-44-4	U025
Dichloroisopropyl ether	Propane, 2,2'-oxybis[2-chloro-	108-60-1	U027
Dichloromethoxy ethane	Ethane, 1,1'-[methylenebis(oxy)]bis[2-chloro-.	111-91-1	U024
Dichloromethyl ether	Methane, oxybis[chloro-	542-88-1	P016
2,4-Dichlorophenol	Phenol, 2,4-dichloro-	120-83-2	U081

Common name	Chemical abstracts name	Chemical abstracts No.	Hazardous waste No.
2,6-Dichlorophenol	Phenol, 2,6-dichloro-	87-65-0	U082
Dichlorophenylarsine	Arsonous dichloride, phenyl-	696-28-6	P036
Dichloropropane, N.O.S.[1]	Propane, dichloro-	26638-19-7	
Dichloropropanol, N.O.S.[1]	Propanol, dichloro-	26545-73-3	
Dichloropropene, N.O.S.[1]	1-Propene, dichloro-	26952-23-8	
1,3-Dichloropropene	1-Propene, 1,3-dichloro-	542-75-6	U084
Dieldrin	2,7:3,6-Dimethanonaphth[2,3-b]oxirene, 3,4,5,6,9,9-hexachloro-1a,2,2a,3,6,6a,7,7a-octahydro-, (1aalpha,2beta,2aalpha,3beta,6beta, 6aalpha,7beta,7aalpha)-.	60-57-1	P037
1,2:3,4-Diepoxybutane	2,2'-Bioxirane	1464-53-5	U085
Diethylarsine	Arsine, diethyl-	692-42-2	P038
1,4-Diethyleneoxide	1,4-Dioxane	123-91-1	U108
Diethylhexyl phthalate	1,2-Benzenedicarboxylic acid, bis(2-ethylhexyl) ester.	117-81-7	U028
N,N'-Diethylhydrazine	Hydrazine, 1,2-diethyl-	1615-80-1	U086
O,O-Diethyl S-methyl dithiophosphate	Phosphorodithioic acid, O,O-diethyl S-methyl ester.	3288-58-2	U087
Diethyl-p-nitrophenyl phosphate	Phosphoric acid, diethyl 4-nitrophenyl ester	311-45-5	P041
Diethyl phthalate	1,2-Benzenedicarboxylic acid, diethyl ester	84-66-2	U088
O,O-Diethyl O-pyrazinyl phosphoro- thioate	Phosphorothioic acid, O,O-diethyl O-pyrazinyl ester.	297-97-2	P040
Diethylstilbesterol	Phenol, 4,4'-(1,2-diethyl-1,2-ethenediyl)bis-, (E)-.	56-53-1	U089
Dihydrosafrole	1,3-Benzodioxole, 5-propyl-	94-58-6	U090
Diisopropylfluorophosphate (DFP)	Phosphorofluoridic acid, bis(1-methylethyl) ester.	55-91-4	P043
Dimethoate	Phosphorodithioic acid, O,O-dimethyl S-[2-(methylamino)-2-oxoethyl] ester.	60-51-5	P044
3,3'-Dimethoxybenzidine	[1,1'-Biphenyl]-4,4'-diamine, 3,3'-dimethoxy-	119-90-4	U091
p-Dimethylaminoazobenzene	Benzenamine, N,N-dimethyl-4-(phenylazo)-	60-11-7	U093
7,12-Dimethylbenz[a]anthracene	Benz[a]anthracene, 7,12-dimethyl-	57-97-6	U094
3,3'-Dimethylbenzidine	[1,1'-Biphenyl]-4,4'-diamine, 3,3'-dimethyl-	119-93-7	U095
Dimethylcarbamoyl chloride	Carbamic chloride, dimethyl-	79-44-7	U097
1,1-Dimethylhydrazine	Hydrazine, 1,1-dimethyl-	57-14-7	U098
1,2-Dimethylhydrazine	Hydrazine, 1,2-dimethyl-	540-73-8	U099
alpha,alpha-Dimethylphenethylamine	Benzeneethanamine, alpha,alpha-dimethyl-	122-09-8	P046
2,4-Dimethylphenol	Phenol, 2,4-dimethyl-	105-67-9	U101
Dimethyl phthalate	1,2-Benzenedicarboxylic acid, dimethyl ester	131-11-3	U102
Dimethyl sulfate	Sulfuric acid, dimethyl ester	77-78-1	U103
Dinitrobenzene, N.O.S.[1]	Benzene, dinitro-	25154-54-5	
4,6-Dinitro-o-cresol	Phenol, 2-methyl-4,6-dinitro-	534-52-1	P047
4,6-Dinitro-o-cresol salts			P047
2,4-Dinitrophenol	Phenol, 2,4-dinitro-	51-28-5	P048
2,4-Dinitrotoluene	Benzene, 1-methyl-2,4-dinitro-	121-14-2	U105
2,6-Dinitrotoluene	Benzene, 2-methyl-1,3-dinitro-	606-20-2	U106
Dinoseb	Phenol; 2-(1-methylpropyl)-4,6-dinitro-	88-85-7	P020
Di-n-octyl phthalate	1,2-Benzenedicarboxylic acid, dioctyl ester	117-84-0	U017
Diphenylamine	Benzenamine, N-phenyl-	122-39-4	
1,2-Diphenylhydrazine	Hydrazine, 1,2-diphenyl-	122-66-7	U109
Di-n-propylnitrosamine	1-Propanamine, N-nitroso-N-propyl-	621-64-7	U111
Disulfoton	Phosphorodithioic acid, O,O-diethyl S-[2-(ethylthio)ethyl] ester	298-04-4	P039
Dithiobiuret	Thioimidodicarbonic diamide $[(H_2N)C(S)]_2NH$.	541-53-7	P049
Endosulfan	6,9-Methano-2,4,3-benzodioxathiepin, 6,7,8,9,10,10-hexachloro-1,5,5a,6,9,9a-hexahydro-, 3-oxide	115-29-7	P050
Endothall	7-Oxabicyclo[2.2.1]heptane-2,3-dicarboxylic acid.	145-73-3	P088
Endrin	2,7:3,6-Dimethanonaphth[2,3-b]oxirene, 3,4,5,6,9,9-hexachloro-1a,2,2a,3,6,6a,7,7a-octa-hydro-, (1aalpha,2beta,2abeta,3alpha,6alpha, 6abeta,7beta,7aalpha)-	72-20-8	P051
Endrin metabolites			P051
Epichlorohydrin	Oxirane, (chloromethyl)-	106-89-8	U041
Epinephrine	1,2-Benzenediol, 4-[1-hydroxy-2-(methylamino)ethyl]-, (R)-	51-43-4	P042
Ethyl carbamate (urethane)	Carbamic acid, ethyl ester	51-79-6	U238
Ethyl cyanide	Propanenitrile	107-12-0	P101

Common name	Chemical abstracts name	Chemical abstracts No.	Hazardous waste No.
Ethylenebisdithiocarbamic acid	Carbamodithioic acid, 1,2-ethanediylbis-	111-54-6	U114
Ethylenebisdithiocarbamic acid, salts and esters.			U114
Ethylene dibromide	Ethane, 1,2-dibromo-	106-93-4	U067
Ethylene dichloride	Ethane, 1,2-dichloro-	107-06-2	U077
Ethylene glycol monoethyl ether	Ethanol, 2-ethoxy-	110-80-5	U359
Ethyleneimine	Aziridine	151-56-4	P054
Ethylene oxide	Oxirane	75-21-8	U115
Ethylenethiourea	2-Imidazolidinethione	96-45-7	U116
Ethylidene dichloride	Ethane, 1,1-dichloro-	75-34-3	U076
Ethyl methacrylate	2-Propenoic acid, 2-methyl-, ethyl ester	97-63-2	U118
Ethyl methanesulfonate	Methanesulfonic acid, ethyl ester	62-50-0	U119
Famphur	Phosphorothioic acid, O-[4-[(dimethylamino)sulfonyl]phenyl] O,O-dimethyl ester.	52-85-7	P097
Fluoranthene	Same	206-44-0	U120
Fluorine	Same	7782-41-4	P056
Fluoroacetamide	Acetamide, 2-fluoro-	640-19-7	P057
Fluoroacetic acid, sodium salt	Acetic acid, fluoro-, sodium salt	62-74-8	P058
Formaldehyde	Same	50-00-0	U122
Formic acid	Same	64-18-6	U123
Glycidylaldehyde	Oxiranecarboxyaldehyde	765-34-4	U126
Halomethanes, N.O.S.[1]			
Heptachlor	4,7-Methano-1H-indene, 1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro-.	76-44-8	P059
Heptachlor epoxide	2,5-Methano-2H-indeno[1,2-b]oxirene, 2,3,4,5,6,7,7-heptachloro-1a,1b,5,5a,6,6a-hexa- hydro-, (1aalpha,1bbeta,2alpha,5alpha, 5abeta,6beta,6aalpha)-.	1024-57-3	
Heptachlor epoxide (alpha, beta, and gamma isomers).			
Hexachlorobenzene	Benzene, hexachloro-	118-74-1	U127
Hexachlorobutadiene	1,3-Butadiene, 1,1,2,3,4,4-hexachloro-	87-68-3	U128
Hexachlorocyclopentadiene	1,3-Cyclopentadiene, 1,2,3,4,5,5-hexachloro-	77-47-4	U130
Hexachlorodibenzo-p-dioxins			
Hexachlorodibenzofurans			
Hexachloroethane	Ethane, hexachloro-	67-72-1	U131
Hexachlorophene	Phenol, 2,2'-methylenebis[3,4,6-trichloro-	70-30-4	U132
Hexachloropropene	1-Propene, 1,1,2,3,3,3-hexachloro-	1888-71-7	U243
Hexaethyl tetraphosphate	Tetraphosphoric acid, hexaethyl ester	757-58-4	P062
Hydrazine	Same	302-01-2	U133
Hydrogen cyanide	Hydrocyanic acid	74-90-8	P063
Hydrogen fluoride	Hydrofluoric acid	7664-39-3	U134
Hydrogen sulfide	Hydrogen sulfide H_2S	7783-06-4	U135
Indeno[1,2,3-cd]pyrene	Same	193-39-5	U137
Isobutyl alcohol	1-Propanol, 2-methyl-	78-83-1	U140
Isodrin	1,4,5,8-- Dimethanonaphthalene, 1,2,3,4,10,10-hexachloro-1,4,4a,5,8,8a-hexahydro-, (1alpha,4alpha,4abeta,5beta,8beta,8abeta)-	465-73-6	P060
Isosafrole	1,3-Benzodioxole, 5-(1-propenyl)-	120-58-1	U141
Kepone	1,3,4-Metheno-2H-cyclobuta[cd]pentalen-2-one, 1,1a,3,3a,4,5,5,5a,5b,6-decachlorooctahydro-.	143-50-0	U142
Lasiocarpine	2-Butenoic acid, 2-methyl-,7-[[[2,3-dihydroxy-2-(1-methoxyethyl)-3-methyl-1-oxobutoxy]methyl]-2,3,5,7a-tetrahydro-1H-pyrrolizin-1-yl ester, [1S-[1alpha(Z),7(2S*,3R*),7aalpha]]-	303-34-1	4143
Lead	Same	7439-92-1	
Lead compounds, N.O.S.[1]			
Lead acetate	Acetic acid, lead(2+) salt	301-04-2	U144
Lead phosphate	Phosphoric acid, lead(2+) salt (2:3)	7446-27-7	U145
Lead subacetate	Lead, bis(acetato-O)tetrahydroxytri-	1335-32-6	U146
Lindane	Cyclohexane, 1,2,3,4,5,6-hexachloro-, (1alpha,2alpha,3beta,4alpha,5alpha,6beta)-	58-89-9	U129
Maleic anhydride	2,5-Furandione	108-31-6	U147
Maleic hydrazide	3,6-Pyridazinedione, 1,2-dihydro-	123-33-1	U148
Malononitrile	Propanedinitrile	109-77-3	U149
Melphalan	L-Phenylalanine, 4-[bis(2-chloroethyl)amino]-.	148-82-3	U150

Common name	Chemical abstracts name	Chemical abstracts No.	Hazardous waste No.
Mercury	Same	7439-97-6	U151
Mercury compounds, N.O.S.[1]			
Mercury fulminate	Fulminic acid, mercury(2+) salt	628-86-4	P065
Methacrylonitrile	2-Propenenitrile, 2-methyl-	126-98-7	U152
Methapyrilene	1,2-Ethanediamine, N,N-dimethyl-N'-2-pyridinyl-N'-(2-thienylmethyl)-	91-80-5	U155
Methomyl	Ethanimidothioic acid, N-[[(methylamino)carbonyl]oxy]-, methyl ester.	16752-77-5	P066
Methoxychlor	Benzene, 1,1'-(2,2,2-trichloroethylidene)bis[4-methoxy-.	72-43-5	U247
Methyl bromide	Methane, bromo-	74-83-9	U029
Methyl chloride	Methane, chloro-	74-87-3	U045
Methyl chlorocarbonate	Carbonochloridic acid, methyl ester	79-22-1	U156
Methyl chloroform	Ethane, 1,1,1-trichloro-	71-55-6	U226
3-Methylcholanthrene	Benz[j]aceanthrylene, 1,2-dihydro-3-methyl-	56-49-5	U157
4,4'-Methylenebis(2-chloroaniline)	Benzenamine, 4,4'-methylenebis[2-chloro-	101-14-4	U158
Methylene bromide	Methane, dibromo-	74-95-3	U068
Methylene chloride	Metnane, dichloro-	75-09-2	U080
Methyl ethyl ketone (MEK)	2-Butanone	78-93-3	U159
Methyl ethyl ketone peroxide	2-Butanone, peroxide	1338-23-4	U160
Methyl hydrazine	Hydrazine, methyl-	60-34-4	P068
Methyl iodide	Methane, iodo-	74-88-4	U138
Methyl isocyanate	Methane, isocyanato-	624-83-9	P064
2-Methyllactonitrile	Propanenitrile, 2-hydroxy-2-methyl-	75-86-5	P069
Methyl methacrylate	2-Propenoic acid, 2-methyl-, methyl ester	80-62-6	U162
Methyl methanesulfonate	Methanesulfonic acid, methyl ester	66-27-3	
Methyl parathion	Phosphorothioic acid, O,O-dimethyl O-(4-nitrophenyl) ester.	298-00-0	P071
Methylthiouracil	4(1H)-Pyrimidinone, 2,3-dihydro-6-methyl-2-thioxo-.	56-04-2	U164
Mitomycin C	Azirino[2',3':3,4]pyrrolo[1,2-a]indole-4,7-dione, 6-amino-8-[[(aminocarbonyl)oxy]methyl]-1,1a,2,8,8a,8b-hexahydro-8a-methoxy-5-methyl-, [1aS-(1aalpha,8beta,8aalpha,8balpha)]-.	50-07-7	U010
MNNG	Guanidine, N-methyl-N'-nitro-N-nitroso-	70-25-7	U163
Mustard gas	Ethane, 1,1'-thiobis[2-chloro-	505-60-2	
Naphthalene	Same	91-20-3	U165
1,4-Naphthoquinone	1,4-Naphthalenedione	130-15-4	U166
alpha-Naphthylamine	1-Naphthalenamine	134-32-7	U167
beta-Naphthylamine	2-Naphthalenamine	91-59-8	U168
alpha-Naphthylthiourea	Thiourea, 1-naphthalenyl-	86-88-4	P072
Nickel	Same	7440-02-0	
Nickel compounds, N.O.S.[1]			
Nickel carbonyl	Nickel carbonyl $Ni(CO)_4$, (T-4)-	13463-39-3	P073
Nickel cyanide	Nickel cyanide $Ni(CN)_2$	557-19-7	P074
Nicotine	Pyridine, 3-(1-methyl-2-pyrrolidinyl)-, (S)-	54-11-5	P075
Nicotine salts			P075
Nitric oxide	Nitrogen oxide NO	10102-43-9	P076
p-Nitroaniline	Benzenamine, 4-nitro-	100-01-6	P077
Nitrobenzene	Benzene, nitro-	98-95-3	U169
Nitrogen dioxide	Nitrogen oxide NO_2	10102-44-0	P078
Nitrogen mustard	Ethanamine, 2-chloro-N-(2-chloroethyl)-N-methyl-.	51-75-2	
Nitrogen mustard, hydrochloride salt			
Nitrogen mustard N-oxide	Ethanamine, 2-chloro-N-(2-chloroethyl)-N-methyl-, N-oxide.	126-85-2	
Nitrogen mustard, N-oxide, hydro- chloride salt.			
Nitroglycerin	1,2,3-Propanetriol, trinitrate	55-63-0	P081
p-Nitrophenol	Phenol, 4-nitro-	100-02-7	U170
2-Nitropropane	Propane, 2-nitro-	79-46-9	U171
Nitrosamines, N.O.S.[1]		35576-91-1D	
N-Nitrosodi-n-butylamine	1-Butanamine, N-butyl-N-nitroso-	924-16-3	U172
N-Nitrosodiethanolamine	Ethanol, 2,2'-(nitrosoimino)bis-	1116-54-7	U173
N-Nitrosodiethylamine	Ethanamine, N-ethyl-N-nitroso-	55-18-5	U174
N-Nitrosodimethylamine	Methanamine, N-methyl-N-nitroso-	62-75-9	P082
N-Nitroso-N-ethylurea	Urea, N-ethyl-N-nitroso-	759-73-9	U176
N-Nitrosomethylethylamine	Ethanamine, N-methyl-N-nitroso-	10595-95-6	
N-Nitroso-N-methylurea	Urea, N-methyl-N-nitroso-	684-93-5	U177

Common name	Chemical abstracts name	Chemical abstracts No.	Hazardous waste No.
N-Nitroso-N-methylurethane	Carbamic acid, methylnitroso-, ethyl ester	615-53-2	U178
N-Nitrosomethylvinylamine	Vinylamine, N-methyl-N-nitroso-	4549-40-0	P084
N-Nitrosomorpholine	Morpholine, 4-nitroso-	59-89-2	
N-Nitrosonornicotine	Pyridine, 3-(1-nitroso-2-pyrrolidinyl)-, (S)-	16543-55-8	
N-Nitrosopiperidine	Piperidine, 1-nitroso	100-75-4	U179
N-Nitrosopyrrolidine	Pyrrolidine, 1-nitroso-	930-55-2	U180
N-Nitrososarcosine	Glycine, N-methyl-N-nitroso-	13256-22-9	
5-Nitro-o-toluidine	Benzenamine, 2-methyl-5-nitro-	99-55-8	U181
Octamethylpyrophosphoramide	Diphosphoramide, octamethyl-	152-16-9	P085
Osmium tetroxide	Osmium oxide OsO_4, (T-4)-	20816-12-0	P087
Paraldehyde	1,3,5-Trioxane, 2,4,6-trimethyl-	123-63-7	U182
Parathion	Phosphorothioic acid, O,O-diethyl O-(4-nitrophenyl) ester.	56-38-2	P089
Pentachlorobenzene	Benzene, pentachloro-	608-93-5	U183
Pentachlorodibenzo-p-dioxins			
Pentachlorodibenzofurans			
Pentachloroethane	Ethane, pentachloro-	76-01-7	U184
Pentachloronitrobenzene (PCNB)	Benzene, pentachloronitro-	82-68-8	U185
Pentachlorophenol	Phenol, pentachloro-	87-86-5	See F027
Phenacetin	Acetamide, N-(4-ethoxyphenyl)-	62-44-2	U187
Phenol	Same	108-95-2	U188
Phenylenediamine	Benzenediamine	25265-76-3	
Phenylmercury acetate	Mercury, (acetato-O)phenyl-	62-38-4	P092
Phenylthiourea	Thiourea, phenyl-	103-85-5	P093
Phosgene	Carbonic dichloride	75-44-5	P095
Phosphine	Same	7803-51-2	P096
Phorate	Phosphorodithioic acid, O,O-diethyl S-[(ethylthio)methyl] ester.	298-02-2	P094
Phthalic acid esters, N.O.S.[1]			
Phthalic anhydride	1,3-Isobenzofurandione	85-44-9	U190
2-Picoline	Pyridine, 2-methyl-	109-06-8	U191
Polychlorinated biphenyls, N.O.S.[1]			
Potassium cyanide	Potassium cyanide K(CN)	151-50-8	P098
Potassium silver cyanide	Argentate(1-), bis(cyano-C)-, potassium	506-61-6	P099
Pronamide	Benzamide, 3,5-dichloro-N-(1,1-dimethyl-2-propynyl)-.	23950-58-5	U192
1,3-Propane sultone	1,2-Oxathiolane, 2,2-dioxide	1120-71-4	U193
n-Propylamine	1-Propanamine	107-10-8	U194
Propargyl alcohol	2-Propyn-1-ol	107-19-7	P102
Propylene dichloride	Propane, 1,2-dichloro-	78-87-5	U083
1,2-Propylenimine	Aziridine, 2-methyl-	75-55-8	P067
Propylthiouracil	4(1H)-Pyrimidinone, 2,3-dihydro-6-propyl-2-thioxo-.	51-52-5	
Pyridine	Same	110-86-1	U196
Reserpine	Yohimban-16-carboxylic acid, 11,17-dimethoxy-18-[(3,4,5-trimethoxybenzoyl)oxy]-smethyl ester, (3beta,16beta,17alpha,18beta,20alpha)-.	50-55-5	U200
Resorcinol	1,3-Benzenediol	108-46-3	U201
Saccharin	1,2-Benzisothiazol-3(2H)-one, 1,1-dioxide	81-07-2	U202
Saccharin salts			U202
Safrole	1,3-Benzodioxole, 5-(2-propenyl)-	94-59-7	U203
Selenium	Same	7782-49-2	
Selenium compounds, N.O.S.[1]			
Selenium dioxide	Selenious acid	7783-00-8	U204
Selenium sulfide	Selenium sulfide SeS_2	7488-56-4	U205
Selenourea	Same	630-10-4	P103
Silver	Same	7440-22-4	
Silver compounds, N.O.S.[1]			
Silver cyanide	Silver cyanide Ag(CN)	506-64-9	P104
Silvex (2,4,5-TP)	Propanoic acid, 2-(2,4,5-trichlorophenoxy)-	93-72-1	See F027
Sodium cyanide	Sodium cyanide Na(CN)	143-33-9	P106
Streptozotocin	D-Glucose, 2-deoxy-2-[[(methylnitrosoamino)carbonyl]amino]-.	18883-66-4	U206
Strontium sulfide[2]	Strontium sulfide SrS	1314-96-1	P107
Strychnine	Strychnidin-10-one	57-24-9	P108
Strychnine salts			P108
TCDD	Dibenzo[b,e][1,4]dioxin, 2,3,7,8-tetrachloro-	1746-01-6	
1,2,4,5-Tetrachlorobenzene	Benzene, 1,2,4,5-tetrachloro-	95-94-3	U207
Tetrachlorodibenzo-p-dioxins			
Tetrachlorodibenzofurans			
Tetrachloroethane, N.O.S.[1]	Ethane, tetrachloro-, N.O.S.	25322-20-7	

Common name	Chemical abstracts name	Chemical abstracts No.	Hazardous waste No.
1,1,1,2-Tetrachloroethane	Ethane, 1,1,1,2-tetrachloro-	630-20-6	U208
1,1,2,2-Tetrachloroethane	Ethane, 1,1,2,2-tetrachloro-	79-34-5	U209
Tetrachloroethylene	Ethene, tetrachloro-	127-18-4	U210
2,3,4,6-Tetrachlorophenol	Phenol, 2,3,4,6-tetrachloro-	58-90-2	See F027
Tetraethyldithiopyrophosphate	Thiodiphosphoric acid, tetraethyl ester	3689-24-5	P109
Tetraethyl lead	Plumbane, tetraethyl-	78-00-2	P110
Tetraethyl pyrophosphate	Diphosphoric acid, tetraethyl ester	107-49-3	P111
Tetranitromethane	Methane, tetranitro-	509-14-8	P112
Thallium	Same	7440-28-0	
Thallium compounds, N.O.S.[1]			
Thallic oxide	Thallium oxide Tl_2O_3	1314-32-5	P113
Thallium(I) acetate	Acetic acid, thallium(1+) salt	563-68-8	U214
Thallium(I) carbonate	Carbonic acid, dithallium(1+) salt	6533-73-9	U215
Thallium(I) chloride	Thallium chloride TlCl	7791-12-0	U216
Thallium(I) nitrate	Nitric acid, thallium(1+) salt	10102-45-1	U217
Thallium selenite	Selenious acid, dithallium(1+) salt	12039-52-0	P114
Thallium(I) sulfate	Sulfuric acid, dithallium(1+) salt	7446-18-6	P115
Thioacetamide	Ethanethioamide	62-55-5	U218
Thiofanox	2-Butanone, 3,3-dimethyl-1-(methylthio)-, 0-[(methylamino)carbonyl] oxime.	39196-18-4	P045
Thiomethanol	Methanethiol	74-93-1	U153
Thiophenol	Benzenethiol	108-98-5	P014
Thiosemicarbazide	Hydrazinecarbothioamide	79-19-6	P116
Thiourea	Same	62-56-6	U219
Thiram	Thioperoxydicarbonic diamide $[(H_2N)C(S)]_2S_2$, tetramethyl-.	137-26-8	U244
Toluene	Benzene, methyl-	108-88-3	U220
Toluenediamine	Benzenediamine, ar-methyl-	25376-45-8	U221
Toluene-2,4-diamine	1,3-Benzenediamine, 4-methyl-	95-80-7	
Toluene-2,6-diamine	1,3-Benzenediamine, 2-methyl-	823-40-5	
Toluene-3,4-diamine	1,2-Benzenediamine, 4-methyl-	496-72-0	
Toluene diisocyanate	Benzene, 1,3-diisocyanatomethyl-	26471-62-5	U223
o-Toluidine	Benzenamine, 2-methyl-	95-53-4	U328
o-Toluidine hydrochloride	Benzenamine, 2-methyl-, hydrochloride	636-21-5	U222
p-Toluidine	Benzenamine, 4-methyl-	106-49-0	U353
Toxaphene	Same	8001-35-2	P123
1,2,4-Trichlorobenzene	Benzene, 1,2,4-trichloro-	120-82-1	
1,1,2-Trichloroethane	Ethane, 1,1,2-trichloro-	79-00-5	U227
Trichloroethylene	Ethene, trichloro-	79-01-6	U228
Trichloromethanethiol	Methanethiol, trichloro-	75-70-7	P118
Trichloromonofluoromethane	Methane, trichlorofluoro-	75-69-4	U121
2,4,5-Trichlorophenol	Phenol, 2,4,5-trichloro-	95-95-4	See F027
2,4,6-Trichlorophenol	Phenol, 2,4,6-trichloro-	88-06-2	See F027
2,4,5-T	Acetic acid, (2,4,5-trichlorophenoxy)-	93-76-5	See F027
Trichloropropane, N.O.S.[1]		25735-29-9	
1,2,3-Trichloropropane	Propane, 1,2,3-trichloro-	96-18-4	
O,O,O-Triethyl phosphorothioate	Phosphorothioic acid, O,O,O-triethyl ester	126-68-1	
1,3,5-Trinitrobenzene	Benzene, 1,3,5-trinitro-	99-35-4	U234
Tris(1-aziridinyl)phosphine sulfide	Aziridine, 1,1',1''-phosphinothioylidynetris-	52-24-4	
Tris(2,3-dibromopropyl) phosphate	1-Propanol, 2,3-dibromo-, phosphate (3:1)	126-72-7	U235
Trypan blue	2,7-Naphthalenedisulfonic acid, 3,3'-[(3,3'-dimethyl[1,1'-biphenyl]-4,4'-diyl)bis(azo)]-bis[5-amino-4-hydroxy-, tetrasodium salt.	72-57-1	U236
Uracil mustard	2,4-(1H,3H)-Pyrimidinedione, 5-[bis(2-chloroethyl)amino]-.	66-75-1	U237
Vanadium pentoxide	Vanadium oxide V_2O_5	1314-62-1	P120
Vinyl chloride	Ethene, chloro-	75-01-4	U043
Warfarin	2H-1-Benzopyran-2-one, 4-hydroxy-3-(3-oxo-1-phenylbutyl)-, when present at concentrations less than 0.3%.	81-81-2	U248
Warfarin	2H-1-Benzopyran-2-one, 4-hydroxy-3-(3-oxo-1-phenylbutyl)-, when present at concentrations greater than 0.3%.	81-81-2	P001
Warfarin salts, when present at concentrations less than 0.3%.			U248
Warfarin salts, when present at concentrations greater than 0.3%.			P001
Zinc cyanide	Zinc cyanide $Zn(CN)_2$	557-21-1	P121
Zinc phosphide	Zinc phosphide Zn_3P_2, when present at concentrations greater than 10%.	1314-84-7	P122

Common name	Chemical abstracts name	Chemical abstracts No.	Hazardous waste No.
Zinc phosphide	Zinc phosphide Zn_3P_2, when present at concentrations of 10% or less.	1314-84-7	U249

[1] The abbreviation N.O.S. (not otherwise specified) signifies those members of the general class not specifically listed by name in this appendix.

[2] At 53 FR 43884, Oct. 31, 1988, Appendix VIII was amended by removing the listing: "Stontium sulfide * * * Same * * * 1314—96—1.". The amendatory instruction in that document was incorrect and the Environmental Protection Agency will publish a correction document in the FEDERAL REGISTER at a later date.

[53 FR 13388, Apr. 22, 1988, as amended at 53 FR 43881, Oct. 31, 1988; 54 FR 50978, Dec. 11, 1989]

APPENDIX IX—WASTES EXCLUDED UNDER §§ 260.20 AND 260.22

TABLE 1—WASTES EXCLUDED FROM NON-SPECIFIC SOURCES

Facility	Address	Waste description
Arco Building Products.	Sugarcreek, Ohio.	Dewatered wastewater treatment sludge (EPA Hazardous Waste No. F019) generated from the chemical conversion coating of aluminum after August 15, 1986.
Arco Chemical Co.	Miami, FL	Dewatered wastewater treatment sludge (EPA Hazardous Waste No. FO19) generated from the chemical conversion coating of aluminum after April 29, 1986.
BBC Brown Boveri, Inc.	Sanford, FL	Dewatered Wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations after October 17, 1986.
Boeing Commercial Airplane Co.	Auburn, Washington.	Residually contaminated soils in an inactive sludge pile containment area on March 27, 1990, previously used to store wastewater treatment sludges generated from electroplating operations (EPA Hazardous Waste No. F006).
Bommer Industries Inc..	Landrum, SC	Wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from their electroplating operations and contained in evaporation ponds #1 and #2 on August 12, 1987.
Capitol Products Corp.	Harrisburg, PA	Dewatered wastewater treatment slugdges (EPA Hazardous Waste No. FO19) generated from the chemical conversion coating of aluminum after September 12, 1986.
Capitol Products Corporation.	Kentland, IN	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F019) generated from the chemical conversion coating of aluminum after November 17, 1986.
Chamberlian-Featherlite, Inc.	Hot Springs, AR.	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F019) generated from the chemical conversion coating of aluminum after July 16, 1986.
Cincinnati Metropolitan Sewer District.	Cincinnati, OH	Sluiced bottom ash (approximately 25,000 cubic yards) contained in the South Lagoon, on September 13, 1985 which contains EPA Hazardous Waste Nos. F001, F002, F003, F004, and F005.
Clay Equipment Corporation.	Cedar Falls, Iowa.	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F006) and spent cyanide bath solutions (EPA Hazardous Waste No. F009) generated from electroplating operations and disposed of in an on-site surface impoundment. This is a onetime exclusion. This exclusion was published on August 1, 1989.
Continental Can Co.	Olympia, WA	Dewatered wastewater treatment sludges (DPA Hazardous Waste No. FO19) generated from the chemical conversion coating of aluminum after September 12, 1986.
Dover Corp., Norns Div.	Tulsa, OK	Dewatered wastewater treatment sludge (EPA Hazardous Waste No. FO06) generated from their electroplating operations after April 29, 1986.
Eli Lilly and Company..	Clinton, Indiana..	Incinerator scrubber liquids, entering and contained in their onsite surface impoundment, and solids settling from these liquids originating from the burning of spent solvents (EPA Hazardous Waste Nos. F002, F003, and F005) contained in their onsite surface impoundment and solids retention area on August 18, 1988 and any new incinerator scubber liquids and settled solids generated in the surface impoundment and and disposed of in the retention are after August 12, 1988.
EPA's Mobile Incineration System.	Denney Farm Site; McDowell, MO.	Process wastewater, rotary kiln ash, CHEAF media, and other solids (except spent activated carbon) (EPA Hazardous Waste Nos. F020, F022, F023, F026, F027, and F028) generated during the field demonstration of EPA's Mobile Incinerator at the Denney Farm Site in McDowell, Missouri, after July 25, 1985, so long as: (1) The incinerator is functioning properly; (2) a grab sample is taken from each tank of wastewater generated and the EP leachate values do not exceed 0.03 ppm for mercury, 0.14 ppm for selenium, and 0.68 ppm for chromium; and (3) a grab sample is taken from each drum of soil or ash generated and a core sample is collected from each CHEAF roll generated and the EP leachate values of daily composites do not exceed 0.044 ppm in ash or CHEAF media for mercury or 0.22 ppm in ash or CHEAF media for selenium.

TABLE 1—WASTES EXCLUDED FROM NON-SPECIFIC SOURCES—Continued

Facility	Address	Waste description
EPA's Mobile Incineration System (MIS).	McDowell, MO..	Kiln ash, cyclone ash, separator sludge, and filtered wastewater (except spent activated carbon) (EPA Hazardous Waste No. F027) generated during the treatment of cancelled pesticides containing 2,4,5-T and Silvex and related materials by the EPA's Mobile Incineration System at the Denney Farm Site in McDowell, Missouri after March 11, 1988, so long as: (1) the incinerator is monitored continuously and is in compliance with operating permit conditions. Should the incinerator fail to comply with the permit conditions relevant to the mechanical operation of the incinerator, RCB must test the residues generated during the run when the failure occurred according to the requirements of Conditions (2) through (5), regardless of whether or not the demonstration in Condition (6) has been made; (2) Four grab samples of wastewater must be composited from the volume of filtered wastewater collected after each eight hour run and, prior to disposal, the composite samples analyzed for the EP toxic metals, nickel, and cyanide. If arsenic, chromium, lead, and silver EP leachate test results exceed 0.44 ppm; barium levels exceed 8.8 ppm; cadmium and selenium levels exceed 0.09 ppm; mercury levels exceed 0.02 ppm; nickel levels exceed 4.4 ppm; or cyanide levels exceed 1.8 ppm, the wastewater must be retreated to achieve these levels or must be disposed in accordance with Subtitle C of RCRA. Analyses must be performed according to SW-846 methodologies. (3) One grab sample must be taken from each drum of kiln ash generated during each eight hour run; all grabs collected during a given eight hour run must then be composited to form one composite sample. One grab sample must be taken from each drum of cyclone ash generated during each eight hour run; all grabs collected during a given eight hour run must then be composited to form one composite sample. A composite sample of four grab samples of the separator sludge must be collected at the end of each eight hour run. Prior to the disposal of the residues from each eight hour run, an EP leachate test must be performed on these composite samples and the leachate analyzed for the EP toxic metals, nickel, and cyanide. If arsenic, chromium, lead, and silver EP leachate test results exceed 1.6 ppm; barium levels exceed 32 ppm; cadmium and selenium levels exceed 0.3 ppm; mercury levels exceed 0.07 ppm; nickel levels exceed 16 ppm; or cyanide levels exceed 6.5 ppm, the wastes must be retreated to achieve these levels or must be disposed in accordance with Subtitle C of RCRA. Analyses must be performed according to SW-846 methodologies. (4) RCB must generate, prior to disposal of residues, verification data from each eight hour run for each treatment residue (*i.e.*, kiln ash, cyclone ash, separator sludge, and filtered wastewater) to demonstrate that the maximum allowable treatment residue concentrations listed below are not exceeded. Samples must be collected as specified in conditions (2) and (3). Analyses must be performed according to SW-846 methodologies. Any residues which exceed any of the levels listed below must be retreated or must be disposed as hazardous. Solid and sludge concentrations must not exceed the following levels: Aldrin—0.015 ppm Benzene—9.7 ppm Benzo(a)pyrene—0.43 ppm Benzo(b)fluoranthene—1.8 ppm Chlordane—0.37 ppm Chloroform—5.4 ppm Chrysene—170 ppm Dibenz(a,h)anthracene—0.083 ppm 1,2-Dichloroethane—4.1 ppm Dichloromethane—2.4 ppm 2,4-Dichlorophenol—480 ppm Dichlorvos—260 ppm Disulfaton—23 ppm Endosulfan I—310 ppm Fluorene—120 ppm Indeno(1,2,3-cd)pyrene—330 ppm Methyl parathion—210 ppm Nitrosodiphenylamine—130 ppm Phenanthrene—150 ppm Polychlorinated biphenyls—0.31 ppm Tetrachloroethylene—59 ppm 2,4,5-TP (silvex)—110 ppm 2,4,6-Trichlorophenol—3.9 ppm. And detected wastewater concentrations do not exceed the following levels: Acetone—35 ppm Aldrin—0.000018 ppm Benzene—0.044 ppm

TABLE 1—WASTES EXCLUDED FROM NON-SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		Benzo(a)pyrene—0.000027 ppm Benzo(b)fluoranthene—0.00018 ppm Biphenyl—15 ppm Bis-2-ethylhexyl phthalate—6.2 ppm Chlordane—0.00024 ppm Chlorobenzene—8.8 ppm Chloroform—0.052 ppm Chrysene—0.0018 ppm 2,4-D—3.5 ppm Dibenz(a,h)anthracene—0.000006 ppm Dichloromethane—0.042 ppm 1,3-Dichlorobenzene—34 ppm 1,4-Dichlorobenzene—0.66 ppm 1,2-Dichlorobenzene—26 ppm 1,2-Dichloroethane—0.044 ppm 2,4-Dichlorophenol—0.88 ppm Dichlorvos—0.78 ppm Diethyl phthalate—4,400 ppm Disulfaton—0.016 ppm Endosulfan I—0.020 ppm Ethyl benzene—35 ppm Fluoranthene—1.8 ppm Fluorene—0.018 ppm Indeno(1,2,3-cd)pyrene—0.0018 ppm Isophorone—62 ppm Methyl chloride—35 ppm Methyl parathion—0.099 ppm Naphthalene—80 ppm Nitrosodiphenylamine—0.063 ppm Pentachlorophenol—8.8 ppm Phenanthrene—0.018 ppm Phenol—8.8 ppm Polychlorinated biphenyls—0.000072 ppm Pyrene—35 ppm Tetrachloroethylene—0.059 ppm 2,3,4,6-Tetrachlorophenol—8.8 ppm Toluene—88 ppm 2,4,5-TP (silvex)—0.088 ppm 1,2,4-Trichlorobenzene—6.2 ppm 2,4,6-Trichlorophenol—0.018 ppm 2,4,5-Trichlorophenol—35 ppm 2,4,5-Trichlorophenoxyacetic acid—0.88 ppm Xylene—619 ppm; (5) RCB must generate, prior to disposal of residues, verification data from each eight hour run for each treatment residue (*i.e.*, kiln ash, cyclone ash, separator sludge, and filtered wastewater) to demonstrate that the residues do not contain tetra-, penta-, or hexachlorodibenzo-p-dioxins or furans at levels of regulatory concern. Samples must be collected as specified in conditions (2) and (3). The TCDD equivalent levels for solids must be less than 5 ppt and for wastewater the levels must be below 0.002 ppt. Any residues with detected dioxins or furans in excess of these levels must be retreated or must be disposed as acutely hazardous. Method 8290, a high resolution gas chromatography and high resolution mass spectroscopy (HRGC/HRMS) analytical method, must be used. For tetra- and penta-chlorinated dioxin and furan homologs, the maximum practical quantitation limit must not exceed 15 ppt for solids and 120 ppq for wastewaters. For hexachlorinated dioxin and furan homologs, the maximum practical quantitation limit must not exceed 37 ppt for solids and 0.3 ppt for wastewaters; (6) The test data from conditions (1), (2), (3), (4) and (5) must be kept on file by RCB for inspection purposes and must be compiled, summarized, and submitted to the Assistant Administrator for Solid Waste and Emergency Response by certified mail on a monthly basis and when the treatment of the cancelled pesticides and related materials is concluded. The testing requirements for conditions (2), (3), (4), and (5) will continue until RCB provides the Assistant Administrator with the results of four consecutive batch analyses for the petitioned wastes, none of which exceed the maximum allowable treatment residue concentrations listed in these conditions and the Assistant Administrator notifies RCB that the conditions have been lifted. All data submitted will be placed in the RCRA docket.

TABLE 1—WASTES EXCLUDED FROM NON-SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		(7) RCB must provide a signed copy of the following certification statement when submitting data in response to the conditions listed above: "Under civil and criminal penalty of law for the making or submission of false or fraudulent statements or representations, I certify that the information contained in or accompanying this document is true, accurate, and complete. As to the (those) identified section(s) of this document for which I cannot personally verify its (their) accuracy, I certify as the Agency official having supervisory responsibility for the persons who, acting under my direct instructions, made the verification that this information is true, accurate and complete."
Envirite Corporation.	Canton, Ohio; Harvey, Illinois; Thomaston, Connecticut; and York, PA.	Dewatered wastewater sludges (EPA Hazardous Waste No. F006) generated from electroplating operations; spent cyanide plating solutions (EPA Hazardous Waste No. F007) generated from electroplating operations; plating bath residues from the bottom of plating baths (EPA Hazardous Waste No. F008) generated from electroplating operations where cyanides are used in the process; spent stripping and cleaning bath solutions (EPA Hazardous Waste No. F009) generated from electro-plating operations where cyanides are used in the process; spent cyanide solutions from salt bath pot cleaning (EPA Hazardous Waste No. F011) generated from Metal heat treating operations; quenching wastewater treatment sludges (EPA Hazardous Waste No. F012) generated from metal heat treating where cyanides are used in the process; wastewater treatment sludges (EPA Hazardous Waste No. F019) generated from the chemical conversion coating of aluminum after November 14, 1986. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern, the facility must implement a contingency testing program for the petitioned wastes. This testing program must meet the following conditions for the exclusions to be valid: (1) Each batch of treatment residue must be representatively sampled and tested using the EP Toxicity test for arsenic, barium, cadmium, chromium, lead, selenium, silver, mercury, and nickel. If the extract concentrations for chromium, lead, arsenic, and silver exceed 0.315 ppm; barium levels exceed 6.3 ppm; cadmium and selenium exceed 0.063 ppm; mercury exceeds 0.0126 ppm; or nickel levels exceed 2.205 ppm, the waste must be re-treated or managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. (2) Each batch of treatment residue must be tested for reactive and leachable cyanide. If the reactive cyanide levels exceed 250 ppm or leachable cyanide levels (using the EP Toxicity test without acetic acid adjustment) exceed 1.26 ppm, the waste must be re-treated or managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. (3) Each batch of waste must be tested for the total content of specific organic toxicants. If the total content of anthracene exceeds 76.8 ppm, 1,2-diphenyl hydrazine exceeds 0.001 ppm, methylene chloride exceeds 8.18 ppm, methyl ethyl ketone exceeds 326 ppm, n-nitrosodiphenylamine exceeds 11.9 ppm, phenol exceeds 1,566 ppm, tetrachloroethylene exceeds 0.188 ppm, or trichloroethylene exceeds 0.592 ppm, the waste must be managed and disposed as a hazardous waste under 40 CFR Parts 262 and 265 and the permitting standards of 40 CFR Part 270. (4) A grab sample must be collected from each batch to form one monthly composite sample which must be tested using GC/MS analysis for the compounds listed in #3 above as well as the remaining organics on the priority pollutant list. (See 47 FR 52309 November 19, 1982, for a list of the priority pollutants.) (5) The data from conditions 1-4 must be kept on file at the facility for inspection purposes and must be compiled, summarized, and submitted to the Administrator by certified mail semi-annually. The Agency will review this information and if needed will propose to modify or withdraw the exclusion. The organics testing described in conditions 3 and 4 above are not required until six months from the date of promulgation. The Agency's decision to conditionally exclude the treatment residue generated from the wastewater treatment systems at these facilities applies only to the wastewater and solids treatment systems as they presently exist as described in the delisting petition. The exclusion does not apply to the proposed process additions described in the petition as recovery including crystalization, electrolytic metals recovery, evaporative recovery, and ion exchange.
Falconer Glass Indust., Inc.	Falconer, NY	Wastewater treatment sludges from the filter press and magnetic drum separator (EPA Hazardous Waste No. F006) generated from electroplating operations after July 16, 1986.
Florida Production Engineering Company.	Daytona Beach, Florida.	This is a one-time exclusion. Wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations and contained in four on-site trenches on January 23, 1987.
General Cable Co.	Muncie, IN	Dewatered wastewater treatment sludges (EPA Hazardous Waste Nos. F006 and K062) generated from electroplating operations and steel finishing operations after October 24, 1986. This exclusion does not apply to sludges in any on-site impoundments as of this date.

TABLE 1—WASTES EXCLUDED FROM NON-SPECIFIC SOURCES—Continued

Facility	Address	Waste description
General Electric Company.	Shreveport Louisiana.	Wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations and contained in four on-site treatment ponds on August 12, 1987.
General Motors Corp., Fisher Body Division.	Elyria, OH	The residue generated from the use of the Chemfix* treatment process on sludge (EPA Hazardous Waste No. F006) generated from electroplating operations and contained in three on-site surface impoundments on November 14, 1986. To assure that stabilization occurs, the following conditions apply to this exclusion: (1) Mixing ratios shall be monitored continuously to assure consistent treatment. (2) One grab sample of the treated waste shall be taken each hour as it is pumped to the holding area (cell) from each trailer unit. At the end of each production day, the grab samples from the individual trailer units will be composited and the EP toxicity test will be run on each composite sample. If lead or total chromium concentrations exceed 0.315 ppm or if nickel exceeds 2.17 ppm, in the EP extract, the waste will be removed and retreated or disposed of as a hazardous waste. (3) The treated waste shall be pumped into bermed cells which are constructed to assure that the treated waste is identifiable and retrievable (*i.e.*, the material can be removed and either disposed of as a hazardous waste or retreated if conditions 1 or 2 are not met). Failure to satisfy any of these conditions would render the exclusion void. This is a one-time exclusion, applicable only to the residue generated from the use of the Chemfix* treatment process on the sludge currently contained in the three on-site surface impoundments.
Goodyear Tire and Rubber Co..	Randleman, NC..	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations.
Gould, Inc	McConnelsville, OH.	Wastewater treatment sludge (EPA Hazardous Waste No. F006) generated from electroplating operations after November 27, 1985.
Hanover Wire Cloth Division.	Hanover, Pennsylvania.	Dewatered filter cake (EPA Hazardous Waste No. F006) generated from electroplating operations after August 15, 1986.
Holston Army Ammunition Plant.	Kingsport, Tennessee.	Dewatered wastewater treatment sludges (EPA Hazardous Waste Nos. F003, F005, and K044) generated from the manufacturing and processing of explosives and containing spent non-halogenated solvents after November 14, 1986.
Imperial Clevite.	Salem, IN	Solid resin cakes containing EPA Hazardous Waste No. F002 generated after August 27, 1985, from solvent recovery operations.
International Minerals and Chemical Corporation.	Terre Haute, Indiana.	Spent non-halogenated solvents and still bottoms (EPA Hazardous Waste No. F003) generated from the recovery of n-butyl alchohol after August 15, 1986.
Kay-Fries, Inc	Stoney Point, NY.	Biological aeration lagoon sludge and filter press sludge generated after September 21, 1984, which contain EPA Hazardous Waste Nos. F003 and F005 as well as that disposed of in a holding lagoon as of September 21, 1984.
Keymark Corp	Fonda, NY	Wastewater treatment sludge (EPA Hazardous Waste No. F019) generated from chemical conversion coating of aluminum after November 27, 1985.
Keymark Corp	Fonda, New York.	Wastewater treatment sludges (EPA Hazardous Waste No. F019) generated from the chemical conversion coating of aluminum and contained in an on-site impoundment on August 12, 1987. This is a one-time exclusion.
Lederle Laboratories..	Pearl River, NY..	Spent non-halogenated solvents and still bottoms (EPA Hazardous Waste Nos. F003 and F005) generated from the recovery of the following solvents: Xylene, acetone, ethyl acetate, ethyl ether, methyl isobutyl ketone, n-butyl alcohol, cyclohexanone, methanol, toluene, and pyridine after August 2, 1988. Excusion applies to primary and secondary filter press sludges and compost soils generated from these sludges.
Lincoln Plating Company.	Lincoln, NE	Wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations after November 17, 1986.
Loxcreen Company, Inc.	Hayti, MO	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F019) generated from the chemical conversion coating of aluminum after July 16, 1986.
Marquette Electronics Incorporated..	Milwaukee, Wisconsin..	Wastewater treatment sludge (EPA Hazardous Waste No. F006) generated from electroplating operations. This exclusion was published on April 20, 1989.
Martin Marietta Aerospace.	Ocala, Florida	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations after January 23, 1987.
Mason Chamberlain, Incorporated.	Bay St. Louis, Mississippi.	Wastewater treatment sludge filter cake (EPA Hazardous Waste No. F019) generated (at a maximum annual rate of 1,262 cubic yards) from the chemical conversion coating of aluminum. This exclusion was published on October 27, 1989.

TABLE 1—WASTES EXCLUDED FROM NON-SPECIFIC SOURCES—Continued

Facility	Address	Waste description
Merck & Company, Incorporated.	Elkton, Virginia.	One-time exclusion for fly ash (EPA Hazardous Waste No. F002) from the incineration of wastewater treatment sludge generated from pharmaceutical production processes and stored in an on-site fly ash lagoon. This exclusion was published on May 12, 1989.
Maytag Company.	Newton, IA	Wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations and wastewater treatment sludges (EPA Hazardous Waste No. F019) generated from the chemical conversion coating of aluminum November 17, 1986.
Metropolitan Sewer District of Greater Cincinnati.	Cincinnati, OH	Sluiced bottom ash sludge (approximately 25,000 cubic yards), contained in the North Lagoon, on September 21, 1984, which contains EPA Hazardous Wastes Nos. F001, F002, F003, F004, and F005.
Michelin Tire Corp.	Sandy Springs, South Carolina.	Dewatered wastewater treatment sludge (EPA Hazardous Wastes No. F006) generated from electroplating operations after November 14, 1986.
Monroe Auto Equipment.	Paragould, AR	Wastewater treatment sludge (EPA Hazardous Waste No. F006) generated from electroplating operations after vacuum filtration after November 27, 1985. This exclusion does not apply to the sludge contained in the on-site impoundment.
North American Philips Consumer Electronics Corporation.	Greenville, Tennessee.	Wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations. This exclusion was published on April 20, 1989.
Pamcor C, Inc	Las Piedras, PR.	Dewatered Wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations after October 17, 1986.
Plastene Supply Company.	Portageville, Missouri.	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations after August 15, 1986.
Reynolds Metals Company.	Sheffield, AL	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F019) generated from the chemical conversion coating of aluminum after August 15, 1986.
Siegel-Robert, Inc.	St. Louis, MO	Wastewater treatment sludge (EPA Hazardous Waste No. F006) generated from electroplating operations after November 27, 1985.
Square D Company.	Oxford, Ohio	Dewatered filter press sludge (EPA Hazardous Waste No. F006) generated from electroplating operations after August 15, 1986.
Syntex Agribusiness.	Springfield, MO.	Kiln ash, cyclone ash, separator sludge, and filtered wastewater (except spent activiated carbon) (EPA Hazardous Waste No. F020 generated during the treatment of wastewater treatment sludge by the EPA's Mobile Incineration System at the Denney Farm Site in McDowell, Missouri after June 2, 1988, so long as: (1) The incinerator is monitored continuously and is in compliance with operating permit conditions. Should the incinerator fail to comply with the permit conditions relevant to the mechanical operation of the incinerator, Syntex must test the residues generated during the run when the failure occurred according to the requirements of Conditions (2) through (6), regardless of whether or not the demonstration in Condition (7) has been made. (2) Four grab samples of wastewater must be composited from the volume of filtered wastewater collected after each eight hour run and, prior to disposal the composite samples must be analyzed for the EP toxic metals, nickel, and cyanide. If arsenic, chromium, lead, and silver EP leachate test results exceed 0.61 ppm; barium levels exceed 12 ppm; cadmium and selenium levels exceed 0.12 ppm; mercury levels exceed 0.02 ppm; nickel levels exceed 6.1 ppm; or cyanide levels exceed 2.4 ppm, the wastewater must be retreated to achieve these levels or must be disposed in accordance with all applicable hazardous waste regulations. Analyses must be performed according to SW-846 methodologies. (3) One grab sample must be taken from each drum of kiln and cyclone ash generated during each eight hour run; all grabs collected during a given eight hour run must then be composited to form one composite sample. A composite sample of four grab samples of the separator sludge must be collected at the end of each eight hour run. Prior to the disposal of the residues from each eight hour run, an EP leachate test must be performed on these composite samples and the leachate analyzed for the EP toxic metals, nickel, and cyanide (using a distilled water extraction for the cyanide extraction) to demonstrate that the following maximum allowable treatment residue concentrations listed below are not exceeded. Analyses must be performed according to SW-846 methodologies. Any residues which exceed any of the levels listed below must be retreated to achieve these levels or must be disposed in accordance with all applicable hazardous waste regulations. Maximum Allowable Solids Treatment Residue EP Leachate Concentrations (mg/L) Arsenic—1.6 Barium—32 Cadmium—0.32

TABLE 1—WASTES EXCLUDED FROM NON-SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		Chromium—1.6 Lead—1.6 Mercury—0.065 Nickel—16 Selenium—0.32 Silver—1.6 Cyanide—6.5 (4)—If Syntex stabilizes any of the kiln and cyclone ash or separator sludge, a Portland cement-type stabilization process must be used and Syntex must collect a composite sample of four grab samples from each batch of stabilized waste. An MEP leachate test must be performed on these composite samples and the leachate analyzed for the EP toxic metals, nickel, and cyanide (using a distilled water extraction for the cyanide leachate analysis) to demonstrate that the maximum allowable treatment residue concentrations listed in Condition (3) are not exceeded during any run of the MEP extraction. Analyses must be performed according to SW-846 methodologies. Any residues which exceed any of the levels listed in Condition (3) must be retreated to achieve these levels or must be disposed in accordance with all applicable hazardous waste regulations. (If the residues are stabilized, the analyses required in this condition supercede the analyses required in Condition (3).) (5) Syntex must generate, prior to disposal of residues, verification data from each eight hour run from each treatment residue (*i.e.*, kiln and cyclone ash, separator sludge, and filtered wastewater) to demonstrate that the maximum allowable treatment residue concentrations listed below are not exceeded. Samples must be collected as specified in Conditions (2) and (3). Analyses must be performed according to SW-846 methodologies. Any solid or liquid residues which exceed any of the levels listed below must be retreated to achieve these levels or must be disposed in accordance with Subtitle C of RCRA. Maximum Allowable Wastewater Concentrations (ppm): Benz(a)anthracene—1×10^{-4} Benzo(a)pyrene—4×10^{-5} Benzo(b)fluoranthene—2×10^{-4} Chloroform—0.07 Chrysene—0.002 Dibenz(a,h)anthracene—9×10^{-6} 1,2-Dichloroethane—0.06 Dichloromethane—0.06 Indeno(1,2,3-cd)pyrene—0.002 Polychlorinated biphenyls—1×10^{-4} 1,2,4,5-Tetrachlorobenzene—0.13 2,3,4,6-Tetrachlorophenol—12 Toluene—120 Trichloroethylene—0.04 2,4,5-Trichlorophenol—49 2,4,6-Trichlorophenol—0.02 Maximum Allowable Solid Treatment Residue Concentrations (ppm): Benz(a)anthracene—1.1 Benzo(a)pyrene—0.43 Benzo(b)fluoranthene—1.8 Chloroform—5.4 Chrysene—170 Dibenz(a,h)anthracene—0.083 Dichloromethane—2.4 1,2-Dichloroethane—4.1 Indeno(1,2,3-cd)pyrene—330 Polychlorinated biphenyls—0.31 1,2,4,5-Tetrachlorobenzene—720 Trichloroethylene—6.6 2,4,6-Trichlorophenol—3.9 (6) Syntex must generate, prior to disposal of residues, verification data from each eight hour run for each treatment residue (*i.e.*, kiln and cyclone ash, separator sludge, and filtered wastewater) to demonstrate that the residues do not contain tetra-, penta-, or hexachloro-dibenzo-p-dioxins or furans at levels of regulatory concern. Samples must be collected as specified in Conditions (2) and (3). The TCDD equivalent levels for wastewaters must be less than 2 ppq and less than 5 ppt for the solid treatment residues. Any residues with detected dioxins or furans in excess of these levels must be retreated or must be disposed as acutely hazardous. Method 8290, a high resolution gas chromatography and high resolution mass spectroscopy (HRGC/HRMS) analytical method, must be used. For tetra- and pentachloronated dioxin and furan homologs, the maximum practical quantitation limit must not exceed 15 ppt for solids and 120 ppq for wastewaters. For hexachlorinated homologs, the maximum practical quantitation limit must not exceed 37 ppt for solids and 300 ppq for wastewaters.

TABLE 1—WASTES EXCLUDED FROM NON-SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		(7)(A) The test data from Conditions (1), (2), (3), (4), (5) and (6) must be kept on file by Syntex for inspection purposes and must be compiled, summarized, and submitted to the Section Chief, Variances Section, PSPD/OSW (WH-563), US EPA, 401 M Street, S.W., Washington, D.C. 20460 by certified mail on a monthly basis and when the treatment of the lagoon sludge is concluded. All data submitted will be placed in the RCRA docket. (B) The testing requirements for Conditions (2), (3), (4), (5), and (6) will continue until Syntex provides the Section Chief, Variances Section, with the results of four consecutive batch analyses for the petitioned wastes, none of which exceed the maximum allowable treatment residue concentrations listed in these conditions and the Section Chief, Variances Section, notifies Syntex that the conditions have been lifted. (8) Syntex must provide a signed copy of the following certification statement when submitting data in response to the conditions listed above: "Under civil and criminal penalty of law for the making or submission of false or fraudulent statements or representations, I certify that the information contained in or accompanying this document is true, accurate, and complete. As to the (those) identified section(s) of this document for which I cannot personally verify its (their) accuracy, I certify as the company official having supervisory responsibility for the persons who, acting under my direct instructions, made the verification that this information is true, accurate and complete."
SR of Tennessee.	Ripley, TN.....	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from the copper, nickel, and chromium electroplating of plastic parts after November 17, 1986.
Tennessee Electroplating.	Ripley, Tennessee.	Dewatered wastewater treatment sludges (EPA Hazardous Waste Nos. F006) generated from electroplating operations after November 17, 1986. To ensure chromium levels do not exceed the regulatory standards there must be continuous batch testing of the filter press sludge for chromium for 45 days after the exclusion is granted. Each batch of treatment residue must be representatively sampled and tested using the EP toxicity test for chromium. This data must be kept on file at the facility for inspection purposes. If the extract levels exceed 0.922 ppm of chromium the waste must be managed and disposed of as hazardous. If these conditions are not met, the exclusion does not apply. This exclusion does not apply to sludges in any on-site impoundments as of this date.
Texas Instruments, Inc.	Dallas, TX.....	Wastewater treatment sludges (EPA Hazardous Waste Nos. F006 and F019) generated after August 27, 1985, from their electroplating operations that have been batch tested for cadmium using the EP toxicity procedure and have been found to contain less than 0.30 ppm cadmium in the EP extract. Wastewater treatment sludges that exceed this level will be considered a hazardous waste.
Tricil Environmental Systems, Inc.	Hilliard, Ohio.....	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations after November 17, 1986. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern, the facility must implement a contingency testing program for the petitioned wastes. This testing program must meet the following conditions for the exclusion to be valid: (1) Each batch of treatment residue must be representatively sampled and tested using the total oil and grease test and the EP Toxicity test (or the Oily Waste EP test, if the oil and grease content of the waste exceeds one percent) for arsenic, barium, cadmium, chromium, lead, selenium, silver, mercury, and nickel. If the extract concentrations for chromium, lead, arsenic, and silver exceed 0.315 ppm; barium levels exceed 6.3 ppm; cadmium and selenium levels exceed 0.063 ppm; mercury levels exceed 0.013 ppm; or nickel levels exceed 2.2 ppm, the waste will be re-treated or managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. (2) Each batch of treatment residue must be tested for reactive and leachable cyanide. If the reactive cyanide levels exceed 250 ppm or leachable cyanide levels (using the EP Toxicity test without acetic acid adjustment) exceed 1.26 ppm, the waste must be re-treated or managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. (3) Each batch of the waste must be tested for the total content of the following organic toxicants. If the total content of any of the constituents exceeds the maximum levels shown, the waste must be managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. Compound and Maximum Acceptable Levels (ppm) Acrolein, 56.8 Anthracene, 76.8 Benzene, 0.106 p-Chloro-m-cresol, 133 1,1-Dichloroethane, 0.01 Fluorene, 10.4 Methylene chloride, 8.2 Methyl ethyl ketone, 326 n-Nitrosodiphenylamine, 11.9 Phenanthrene, 14 Tetrachloroethylene, 0.188 Trichloroethylene, 0.59

TABLE 1—WASTES EXCLUDED FROM NON-SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		Chloroform, 0.013 1,2-Dichloroethane, 0.0083 1,2-trans-Dichloroethylene, 231 2,4-Dimethylphenol, 12.5 Vinyl chloride, 0.18 (4) A grab sample must be collected from each batch to form one monthly composite sample, which must be tested using GC/MS analysis for the compounds shown above as well as the remaining organics on the priority pollutant list. (See 47 FR 52309, November 19, 1982, for a list of the priority pollutants.) (5) The test data from conditions 1-4 must be kept on file at the facility for inspection purposes and must be compiled, summarized, and submitted to the Administrator by certified mail on a semiannual basis. The Agency will review this information and if needed, will propose to modify or withdraw the exclusion. The organics testing described in conditions 3 and 4 above is not required until May 18, 1987. The Agency's decision to conditionally exclude the treatment residue generated from the wastewater treatment system at this facility applies only to the wastewater treatment residue as described in this petition.
Tricil Environmental Systems, Inc.	Nashville, Tennessee	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F019) generated from chemical conversion coating of aluminum after November 17, 1986. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern, the facility must implement a contingency testing program for the petitioned wastes. This testing program must meet the following conditions for the exclusion to be valid: (1) Each batch of treatment residue must be representatively sampled and tested using the total oil and grease test and the EP Toxicity test (or the Oily Waste EP test, if the oil and grease content of the waste exceeds one percent) for arsenic, barium, cadmium, chromium, lead, selenium, silver, mercury, and nickel. If the extract concentrations for chromium, lead, arsenic, and silver exceed 1.1 ppm; barium levels exceed 22.2 ppm; cadmium and selenium levels exceed 0.22 ppm; mercury levels exceed 0.044 ppm; or nickel levels exceed 7.8 ppm, the waste will be re-treated or managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. (2) Each batch of treatment residue must be tested for reactive and leachable cyanide. If the reactive cyanide levels exceed 250 ppm or leachable cyanide levels (using the EP Toxicity test without acetic acid adjustment) exceed 4.4 ppm, the waste must be re-treated or managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. (3) Each batch of the waste must be tested for the total content of the following organic toxicants. If the total content of any of the constituents exceeds the maximum levels shown, the waste must be managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. Compound and Maximum Acceptable Levels (ppm) Acrolein, 363 Anthracene, 492 Benzene, 0.68 p-Chloro-m-cresol, 848 1,1-Dichloroethane, 0.068 Fluorene, 66.7 Methylene chloride, 52.4 n-Nitrosodiphenylamine, 76.1 Phenanthrene, 89 Tetrachloroethylene, 1.2 Trichloroethylene, 3.78 Chloroform, 0.081 1,2-Dichloroethane, 0.053 2,4-Dimethylphenol, 79.7 Vinyl chloride, 1.16 1,2-Diphenyl hydrazine, 0.005 (4) A grab sample must be collected from each batch to form one monthly composite sample, which must be tested using GC/MS analysis for the compounds shown above as well as the remaining organics on the priority pollutant list. (See 47 FR 52309, November 19, 1982, for a list of the priority pollutants.) (5) The test data from conditions 1-4 must be kept on file at the facility for inspection purposes and must be compiled, summarized, and submitted to the Administrator by certified mail on a semiannual basis. The Agency will review this information and if needed, will propose to modify or withdraw the exclusion. The organics testing described in conditions 3 and 4 above is not required until May 18, 1987. The Agency's decision to conditionally exclude the treatment residue generated from the wastewater treatment system at this facility applies only to the wastewater treatment residue as described in this petition.

TABLE 1—WASTES EXCLUDED FROM NON-SPECIFIC SOURCES—Continued

Facility	Address	Waste description
Tricil Environmental Systems, Inc.	Muskegon, Michigan.	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations after November 17, 1986. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern, the facility must implement a contingency testing program for the petitioned wastes. This testing program must meet the following conditions for the exclusion to be valid: (1) Each batch of treatment residue must be representatively sampled and tested using the total oil and grease test and the EP Toxicity test (or the Oily Waste EP test, if the oil and grease content of the waste exceeds one percent) for arsenic, barium, cadmium, chromium, lead, selenium, silver, mercury, and nickel. If the extract concentrations for chromium, lead, arsenic, and silver exceed 0.315 ppm; barium levels exceed 6.3 ppm; cadmium and selenium levels exceed 0.063 ppm; mercury levels exceed 0.013 ppm; or nickel levels exceed 2.2 ppm, the waste will be re-treated or managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. (2) Each batch of treatment residue must be tested for reactive and leachable cyanide. If the reactive cyanide levels exceed 250 ppm or leachable cyanide levels (using the EP Toxicity test without acetic acid adjustment) exceed 1.26 ppm, the waste must be re-treated or managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. (3) Each batch of the waste must be tested for the total content of the following organic toxicants. If the total content of any of the constituents exceeds the maximum levels shown, the waste must be managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. Compound and Maximum Acceptable Levels (ppm) Acrolein, 56.8 Anthracene, 76.8 Benzene, 0.106 p-Chloro-m-cresol, 133 1,1-Dichloroethane, 0.01 Fluorene, 10.4 Methylene chloride, 8.2 Methyl ethyl ketone, 326 n-Nitrosodiphenylamine, 11.9 Phenanthrene, 14 Tetrachloroethylene, 0.188 Trichloroethylene, 0.59 Chloroform, 0.013 1,2-Dichloroethane, 0.0083 1,2-trans-Dichloroethylene, 231 2,4-Dimethylphenol, 12.5 Vinyl chloride, 0.18 (4) A grab sample must be collected from each batch to form one monthly composite sample, which must be tested using GC/MS analysis for the compounds shown above as well as the remaining organics on the priority pollutant list. (See 47 FR 52309, November 19, 1982, for a list of the priority pollutants.) (5) The test data from conditions 1–4 must be kept on file at the facility for inspection purposes and must be compiled, summarized, and submitted to the Administrator by certified mail on a semiannual basis. The Agency will review this information and if needed, will propose to modify or withdraw the exclusion. The organics testing described in conditions 3 and 4 above is not required until May 18, 1987. The Agency's decision to conditionally exclude the treatment residue generated from the wastewater treatment system at this facility applies only to the wastewater treatment residue as described in this petition.
United Technologies Automotive, Inc.	Jeffersonville, IN.	Dewatered wastewater treatment sludge (EPA Hazardous Waste No. FO19) generated from the chemical conversion of aluminum after April 29, 1986.
Universal Oil Products.	Decatur, Alabama.	Wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations and contained in two on-site lagoons on August 15, 1986. This is a one-time exclusion.
U.S. EPA Combustion Research Facility.	Jefferson, Arkansas.	One-time exclusion for scrubber water (EPA Hazardous Waste No. F020) generated in 1985 from the incineration of Vertac still bottoms. This exclusion was published on June 28, 1989.
U.S. Nameplate Company, Inc.	Mount Vernon, Iowa.	Retreated wastewater treatment sludges (EPA Hazardous Waste No. F006) previously generated from electroplating operations and currently contained in an on-site surface impoundment after September 28, 1988. This is a one-time exclusion for the reteated wastes only. This exclution does not relieve the waste unit from regulatory compliance under Subtitle C.

TABLE 1—WASTES EXCLUDED FROM NON-SPECIFIC SOURCES—Continued

Facility	Address	Waste description
VAW of America Incorporated.	St. Augustine, Florida.	Wastewater treatment sludge filter cake (EPA Hazardous Waste No. F019) generated from the chemical conversion coating of aluminum. This exclusion was published on February 1, 1989.
Vermont American, Corp.	Newark, OH.....	Wastewater treatment sludge (EPA Hazardous Waste No. F006) generated from electroplating operations after November 27, 1985.
Waterloo Industries.	Pocahontas, AR.	Wastewater treatment sludges (EPA Hazardous Waste No. F006) generated from electroplating operations after dewatering and held on-site on July 17, 1986 and any such sludge generated (after dewatering) after July 17, 1986.
Watervliet Arsenal.	Watervliet, NY..	Wastewater treatment sludges (EPA Hazardous Waste No F006) generated from electroplating operations after January 10, 1986.
William L. Bonnell Co.	Carthage, TN....	Dewatered Wastewater treatment sludges (Vacuum filter sludge) (EPA Hazardous Waste No. F019) currently generated from the chemical conversion coating of aluminum after October 17, 1986. This exclusion does not apply to sludges in the on-site surface impoundments.
William L. Bonnell Co.	Newnan, Georgia.	Dewatered wastewater treatment sludges (EPA Hazardous Waste No. F019) generated from the chemical conversion coating of aluminum after November 14, 1986. This exclusion does not include sludges contained in Bonnell's on-site surface impoundments.
Windsor Plastics, Inc.	Evansville, IN ...	Spent non-halogenated solvents and still bottoms (EPA Hazardous Waste No. F003) generated from the recovery of acetone after November 17, 1986.

TABLE 2—WASTES EXCLUDED FROM SPECIFIC SOURCES

Facility	Address	Waste description
American Cyanamid.	Hannibal, Missouri.	Wastewater and sludge (EPA Hazardous Waste No. K038) generated from the washing and stripping of phorate production and contained in on-site lagoons on May 8, 1987, and such wastewater and sludge generated after May 8, 1987.
Amoco Oil Co...	Wood River, IL.	150 million gallons of DAF from petroleum refining contained in in four surge ponds after treatment with the Chemifix' stabilization process. This waste contains EPA Hazardous Waste No. K048. This exclusion applies to the 150 million gallons of waste after chemical stabilization as long as the mixing ratios of the reagent with the waste are monitored continuously and do not vary outside of the limits presented in the demonstration samples; one grab sample is taken each hour from each treatment unit, composited, and EP toxicity tests performed on each sample. If the levels of lead or total chromium exceed 0.5 ppm in the EP extract, then the waste that was processed during the compositing period is considered hazardous; the treatment residue shall be pumped into bermed cells to ensure that the waste is identifiable in the event that removal is necessary.
Bethlehem Steel Corp.	Steelton, PA	Uncured and cured chemically stabilized electric arc furnace dust/sludge (CSEAFD) treatment residue (K061) generated from the primary production of steel after May 22, 1989. This exclusion is conditioned upon the data obtained from Bethlehem's full-scale CSEAFD treatment facility because Bethlehem's original data were obtained from a laboratory-scale CSEAFD treatment process. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern once the full-scale treatment facility is in operation, Bethlehem must implement a testing program for the petitioned waste. This testing program must meet the following conditions for the exclusion to be valid: (1) *Testing:* (A) *Initial Testing:* During the first four weeks of operation of the full-scale treatment system, Bethlehem must collect representative grab samples of each treated batch of the CSEAFD and composite the grab samples daily. The daily composites, prior to disposal, must be analyzed for the EP leachate concentrations of all the EP toxic metals, nickel and cyanide (using distilled water in the cyanide extractions), and the total constituent concentrations of reactive sulfide and reactive cyanide. Analyses must be performed according to SW-846 methodologies. Bethlehem must report the analytical test data obtained during this initial period no later than 90 days after the treatment of the first full-scale batch. (B) *Subsequent Testing:* Bethlehem must collect representative grab samples from every treated batch of CSEAFD generated daily and composite all of the grab samples to produce a weekly composite sample. Bethlehem then must analyze each weekly composite sample for the EP leachate concentrations of all the EP toxic metals and nickel. Analyses must be performed according to SW-846 methodologies. The analytical data, including all quality control information, must be compiled and maintained on site for a minimum of three years. These data must be furnised upon request and made available for inspection by any employee or representative of EPA or the State of Pennsylvania.

TABLE 2—WASTES EXCLUDED FROM SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		(2) *Delisting Levels:* If the EP extract concentrations resulting from the testing in condition (1)(A) or (1)(B) for chromium, lead, arsenic, or silver exceed 0.315 mg/L, for barium exceeds 6.3 mg/l; for cadmium or selenium exceed 0.063 mg/l; for mercury exceeds 0.0126 mg/l; for nickel exceeds 3.15 mg/l; or for cyanide exceeds 4.42 mg/L, or total reactive cyanide or total reactive sulfide levels exceed 250 mg/kg and 500 mg/kg, respectively, the waste must either be re-treated or managed and disposed in accordance with subtitle C of RCRA. (3) *Data submittals:* Within one week of system start-up, Bethlehem must notify the Section Chief, Variances Section (see address below) when their full-scale stabilization system is on-line and waste treatment has begun. All data obtained through the initial testing condition (1)(A), must be submitted to the Section Chief, Variances Section, PSPD/OSW, (OS-343), U.S. EPA, 401 M Street, S.W., Washington, DC 20460 within the time period specified in condition (1)(A). At the Section Chief's request, Bethlehem must submit analytical data obtained through condition (1)(B) to the above address, within the time period specified by the Section Chief. Failure to submit the required data obtained from either condition (1)(A) or (1)(B) within the specified time periods will be considered by the Agency sufficient basis to revoke Bethlehem's exclusion to the extent directed by EPA. All data must be accompanied by the following certification statement: "Under civil and criminal penalty of law for the making or submission of false or fraudulent statements or representations (pursuant to the applicable provisions of the Federal Code which include, but may not be limited to, 18 U.S.C. 6928), I certify that the information contained in or accompanying this document is true, accurate and complete. "As to the (those) identified section(s) of this document for which I cannot personally verify its (their) truth and accuracy, I certify as the company official having supervisory responsibility for the persons who, acting under my direct instructions, made the verification that this information is true, accurate and complete. "In the event that any of this information is determined by EPA in its sole discretion to be false, inaccurate or incomplete, and upon conveyance of this fact to the company, I recognize and agree that this exclusion of wastes will be void as if it never had effect or to the extent directed by EPA and that the company will be liable for any actions taken in contravention of the company's RCRA and CERCLA obligations premised upon the company's reliance on the void exclusion."
Bethlehem Steel Corp.	Johnstown, PA.	Uncured and cured chemically stabilized electric arc furnace dust/sludge (CSEAFD) treatment residue (K061) generated from the primary production of steel after May 22, 1989. This exclusion is conditioned upon the data obtained from Bethlehem's full-scale CSEAFD treatment facility because Bethlehem's original data were obtained from a labortory-scale CSEAFD treatment process. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern once the full-scale treatment facility is in operation, Bethlehem must implement a testing program for the petitioned waste. This testing program must meet the following conditions for the exclusion to be valid: (1) *Testing:* (A) *Initial Testing:* During the first four weeks of operation of the full-scale treatment system, Bethlehem must collect representative grab samples of each treated batch of the CSEAFD and composite the grab samples daily. The daily composites, prior to disposal, must be analyzed for the EP leachate concentrations of all the EP toxic metals, nickel and cyanide (using distilled water in the cyanide extractions), and the total constituent concentrations of reactive sulfide and reactive cyanide. Analyses must be performed according to SW-846 methodologies. Bethlehem must report the analytical test data obtained during this initial period no later than 90 days after the treatment of the first full-scale batch. (B) *Subsequent Testing:* Bethlehem must collect representative grab samples from every treated batch of CSEAFD generated daily and composite all of the grab samples to produce a weekly composite sample. Bethlehem then must analyze each weekly composite sample for the EP leachate concentrations of all the EP toxic metals and nickel. Analyses must be performed according to SW-846 methodologies. The analytical data, including all quality control information, must be compiled and maintained on site for a minimum of three years. These data must be furnished upon request and made available for inspection by any employeee or representative of EPA or the State of Pennsylvania. (2) *Delisting Levels:* If the EP extract concentrations resulting from the testing in condition (1)(A) or (1)(B) for chromium, lead, arsenic, or silver exceed 0.315 mg/L, for barium exceeds 6.3 mg/l; for cadmium or selenium exceed 0.063 mg/l; for mercury exceeds 0.0126 mg/l; for nickel exceeds 3.15 mg/l; or for cyanide exceeds 4.42 mg/L, or total reactive cyanide or total reactive sulfide levels exceed 250 mg/kg and 500 mg/kg, respectively, the waste must either be re-treated or managed and disposed in accordance with subtitle C of RCRA.

TABLE 2—WASTES EXCLUDED FROM SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		(3) *Data submittals:* Within one week of system start-up, Bethlehem must notify the Section Chief, Variances Section (see address below) when their full-scale stabilization system is on-line and waste treatment has begun. All data obtained through the initial testing condition (1)(A), must be submitted to the Section Chief, Variances Section, PSPD/OSW, (OS-343), U.S. EPA, 401 M Street, SW., Washington, DC 20406 within the time period specified in condition (1)(A). At the Section Chief's request, Bethlehem must submit analytical data obtained through condition (1)(B) to the above address, within the time period specified by the Section Chief. Failure to submit the required data obtained from either condition (1)(A) or (1)(B) within the specified time periods will be considered by the Agency sufficient basis to revoke Bethlehem's exclusion to the extent directed by EPA. All data must be accompanied by the following certification statement: "Under civil and criminal penalty of law for the making or submission of false or fraudulent statements or representations (pursuant to the applicable provisions of the Federal Code which include, but may not be limited to, 18 U.S.C. 6928), I certify that the information contained in or accompanying this document is true, accurate and complete. "As to the (those) identified section(s) of this document for which I cannot personally verify its (their) truth and accuracy, I certify as the company official having supevisory responsibility for the persons who, acting under my direct instructions, made the verification that this information is true, accurate and complete. "In the event that any of this information is determined by EPA in its sole discretion to be false, inaccurate or incomplete, and upon conveyance of this fact to the company, I recognize and agree that this exclusion of wastes will be void as if it never had effect or to the extent directed by EPA and that the company will be liable for any actions taken in contravention of the company's RCRA and CERCLA obligations premised upon the company's reliance on the void exclusion."
BF Goodrich Intermediates Company, Inc.	Calvert City, Kentucky.	Brine purification muds and saturator insolubles (EPA Hazardous Waste No. K071) after August 18, 1989. This exclusion is conditional upon the collection and submission of data obtained from BFG's full-scale treatment system because BFG's original data was based on data presented by another petitioner using an identical treatment process. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern once the full-scale treatment facility is in operation, BFG must implement a testing program. All sampling and analyses (including quality control procedures) must be performed according to SW-846 procedures. This testing program must meet the following conditions for the exclusion to be valid: (1) Initial Testing: During the first four weeks of full-scale operation, BFG must do the following: (A) Collect representative grab samples from every batch of the treated mercury brine purification muds and treated saturator insolubles on a daily basis and composite the grab samples to produce two separate daily composite samples (one of the treated mercury brine purification muds and one of the treated saturator insolubles). Prior to disposal of the treated batches, two daily composite samples must be analyzed for EP leachate concentration of mercury. BFG must report the analytical test data, including all quality control data, within 90 days after the treatment of the first full-scale batch. (B) Collect representative grab samples from every batch of the treated mercury brine purification muds and treated saturator insolubles on a daily basis and composite the grab samples to produce two separate weekly composite samples (one of the treated mercury brine muds and one of the treated saturator insolubles). Prior to disposal of the treated batches, two weekly composite samples must be analyzed for the EP leachate concentrations of all the EP toxic metals (except mercury), nickel, and cyanide (using distilled water in the cyanide extractions), and the total constituent concentrations of reactive sulfide and reactive cyanide. BFG must report the analytical test data, including all quality control data, obtained during this initial period no later than 90 days after the treatment of the first full-scale batch. (2) Subsequent Testing: After the first four weeks of full-scale operation, BFG must do the following: (A) Continue to sample and test as described in condition (1)(A). BFG must compile and store on-site for a minimum of three years all analytical data and quality control data. These data must be furnished upon request and made available for inspection by any employee or representative of EPA or the State of Kentucky. (B) Continue to sample and test as described in condition (1)(B). BFG must compile and store on-site for a minimum of three years all analytical data and quality control data. These data must be furnished upon request and made available for inspection by any employee or representative of EPA or the State of Kentucky. These testing requirements shall be terminated by EPA when the results of four consecutive weekly composite samples of both the treated mercury brine muds and treated saturator insolubles, obtained from either the initial testing or subsequent testing, show the maximum allowable levels in condition (3) are not exceeded and the Section Chief, Variances Section, notifies BFG that the requirements of this condition have been lifted.

TABLE 2—WASTES EXCLUDED FROM SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		(3) If, under condition (1) or (2), the EP leachate concentrations for chromium, lead, arsenic, or silver exceed 0.316 mg/l; for barium exceeds 6.31 mg/l; for cadmium or selenium exceed 0.063 mg/l; for mercury exceeds 0.0126 mg/l, for nickel exceeds 3.16 mg/l; for cyanide exceeds 4.42 mg/l; or for total reactive cyanide or total reactive sulfide levels exceed 250 mg/kg and 500 mg/kg, respectively, the waste must either be retreated until it meets these levels or managed and disposed of in accordance with subtitle C of RCRA. (4) Within one week of system start-up, BFG must notify the Section Chief, Variances Section (see address below) when the full-scale system is on-line and waste treatment has begun. All data obtained through condition (1) must be submitted to the Section Chief, Variances Section, PSPD/OSW (OS-343), U.S. EPA, 401 M Street, SW., Washington, DC 20460 within the time period specified in condition (1). At the Section Chief's request, BFG must submit any other analytical data obtained through condition (2) to the above address, within the time period specified by the Section Chief. Failure to submit the required data will be considered by the Agency sufficient basis to revoke BFG's exclusion to the extent directed by EPA. All data must be accompanied by the following certification statement: "Under civil and criminal penalty of law for the making or submission of false or fraudulent statements or representations (pursuant to the applicable provisions of the Federal Code which include, but may not be limited to, 18 U.S.C. § 6928), I certify that the information contained in or accompanying this document is true, accurate and complete. As to the (those) identified section(s) of this document for which I cannot personally verify its (their) truth and accuracy, I certify as the company official having supervisory responsibility for the persons who, acting under my direct instructions, made the verification that this information is true, accurate and complete. In the event that any of this information is determined by EPA in its sole discretion to be false, inaccurate or incomplete, and upon conveyance of this fact to the company, I recognize and agree that this exclusion of wastes will be void as if it never had effect or to the extent directed by EPA and that the company will be liable for any actions taken in contravention of the company's RCRA and CERCLA obligations premised upon the company's reliance on the void exclusion."
CF&I Steel Corporation..	Pueblo, Colorado..	Fully-cured chemically stabilized electric arc furnace dust/sludge (CSEAFD) treatment residue (EPA Hazardous Waste No. K061) generated from the primary production of steel after May 9, 1989. This exclusion is conditioned upon the data obtained from CF&I's full-scale CSEAFD treatment facility because CF&I's original data was obtained from a laboratory-scale CSEAFD treatment process. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern once the full-scale treatment facility is in operation, CF&I must implement a testing program for the petitioned waste. This testing program must meet the following conditions for the exclusion to be vaild: (1) *Testing:* (A) *Initial Testing:* During the first four weeks of operation of the full-scale treatment system, CF&I must collect representative grab samples of each treated batch of the CSEAFD and composite the grab samples daily. The daily composites, prior to disposal, must be analyzed for the EP leachate concentrations of all the EP toxic metals, nickel, and cyanide (using distilled water in the cyanide extractions), and the total constituent concentrations of reactive sulfide and reactive cyanide. Analyses must be performed according to SW-846 methodologies. CF&I must report the analytical test data obtained during this initial period no later than 90 days after the treatment of the first full-scale batch. (B) *Subsequent Testing:* CF&I must collect representative grab samples from every treated batch of CSEAFD generated daily and composite all of the grab samples to produce a weekly composite sample. CF&I then must analyze each weekly composite sample for the EP leachate concentrations of all of the EP toxic metals and nickel. Analyses must be performed according to SW-846 methodologies. The analytical data, including all quality control information, must be compiled and maintained on site for a minimum of three years. These data must be furnished upon request and made available for inspection by any employee or representative of EPA or the State of Colorado. (2) *Delisting levels:* If the EP extract concentrations determined in conditions (1)(A) or (1)(B) for chromium, lead, arsenic, or silver exceed 0.315 mg/1; for barium exceeds 6.3 mg/1; for cadmium or selenium exceed 0.063 mg/1; for mercury exceeds 0.0126 mg/1; for nickel exceeds 3.15 mg/1; or for cyanide exceeds 4.42 mg/1, or total reactive cyanide or total reactive sulfide levels exceed 250 mg/kg and 500 mg/kg, respectively, the waste must either be re-treated or managed and disposed in accordance with Subtitle C of RCRA.

TABLE 2—WASTES EXCLUDED FROM SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		(3) *Data submittals:* Within one week of system start-up, CF&I must notify the Section Chief, Variances Section (see address below) when their full-scale stabilization system is on-line and waste treatment has begun. All data obtained through the initial testing condition (1)(A), must be submitted to the Section Chief, Variances Section, PSPD/OSW, (OS-343), U.S. EPA, 401 M Street, SW., Washington, DC 20460 within the time period specified in condition (1)(A). At the Section Chief's request, CF&I must submit analytical data obtained through condition (1)(B) to the above address, within the time period specified by the Section Chief. Failure to submit the required data obtained from either condition (1)(A) or (1)(B) within the specified time periods will be considered by the Agency sufficient basis to revoke CF&I's exclusion to the extent directed by EPA. All data must be accompanied by the following certification statement: "Under civil and criminal penalty of law for the making of submission of false or fraudulent statements or representations (pursuant to the applicable provisions of the Federal Code which include, but may not be limited to, 18 U.S.C. 6928), I certify that the information contained in or accompanying this document is true, accurate and complete. As to the (those) identified section(s) of this document for which I cannot personally verify its (their) truth and accuracy, I certify as the company official having supervisory responsibility for the persons who, acting under my direct instructions, made the verification that this information is true, accurate and complete. In the event that any of this information is determined by EPA in its sole discretion to be false, inaccurate or incomplete, and upon conveyance of this fact to the company, I recognize and agree that this exclusion of wastes will be void as if it never had effect or to the extent directed by EPA and that the company will be liable for any actions taken in contravention of the company's RCRA and CERCLA obligations premised upon the company's reliance on the void exclusion."
Envirite Corporation.	Canton, Ohio; Harvey, Illinois; Thomaston, Connecticut; and York PA.	Spent pickle liquor (EPA Hazardous Waste No. K062) generated from steel finishing operations of facilities within the iron and steel industry (SIC Codes 331 and 332); wastewater treatment sludge (EPA Hazardous Waste No. K002) generated from the production of chrome yellow and orange pigments; wastewater treatment sludge (EPA Hazardous Waste No. K003) generated from the production of molybdate orange pigments; wastewater treatment sludge (EPA Hazardous Waste No. K004) generated from the production of zinc yellow pigments; wastewater treatment sludge (EPA Hazardous Waste No. K005) generated from the production of chrome green pigments; wastewater treatment sludge (EPA Hazardous Waste No. K006) generated from the production of chrome oxide green pigments (anhydrous and hydrated); wastewater treatment sludge (EPA Hazardous Waste No. K007) generated from the production of iron blue pigments; oven residues (EPA Hazardous Waste No. K008) generated from the production of chrome oxide green pigments after November 14, 1986. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern, the facility must implement a contingency testing program for the petitioned wastes. This testing program must meet the following conditions for the exclusions to be valid: (1) Each batch of treatment residue must be representatively sampled and tested using the EP Toxicity test for arsenic, barium, cadmium, chromium, lead, selenium, silver, mercury, and nickel. If the extract concentrations for chromium, lead, arsenic, and silver exceed 0.315 ppm; barium levels exceed 6.3 ppm; cadmium and selenium exceed 0.063 ppm; mercury exceeds 0.0126 ppm; or nickel levels exceed 2.205 ppm, the waste must be re-treated or managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. (2) Each batch of treatment residue must be tested for reactive and leachable cyanide. If the reactive cyanide levels exceed 250 ppm; or leachable cyanide levels (using the EP Toxicity test without acetic acid adjustment) exceed 1.26 ppm, the waste must be re-treated or managed and disposed as hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR 270. (3) Each batch of waste must be tested for the total content of specific organic toxicants. If the total content of anthracene exceeds 76.8 ppm, 1,2-diphenyl hydrazine exceeds 0.001 ppm, methylene chloride exceeds 8.18 ppm, methyl ethyl ketone exceeds 326 ppm, n-nitrosodiphenylamine exceeds 11.9 ppm, phenol exceeds 1,566 ppm, tetrachloroethylene exceeds 0.188 ppm, or trichloroethylene exceeds 0.592 ppm, the waste must be managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. (4) A grab sample must be collected from each batch to form one monthly composite sample which must be tested using GC/MS analysis for the compounds listed in #3 above as well as the remaining organics on the priority pollutan list. (See 47 FR 52309, November 19, 1982, for a list of the priority pollutants.)

TABLE 2—WASTES EXCLUDED FROM SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		(5) The data from conditions 1-4 must be kept on file at the facility for inspection purposes and must be compiled, summarized, and submitted to the Administrator by certified mail semi-annually. The Agency will review this information and if needed will propose to modify or withdraw the exclusion. The organics testing described in conditions 3 and 4 above is not required until six months from the date of promulgation. The Agency's decision to conditionally exclude the treatment residue generated from the wastewater treatment systems at these facilities applies only to the wastewater and solids treatment systems as they presently exist as described in the delisting petition. The exclusion does not apply to the proposed process additions described in the petition as recovery, including crystalization, electrolytic metals recovery, evaporative recovery, and ion exchange.
LCP Chemical..	Orrington, ME...	Brine purification muds and wastewater treatment sludges generated after August 27, 1985 from their chlor-alkali manufacturing operations (EPA Hazardous Waste Nos. K071 and K106) that have been batch tested for mercury using the EP toxicity procedures and have been found to contain less than 0.05 ppm mercury in the EP extract. Brine purification muds and wastewater treatment sludges that exceed this level will be considered a hazardous waste.
Mearl Corp.....	Peekskill, NY....	Wastewater treatment sludge (EPA Hazardous Waste Nos. K006 and K007) generated from the production of chrome oxide green and iron blue pigments after November 27, 1985.
Monsanto Industrial Chemicals Company.	Sauget, Illinois..	Brine purification muds (EPA Hazardous Waste No. K071) generated from the mercury cell process in chlorine production, where separately prepurified brine is not used after August 15, 1986.
Occidental Chemical Corp. Muscle Shoals Plant.	Sheffield, Alabama.	Retorted wastewater treatment sludge from the mercury cell process in chlorine production (EPA Hazardous Waste No. K106) after September 19, 1989. This exclusion is conditional upon the submission of data obtained from Occidental's full-scale retort treatment system because Occidental's original data were based on a pilot-scale retort system. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern once the full-scale treatment facility is in operation, Occidental must implement a testing program. All sampling and analyses (including quality control procedures) must be performed according to SW-846 procedures. This testing program must meet the following conditions for the exclusion to be valid: (1) Initial Testing—During the first four weeks of full-scale retort operation, Occidental must do the following: (A) Collect representative grab samples from every batch of retorted material and composite the grab samples to produce a weekly composite sample. The weekly composite samples, prior to disposal or recycling, must be analyzed for the EP leachate concentrations of all the EP toxic metals (except mercury), nickel, and cyanide (using distilled water in the cyanide extractions), and the total constitutent concentrations of reactive sulfide and reactive cyanide. Occidental must report the analytical test data, including all quality control data, obtained during this initial period no later than 90 days after the treatment of the first full-scale batch. (B) Collect representative grab samples of every batch of retorted material prior to its disposal or recycling and analyze the sample for EP leachate concentration of mercury. Occidental must report the analytical test data, including all quality control data, within 90 days after the treatment of the first full-scale batch. (2) Subsequent Testing—After the first four weeks of full-scale retort operation, Occidental must do the following: (A) Continue to sample and test as described in condition (1)(A). Occidental must compile and store on-site for a minimum of three years all analytical data and quality control data. These data must be furnished upon request and made available for inspection by any employee or representative of EPA or the State of Alabama. These testing requirements shall be terminated by EPA when the results of four consecutive weekly composite samples of the petitioned waste, obtained from either the initial testing or subsequent testing show the maximum allowable levels in condition (3) are not exceeded and the Section Chief, Variances Section, notifies Occidental that the requirements of this condition have been lifted. (B) Continue to sample and test for mercury as described in condition (1)(B). Occidental must compile and store on-site for a minimum of three years all analytical data and quality control data. These data must be furnished upon request and made available for inspection by any employee or representative of EPA or the State of Alabama. These testing requirements shall remain in effect until Occidental provides EPA with analytical and quality control data for thirty consecutive batches of retorted material, collected as described in condition (1)(B), demonstrating that the EP leachable levels of mercury are below the maximum allowable level in condition (3) and the Section Chief, Variances Section, notifies Occidental that the testing in condition (2)(B) may be replaced with (2)(C).

TABLE 2—WASTES EXCLUDED FROM SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		(C) [If the conditions in (2)(B) are satisfied, the testing requirements for mercury in (2)(B) shall be replaced with the following condition]. Collect representative grab samples from every batch of retorted material on a daily basis and composite the grab samples to produce a weekly composite sample. Occidental must analyze each weekly composite sample prior to its disposal or recycling for the EP leachate concentration of mercury. Occidental must compile and store on-site for a minimum of three years all analytical data and quality control data. These data must be furnished upon request and made available for inspection by any employee or representative of EPA or the State of Alabama. (3) If, under condition (1) or (2), the EP leachate concentrations for chromium, lead, arsenic, or silver exceed 1.616 mg/l; for barium exceeds 32.3 mg/l; for cadmium or selenium exceed 0.323 mg/l; for mercury exceeds 0.065 mg/l, for nickel exceeds 16.15 mg/l; for cyanide exceeds 22.61 mg/l; or for total reactive cyanide or total reactive sulfide levels exceed 250 mg/kg and 500 mg/kg, respectively, the waste must either be retreated until it meets these levels or managed and disposed of in accordance with subtitle C of RCRA. (4) Within one week of system start-up, Occidental must notify the Section Chief, Variances Section (see address below) when the full-scale retort system is on-line and waste treatment has begun. All data obtained through condition (1) must be submitted to the Section Chief, Variances Section, PSPD/OSW (OS-343), U.S. EPA, 401 M Street SW., Washington, DC 20460 within the time period specified in condition (1). At the Section Chief's request, Occidental must submit any other analytical data obtained through condition (2) to the above address, within the time period specified by the Section Chief. Failure to submit the required data will be considered by the Agency sufficient basis to revoke Occidental's exclusion to the extent directed by EPA. All data must be accompanied by the following certification statement: "Under civil and criminal penalty of law for the making or submission of false or fraudulent statements or representations (pursuant to the applicable provisions of the Federal Code which include, but may not be limited to, 18 U.S.C. 6928), I certify that the information contained in or accompanying this document is true, accurate and complete. As to the (those) identified section(s) of this document for which I cannot personnal verify its (their) truth and accuracy, I certify as the company official having supervisory responsibility for the persons who, acting under my direct instructions, made the verification that this information is true, accurate and complete. In the event that any of this information is determined by EPA in its sole discretion to be false, inaccurate or incomplete, and upon conveyance of this fact to the company, I recognize and agree that this exclusion of wastes will be void as if it never had effect or to the extent directed by EPA and that the company will be liable for any actions taken in contravention of the company's RCRA and CERCLA obligations premised upon the company's reliance on the void exclusion."

TABLE 2—WASTES EXCLUDED FROM SPECIFIC SOURCES—Continued

Facility	Address	Waste description
Roanoke Electric Steel Corp..	Roanoke, VA....	Fully-cured chemically stabilized electric arc furnace dust/sludge (CSEAFD) treatment residue (EPA Hazardous Waste No. K061) generated from the primary production of steel after March 22, 1989. This exclusion is conditioned upon the data obtained from Roanoke's full-scale CSEAFD treatment facility because Roanoke's original data were obtained from a laboratory-scale CSEAFD treatment process. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern once the full-scale treatment facility is in operation, Roanoke must implement a testing program for the petitioned waste. This testing program must meet the following conditions for the exclusion to be valid: (1) *Testing:* (A) *Initial testing:* During the first four weeks of operation of the full-scale treatment system, Roanoke must collect representative grab samples of each treated batch of the CSEAFD and composite the grab samples daily. The daily composites, prior to disposal, must be analyzed for the EP leachate concentrations of all the EP toxic metals, nickel and cyanide (using distilled water in the cyanide extractions), and the total constituent concentrations of reactive sulfide and reactive cyanide. Analyses must be performed according to SW-846 methodologies. Roanoke must report the analytical test data obtained during this initial period no later than 90 days after the treatment of the first full-scale batch. *(B) Subsequent testing: Roanoke must collect representative grab samples from every treated batch of CSEAFD generated daily and composite all of the grab samples to produce a weekly composite sample. Roanoke then must analyze each weekly composite sample for all of the EP toxic metals and nickel. Analyses must be performed according to SW-846 methodologies. The analytical data, including all quality control information, must be compiled and maintained on site for a minimum of three years. These data must be furnished upon request and made available for inspection by any employee or representative of EPA or the State of Virginia.* (2) *Delisting levels:* If the EP extract concentrations for chromium, lead, arsenic, or silver exceed 0.315 mg/l; for barium exceeds 6.3 mg/l; for cadmium or selenium exceed 0.063 mg/l; for mercury exceeds 0.0126 mg/l; for nickel exceeds 3.15 mg/l; or for cyanide exceeds 1.26 mg/l, or total reactive cyanide or total reactive sulfide levels exceed 250 mg/kg and 500 mg/kg, respectively, the waste must either be re-treated or managed and disposed in accordance with Subtitle C of RCRA. *(3) Data submittals: Within one week of system start-up, Roanoke must notify the Section Chief, Variances Section (see address below) when their full-scale stabilization system in on-line and waste treatment has begun. All data obtained through the initial testing condition (1)(A), must be submitted to the Section Chief, Variances Section, PSPD/OSW, (OS-343), U.S. EPA, 401 M Street, SW., Washington, DC 20460 within the time period specified in condition (1)(A). Failure to submit the required data or keep the required records will be considered by the Agency, at its discretion, sufficient basis to revoke Roanoke's exclusion.* All data must be accompanied by the following certification statement: "Under civil and criminal penalty of law for the making or submission of false or fraudulent statements or representations (pursuant to the applicable provisions of the Federal Code which include, but may not be limited to, 18 USC 6928), I certify that the information contained in or accompanying this document is true, accurate and complete. As to the (those) identified section(s) of this document for which I cannot personally verify its (their) truth and accuracy, I certify as the company official having supervisory responsibility for the persons who, acting under my direct instructions, made the verification that this information is true, accurate and complete. In the event that any of this information is determined by EPA in its sole discretion to be false, inaccurate or incomplete, and upon conveyance of this fact to the company, I recognize and agree that this exclusion of wastes will be void as if it never had effect or to the extent directed by EPA and that the company will be liable for any actions taken in contravention of the company's RCRA and CERCLA obligations premised upon the company's reliance on the void exclusion."
Stauffer Chemical Co.	Axis, AL.....	Brine purification muds generated from their chlor-alkali manufacturing operatings (EPA Hazardous Waste No. K071) and disposed of in brine mud pond HWTF: 5 EP-201.
Stauffer Chemical Co.	St. Gabriel, LA .	Brine purification muds, which have been washed and vacuum filtered, generated after August 27, 1985 from their chlor-alkali manufacturing operations (EPA Hazardous Waste No. K071) that have been batch tested for mercury using the EP toxicity procedure and have been found to contain less than 0.05 ppm in mercury in the EP extract. Brine purification muds that exceed this level will be considered a hazardous waste.
Tricil Environmental Systems, Inc.	Hilliard, Ohio.....	Spent pickle liquor (EPA Hazardous Waste No. K062) generated by steel finishing operations of facilities within the iron and steel industry (SIC Codes 331 and 332) after November 17, 1986. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern, the facility must implement a contingency testing program for the petitioned wastes. This testing program must meet the following conditions for the exclusions to be valid:

TABLE 2—WASTES EXCLUDED FROM SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		(1) Each batch of treatment residue must be representatively sampled and tested using the total oil and grease test and the EP Toxicity test (or the Oily Waste EP test, if the oil and grease content of the waste exceeds one percent) for arsenic, barium, cadmium, chromium, lead, mercury, selenium, silver and nickel. If the extract concentrations for chromium, lead, arsenic, barium, and silver exceed 6.3 ppm; cadmium and selenium exceed 0.063 ppm; mercury levels exceed 0.013 ppm; or nickel levels exceed 2.2 ppm, the waste will be retreated or managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR 270. (2) Each batch of treatment residue must be tested for reactive and leachable cyanide. If the reactive cyanide levels exceed 250 ppm; or leachable cyanide levels (using ther EP Toxicity test without acetic acid adjustment) exceed 1.26 ppm, the waste must be retreated or managed and disposed as hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270. (3) Each batch of waste must be tested for the total content of the following organic toxicants. If the total content of any of the constituents exceeds the maximum levels shown, the waste must be managed and disposed as a hazardous waste under 40 CFR Parts 262 and 265 and the permitting standards of 40 CFR Part 270. Compound and Maximum Acceptable Levels (ppm) Acrolein, 56.8 Anthracene, 76.8 Benzene, 0.106 p-Chloro-m-cresol, 133 1,1-Dichloroethane, 0.01 Fluorene, 10.4 Methylenechloride, 8.2 Methyl ethyl ketone, 326 n-Nitrosodiphenylamine, 11.9 Phenanthrene, 14 Tetrachloroethylene, 0.188 Trichloroethylene, 0.59 Chloroform, 0.013 1,2-Dichloroethane, 0.0083 1,2-trans-Dichloroethylene, 231 2,4-Dimethylphenol, 12.5 Vinyl chloride, 0.18 1,2-Diphenyl hydrazine, 0.001 (4) A grab sample must be collected from each batch to form one monthy composite sample, which must be tested using GC/MS analysis for the organic compounds shown above, as well as the remaining organics on the priority pollutant list (see 47 FR 52309, November 19, 1982, Appendix A-126 Priority Pollutants). (5) The test data from conditions 1-4 must be kept on file at the facility for inspection purposes and must be compiled, summarized, and submitted to the Administrator by certified mail on a semiannual basis. The Agency will review this information and if needed, will propose to modify or withdraw the exclusion. The organics testing described in conditions 3 and 4 above is not required until May 18, 1987. The Agency's decision to conditionally exclude the treatment residue generated from the wastewater treatment system at this facility applies only to the wastewater treatment residue described in this petition.
Tricil Environmental System, Inc.	Muskegon, Michigan.	Spent pickle liquor (EPA Hazardous Waste No. K062) generated by steel finishing operations of facilities within the iron and steel industry (SIC Codes 331 and 332); after November 17, 1986. To ensure that hazardous constituents are not present in the waste at levels of regulatory concern, the facility must implement a contingency testing program for the petitioned wastes. This testing program must meet the following conditions for the exclusion to be valid: (1) Each batch of treatment residue must be representatively sampled and tested using the total oil and grease test and the EP Toxicity test (or the Oily Waste EP test, if the oil and grease content of the waste exceeds one percent) for arsenic, barium, cadmium, chromium, lead, mercury, selenium, silver and nickel. If the extract concentrations for chromium, lead, arsenic, barium, and silver exceed 6.3 ppm, cadmium and selenium exceed 0.063 ppm; mercury levels exceed 0.013 ppm; or nickel levels exceed 2.2 ppm, the waste will be retreated or managed and disposed as a hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR 270. (2) Each batch of treatment residue must be tested for reactive and leachable cyanide. If the reactive cyanide levels exceed 250 ppm; or leachable cyanide levels (using the EP Toxicity test without acetic acid adjustment) exceed 1.26 ppm, the waste must be retreated or managed and disposed as hazardous waste under 40 CFR Parts 262 to 265 and the permitting standards of 40 CFR Part 270.

TABLE 2—WASTES EXCLUDED FROM SPECIFIC SOURCES—Continued

Facility	Address	Waste description
		(3) Each batch of waste must be tested for the total content of the following organic toxicants. If the total content of any of the constituents exceeds the maximum levels shown, the waste must be managed and disposed as a hazardous waste under 40 CFR Parts 262 and 265 and the permitting standards of 40 CFR Part 270: Compound and Maximum Acceptable Levels (ppm) Acrolein, 56.8 Anthracene, 76.8 Benzene, 0.106 p-Chloro-m-cresol, 133 1,1-Dichloroethane, 0.01 Fluorene, 10.4 Methylenechloride, 8.2 Methyl ethyl ketone, 326 n-Nitrosodiphenylamine, 11.9 Phenanthrene, 14 Tetrachloroethylene, 0.188 Trichloroethylene, 0.59 Chloroform, 0.013 1,2-Dichloroethane, 0.0083 1,2-trans-Dichloroethylene, 231 2,4-Dimethylphenol, 12.5 Vinyl chloride, 0.18 1,2-Diphenyl hydrazine, 0.001 (4) A grab sample must be collected from each batch to form one montnly composite sample, which must be tested using GC/MS analysis for the organic compounds shown above, as well as the remaining organics on the priority pollutant list (see 47 FR 52309, November 19, 1982, Appendix A-126 Priority Pollutants). (5) The test data from conditions 1-4 must be kept on file at the facility for inspection purposes and must be compiled, summarized, and submitted to the Administrator by certified mail on a semiannual basis. The Agency will review this information and if needed, will propose to modify or withdraw the exclusion. The organics testing described in conditions 3 and 4 above is not required until May 18, 1987. The Agency's decision to conditionally exclude the treatment residue generated from the wasterwater treatment system at this facility applies only to the wastewater treatment residue descnbed in this petition.
Vulcan Materials Company.	Port Edwards, WI.	Brine punfication muds (EPA Hazardous Waste No. K071) generated from the mercury cell process in chlorine production, where separately prepunfied brine is not used after November 17, 1986. To assure that mercury levels in this waste are maintained at acceptable levels, the following conditions apply to this exclusion: Each batch of treated brine clarifier muds and saturator insolubles must be tested (by the extraction procedure) prior to disposal and the leachate concentration of mercury must be less than or equal to 0.0129 ppm. If the waste does not meet this requirement, then it must be re-treated or disposed of as hazardous. This exclusion does not apply to wastes for which either of these conditions is not satisfied.

TABLE 3—WASTES EXCLUDED FROM COMMERCIAL CHEMICAL PRODUCTS, OFF-SPECIFICATION SPECIES, CONTAINER RESIDUES, AND SOIL RESIDUES THEREOF

Facility	Address	Waste description
Union Carbide Corp.	Taft, LA	Contaminated soil (approximately 11,000 cubic yards), which contains acrolein in concentrations of less than 9 ppm.

[49 FR 37070, Sept. 21, 1984]

EDITORIAL NOTE: For FEDERAL REGISTER citations affecting Appendix IX of Part 261, see the List of CFR Sections Affected in the Finding Aids section of this volume.

APPENDIX X—METHOD OF ANALYSIS FOR CHLORINATED DIBENZO-P-DIOXINS AND -DIBENZOFURANS [1, 2, 3, 4]

Method 8280

1. *Scope and Application*

[1] This method is appropriate for the analysis of tetra-, penta-, and hexachlorinated dibenzo-*p*-dioxins and -dibenzofurans.

[2] Analytical protocol for determination of TCDDs in phenolic chemical wastes and soil samples obtained from the proximity of chemical dumps. T.O. Tiernan and M. Taylor. Brehm Laboratory, Wright State University, Dayton, OH 45435.

Continued

1.1 This method measures the concentration of chlorinated dibenzo-*p*-dioxins and chlorinated dibenzofurans in chemical wastes including still bottoms, filter aids, sludges, spent carbon, and reactor residues, and in soils.

1.2 The sensitivity of this method is dependent upon the level of interferences.

1.3 This method is recommended for use only by analysts experienced with residue analysis and skilled in mass spectral analytical techniques.

1.4 Because of the extreme toxicity of these compounds, the analyst must take necessary precautions to prevent exposure to himself, or to others, of materials known or believed to contain CDDs or CDFs.

2. *Summary of the Method*

2.1 This method is an analytical extraction cleanup procedure, and capillary column gas chromatograph-low resolution mass spectrometry method, using capillary column GC/MS conditions and internal standard techniques, which allow for the measurement of PCDDs and PCDFs in the extract.

2.2 If interferences are encountered, the method provides selected general purpose cleanup procedures to aid the analyst in their elimination.

3. *Interferences*

3.1 Solvents, reagents, glassware, and other sample processing hardware may yield discrete artifacts and/or elevated baselines causing misinterpretation of gas chromatograms. All of these materials must be demonstrated to be free from interferences under the conditions of the analysis by running method blanks. Specific selection of reagents and purification of solvents by distillation in all-glass systems may be required.

3.2 Interferences co-extracted from the samples will vary considerably from source to source, depending upon the diversity of the industry being sampled. PCDD is often associated with other interfering chlorinated compounds such as PCB's which may be at concentrations several orders of magnitude higher than that of PCDD. While general cleanup techniques are provided as part of this method, unique samples may require additional cleanup approaches to achieve the sensitivity stated in Table 1.

TABLE 1—GAS CHROMATOGRAPHY OF TCDD

Column	Retention time (min.)	Detection limit (μg/kg)[1]
Glass capillary	9.5	0.003

[1] Detection limit for liquid samples is 0.003 μg/l. This is calculated from the minimum detectable GC response being equal to five times the GC background noise assuming a 1 ml effective final volume of the 1 liter sample extract, and a GC injection of 5 microliters. Detection levels apply to both electron capture and GC/MS detection. For further details see 44 FR 69526 (December 3, 1979).

3.3 The other isomers of tetrachlorodibenzo-*p*-dioxin may interfere with the measurement of 2,3,7,8-TCDD. Capillary column gas chromatography is required to resolve those isomers that yield virtually identical mass fragmentation patterns.

4. *Apparatus and Materials*

4.1. Sampling equipment for discrete or composite sampling.

4.1.1 Grab sample bottle—amber glass, 1-liter or 1-quart volume. French or Boston Round design is recommended. The container must be washed and solvent rinsed before use to minimize interferences.

4.1.2. Bottle caps—threaded to screw on to the sample bottles. Caps must be lined with Teflon. Solvent washed foil, used with the shiny side towards the sample, may be substituted for the Teflon if sample is not corrosive.

4.1.3. Compositing equipment—automatic or manual composing system. No tygon or rubber tubing may be used, and the system must incorporate glass sample containers for the collection of a minimum of 250 ml. Sample containers must be kept refrigerated after sampling.

4.2 Water bath—heated, with concentric ring cover, capable of temperature control (±2 °C). The bath should be used in a hood.

4.3 Gas chromatograph/mass spectrometer data system.

4.3.1 Gas chromatograph: An analytical system with a temperature-programmable

[3] Analytical protocol for determination of chlorinated dibenzo-*p*-dioxins and chlorinated dibenzofurans in river water. T.O. Tiernan and M. Taylor. Brehm Laboratory, Wright State University, Dayton, OH 45435.

[4] In general, the techniques that should be used to handle these materials are those which are followed for radioactive or infectious laboratory materials. Assistance in evaluating laboratory practices may be obtained from industrial hygienists and persons specializing in safe laboratory practices. Typical infectious waste incinerators are probably not satisfactory devices for disposal of materials highly contaminated with CDDs or CDFs. Safety instructions are outlined in EPA Test Method 613(4.0)

See also: (1) "Program for monitoring potential contamination in the laboratory following the handling and analyses of chlorinated dibenzo-p-dioxins and dibenzofurans" by F. D. Hileman et al., *In:* Human and Environmental Risks of Chlorinated Dioxins and Related Compounds, R.E. Tucker, et al, eds., Plenum Publishing Corp., 1983. 2) Safety procedures outlined in EPA Method 613, Federal Register volume 44, No. 233, December 3, 1979.

gas chromatograph and all required accessories including syringes, analytical columns, and gases.

4.3.2 Column: SP-2250 coated on a 30 m long × 0.25 mm I.D. glass column (Supelco No. 2-3714 or equivalent). Glass capillary column conditions: Helium carrier gas at 30 cm/sec linear velocity run splitless. Column temperature is 210 °C.

4.3.3 Mass spectrometer: Capable of scanning from 35 to 450 amu every 1 sec or less, utilizing 70 volts (nominal) electron energy in the electron impact ionization mode and producing a mass spectrum which meets all the criteria in Table 2 when 50 ng of decafluorotriphenyl-phosphine (DFTPP) is injected through the GC inlet. The system must also be capable of selected ion monitoring (SIM) for at least 4 ions simultaneously, with a cycle time of 1 sec or less. Minimum integration time for SIM is 100 ms. Selected ion monitoring is verified by injecting .015 ng of TCDD Cl^{37} to give a minimum signal to noise ratio of 5 to 1 at mass 328.

TABLE 2—DFTPP KEY IONS AND ION ABUNDANCE CRITERIA [1]

Mass	Ion abundance criteria
51	30-60% of mass 198.
68	Less than 2% of mass 69.
70	Less than 2% of mass 69.
127	40-60% of mass 198.
197	Less than 1% of mass 198.
198	Base peak, 100% relative abundance.
199	5-9% of mass 198.
275	10-30% of mass 198.
365	Greater than 1% of mass 198.
441	Present but less than mass 443.
442	Greater than 40% of mass 198.
443	17-23% of mass 442.

[1] J. W. Eichelberger, L.E. Harris, and W.L. Budde. 1975 Reference compound to calibrate ion abundance measurement in gas chromatography-mass spectrometry. Analytical Chemistry 47:995.

4.3.4 GC/MS interface: Any GC-to-MS interface that gives acceptable calibration points at 50 ng per injection for each compound of interest and achieves acceptable tuning performance criteria (see Sections 6.1 through 6.3) may be used. GC-to-MS interfaces constructed of all glass or glass-lined materials are recommended. Glass can be deactivated by silanizing with dichlorodimethylsilane. The interface must be capable of transporting at least 10 ng of the components of interest from the GC to the MS.

4.3.5 Data system: A computer system must be interfaced to the mass spectrometer. The system must allow the continuous acquisition and storage on machine-readable media of all mass spectra obtained throughout the duration of the chromatographic program. The computer must have software that can search any GC/MS data file for ions of a specific mass and that can plot such ion abundances versus time or scan number. This type of plot is defined as an Extracted Ion Current Profile (EICP). Software must also be able to integrate the abundance, in any EICP, between specified time or scan number limits.

4.4 Pipettes-Disposable, Pasteur, 150 mm long × 5 mm ID (Fisher Scientific Co., No. 13-678-6A or equivalent).

4.5 Flint glass bottle (Teflon-lined screw cap).

4.6 Reacti-vial (silanized) (Pierce Chemical Co.).

5. *Reagents*

5.1 Potassium hydroxide-(ACS), 2% in distilled water.

5.2 Sulfuric acid-(ACS), concentrated.

5.3 Methylene chloride, hexane, benzene, petroleum ether, methanol, tetradecane-pesticide quality or equivalent.

5.4 Prepare stock standard solutions of TCDD and ^{37}Cl-TCDD (molecular weight 328) in a glove box. The stock solutions are stored in a glovebox, and checked frequently for signs of degradation or evaporation, especially just prior to the preparation of working standards.

5.5 Alumina-basic, Woelm; 80/200 mesh. Before use activate overnight at 600°C, cool to room temperature in a dessicator.

5.6 Prepurified nitrogen gas

6.0 *Calibration*

6.1 Before using any cleanup procedure, the analyst must process a series of calibration standards through the procedure to validate elution patterns and the absence of interferences from reagents.

6.2 Prepare GC/MS calibration standards for the internal standard technique that will allow for measurement of relative response factors of at least three CDD/^{37}CDD ratios. Thus, for TCDDs, at least three TCDD/^{37}Cl-TCDD and TCDF/^{37}Cl-TCDF must be determined.[5] The ^{37}Cl-TCDD/F concentration in the standard should be fixed and selected to yield a reproducible response at the most sensitive setting of the mass spectrometer. Response factors for PCDD and HxCDD may be determined by measuring the response of the tetrachloro-labelled compounds relative to

[5] ^{37}Cl-labelled 2,3,7,8-TCDD and 2,3,7,8-TCDF are available from K.O.R. Isotopes, and Cambridge Isotopes, Inc., Cambridge, MA. Proper standardization requires the use of a specific labelled isomer for each congener to be determined. However, the only labelled isomers readily available are ^{37}Cl-2,3,7,8-TCDD and ^{37}Cl-2,3,7,8-TCDF. This method therefore uses these isomers as surrogates for the CDDs and CDFs. When other labelled CDDs and CDFs are available, their use will be required.

that of the unlabelled 1,2,3,4- or 2,3,7,8-TCDD, 1,2,3,4,7-PCDD or 1,2,3,4,7,8-HxCDD, which are commercially available.[6]

6.3 Assemble the necessary GC/MS apparatus and establish operating parameters equivalent to those indicated in Section 11.1 of this method. Calibrate the GC/MS system according to Eichelberger, et al. (1975) by the use of decafluorotriphenyl phosphine (DFTPP). By injecting calibration standards, establish the response factors for CDDs *vs.* ^{37}Cl-TCDD, and for CDFs *vs.* ^{37}Cl-TCDF. The detection limit provided in Table 1 should be verified by injecting .015 ng of ^{37}Cl-TCDD which should give a minimum signal to noise ratio of 5 to 1 at mass 328.

7. *Quality Control*

7.1 Before processing any samples, the analyst should demonstrate through the analysis of a distilled water method blank, that all glassware and reagents are interference-free. Each time a set of samples is extracted, or there is a change in reagents, a method blank should be processed as a safeguard against laboratory contamination.

7.2 Standard quality assurance practices must be used with this method. Field replicates must be collected to measure the precision of the sampling technique. Laboratory replicates must be analyzed to establish the precision of the analysis. Fortified samples must be analyzed to establish the accuracy of the analysis.

8. *Sample Collection, Preservation, and Handling*

8.1 Grab and composite samples must be collected in glass containers. Conventional sampling practices should be followed, except that the bottle must not be prewashed with sample before collection. Composite samples should be collected in glass containers in accordance with the requirements of the RCRA program. Sampling equipment must be free of tygon and other potential sources of contamination.

8.2 The samples must be iced or refrigerated from the time of collection until extraction. Chemical preservatives should not be used in the field unless more than 24 hours will elapse before delivery to the laboratory. If an aqueous sample is taken and the sample will not be extracted within 48 hours of collection, the sample should be adjusted to a pH range of 6.0-8.0 with sodium hydroxide or sulfuric acid.

8.3 All samples must be extracted within 7 days and completely analyzed within 30 days of collection.

9. *Extraction and Cleanup Procedures*

9.1 Use an aliquot of 1-10 g sample of the chemical waste or soil to be analyzed. Soils should be dried using a stream of prepurified nitrogen and pulverized in a ball-mill or similar device. Perform this operation in a clear area with proper hood space. Transfer the sample to a tared 125 ml flint glass bottle (Teflon-lined screw cap) and determine the weight of the sample. Add an appropriate quantity of ^{37}Cl-labelled 2,3,7,8-TCDD (adjust the quantity according to the required minimum detectable concentration), which is employed as an internal standard.

9.2 Extraction

9.2.1 Extract chemical waste samples by adding 10 ml methanol, 40 ml petroleum ether, 50 ml doubly distilled water, and then shaking the mixture for 2 minutes. Tars should be completely dissolved in any of the recommended neat solvents. Activated carbon samples must be extracted with benzene using method 3540 in SW-846 (Test Methods for Evaluating Solid Waste—Physical/Chemical Methods, available from G.P.O. Stock #055-022-81001-2). Quantitatively transfer the organic extract or dissolved sample to a clean 250 ml flint glass bottle (Teflon lined screw cap), add 50 ml doubly distilled water and shake for 2 minutes. Discard the aqueous layer and proceed with Step 9.3.

9.2.2 Extract soil samples by adding 40 ml of petroleum ether to the sample, and then shaking for 20 minutes. Quantitatively transfer the organic extract to a clean 250 ml flint glass bottle (Teflon-lined screw cap), add 50 ml doubly distilled water and shake for 2 minutes. Discard the aqueous layer and proceed with Step 9.3.

9.3 Wash the organic layer with 50 ml of 20% aqueous potassium hydroxide by shaking for 10 minutes and then remove and discard the aqueous layer.

9.4 Wash the organic layer with 50 ml of doubly distilled water by shaking for 2 minutes, and discard the aqueous layer.

9.5 Cautiously add 50 ml concentrated sulfuric acid and shake for 10 minutes. Allow the mixture to stand until layers separate (approximately 10 minutes), and remove and discard the acid layer. Repeat acid washing until no color is visible in the acid layer.

9.6 Add 50 ml of doubly distilled water to the organic extract and shake for 2 minutes. Remove and discard the aqueous layer and dry the organic layer by adding 10g of anhydrous sodium sulfate.

9.7 Concentrate the extract to incipient dryness by heating in a 55° C water bath and simultaneously flowing a stream of pre-

[6] This procedure is adopted because standards are not available for most of the CDDs and CDFs, and assumes that all the congeners will show the same response as the unlabelled congener used as a standard. Although this assumption may not be true in all cases, the error will be small.

purified nitrogen over the extract. Quantitatively transfer the residue to an alumina microcolumn fabricated as follows:

9.7.1 Cut off the top section of a 10 ml disposable Pyrex pipette at the 4.0 ml mark and insert a plug of silanized glass wool into the tip of the lower portion of the pipette.

9.7.2 Add 2.8g of Woelm basic alumina (previously activated at 600° C overnight and then cooled to room temperature in a desiccator just prior to use).

9.7.3 Transfer sample extract with a small volume of methylene chloride.

9.8 Elute the microcolumn with 10 ml of 3% methylene chloride-in-hexane followed by 15 ml of 20% methylene chloride-in-hexane and discard these effluents. Elute the column with 15 ml of 50% methylene chloride-in-hexane and concentrate this effluent (55° C water bath, stream of prepurified nitrogen) to about 0.3-0.5 ml.

9.9 Quantitatively transfer the residue (using methylene chloride to rinse the container) to a silanized Reacti-Vial (Pierce Chemical Co.). Evaporate, using a stream of prepurified nitrogen, almost to dryness, rinse the walls of the vessel with approximately 0.5 ml methylene chloride, evaporate just to dryness, and tightly cap the vial. Store the vial at 5° C until analysis, at which time the sample is reconstituted by the addition of tridecane.

9.10 Approximately 1 hour before GC-MS (HRGC-LRMS) analysis, dilute the residue in the micro-reaction vessel with an appropriate quantity of tridecane. Gently swirl the tridecane on the lower portion of the vessel to ensure dissolution of the CDDs and CDFs. Analyze a sample by GC/EC to provide insight into the complexity of the problem, and to determine the manner in which the mass spectrometer should be used. Inject an appropriate aliquot of the sample into the GC-MS instrument, using a syringe.

9.11 If, upon preliminary GC-MS analysis, the sample appears to contain interfering substances which obscure the analyses for CDDs and CDFs, high performance liquid chromatographic (HPLC) cleanup of the extract is accomplished, prior to further GC-MS analysis.

10. *HPLC Cleanup Procedure*[7]

10.1 Place approximately 2 ml of hexane in a 50 ml flint glass sample bottle fitted with a Teflon-lined cap.

10.2 At the appropriate retention time, position sample bottle to collect the required fraction.

10.3 Add 2 ml of 5% (w/v) sodium carbonate to the sample fraction collected and shake for one minute.

10.4 Quantitatively remove the hexane layer (top layer) and transfer to a micro-reaction vessel.

10.5 Concentrate the fraction to dryness and retain for further analysis.

11. *GC/MS Analysis*

11.1 The following column conditions are recommended: Glass capillary column conditions: SP-2250 coated on a 30 m long x 0.25 mm I.D. glass column (Supelco No. 2-3714, or equivalent) with helium carrier gas at 30 cm/sec linear velocity, run splitless. Column temperature is 210°C. Under these conditions the retention time for TCDDs is about 9.5 minutes. Calibrate the system daily with, a minimum, three injections of standard mixtures.

11.2 Calculate response factors for standards relative to ^{37}Cl-TCDD/F (see Section 12).

11.3 Analyze samples with selected ion monitoring of at least two ions from Table 3. Proof of the presence of CDD or CDF exists if the following conditions are met:

11.3.1 The retention time of the peak in the sample must match that in the standard, within the performance specifications of the analytical system.

11.3.2 The ratio of ions must agree within 10% with that of the standard.

11.3.3 The retention time of the peak maximum for the ions of interest must exactly match that of the peak.

[7] For cleanup see also method #8320 or #8330, SW-846, Test Methods for Evaluating Solid Waste, Physical/Chemical Methods (1982).

TABLE 3—LIST OF ACCURATE MASSES MONITORED USING GC SELECTED-ION MONITORING, LOW RESOLUTION, MASS SPECTROMETRY FOR SIMULTANEOUS DETERMINATION OF TETRA-, PENTA-, AND HEXACHLORINATED DIBENZO-*p*-DIOXINS AND DIBENZOFURANS

Class of chlorinated dibenzodioxin or dibenzofuran	Number of chlorine substituents (x)	Monitored m/z for dibenzodioxins $C_{12}H_{8-x}O_2I_x$	Monitored m/z for dibenzofurans $C_{12}H_{8-x}OCl_x$	Approximate theoretical ratio expected on basis of isotopic abundance
Tetra	4	[1] 319.897	[1] 303.902	0.74
		321.894	305.903	1.00
		[2] 327.885	[2] 311.894	
		[3] 256.933		0.21
		[3] 258.930		0.20
Penta	5	[1] 353.858	[1] 337.863	0.57
		355.855	339.860	1.00
Hexa	6	389.816	373.821	1.00
		391.813	375.818	0.87

[1] Molecular ion peak.
[2] Cl_4—labelled standard peaks.
[3] Ions which can be monitored in TCDD analyses for confirmation purposes.

11.4 Quantitate the CDD and CDF peaks from the response relative to the ^{37}Cl-TCDD/F internal standards. Recovery of the internal standard should be greater than 50 percent.

11.5 If a response is obtained for the appropriate set of ions, but is outside the expected ratio, a co-eluting impurity may be suspected. In this case, another set of ions characteristic of the CDD/CDF molecules should be analyzed. For TCDD a good choice of ions is m/e 257 and m/e 259. For TCDF a good choice of ions is m/e 241 and 243. These ions are useful in characterizing the molecular structure to TCDD or TCDF. For analysis of TCDD good analytical technique would require using all four ions, m/e 257, 320, 322, and 328, to verify detection and signal to noise ratio of 5 to 1. Suspected impurities such as DDE, DDD, or PCB residues can be confirmed by checking for their major fragments. These materials can be removed by the cleanup columns. Failure to meet criteria should be explained in the report, or the sample reanalyzed.

11.6 If broad background interference restricts the sensitivity of the GC/MS analysis, the analyst should employ cleanup procedures and reanalyze by GC/MS. See section 10.0.

11.7 In those circumstances where these procedures do not yield a definitive conclusion, the use of high resolution mass spectrometry is suggested.

12. *Calculations*

12.1 Determine the concentration of individual compounds according to the formula:

$$\text{Concentration, } \mu g/gm = \frac{A \times A_s}{G \times A_{is} \times R_f}$$

where:

A = μg of internal standard added to the sample [8]
G = gm of sample extracted
A_s = area of characteristic ion of the compound being quantified.
A_{is} = area of characteristic ion of the internal standard
R_f = response factor [9]

Response factors are calculated using data obtained from the analysis of standards according to the formula:

$$Rf \quad \frac{A_s \times C_{is}}{A_{is} \times C_s}$$

where:

[8] The proper amount of standard to be used is determined from the calibration curve (See Section 6.0).

[9] If standards for PCDDs/Fs and HxCDDs/Fs are not available, response factors for ions derived from these congeners are calculated relative to ^{37}Cl-TCDD/F. The analyst may use response factors for 1,2,3,4- or 2,3,7,8-TCDD, 1,2,3,4,7-PeCDD, or 1,2,3,4,7,8-HxCDD for quantitation of TCDDs/Fs, PeCDDs/Fs and HxCDDs/Fs, respectively. Implicit in this requirement is the assumption that the same response is obtained from PCDDs/Fs ccontaining the same numbers of chlorine atoms.

C_{is} = concentration of the internal standard
C_c = concentration of the standard compound

12.2 Report results in micrograms per gram without correction for recovery data. When duplicate and spiked samples are analyzed, all data obtained should be reported.

12.3 Accuracy and Precision. No data are available at this time.

[50 FR 2001, Jan. 14, 1985]

PART 262—STANDARDS APPLICABLE TO GENERATORS OF HAZARDOUS WASTE

Subpart A—General

Sec.
262.10 Purpose, scope, and applicability.
262.11 Hazardous waste determination.
262.12 EPA identification numbers.

Subpart B—The Manifest

262.20 General requirements.
262.21 Acquisition of manifests.
262.22 Number of copies.
262.23 Use of the manifest.

Subpart C—Pre-Transport Requirements

262.30 Packaging.
262.31 Labeling.
262.32 Marking.
262.33 Placarding.
262.34 Accumulation time.

Subpart D—Recordkeeping and Reporting

262.40 Recordkeeping.
262.41 Biennial report.
262.42 Exception reporting.
262.43 Additional reporting.
262.44 Special requirements for generators of between 100 and 1000 kg/mo.

Subpart E—Exports of Hazardous Waste

262.50 Applicability.
262.51 Definitions.
262.52 General requirements.
262.53 Notification of intent to export.
262.54 Special manifest requirements.
262.55 Exception reports.
262.56 Annual reports.
262.57 Recordkeeping.
262.58 International agreements. [Reserved]

Subpart F—Imports of Hazardous Waste

262.60 Imports of hazardous waste.

Subpart G—Farmers

262.70 Farmers.

APPENDIX—UNIFORM HAZARDOUS WASTE MANIFEST AND INSTRUCTIONS (EPA FORMS 8700-22 AND 8700-22A AND THEIR INSTRUCTIONS)

AUTHORITY: 42 U.S.C. 6906, 6912, 6922, 6923, 6924, 6925, and 6937.

SOURCE: 45 FR 33142, May 19, 1980, unless otherwise noted.

Subpart A—General

§ 262.10 Purpose, scope, and applicability.

(a) These regulations establish standards for generators of hazardous waste.

(b) A generator who treats, stores, or disposes of hazardous waste on-site must only comply with the following sections of this part with respect to that waste: Section 262.11 for determining whether or not he has a hazardous waste, § 262.12 for obtaining an EPA identification number, § 262.34 for accumulation of hazardous waste, § 262.40 (c) and (d) for recordkeeping, § 262.43 for additional reporting, and if applicable, § 262.70 for farmers.

(c) Any person who imports hazardous waste into the United States must comply with the standards applicable to generators established in this part.

(d) A farmer who generates waste pesticides which are hazardous waste and who complies with all of the requirements of § 262.70 is not required to comply with other standards in this part or 40 CFR parts 270, 264, 265, or 268 with respect to such pesticides.

(e) A person who generates a hazardous waste as defined by 40 CFR Part 261 is subject to the compliance requirements and penalties prescribed in section 3008 of the Act if he does not comply with the requirements of this part.

(f) An owner or operator who initiates a shipment of hazardous waste from a treatment, storage, or disposal facility must comply with the generator standards established in this part.

NOTE 1: The provisions of § 262.34 are applicable to the on-site accumulation of hazardous waste by generators. Therefore, the provisions of § 262.34 only apply to owners

or operators who are shipping hazardous waste which they generated at that facility.

NOTE 2: A generator who treats, stores, or disposes of hazardous waste on-site must comply with the applicable standards and permit requirements set forth in 40 CFR Parts 264, 265, and 266 and Part 270.

[45 FR 33142, May 19, 1980, as amended at 45 FR 86970, Dec. 31, 1980; 47 FR 1251, Jan. 11, 1982; 48 FR 14294, Apr. 1, 1983; 53 FR 27164, July 19, 1988]

§ 262.11 Hazardous waste determination.

A person who generates a solid waste, as defined in 40 CFR 261.2, must determine if that waste is a hazardous waste using the following method:

(a) He should first determine if the waste is excluded from regulation under 40 CFR 261.4.

(b) He must then determine if the waste is listed as a hazardous waste in Subpart D of 40 CFR Part 261.

NOTE: Even if the waste is listed, the generator still has an opportunity under 40 CFR 260.22 to demonstrate to the Administrator that the waste from his particular facility or operation is not a hazardous waste.

(c) For purposes of compliance with 40 CFR part 268, or if the waste is not listed in subpart D of this part, the generator must then determine whether the waste is identified in subpart C of 40 CFR part 261 by either:

(1) Testing the waste according to the methods set forth in Subpart C of 40 CFR Part 261, or according to an equivalent method approved by the Administrator under 40 CFR 260.21; or

(2) Applying knowledge of the hazard characteristic of the waste in light of the materials or the processes used.

(d) If the waste is determined to be hazardous, the generator must refer to Parts 264, 265, 268 of this chapter for possible exclusions or restrictions pertaining to management of his specific waste.

[45 FR 33142, May 19, 1980, as amended at 45 FR 76624, Nov. 19, 1980; 51 FR 40637, Nov. 7, 1986; 55 FR 22684, June 1, 1990]

§ 262.12 EPA identification numbers.

(a) A generator must not treat, store, dispose of, transport, or offer for transportation, hazardous waste without having received an EPA identification number from the Administrator.

(b) A generator who has not received an EPA identification number may obtain one by applying to the Administrator using EPA form 8700-12. Upon receiving the request the Administrator will assign an EPA identification number to the generator.

(c) A generator must not offer his hazardous waste to transporters or to treatment, storage, or disposal facilities that have not received an EPA identification number.

Subpart B—The Manifest

§ 262.20 General requirements.

(a) A generator who transports, or offers for transportation, hazardous waste for offsite treatment, storage, or disposal must prepare a Manifest OMB control number 2050-0039 on EPA form 8700-22, and, if necessary, EPA form 8700-22A, according to the instructions included in the Appendix to Part 262.

(b) A generator must designate on the manifest one facility which is permitted to handle the waste described on the manifest.

(c) A generator may also designate on the manifest one alternate facility which is permitted to handle his waste in the event an emergency prevents delivery of the waste to the primary designated facility.

(d) If the transporter is unable to deliver the hazardous waste to the designated facility or the alternate facility, the generator must either designate another facility or instruct the transporter to return the waste.

(e) The requirements of this subpart do not apply to hazardous waste produced by generators of greater than 100 kg but less than 1000 kg in a calendar month where:

(1) The waste is reclaimed under a contractual agreement pursuant to which:

(i) The type of waste and frequency of shipments are specified in the agreement;

(ii) The vehicle used to transport the waste to the recycling facility and to deliver regenerated material back to

the generator is owned and operated by the reclaimer of the waste; and

(2) The generator maintains a copy of the reclamation agreement in his files for a period of at least three years after termination or expiration of the agreement.

[45 FR 33142, May 19, 1980, as amended at 49 FR 10500, Mar. 20, 1984; 51 FR 10175, Mar. 24, 1986; 53 FR 45090, Nov. 8, 1988]

§ 262.21 Acquisition of manifests.

(a) If the State to which the shipment is manifested (consignment State) supplies the manifest and requires its use, then the generator must use that manifest.

(b) If the consignment State does not supply the manifest, but the State in which the generator is located (generator State) supplies the manifest and requires its use, then the generator must use that State's manifest.

(c) If neither the generator State nor the consignment State supplies the manifest, then the generator may obtain the manifest from any source.

[49 FR 10500, Mar. 20, 1984]

§ 262.22 Number of copies.

The manifest consists of at least the number of copies which will provide the generator, each transporter, and the owner or operator of the designated facility with one copy each for their records and another copy to be returned to the generator.

§ 262.23 Use of the manifest.

(a) The generator must:

(1) Sign the manifest certification by hand; and

(2) Obtain the handwritten signature of the initial transporter and date of acceptance on the manifest; and

(3) Retain one copy, in accordance with § 262.40(a).

(b) The generator must give the transporter the remaining copies of the manifest.

(c) For shipments of hazardous waste within the United States solely by water (bulk shipments only), the generator must send three copies of the manifest dated and signed in accordance with this section to the owner or operator of the designated facility or the last water (bulk shipment) transporter to handle the waste in the United States if exported by water. Copies of the manifest are not required for each transporter.

(d) For rail shipments of hazardous waste within the United States which originate at the site of generation, the generator must send at least three copies of the manifest dated and signed in accordance with this section to:

(1) The next non-rail transporter, if any; or

(2) The designated facility if transported solely by rail; or

(3) The last rail transporter to handle the waste in the United States if exported by rail.

(e) For shipments of hazardous waste to a designated facility in an authorized State which has not yet obtained authorization to regulate that particular waste as hazardous, the generator must assure that the designated facility agrees to sign and return the manifest to the generator, and that any out-of-state transporter signs and forwards the manifest to the designated facility.

NOTE: See § 263.20(e) and (f) for special provisions for rail or water (bulk shipment) transporters.

[45 FR 33142, May 19, 1980, as amended at 45 FR 86973, Dec. 31, 1980; 55 FR 2354, Jan. 23, 1990]

EFFECTIVE DATE NOTE: At 55 FR 2354, Jan. 23, 1990, § 262.23 paragraph (e) was added, effective July 23, 1990.

Subpart C—Pre-Transport Requirements

§ 262.30 Packaging.

Before transporting hazardous waste or offering hazardous waste for transportation off-site, a generator must package the waste in accordance with the applicable Department of Transportation regulations on packaging under 49 CFR Parts 173, 178, and 179.

§ 262.31 Labeling.

Before transporting or offering hazardous waste for transportation off-site, a generator must label each package in accordance with the applicable Department of Transportation regula-

tions on hazardous materials under 49 CFR Part 172.

§ 262.32 Marking.

(a) Before transporting or offering hazardous waste for transportation off-site, a generator must mark each package of hazardous waste in accordance with the applicable Department of Transportation regulations on hazardous materials under 49 CFR Part 172;

(b) Before transporting hazardous waste or offering hazardous waste for transportation off-site, a generator must mark each container of 110 gallons or less used in such transportation with the following words and information displayed in accordance with the requirements of 49 CFR 172.304:

HAZARDOUS WASTE—Federal Law Prohibits Improper Disposal. If found, contact the nearest police or public safety authority or the U.S. Environmental Protection Agency.

Generator's Name and Address ————.
Manifest Document Number ————.

§ 262.33 Placarding.

Before transporting hazardous waste or offering hazardous waste for transportation off-site, a generator must placard or offer the initial transporter the appropriate placards according to Department of Transportation regulations for hazardous materials under 49 CFR Part 172, Subpart F.

§ 262.34 Accumulation time.

(a) Except as provided in paragraphs (d), (e), and (f) of this section, a generator may accumulate hazardous waste on-site for 90 days or less without a permit or without having interim status, provided that:

(1) The waste is placed in containers and the generator complies with Subpart I of 40 CFR Part 265, or the waste is placed in tanks and the generator complies with Subpart J of 40 CFR Part 265, except § 265.197(c), and § 265.200. In addition, such a generator is exempt from all the requirements in Subparts G and H of 40 CFR Part 265, except for § 265.111 and § 265.114.

(2) The date upon which each period of accumulation begins is clearly marked and visible for inspection on each container;

(3) While being accumulated on-site, each container and tank is labeled or marked clearly with the words, "Hazardous Waste"; and

(4) The generator complies with the requirements for owners or operators in subparts C and D in 40 CFR part 265, with § 265.16, and with 40 CFR 268.7(a)(4).

(b) A generator who accumulates hazardous waste for more than 90 days is an operator of a storage facility and is subject to the requirements of 40 CFR Parts 264 and 265 and the permit requirements of 40 CFR Part 270 unless he has been granted an extension to the 90-day period. Such extension may be granted by EPA if hazardous wastes must remain on-site for longer than 90 days due to unforeseen, temporary, and uncontrollable circumstances. An extension of up to 30 days may be granted at the discretion of the Regional Administrator on a case-by-case basis.

(c)(1) A generator may accumulate as much as 55 gallons of hazardous waste or one quart of acutely hazardous waste listed in § 261.33(e) in containers at or near any point of generation where wastes initially accumulate, which is under the control of the operator of the process generating the waste, without a permit or interim status and without complying with paragraph (a) of this section provided he:

(i) Complies with §§ 265.171, 265.172, and 265.173(a) of this chapter; and

(ii) Marks his containers either with the words "Hazardous Waste" or with other words that identify the contents of the containers.

(2) A generator who accumulates either hazardous waste or acutely hazardous waste listed in § 261.33(e) in excess of the amounts listed in paragraph (c)(1) of this section at or near any point of generation must, with respect to that amount of excess waste, comply within three days with paragraph (a) of this section or other applicable provisions of this chapter. During the three day period the generator must continue to comply with paragraphs (c)(1)(i) through (ii) of this section. The generator must mark

the container holding the excess accumulation of hazardous waste with the date the excess amount began accumulating.

(d) A generator who generates greater than 100 kilograms but less than 1000 kilograms of hazardous waste in a calendar month may accumulate hazardous waste on-site for 180 days or less without a permit or without having interim status provided that:

(1) The quantity of waste accumulated on-site never exceeds 6000 kilograms;

(2) The generator complies with the requirements of Subpart I of Part 265, except § 265.176;

(3) The generator complies with the requirements of § 265.201 in Subpart J of Part 265;

(4) The generator complies with the requirements of paragraphs (a)(2) and (a)(3) of this section and the requirements of Subpart C of Part 265; and

(5) The generator complies with the following requirements:

(i) At all times there must be at least one employee either on the premises or on call (*i.e.*, available to respond to an emergency by reaching the facility within a short period of time) with the responsibility for coordinating all emergency response measures specified in paragraph (d)(5)(iv) of this section. This employee is the emergency coordinator.

(ii) The generator must post the following information next to the telephone:

(A) The name and telephone number of the emergency coordinator;

(B) Location of fire extinguishers and spill control material, and, if present, fire alarm; and

(C) The telephone number of the fire department, unless the facility has a direct alarm.

(iii) The generator must ensure that all employees are thoroughly familiar with proper waste handling and emergency procedures, relevant to their responsibilities during normal facility operations and emergencies;

(iv) The emergency coordinator or his designee must respond to any emergencies that arise. The applicable responses are as follows:

(A) In the event of a fire, call the fire department or attempt to extinguish it using a fire extinguisher;

(B) In the event of a spill, contain the flow of hazardous waste to the extent possible, and as soon as is practicable, clean up the hazardous waste and any contaminated materials or soil;

(C) In the event of a fire, explosion, or other release which could threaten human health outside the facility or when the generator has knowledge that a spill has reached surface water, the generator must immediately notify the National Response Center (using their 24-hour toll free number 800/424-8802). The report must include the following information:

(1) The name, address, and U.S. EPA Identification Number of the generator;

(2) Date, time, and type of incident (*e.g.*, spill or fire);

(3) Quantity and type of hazardous waste involved in the incident;

(4) Extent of injuries, if any; and

(5) Estimated quantity and disposition of recovered materials, if any.

(e) A generator who generates greater than 100 kilograms but less than 1000 kilograms of hazardous waste in a calendar month and who must transport his waste, or offer his waste for transportation, over a distance of 200 miles or more for off-site treatment, storage or disposal may accumulate hazardous waste on-site for 270 days or less without a permit or without having interim status provided that he complies with the requirements of paragraph (d) of this section.

(f) A generator who generates greater than 100 kilograms but less than 1000 kilograms of hazardous waste in a calendar month and who accumulates hazardous waste in quantities exceeding 6000 kg or accumulates hazardous waste for more than 180 days (or for more than 270 days if he must transport his waste, or offer his waste for transportation, over a distance of 200 miles or more) is an operator of a storage facility and is subject to the requirements of 40 CFR Parts 264 and 265 and the permit requirements of 40 CFR Part 270 unless he has been granted an extension to the 180-day (or 270-day if applicable) period. Such

extension may be granted by EPA if hazardous wastes must remain on-site for longer than 180 days (or 270 days if applicable) due to unforeseen, temporary, and uncontrollable circumstances. An extension of up to 30 days may be granted at the discretion of the Regional Administrator on a case-by-case basis.

[47 FR 1251, Jan. 11, 1982, as amended at 48 FR 14294, Apr. 1, 1983; 49 FR 49571, Dec. 20, 1984; 51 FR 10175, Mar. 24, 1986; 51 FR 25472, July 14, 1986; 55 FR 22684, June 1, 1990]

Subpart D—Recordkeeping and Reporting

§ 262.40 Recordkeeping.

(a) A generator must keep a copy of each manifest signed in accordance with § 262.23(a) for three years or until he receives a signed copy from the designated facility which received the waste. This signed copy must be retained as a record for at least three years from the date the waste was accepted by the initial transporter.

(b) A generator must keep a copy of each Biennial Report and Exception Report for a period of at least three years from the due date of the report.

(c) A generator must keep records of any test results, waste analyses, or other determinations made in accordance with § 262.11 for at least three years from the date that the waste was last sent to on-site or off-site treatment, storage, or disposal.

(d) The periods or retention referred to in this section are extended automatically during the course of any unresolved enforcement action regarding the regulated activity or as requested by the Administrator.

[45 FR 33142, May 19, 1980, as amended at 48 FR 3981, Jan. 28, 1983]

§ 262.41 Biennial report.

(a) A generator who ships any hazardous waste off-site to a treatment, storage or disposal facility within the United States must prepare and submit a single copy of a Biennial Report to the Regional Administrator by March 1 of each even numbered year. The Biennial Report must be submitted on EPA Form 8700-13A, must cover generator activities during the previous year, and must include the following information:

(1) The EPA identification number, name, and address of the generator;

(2) The calendar year covered by the report;

(3) The EPA identification number, name, and address for each off-site treatment, storage, or disposal facility in the United States to which waste was shipped during the year;

(4) The name and EPA identification number of each transporter used during the reporting year for shipments to a treatment, storage or disposal facility within the United States;

(5) A description, EPA hazardous waste number (from 40 CFR Part 261, Subpart C or D), DOT hazard class, and quantity of each hazardous waste shipped off-site for shipments to a treatment, storage or disposal facility within the United States. This information must be listed by EPA identification number of each such off-site facility to which waste was shipped.

(6) A description of the efforts undertaken during the year to reduce the volume and toxicity of waste generated.

(7) A description of the changes in volume and toxicity of waste actually achieved during the year in comparison to previous years to the extent such information is available for years prior to 1984.

(8) The certification signed by the generator or authorized representative.

(b) Any generator who treats, stores, or disposes of hazardous waste on-site must submit a biennial report covering those wastes in accordance with the provisions of 40 CFR Parts 270, 264, 265, and 266. Reporting for exports of hazardous waste is not required on the Biennial Report form. A separate annual report requirement is set forth at 40 CFR 262.56.

[48 FR 3981, Jan. 28, 1983, as amended at 48 FR 14294, Apr. 1, 1983; 50 FR 28746, July 15, 1985; 51 FR 28682, Aug. 8, 1986]

§ 262.42 Exception reporting.

(a)(1) A generator of greater than 1000 kilograms of hazardous waste in a calendar month who does not receive a

copy of the manifest with the handwritten signature of the owner or operator of the designated facility within 35 days of the date the waste was accepted by the initial transporter must contact the transporter and/or the owner or operator of the designated facility to determine the status of the hazardous waste.

(2) A generator of greater than 1000 kilograms of hazardous waste in a calendar month must submit an Exception Report to the EPA Regional Administrator for the Region in which the generator is located if he has not received a copy of the manifest with the handwritten signature of the owner or operator of the designated facility within 45 days of the date the waste was accepted by the initial transporter. The Exception Report must include:

(i) A legible copy of the manifest for which the generator does not have confirmation of delivery;

(ii) A cover letter signed by the generator or his authorized representative explaining the efforts taken to locate the hazardous waste and the results of those efforts.

(b) A generator of greater than 100 kilograms but less than 1000 kilograms of hazardous waste in a calendar month who does not receive a copy of the manifest with the handwritten signature of the owner or operator of the designated facility within 60 days of the date the waste was accepted by the initial transporter must submit a legible copy of the manifest, with some indication that the generator has not received confirmation of delivery, to the EPA Regional Administrator for the Region in which the generator is located.

NOTE: The submission to EPA need only be a handwritten or typed note on the manifest itself, or on an attached sheet of paper, stating that the return copy was not received.

(Information collection requirements approved by the Office of Management and Budget under control number 2050-0039)

[52 FR 35898, Sept. 23, 1987]

§ 262.43 Additional reporting.

The Administrator, as he deems necessary under sections 2002(a) and 3002(6) of the Act, may require generators to furnish additional reports concerning the quantities and disposition of wastes identified or listed in 40 CFR Part 261.

§ 262.44 Special requirements for generators of between 100 and 1000 kg/mo.

A generator of greater than 100 kilograms but less than 1000 kilograms of hazardous waste in a calendar month is subject only to the following requirements in this subpart:

(a) Section 262.40(a), (c), and (d), recordkeeping;

(b) Section 262.42(b), exception reporting; and

(c) Section 262.43, additional reporting.

(Information collection requirements approved by the Office of Management and Budget under control number 2050-0039)

[52 FR 35899, Sept. 23, 1987]

Subpart E—Exports of Hazardous Waste

SOURCE: 51 FR 28682, Aug. 8, 1986, unless otherwise noted.

§ 262.50 Applicability.

This subpart establishes requirements applicable to exports of hazardous waste. Except to the extent § 262.58 provides otherwise, a primary exporter of hazardous waste must comply with the special requirements of this subpart and a transporter transporting hazardous waste for export must comply with applicable requirements of Part 263. Section 262.58 sets forth the requirements of international agreements between the United States and receiving countries which establish different notice, export, and enforcement procedures for the transportation, treatment, storage and disposal of hazardous waste for shipments between the United States and those countries.

§ 262.51 Definitions.

In addition to the definitions set forth at 40 CFR 260.10, the following definitions apply to this subpart:

"Consignee" means the ultimate treatment, storage or disposal facility in a receiving country to which the hazardous waste will be sent.

"EPA Acknowledgement of Consent" means the cable sent to EPA from the U.S. Embassy in a receiving country that acknowledges the written consent of the receiving country to accept the hazardous waste and describes the terms and conditions of the receiving country's consent to the shipment.

"Primary Exporter" means any person who is required to originate the manifest for a shipment of hazardous waste in accordance with 40 CFR Part 262, Subpart B, or equivalent State provision, which specifies a treatment, storage, or disposal facility in a receiving country as the facility to which the hazardous waste will be sent and any intermediary arranging for the export.

"Receiving country" means a foreign country to which a hazardous waste is sent for the purpose of treatment, storage or disposal (except short-term storage incidental to transportation).

"Transit country" means any foreign country, other than a receiving country, through which a hazardous waste is transported.

[53 FR 27164, July 19, 1988]

§ 262.52 General requirements.

Exports of hazardous waste are prohibited except in compliance with the applicable requirements of this Subpart and Part 263. Exports of hazardous waste are prohibited unless:

(a) Notification in accordance with § 262.53 has been provided;

(b) The receiving country has consented to accept the hazardous waste;

(c) A copy of the EPA Acknowledgment of Consent to the shipment accompanies the hazardous waste shipment and, unless exported by rail, is attached to the manifest (or shipping paper for exports by water (bulk shipment)).

(d) The hazardous waste shipment conforms to the terms of the receiving country's written consent as reflected in the EPA Acknowledgment of Consent.

(Approved by the Office of Management and Budget under control number 2050-0035)

§ 262.53 Notification of intent to export.

(a) A primary exporter of hazardous waste must notify EPA of an intended export before such waste is scheduled to leave the United States. A complete notification should be submitted sixty (60) days before the initial shipment is intended to be shipped off site. This notification may cover export activities extending over a twelve (12) month or lesser period. The notification must be in writing, signed by the primary exporter, and include the following information:

(1) Name, mailing address, telephone number and EPA ID number of the primary exporter;

(2) By consignee, for each hazardous waste type:

(i) A description of the hazardous waste and the EPA hazardous waste number (from 40 CFR Part 261, Subparts C and D), U.S. DOT proper shipping name, hazard class and ID number (UN/NA) for each hazardous waste as identified in 49 CFR Parts 171 through 177;

(ii) The estimated frequency or rate at which such waste is to be exported and the period of time over which such waste is to be exported.

(iii) The estimated total quantity of the hazardous waste in units as specified in the instructions to the Uniform Hazardous Waste Manifest Form (8700-22);

(iv) All points of entry to and departure from each foreign country through which the hazardous waste will pass;

(v) A description of the means by which each shipment of the hazardous waste will be transported (e.g., mode of transportation vehicle (air, highway, rail, water, etc.), type(s) of container (drums, boxes, tanks, etc.));

(vi) A description of the manner in which the hazardous waste will be treated, stored or disposed of in the receiving country (e.g., land or ocean incineration, other land disposal, ocean dumping, recycling);

(vii) The name and site address of the consignee and any alternate consignee; and

(viii) The name of any transit countries through which the hazardous waste will be sent and a description of

the approximate length of time the hazardous waste will remain in such country and the nature of its handling while there;

(b) Notification shall be sent to the Office of International Activities (A-106), EPA, 401 M Street, SW., Washington, DC 20460 with "Attention: Notification to Export" prominently displayed on the front of the envelope.

(c) Except for changes to the telephone number in paragraph (a)(1) of this section, changes to paragraph (a)(2)(v) of this section and decreases in the quantity indicated pursuant to paragraph (a)(2)(iii) of this section when the conditions specified on the original notification change (including any exceedance of the estimate of the quantity of hazardous waste specified in the original notification), the primary exporter must provide EPA with a written renotification of the change. The shipment cannot take place until consent of the receiving country to the changes (except for changes to paragraph (a)(2)(viii) of this section and in the ports of entry to and departure from transit countries pursuant to paragraph (a)(2)(iv) of this section) has been obtained and the primary exporter receives an EPA Acknowledgment of Consent reflecting the receiving country's consent to the changes.

(d) Upon request by EPA, a primary exporter shall furnish to EPA any additional information which a receiving country requests in order to respond to a notification.

(e) In conjunction with the Department of State, EPA will provide a complete notification to the receiving country and any transit countries. A notification is complete when EPA receives a notification which EPA determines satisfies the requirements of paragraph (a) of this section. Where a claim of confidentiality is asserted with respect to any notification information required by paragraph (a) of this section, EPA may find the notification not complete until any such claim is resolved in accordance with 40 CFR 260.2.

(f) Where the receiving country consents to the receipt of the hazardous waste, EPA will forward an EPA Acknowledgment of Consent to the primary exporter for purposes of § 262.54(h). Where the receiving country objects to receipt of the hazardous waste or withdraws a prior consent, EPA will notify the primary exporter in writing. EPA will also notify the primary exporter of any responses from transit countries.

(Approved by the Office of Management and Budget under control number 2050-0035)

§ 262.54 Special manifest requirements.

A primary exporter must comply with the manifest requirements of 40 CFR 262.20 through 262.23 except that:

(a) In lieu of the name, site address and EPA ID number of the designated permitted facility, the primary exporter must enter the name and site address of the consignee;

(b) In lieu of the name, site address and EPA ID number of a permitted alternate facility, the primary exporter may enter the name and site address of any alternate consignee.

(c) In Special Handling Instructions and Additional Information, the primary exporter must identify the point of departure from the United States;

(d) The following statement must be added to the end of the first sentence of the certification set forth in Item 16 of the Uniform Hazardous Waste Manifest Form: "and conforms to the terms of the attached EPA Acknowledgment of Consent";

(e) In lieu of the requirements of § 262.21, the primary exporter must obtain the manifest form from the primary exporter's State if that State supplies the manifest form and requires its use. If the primary exporter's State does not supply the manifest form, the primary exporter may obtain a manifest form from any source.

(f) The primary exporter must require the consignee to confirm in writing the delivery of the hazardous waste to that facility and to describe any significant discrepancies (as defined in 40 CFR 264.72(a)) between the manifest and the shipment. A copy of the manifest signed by such facility may be used to confirm delivery of the hazardous waste.

(g) In lieu of the requirements of § 262.20(d), where a shipment cannot be delivered for any reason to the designated or alternate consignee, the primary exporter must:

(1) Renotify EPA of a change in the conditions of the original notification to allow shipment to a new consignee in accordance with § 262.53(c) and obtain an EPA Acknowledgment of Consent prior to delivery; or

(2) Instruct the transporter to return the waste to the primary exporter in the United States or designate another facility within the United States; and

(3) Instruct the transporter to revise the manifest in accordance with the primary exporter's instructions.

(h) The primary exporter must attach a copy of the EPA Acknowledgment of Consent to the shipment to the manifest which must accompany the hazardous waste shipment. For exports by rail or water (bulk shipment), the primary exporter must provide the transporter with an EPA Acknowledgment of Consent which must accompany the hazardous waste but which need not be attached to the manifest except that for exports by water (bulk shipment) the primary exporter must attach the copy of the EPA Acknowledgment of Consent to the shipping paper.

(i) The primary exporter shall provide the transporter with an additional copy of the manifest for delivery to the U.S. Customs official at the point the hazardous waste leaves the United States in accordance with § 263.20(g)(4).

(Approved by the Office of Management and Budget under control number 2050-0035)

§ 262.55 Exception reports.

In lieu of the requirements of § 262.42, a primary exporter must file an exception report with the Administrator if:

(a) He has not received a copy of the manifest signed by the transporter stating the date and place of departure from the United States within forty-five (45) days from the date it was accepted by the initial transporter;

(b) Within ninety (90) days from the date the waste was accepted by the initial transporter, the primary exporter has not received written confirmation from the consignee that the hazardous waste was received;

(c) The waste is returned to the United States.

(Approved by the Office of Management and Budget under control number 2050-0035)

§ 262.56 Annual reports.

(a) Primary exporters of hazardous waste shall file with the Administrator no later than March 1 of each year, a report summarizing the types, quantities, frequency, and ultimate destination of all hazardous waste exported during the previous calendar year. Such reports shall include the following:

(1) The EPA identification number, name, and mailing and site address of the exporter;

(2) The calendar year covered by the report;

(3) The name and site address of each consignee;

(4) By consignee, for each hazardous waste exported, a description of the hazardous waste, the EPA hazardous waste number (from 40 CFR Part 261, Subpart C or D), DOT hazard class, the name and US EPA ID number (where applicable) for each transporter used, the total amount of waste shipped and number of shipments pursuant to each notification;

(5) Except for hazardous waste produced by exporters of greater than 100 kg but less than 1000 kg in a calendar month, unless provided pursuant to § 262.41, in even numbered years:

(i) A description of the efforts undertaken during the year to reduce the volume and toxicity of waste generated; and

(ii) A description of the changes in volume and toxicity of waste actually achieved during the year in comparison to previous years to the extent such information is available for years prior to 1984.

(6) A certification signed by the primary exporter which states:

I certify under penalty of law that I have personally examined and am familiar with

the information submitted in this and all attached documents, and that based on my inquiry of those individuals immediately rsponsible for obtaining the information, I believe that the submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information including the possibility of fine and imprisonment.

(b) Reports shall be sent to the following address: Office of International Activities (A-106), Environmental Protection Agency, 401 M Street SW., Washington, DC 20460.

(Approved by the Office of Management and Budget under control number 2050-0035)

§ 262.57 Recordkeeping.

(a) For all exports a primary exporter must:

(1) Keep a copy of each notification of intent to export for a period of at least three years from the date the hazardous waste was accepted by the initial transporter;

(2) Keep a copy of each EPA Acknowledgment of Consent for a period of at least three years from the date the hazardous waste was accepted by the initial transporter;

(3) Keep a copy of each confirmation of delivery of the hazardous waste from the consignee for at least three years from the date the hazardous waste was accepted by the initial transporter; and

(4) Keep a copy of each annual report for a period of at least three years from the due date of the report.

(b) The periods of retention referred to in this section are extended automatically during the course of any unresolved enforcement action regarding the regulated activity or as requested by the Administrator.

(Approved by the Office of Management and Budget under control number 2050-0035)

§ 262.58 International agreements. [(Reserved)]

Subpart F—Imports of Hazardous Waste

§ 262.60 Imports of hazardous waste.

(a) Any person who imports hazardous waste from a foreign country into the United States must comply with the requirements of this part and the special requirements of this subpart.

(b) When importing hazardous waste, a person must meet all the requirements of § 262.20(a) for the manifest except that:

(1) In place of the generator's name, address and EPA identification number, the name and address of the foreign generator and the importer's name, address and EPA identification number must be used.

(2) In place of the generator's signature on the certification statement, the U.S. importer or his agent must sign and date the certification and obtain the signature of the initial transporter.

(c) A person who imports hazardous waste must obtain the manifest form from the consignment State if the State supplies the manifest and requires its use. If the consignment State does not supply the manifest form, then the manifest form may be obtained from any source.

[51 FR 28685, Aug. 8, 1986]

Subpart G—Farmers

§ 262.70 Farmers.

A farmer disposing of waste pesticides from his own use which are hazardous wastes is not required to comply with the standards in this part or other standards in 40 CFR Parts 264, 265, 268, or 270 for those wastes provided he triple rinses each emptied pesticide container in accordance with § 261.7(b)(3) and disposes of the pesticide residues on his own farm in a manner consisent with the disposal instructions on the pesticide label.

[53 FR 27165, July 19, 1988]

APPENDIX—UNIFORM HAZARDOUS WASTE MANIFEST AND INSTRUCTIONS (EPA FORMS 8700-22 AND 8700-22A AND THEIR INSTRUCTIONS)

U.S. EPA Form 8700-22

Read all instructions before completing this form.

This form has been designed for use on a 12-pitch (elite) typerwriter; a firm point pen may also be used—press down hard.

Federal regulations require generators and transporters of hazardous waste and owners or operators of hazardous waste treatment, storage, and disposal facilities to use this form (8700-22) and, if necessary, the continuation sheet (Form 8700-22A) for both inter and intrastate transportation.

Federal regulations also require generators and transporters of hazardous waste and owners or operators of hazardous waste treatment, storage and disposal facilities to complete the following information:

* * * * *

Please print or type. *(Form designed for use on elite (12-pitch) typewriter.)* *Form Approved. OMB No. 2050-0039. Expires 9-30-81*

UNIFORM HAZARDOUS WASTE MANIFEST

1. Generator's US EPA ID No. | Manifest Document No.
2. Page 1 of | Information in the shaded areas is not required by Federal law

GENERATOR

3. Generator's Name and Mailing Address
4. Generator's Phone ( )

A. State Manifest Document Number
B. State Generator's ID

5. Transporter 1 Company Name | 6. US EPA ID Number

C. State Transporter's ID
D. Transporter's Phone

7. Transporter 2 Company Name | 8. US EPA ID Number

E. State Transporter's ID
F. Transporter's Phone

9. Designated Facility Name and Site Address | 10. US EPA ID Number

G. State Facility's ID
H. Facility's Phone

11. US DOT Description *(Including Proper Shipping Name, Hazard Class, and ID Number)*	12. Containers No.	Type	13. Total Quantity	14. Unit Wt/Vol	I. Waste No.
a.					
b.					
c.					
d.					

J. Additional Descriptions for Materials Listed Above

K. Handling Codes for Wastes Listed Above

15. Special Handling Instructions and Additional Information

16. **GENERATOR'S CERTIFICATION:** I hereby declare that the contents of this consignment are fully and accurately described above by proper shipping name and are classified, packed, marked, and labeled, and are in all respects in proper condition for transport by highway according to applicable international and national government regulations.

If I am a large quantity generator, I certify that I have a program in place to reduce the volume and toxicity of waste generated to the degree I have determined to be economically practicable and that I have selected the practicable method of treatment, storage, or disposal currently available to me which minimizes the present and future threat to human health and the environment; OR, if I am a small quantity generator, I have made a good faith effort to minimize my waste generation and select the best waste management method that is available to me and that I can afford.

Printed/Typed Name | Signature | Month Day Year

TRANSPORTER

17. Transporter 1 Acknowledgement of Receipt of Materials

Printed/Typed Name | Signature | Month Day Year

18. Transporter 2 Acknowledgement of Receipt of Materials

Printed/Typed Name | Signature | Month Day Year

FACILITY

19. Discrepancy Indication Space

20. Facility Owner or Operator Certification of receipt of hazardous materials covered by this manifest except as noted in Item 19

Printed/Typed Name | Signature | Month Day Year

EPA Form 8700-22 (Rev. 9-81) Previous editions are obsolete

The following statement must be included with each Uniform Hazardous Waste Manifest, either on the form, in the instructions to the form, or accompanying the form:

Public reporting burden for this collection of information is estimated to average: 37 minutes for generators, 15 minutes for transporters, and 10 minutes for treatment, storage and disposal facilities. This includes time for reviewing instructions, gathering data, and completing and reviewing the form. Send comments regarding the burden estimate, including suggestions for reducing this burden, to: Chief, Information Policy Branch, PM-223, U.S. Environmental Protection Agency, 401 M Street SW., Washington, DC 20460; and to the Office of Information and Regulatory Affairs, Office of Management and Budget, Washington, DC 20503.

GENERATORS

Item 1. Generator's U.S. EPA ID Number—Manifest Document Number

Enter the generator's U.S. EPA twelve digit identification number and the unique five digit number assigned to this Manifest (e.g., 00001) by the generator.

Item 2. Page 1 of ——

Enter the total number of pages used to complete this Manifest, i.e., the first page (EPA Form 8700-22) plus the number of Continuation Sheets (EPA Form 8700-22A), if any.

Item 3. Generator's Name and Mailing Address

Enter the name and mailing address of the generator. The address should be the location that will manage the returned Manifest forms.

Item 4. Generator's Phone Number

Enter a telephone number where an authorized agent of the generator may be reached in the event of an emergency.

Item 5. Transporter 1 Company Name

Enter the company name of the first transporter who will transport the waste.

Item 6. U.S. EPA ID Number

Enter the U.S. EPA twelve digit identification number of the first transporter identified in item 5.

Item 7. Transporter 2 Company Name

If applicable, enter the company name of the second transporter who will transport the waste. If more than two transporters are used to transport the waste, use a Continuation Sheet(s) (EPA Form 8700-22A) and list the transporters in the order they will be transporting the waste.

Item 8. U.S. EPA ID Number

If applicable, enter the U.S. EPA twelve digit identification number of the second transporter identified in item 7.

NOTE: If more than two transporters are used, enter each additional transporter's company name and U.S. EPA twelve digit identification number in items 24-27 on the Continuation Sheet (EPA Form 8700-22A). Each Continuation Sheet has space to record two additional transporters. Every transporter used between the generator and the designated facility must be listed.

Item 9. Designated Facility Name and Site Address

Enter the company name and site address of the facility designated to receive the waste listed on this Manifest. The address must be the site address, which may differ from the company mailing address.

Item 10. U.S. EPA ID Number

Enter the U.S. EPA twelve digit identification number of the designated facility identified in item 9.

Item 11. U.S. DOT Description [Including Proper Shipping Name, Hazard Class, and ID Number (UN/NA)]

Enter the U.S. DOT Proper Shipping Name, Hazard Class, and ID Number (UN/NA) for each waste as identified in 49 CFR 171 through 177.

NOTE: If additional space is needed for waste descriptions, enter these additional descriptions in item 28 on the Continuation Sheet (EPA Form 8700-22A).

Item 12. Containers (No. and Type)

Enter the number of containers for each waste and the appropriate abbreviation from Table I (below) for the type of container.

Table I—Types of Containers

DM = Metal drums, barrels, kegs
DW = Wooden drums, barrels, kegs
DF = Fiberboard or plastic drums, barrels, kegs
TP = Tanks portable
TT = Cargo tanks (tank trucks)
TC = Tank cars
DT = Dump truck
CY = Cylinders
CM = Metal boxes, cartons, cases (including roll-offs)
CW = Wooden boxes, cartons, cases
CF = Fiber or plastic boxes, cartons, cases

BA=Burlap, cloth, paper or plastic bags

Item 13. Total Quantity

Enter the total quantity of waste described on each line.

Item 14. Unit (Wt./Vol.)

Enter the appropriate abbreviation from Table II (below) for the unit of measure.

Table II—Units of Measure

G=Gallons (liquids only)
P=Pounds
T=Tons (2000 lbs)
Y=Cubic yards
L=Liters (liquids only)
K=Kilograms
M=Metric tons (1000 kg)
N=Cubic meters

Item 15. Special Handling Instructions and Additional Information

Generators may use this space to indicate special transportation, treatment, storage, or disposal information or Bill of Lading information. States may not require additional, new, or different information in this space. For international shipments, generators must enter in this space the point of departure (City and State) for those shipments destined for treatment, storage, or disposal outside the jurisdiction of the United States.

Item 16. Generator's Certification

The generator must read, sign (by hand), and date the certification statement. If a mode *other than* highway is used, the word "highway" should be lined out and the appropriate mode (rail, water, or air) inserted in the space below. If another mode *in addition to* the highway mode is used, enter the appropriate additional mode (e.g., *and rail*) in the space below.

Primary exporters shipping hazardous wastes to a facility located outside of the United States must add to the end of the first sentence of the certification the following words "and conforms to the terms of the EPA Acknowledgment of Consent to the shipment."

In signing the waste minimization certification statement, those generators who have not been exempted by statute or regulation from the duty to make a waste minimization certification under section 3002(b) of RCRA are also certifying that they have complied with the waste minimization requirements.

Generators may preprint the words, "On behalf of" in the signature block or may hand write this statement in the signature block prior to signing the generator certifications.

NOTE: All of the above information *except* the handwritten signature required in item 16 may be preprinted.

* * * * *

TRANSPORTERS

Item 17. Transporter 1 Acknowledgement of Receipt of Materials

Enter the name of the person accepting the waste on behalf of the first transporter. That person must acknowledge acceptance of the waste described on the Manifest by signing and entering the date of receipt.

Item 18. Transporter 2 Acknowledgement of Receipt of Materials

Enter, if applicable, the name of the person accepting the waste on behalf of the second transporter. That person must acknowledge acceptance of the waste described on the Manifest by signing and entering the date of receipt.

NOTE: International Shipments—Transporter Responsibilities.

Exports—Transporters must sign and enter the date the waste left the United States in item 15 of Form 8700-22.

Imports—Shipments of hazardous waste regulated by RCRA and transported into the United States from another country must upon entry be accompanied by the U.S. EPA Uniform Hazardous Waste Manifest. Transporters who transport hazardous waste into the United States from another country are responsible for completing the Manifest (40 CFR 263.10(c)(1)).

Owners and Operators of Treatment, Storage, or Disposal Facilities

Item 19. Discrepancy Indication Space

The authorized representative of the designated (or alternate) facility's owner or operator must note in this space any significant discrepancy between the waste described on the Manifest and the waste actually received at the facility.

Owners and operators of facilities located in unauthorized States (i.e., the U.S. EPA administers the hazardous waste management program) who cannot resolve significant discrepancies within 15 days of receiving the waste must submit to their Regional Administrator (see list below) a letter with a copy of the Manifest at issue describing the discrepancy and attempts to reconcile it (40 CFR 264.72 and 265.72).

Owners and operators of facilities located in authorized States (i.e., those States that have received authorization from the U.S. EPA to administer the hazardous waste program) should contact their State agency for

information on State Discrepancy Report requirements.

EPA Regional Administrators

Regional Administrator, U.S. EPA Region I, J.F. Kennedy Fed. Bldg., Boston, MA 02203

Regional Administrator, U.S. EPA Region II, 26 Federal Plaza, New York, NY 10278

Regional Administrator, U.S. EPA Region III, 6th and Walnut Sts., Philadelphia, PA 19106

Regional Administrator, U.S. EPA Region IV, 345 Courtland St., NE., Atlanta, GA 30365

Regional Administrator, U.S. EPA Region V, 230 S. Dearborn St., Chicago, IL 60604

Regional Administrator, U.S. EPA Region VI, 1201 Elm Street, Dallas, TX 75270

Regional Administrator, U.S. EPA Region VII, 324 East 11th Street, Kansas City, MO 64106

Regional Administrator, U.S. EPA Region VIII, 1860 Lincoln Street, Denver, CO 80295

Regional Administrator, U.S. EPA Region IX, 215 Freemont Street, San Francisco, CA 94105

Regional Administrator, U.S. EPA Region X, 1200 Sixth Avenue, Seattle, WA 98101

Item 20. Facility Owner or Operator: Certification of Receipt of Hazardous Materials Covered by This Manifest Except as Noted in Item 19

Print or type the name of the person accepting the waste on behalf of the owner or operator of the facility. That person must acknowledge acceptance of the waste described on the Manifest by signing and entering the date of receipt.

Items A-K are not required by Federal regulations for intra- or interstate transportation. However, States may require generators and owners or operators of treatment, storage, or disposal facilities to complete some or all of items A-K as part of State manifest reporting requirements. Generators and owners and operators of treatment, storage, or disposal facilities are advised to contact State officials for guidance on completing the shaded areas of the Manifest.

constituents, waste feed rates and the operating parameters identified in § 264.345 of this chapter.

(2) The Director will review this statement and any other relevant information submitted with Part B of the permit application and specify requirements for this period sufficient to meet the performance standards of § 264.343 of this chapter based on his engineering judgment.

(b) For the purposes of determining feasibility of compliance with the performance standards of § 264.343 of this chapter and of determining adequate operating conditions under § 264.345 of this chapter, the Director must establish conditions in the permit for a new hazardous waste incinerator to be effective during the trial burn.

(1) Applicants must propose a trial burn plan, prepared under paragraph (b)(2) of this section with a Part B of the permit application.

(2) The trial burn plan must include the following information:

(i) An analysis of each waste or mixture of wastes to be burned which includes:

(A) Heat value of the waste in the form and composition in which it will be burned.

(B) Viscosity (if applicable), or description of the physical form of the waste.

(C) An identification of any hazardous organic constituents listed in Part 261, Appendix VIII of this chapter, which are present in the waste to be burned, except that the applicant need not analyze for constituents listed in Part 261, Appendix VIII, of this chapter which would reasonably not be expected to be found in the waste. The constituents excluded from analysis must be identified, and the basis for the exclusion stated. The waste analysis must rely on analytical techniques specified in "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods" (incorporated by reference, see § 270.6), or other equivalent.

(D) An approximate quantification of the hazardous constituents identified in the waste, within the precision produced by the analytical methods specified in "Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods," (incorporated by reference, see § 270.6), or their equivalent.

(ii) A detailed engineering description of the incinerator for which the permit is sought including:

(A) Manufacturer's name and model number of incinerator (if available).

(B) Type of incinerator.

(C) Linear dimensions of the incinerator unit including the cross sectional area of combustion chamber.

(D) Description of the auxiliary fuel system (type/feed).

(E) Capacity of prime mover.

(F) Description of automatic waste feed cut-off system(s).

(G) Stack gas monitoring and pollution control equipment.

(H) Nozzle and burner design.

(I) Construction materials.

(J) Location and description of temperature, pressure, and flow indicating and control devices.

(iii) A detailed description of sampling and monitoring procedures, including sampling and monitoring locations in the system, the equipment to be used, sampling and monitoring frequency, and planned analytical procedures for sample analysis.

(iv) A detailed test schedule for each waste for which the trial burn is planned including date(s), duration, quantity of waste to be burned, and other factors relevant to the Director's decision under paragraph (b)(5) of this section.

(v) A detailed test protocol, including, for each waste identified, the ranges of temperature, waste feed rate, combustion gas velocity, use of auxiliary fuel, and any other relevant parameters that will be varied to affect the destruction and removal efficiency of the incinerator.

(vi) A description of, and planned operating conditions for, any emission control equipment which will be used.

(vii) Procedures for rapidly stopping waste feed, shutting down the incinerator, and controlling emissions in the event of an equipment malfunction.

(viii) Such other information as the Director reasonably finds necessary to determine whether to approve the trial burn plan in light of the purposes of this paragraph and the criteria in paragraph (b)(5) of this section.

(3) The Director, in reviewing the trial burn plan, shall evaluate the sufficiency of the information provided and may require the applicant to supplement this information, if necessary, to achieve the purposes of this paragraph.

(4) Based on the waste analysis data in the trial burn plan, the Director will specify as trial Principal Organic Hazardous Constituents (POHCs), those constituents for which destruction and removal efficiencies must be calculated during the trial burn. These trial POHCs will be specified by the Director based on his estimate of the difficulty of incineration of the constituents identified in the waste analysis, their concentration or mass in the waste feed, and, for wastes listed in Part 261, Subpart D, of this chapter, the hazardous waste organic constituent or constituents identified in Appendix VII of that part as the basis for listing.

(5) The Director shall approve a trial burn plan if he finds that:

(i) The trial burn is likely to determine whether the incinerator performance standard required by § 264.343 of this chapter can be met;

(ii) The trial burn itself will not present an imminent hazard to human health or the environment;

(iii) The trial burn will help the Director to determine operating requirements to be specified under § 264.345 of this chapter; and

(iv) The information sought in paragraphs (b)(5) (i) and (ii) of this section cannot reasonably be developed through other means.

(6) During each approved trial burn (or as soon after the burn as is practicable), the applicant must make the following determinations:

(i) A quantitative analysis of the trial POHCs in the waste feed to the incinerator.

(ii) A quantitative analysis of the exhaust gas for the concentration and mass emissions of the trial POHCs, oxygen (O_2) and hydrogen chloride (HCl).

(iii) A quantitative analysis of the scrubber water (if any), ash residues, and other residues, for the purpose of estimating the fate of the trial POHCs.

(iv) A computation of destruction and removal efficiency (DRE), in accordance with the DRE formula specified in § 264.343(a) of this chapter.

(v) If the HCl emission rate exceeds 1.8 kilograms of HCl per hour (4 pounds per hour), a computation of HCl removal efficiency in accordance with § 264.343(b) of this chapter.

(vi) A computation of particulate emissions, in accordance with § 264.343(c) of this chapter.

(vii) An identification of sources of fugitive emissions and their means of control.

(viii) A measurement of average, maximum, and minimum temperatures and combustion gas velocity.

(ix) A continuous measurement of carbon monoxide (CO) in the exhaust gas.

(x) Such other information as the Director may specify as necessary to ensure that the trial burn will determine compliance with the performance standards in § 264.343 of this chapter and to establish the operating conditions required by § 264.345 of this chapter as necessary to meet that performance standard.

(7) The applicant must submit to the Director a certification that the trial burn has been carried out in accordance with the approved trial burn plan, and must submit the results of all the determinations required in paragraph (b)(6) of this section. This submission shall be made within 90 days of completion of the trial burn, or later if approved by the Director.

(8) All data collected during any trial burn must be submitted to the Director following the completion of the trial burn.

(9) All submissions required by this paragraph must be certified on behalf of the applicant by the signature of a person authorized to sign a permit application or a report under § 270.11.

(10) Based on the results of the trial burn, the Director shall set the operating requirements in the final permit according to § 264.345 of this chapter. The permit modification shall proceed according to § 270.42.

(c) For the purposes of allowing operation of a new hazardous waste incinerator following completion of the trial burn and prior to final modifica-

tion of the permit conditions to reflect the trial burn results, the Director may establish permit conditions, including but not limited to allowable waste feeds and operating conditions sufficient to meet the requirements of § 264.345 of this chapter, in the permit to a new hazardous waste incinerator. These permit conditions will be effective for the minimum time required to complete sample analysis, data computation and submission of the trial burn results by the applicant, and modification of the facility permit by the Director.

(1) Applicants must submit a statement, with Part B of the permit application, which identifies the conditions necessary to operate in compliance with the performance standards of § 264.343 of this chapter, during this period. This statement should include, at a minimum, restrictions on waste constituents, waste feed rates, and the operating parameters in § 264.345 of this chapter.

(2) The Director will review this statement and any other relevant information submitted with Part B of the permit application and specify those requirements for this period most likely to meet the performance standards of § 264.343 of this chapter based on his engineering judgment.

(d) For the purpose of determining feasibility of compliance with the performance standards of § 264.343 of this chapter and of determining adequate operating conditions under § 264.345 of this chapter, the applicant for a permit for an existing hazardous waste incinerator must prepare and submit a trial burn plan and perform a trial burn in accordance with § 270.19(b) and paragraphs (b)(2) through (b)(9) of this section or, instead, submit other information as specified in § 270.19(c). Applicants submitting information under § 270.19(a) are exempt from compliance with §§ 264.343 and 264.345 and, therefore, are exempt from the requirement to conduct a trial burn. Applicants who submit trial burn plans and receive approval before submission of a permit application must complete the trial burn and submit the results, specified in paragraph (b)(6), with Part B of the permit application. If completion of this process conflicts with the date set for submission of the Part B application, the applicant must contact the Director to establish a later date for submission of the Part B application or the trial burn results. Trial burn results must be submitted prior to issuance of the permit. When the applicant submits a trial burn plan with Part B of the permit application, the Director will specify a time period prior to permit issuance in which the trial burn must be conducted and the results submitted.

[48 FR 14228, Apr. 1, 1983, as amended at 53 FR 37939, Sept. 28, 1988; 54 FR 4288, Jan. 30, 1989]

§ 270.63 Permits for land treatment demonstrations using field test or laboratory analyses.

(a) For the purpose of allowing an owner or operator to meet the treatment demonstration requirements of § 264.272 of this chapter, the Director may issue a treatment demonstration permit. The permit must contain only those requirements necessary to meet the standards in § 264.272(c). The permit may be issued either as a treatment or disposal permit covering only the field test or laboratory analyses, or as a two-phase facility permit covering the field tests, or laboratory analyses, and design, construction operation and maintenance of the land treatment unit.

(1) The Director may issue a two-phase facility permit if he finds that, based on information submitted in Part B of the application, substantial, although incomplete or inconclusive, information already exists upon which to base the issuance of a facility permit.

(2) If the Director finds that not enough information exists upon which he can establish permit conditions to attempt to provide for compliance with all of the requirements of Subpart M, he must issue a treatment demonstration permit covering only the field test or laboratory analyses.

(b) If the Director finds that a phased permit may be issued, he will establish, as requirements in the first phase of the facility permit, conditions for conducting the field tests or labo-

ratory analyses. These permit conditions will include design and operating parameters (including the duration of the tests or analyses and, in the case of field tests, the horizontal and vertical dimensions of the treatment zone), monitoring procedures, post-demonstration clean-up activities, and any other conditions which the Director finds may be necessary under § 264.272(c). The Director will include conditions in the second phase of the facility permit to attempt to meet all Subpart M requirements pertaining to unit design, construction, operation, and maintenance. The Director will establish these conditions in the second phase of the permit based upon the substantial but incomplete or inconclusive information contained in the Part B application.

(1) The first phase of the permit will be effective as provided in § 124.15(b) of this chapter.

(2) The second phase of the permit will be effective as provided in paragraph (d) of this section.

(c) When the owner or operator who has been issued a two-phase permit has completed the treatment demonstration, he must submit to the Director a certification, signed by a person authorized to sign a permit application or report under § 270.11, that the field tests or laboratory analyses have been carried out in accordance with the conditions specified in phase one of the permit for conducting such tests or analyses. The owner or operator must also submit all data collected during the field tests or laboratory analyses within 90 days of completion of those tests or analyses unless the Director approves a later date.

(d) If the Director determines that the results of the field tests or laboratory analyses meet the requirements of § 264.272 of this chapter, he will modify the second phase of the permit to incorporate any requirements necessary for operation of the facility in compliance with Part 264, Subpart M, of this chapter, based upon the results of the field tests or laboratory analyses.

(1) This permit modification may proceed under § 270.42, or otherwise will proceed as a modification under § 270.41(a)(2). If such modifications are necessary, the second phase of the permit will become effective only after those modifications have been made.

(2) If no modifications of the second phase of the permit are necessary, the Director will give notice of his final decision to the permit applicant and to each person who submitted written comments on the phased permit or who requested notice of the final decision on the second phase of the permit. The second phase of the permit then will become effective as specified in § 124.15(b).

[48 FR 14228, Apr. 1, 1983, as amended at 53 FR 37939, Sept. 28, 1988]

§ 270.64 Interim permits for UIC wells.

The Director may issue a permit under this part to any Class I UIC well (see § 144.6) injecting hazardous wastes within a State in which no UIC program has been approved or promulgated. Any such permit shall apply and insure compliance with all applicable requirements of 40 CFR Part 264, Subpart R (RCRA standards for wells), and shall be for a term not to exceed two years. No such permit shall be issued after approval or promulgation of a UIC program in the State. Any permit under this section shall contain a condition providing that it will terminate upon final action by the Director under a UIC program to issue or deny a UIC permit for the facility.

[48 FR 14228, Apr. 1, 1983; 48 FR 30114, June 30, 1983]

§ 270.65 Research, development, and demonstration permits.

(a) The Administrator may issue a research, development, and demonstration permit for any hazardous waste treatment facility which proposes to utilize an innovative and experimental hazardous waste treatment technology or process for which permit standards for such experimental activity have not been promulgated under Part 264 or 266. Any such permit shall include such terms and conditions as will assure protection of human health and the environment. Such permits:

(1) Shall provide for the construction of such facilities as necessary, and for operation of the facility for not

longer than one year unless renewed as provided in paragraph (d) of this section, and

(2) Shall provide for the receipt and treatment by the facility of only those types and quantities of hazardous waste which the Administrator deems necessary for purposes of determining the efficacy and performance capabilities of the technology or process and the effects of such technology or process on human health and the environment, and

(3) Shall include such requirements as the Administrator deems necessary to protect human health and the environment (including, but not limited to, requirements regarding monitoring, operation, financial responsibility, closure, and remedial action), and such requirements as the Administrator deems necessary regarding testing and providing of information to the Administrator with respect to the operation of the facility.

(b) For the purpose of expediting review and issuance of permits under this section, the Administrator may, consistent with the protection of human health and the environment, modify or waive permit application and permit issuance requirements in Parts 124 and 270 except that there may be no modification or waiver of regulations regarding financial responsibility (including insurance) or of procedures regarding public participation.

(c) The Administrator may order an immediate termination of all operations at the facility at any time he determines that termination is necessary to protect human health and the environment.

(d) Any permit issued under this section may be renewed not more than three times. Each such renewal shall be for a period of not more than 1 year.

[50 FR 28752, July 15, 1985]

Subpart G—Interim Status

§ 270.70 Qualifying for interim status.

(a) Any person who owns or operates an "existing HWM facility" or a facility in existence on the effective date of statutory or regulatory amendments under the Act that render the facility subject to the requirement to have an RCRA permit shall have interim status and shall be treated as having been issued a permit to the extent he or she has:

(1) Complied with the requirements of section 3010(a) of RCRA pertaining to notification of hazardous waste activity.

[*Comment*: Some existing facilities may not be required to file a notification under section 3010(a) of RCRA. These facilities may qualify for interim status by meeting paragraph (a)(2) of this section.]

(2) Complied with the requirements of § 270.10 governing submission of Part A applications;

(b) Failure to qualify for interim status. If EPA has reason to believe upon examination of a Part A application that it fails to meet the requirements of § 270.13, it shall notify the owner or operator in writing of the apparent deficiency. Such notice shall specify the grounds for EPA's belief that the application is deficient. The owner or operator shall have 30 days from receipt to respond to such a notification and to explain or cure the alleged deficiency in his Part A application. If, after such notification and opportunity for response, EPA determines that the application is deficient it may take appropriate enforcement action.

(c) Paragraph (a) of this section shall not apply to any facility which has been previously denied a RCRA permit or if authority to operate the facility under RCRA has been previously terminated.

[48 FR 14228, Apr. 1, 1983, as amended at 49 FR 17718, Apr. 24, 1984; 50 FR 28753, July 15, 1985]

§ 270.71 Operation during interim status.

(a) During the interim status period the facility shall not:

(1) Treat, store, or dispose of hazardous waste not specified in Part A of the permit application;

(2) Employ processes not specified in Part A of the permit application; or

(3) Exceed the design capacities specified in Part A of the permit application.

(b) Interim status standards. During interim status, owners or operators

sh[illegible] mply with the interim status stan[illegible] at 40 CFR Part 265.

§ 270.72 Changes during interim status.

(a) Except as provided in paragraph (b), the owner or operator of an interim status facility may make the following changes at the facility:

(1) Treatment, storage, or disposal of new hazardous wastes not previously identified in Part A of the permit application (and, in the case of newly listed or identified wastes, addition of the units being used to treat, store, or dispose of the hazardous wastes on the effective date of the listing or identification) if the owner or operator submits a revised Part A permit application prior to such treatment, storage, or disposal;

(2) Increases in the design capacity of processes used at the facility if the owner or operator submits a revised Part A permit application prior to such a change (along with a justification explaining the need for the change) and the Director approves the changes because:

(i) There is a lack of available treatment, storage, or disposal capacity at other hazardous waste management facilities, or

(ii) The change is necessary to comply with a Federal, State, or local requirement.

(3) Changes in the processes for the treatment, storage, or disposal of hazardous waste or addition of processes if the owner or operator submits a revised Part A permit application prior to such change (along with a justification explaining the need for the change) and the Director approves the change because:

(i) The change is necessary to prevent a threat to human health and the environment because of an emergency situation, or

(ii) The change is necessary to comply with a Federal, State, or local requirement.

(4) Changes in the ownership or operational control of a facility if the new owner or operator submits a revised Part A permit application no later than 90 days prior to the scheduled change. When a transfer of operational control of a facility occurs, the old owner or operator shall comply with the requirements of 40 CFR Part 265, Subpart H (Financial Requirements), until the new owner or operator has demonstrated to the Director that he is complying with the requirements of that subpart. The new owner or operator must demonstrate compliance with Subpart H requirements within six months of the date of the change in ownership or operational control of the facility. Upon demonstration to the Director by the new owner or operator of compliance with Subpart H, the Director shall notify the old owner or operator in writing that he no longer needs to comply with Subpart H as of the date of demonstration. All other interim status duties are transferred effective immediately upon the date of the change in ownership or operational control of the facility.

(5) Changes made in accordance with an interim status corrective action order issued by EPA under section 3008(h) or other Federal authority, by an authorized State under comparable State authority, or by a court in a judicial action brought by EPA or by an authorized State. Changes under this paragraph are limited to the treatment, storage, or disposal of solid waste from releases that originate within the boundary of the facility.

(b) Except as specifically allowed under this paragraph, changes listed under paragraph (a) of this section may not be made if they amount to reconstruction of the hazardous waste management facility. Reconstruction occurs when the capital investment in the changes to the facility exceeds 50 percent of the capital cost of a comparable entirely new hazardous waste management facility. If all other requirements are met, the following changes may be made even if they amount to a reconstruction:

(1) Changes made solely for the purposes of complying with the requirements of 40 CFR 265.193 for tanks and ancillary equipment.

(2) If necessary to comply with Federal, State, or local requirements, changes to an existing unit, changes solely involving tanks or containers, or addition of replacement surface in-

poundments that satisfy the standards of section 3004(o).

(3) Changes that are necessary to allow owners or operators to continue handling newly listed or identified hazardous wastes that have been treated, stored, or disposed of at the facility prior to the effective date of the rule establishing the new listing or identification.

(4) Changes during closure of a facility or of a unit within a facility made in accordance with an approved closure plan.

(5) Changes necessary to comply with an interim status corrective action order issued by EPA under section 3008(h) or other Federal authority, by an authorized State under comparable State authority, or by a court in a judicial proceeding brought by EPA or an authorized State, provided that such changes are limited to the treatment, storage, or disposal of solid waste from releases that originate within the boundary of the facility.

(6) Changes to treat or store, in tanks or containers, hazardous wastes subject to land disposal restrictions imposed by Part 268 or RCRA section 3004, provided that such changes are made solely for the purpose of complying with Part 268 or RCRA section 3004.

[54 FR 9608, Mar. 7, 1989]

§ 270.73 Termination of interim status.

Interim status terminates when:

(a) Final administrative disposition of a permit application is made; or

(b) Interim status is terminated as provided in § 270.10(e)(5).

(c) For owners or operators of each land disposal facility which has been granted interim status prior to November 8, 1984, on November 8, 1985, unless:

(1) The owner or operator submits a Part B application for a permit for such facility prior to that date; and

(2) The owner or operator certifies that such facility is in compliance with all applicable ground-water monitoring and financial responsibility requirements.

(d) For owners or operators of each land disposal facility which is in existence on the effective date of statutory or regulatory amendments under the Act that render the facility subject to the requirement to have a RCRA permit and which is granted interim status, twelve months after the date on which the facility first becomes subject to such permit requirement unless the owner or operator of such facility:

(1) Submits a Part B application for a RCRA permit for such facility before the date 12 months after the date on which the facility first becomes subject to such permit requirement; and

(2) Certifies that such facility is in compliance with all applicable ground water monitoring and financial responsibility requirements.

(e) For owners or operators of any land disposal unit that is granted authority to operate under § 270.72(a)(1), (2) or (3), on the date 12 months after the effective date of such requirement, unless the owner or operator certifies that such unit is in compliance with all applicable groundwater monitoring and financial responsibility requirements.

(f) For owners or operators of each incinerator facility on November 8, 1989, unless the owner or operator of the facility submits a Part B application for a RCRA permit for an incinerator facility by November 8, 1986.

(g) For owners or operators of any facility (other than a land disposal or an incinerator facility) on November 8, 1992, unless the owner or operator of the facility submits a Part B application for a RCRA permit for the facility by November 8, 1988.

(Approved by the Office of Management and Budget under control number 2050-0037)

[46 FR 14228, Apr. 1, 1983, as amended at 50 FR 28753, July 15, 1985; 54 FR 9609, Mar. 7, 1989]

PART 271—REQUIREMENTS FOR AUTHORIZATION OF STATE HAZARDOUS WASTE PROGRAMS

Subpart A—Requirements for Final Authorization

Sec.
271.1 Purpose and scope.
271.2 Definitions.
271.3 Availability of final authorization.
271.4 Consistency.
271.5 Elements of a program submission.
271.6 Program description.
271.7 Attorney General's statement.
271.8 Memorandum of Agreement with the Regional Administrator.
271.9 Requirements for identification and listing of hazardous wastes.
271.10 Requirements of generators of hazardous wastes.
271.11 Requirements for transporters of hazardous wastes.
271.12 Requirements for hazardous waste management facilities.
271.13 Requirements with respect to permits and permit applications.
271.14 Requirements for permitting.
271.15 Requirements for compliance evaluation programs.
271.16 Requirements for enforcement authority.
271.17 Sharing of information.
271.18 Coordination with other programs.
271.19 EPA review of State permits.
271.20 Approval process.
271.21 Procedures for revision of State programs.
271.22 Criteria for withdrawing approval of State programs.
271.23 Procedures for withdrawing approval of State programs.
271.24 Interim authorization under section 3006(g) of RCRA.
217.25 HSWA requirements.

Subpart B—Requirements for Interim Authorization

271.121 Purpose and scope.
271.122 Schedule.
271.123 Elements of a program submission.
271.124 Program description.
271.125 Attorney General's statement.
271.126 Memorandum of Agreement with the Regional Administrator.
271.127 Authorization plan.
271.128 Program requirements for interim authorization for Phase I.
271.129 Additional program requirements for interim authorization for Phase II.
271.130 Interstate movement of hazardous waste.
271.131 Progress reports.
Sec.
271.132 Sharing of information.
271.13 Coordination with other programs.
271.13 EPA review of State permits.
271.135 Approval process.
271.136 Withdrawal of State programs.
271.137 Reversion of State programs.
271.138 Interim authorization under section 3006(g) of RCRA.

AUTHORITY: 42 U.S.C. 6905, 6912(a), and 6926.

SOURCE: 48 FR 14248, Apr. 1, 1983, unless otherwise noted.

Subpart A—Requirements for Final Authorization

§ 271.1 Purpose and scope.

(a) This subpart specifies the procedures EPA will follow in approving, revising, and withdrawing approval of State programs and the requirements State programs must meet to be approved by the Administrator under sections 3006 (b) and (f) of RCRA.

(b) State submissions for program approval must be made in accordance with the procedures set out in this subpart.

(c) The substantive provisions which must be included in State programs for them to be approved include requirements for permitting, compliance evaluation, enforcement, public participation, and sharing of information. Many of the requirements for State programs are made applicable to States by cross-referencing other EPA regulations. In particular, many of the provisions of Parts 270 and 124 are made applicable to States by the references contained in § 271.14.

(d) Upon receipt of a complete submission, EPA will conduct a public hearing, if interest is shown, and determine whether to approve or disapprove the program taking into consideration the requirements of this subpart, the Act and any comments received.

(e) The Administrator shall approve State programs which conform to the applicable requirements of this subpart.

(f) Except as provided in § 271.3(a)(3), upon approval of a State permitting program, the Administrator shall suspend the issuance of Fed-